



VICTORY LOFTS 104 OFFICE

101 S 12TH ST, UNIT 104,
TAMPA, FL 33602


HALFLANTS + PICHETTE

VICTORY LOFTS 104 OFFICE

101 S 12th St Unit 104, Tampa, FL 33602

Revision Schedule		
No.	Date	Description

SEAL

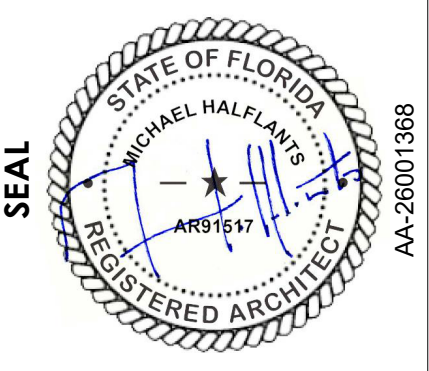


DATE	03/03/2026
PHASE	FOR CONSTR
PROJECT #	00-000

G001
COVER SHEET

INTERIOR PARTITION TYPES


PARTITION TYPE "A0"

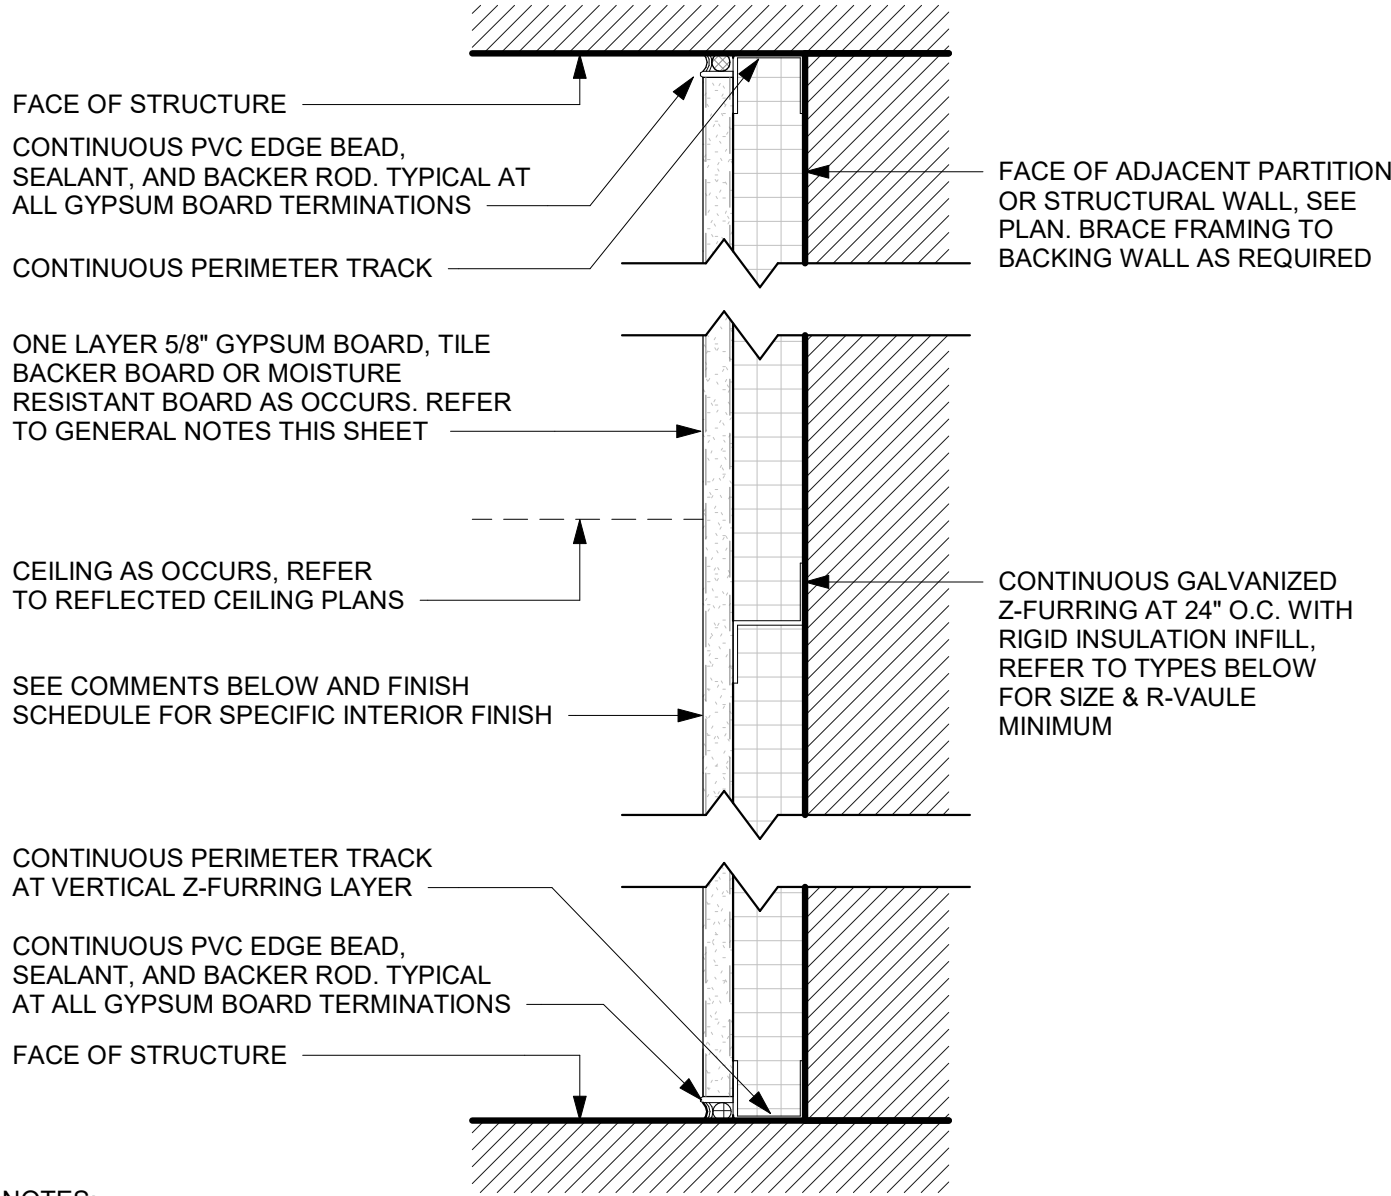

- NOTES:
1. GENERIC WALL TERMINATIONS SHOWN, REFER TO SPECIFIC WALL TERMINATION DETAILING FOR ALTERNATE CONDITIONS.
 2. STUD SYSTEMS SHALL BE BRACED BACK TO BACKER WALL AS REQUIRED TO MEET WALL LOADING REQUIREMENTS
 3. COORDINATE EXTENT OF TILE BACKER BOARD WITH FINISH DRAWINGS.

PARTITION DESIGNATION	CORE SIZE	FIRE RATING	UL LISTING	STC RATING	STC TEST	COMMENTS
A0.02.1	1 1/2"	-	-	-	-	R5.7 MIN INSULATION

PARTITION TYPE "A3"

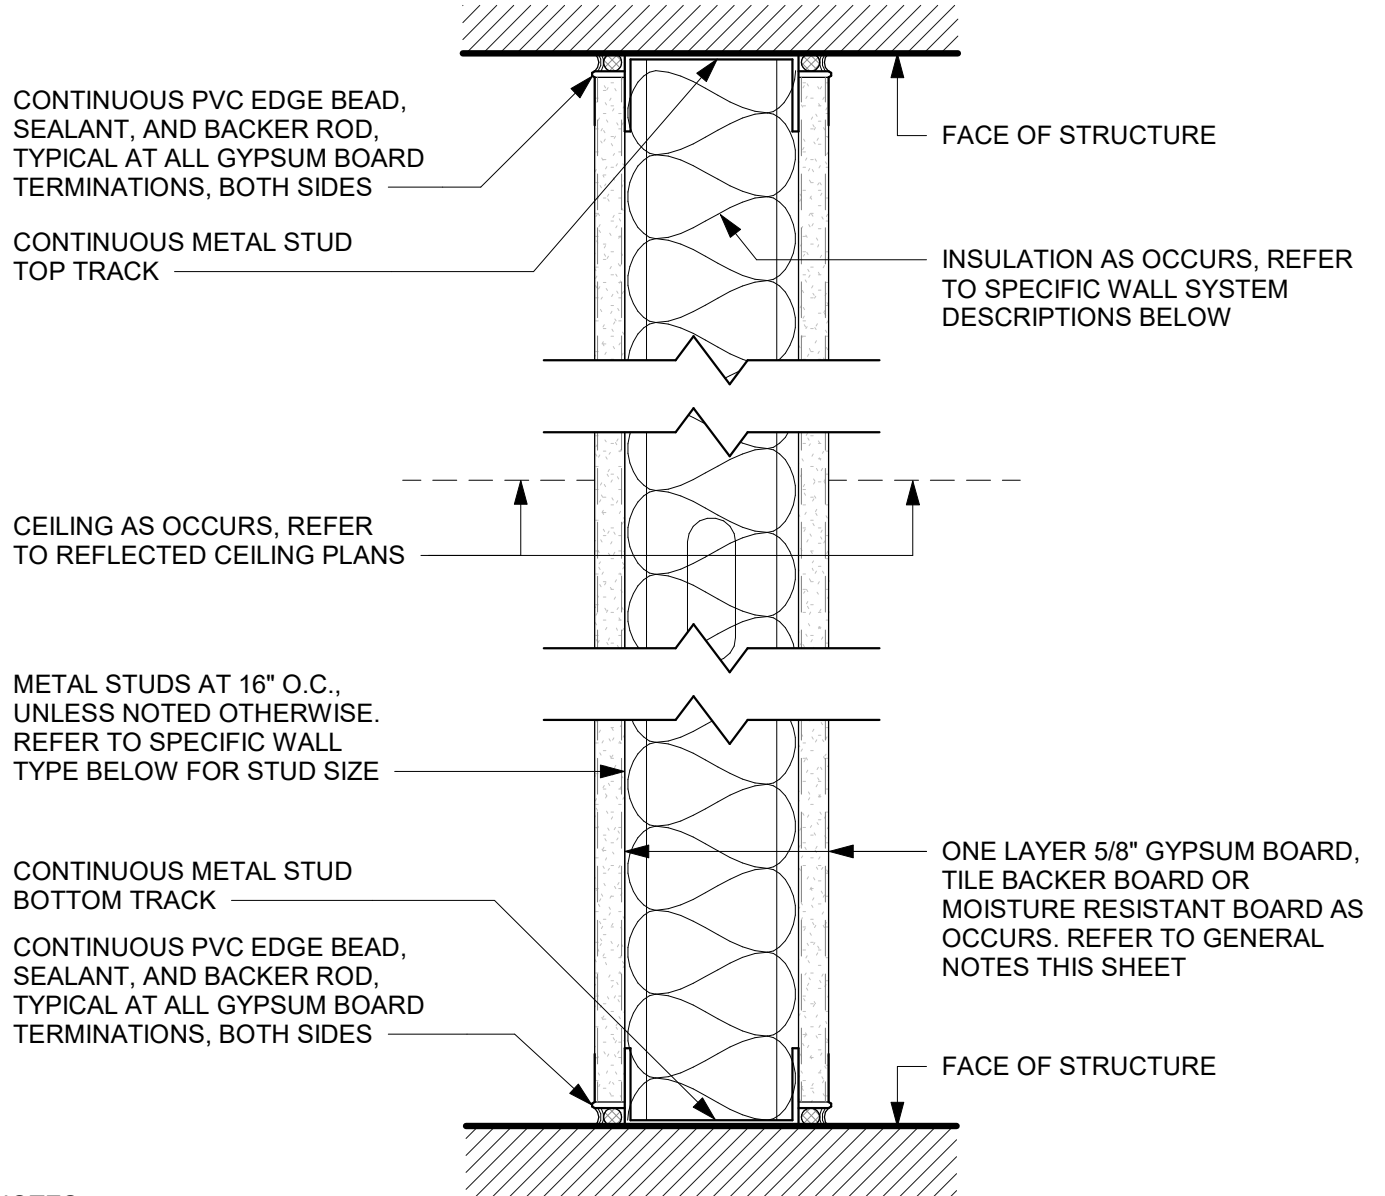

- NOTES:
1. GENERIC WALL TERMINATIONS SHOWN, REFER TO SPECIFIC WALL TERMINATION DETAILING FOR ALTERNATE CONDITIONS.
 2. PROVIDE MONOLITHIC FLUID APPLIED WATER BARRIER OVER TILE BACKER BOARD AT ALL SHOWER WALL LOCATIONS.
 3. COORDINATE EXTENT OF TILE BACKER BOARD WITH FINISH DRAWINGS.
 4. MAINTAIN WALL RATING AT INTERFACE OF ALL INTERCONNECTED WALL AND FLOOR ASSEMBLIES. REFER TO LIFE SAFETY DRAWINGS FOR ADDITIONAL INFORMATION.

VERIFY EXISTING STUD SIZE AND MATCH WHEN ADDING TO OR EXTENDING EXISTING PARTITIONS

PARTITION DESIGNATION	CORE SIZE	FIRE RATING	UL LISTING	STC RATING	STC TEST	COMMENTS
A3.04.1	3 5/8"	-	-	-	-	
A3.08.1	8"	-	-	-	-	


PARTITION TYPE NOTES


1. ALL WALLS SHALL EXTEND TO THE UNDERSIDE OF FIRE RATED FLOOR ASSEMBLY ABOVE UNLESS NOTED OTHERWISE.
2. PROVIDE SOLID WOOD FIRE-RETARDANT BLOCKING IN WALLS AS REQUIRED TO ANCHOR ALL ACCESSORIES, MILLWORK, FIXTURES, ETC.
3. IN NON FIRE RATED PARTITIONS, TILE BACKER BOARD SHEATHING SHALL BE SUBSTITUTED FOR GYPSUM BOARD AT CERAMIC TILE LOCATIONS, MOISTURE/MOLD RESISTANT GYPSUM BOARD SHEATHING SHALL BE SUBSTITUTED FOR STANDARD GYPSUM BOARD IN ALL BATHROOMS. IN FIRE RATED PARTITIONS, TILE BACKER BOARD SHALL BE ADDED TO WALL SYSTEM AT CERAMIC TILE LOCATIONS, MOISTURE/MOLD RESISTANT GYPSUM BOARD SHEATHING SHALL BE ADDED TO WALL SYSTEM IN ALL BATHROOMS. CONTINUITY OF UL-RATED ASSEMBLIES SHALL BE MAINTAINED AT ALL TIMES.
4. ALL INTERIOR EMBEDDED WOOD (WOOD WITHIN EXTERIOR AND INTERIOR WALL SYSTEMS) SHALL BE FIRE RETARDANT TREATED (F.R.T.). REFER TO FULL UL LISTING FOR COMPLETE CRITERIA WHERE EMBEDDED WOOD MAY BE REQUIRED AT UL LISTED FIRE-RATED PARTITIONS.
5. ALL EXTERIOR WOOD (WOOD USED OUTSIDE OF AIR AND WATER RESISTIVE BARRIER SYSTEM) SHALL BE PRESSURE TREATED (P.T.).
6. PROVIDE PVC TRIM COMPONENTS AT ALL CHANGES OF PLANE IN DRYWALL SURFACES (J MOULDS, SEALANT AND BACKER ROD AT ALL GYPSUM TRANSITIONS TO OTHER MATERIALS, CORNER BEADS AT CORNERS, ETC).
7. WHERE WALLS OF VARYING FIRE AND/OR SMOKE RATING MEET OR INTERSECT, WALLS OF GREATER RATING SHALL RUN CONTINUOUS.

INTERIOR CEILING TYPES


CEILING TYPE (201 | X' - X')

GYPSUM BOARD ASSEMBLIES

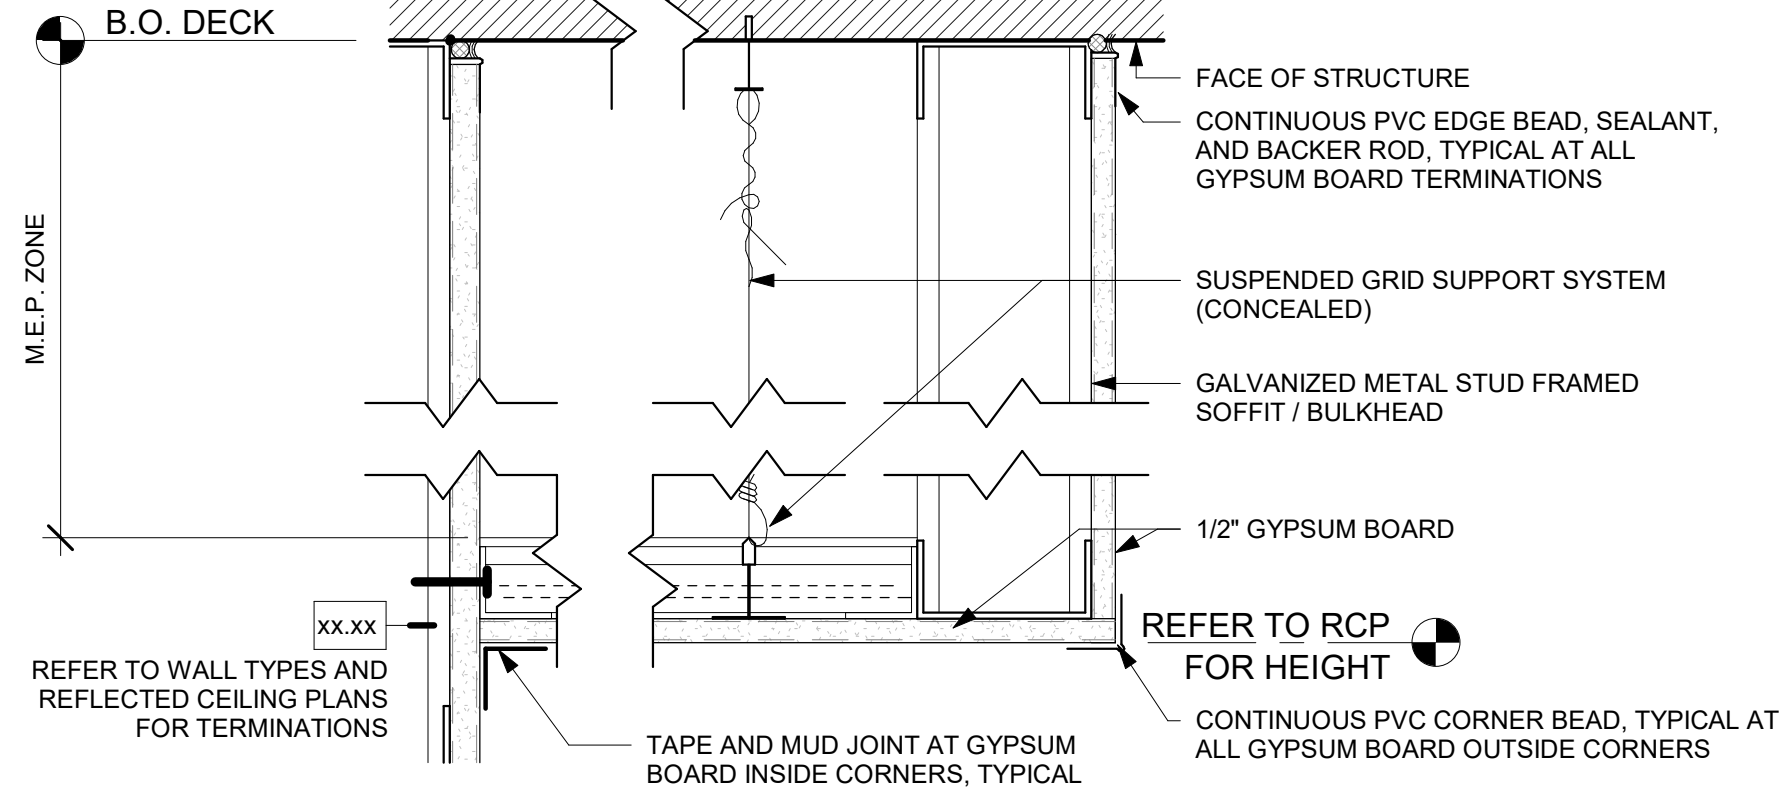


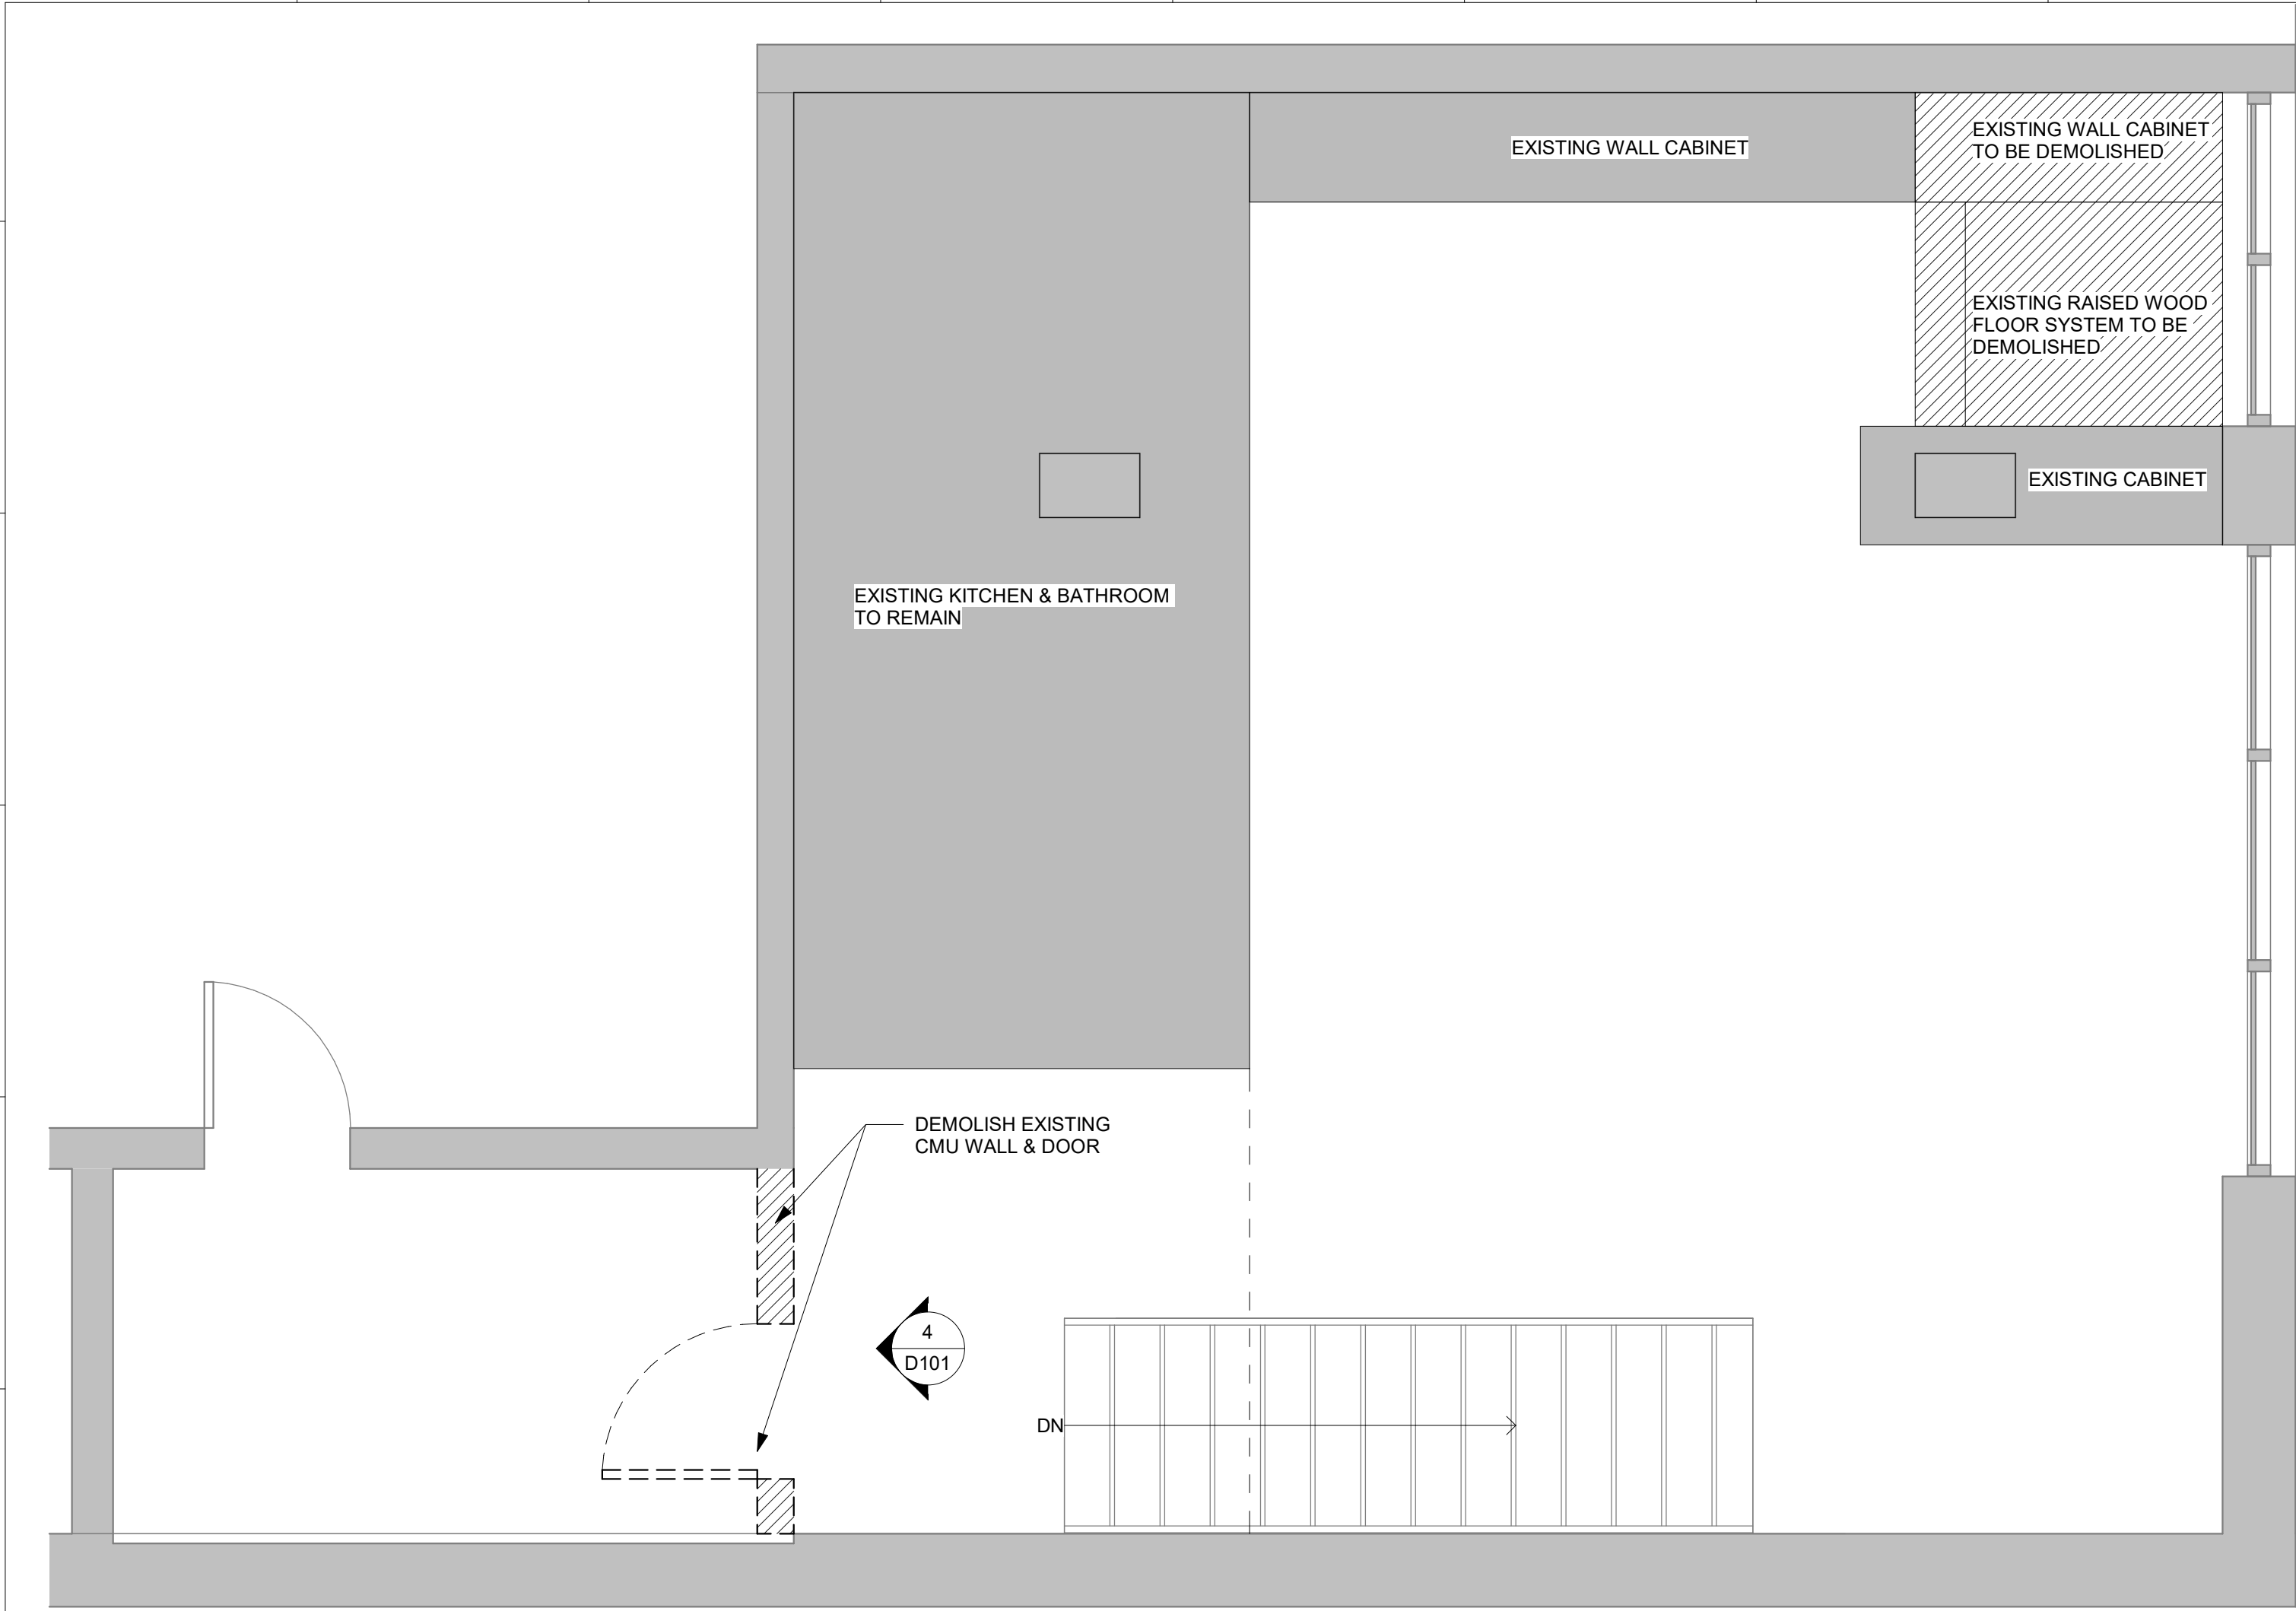


2 LEVEL 2 DEMO
3/8" = 1'-0"

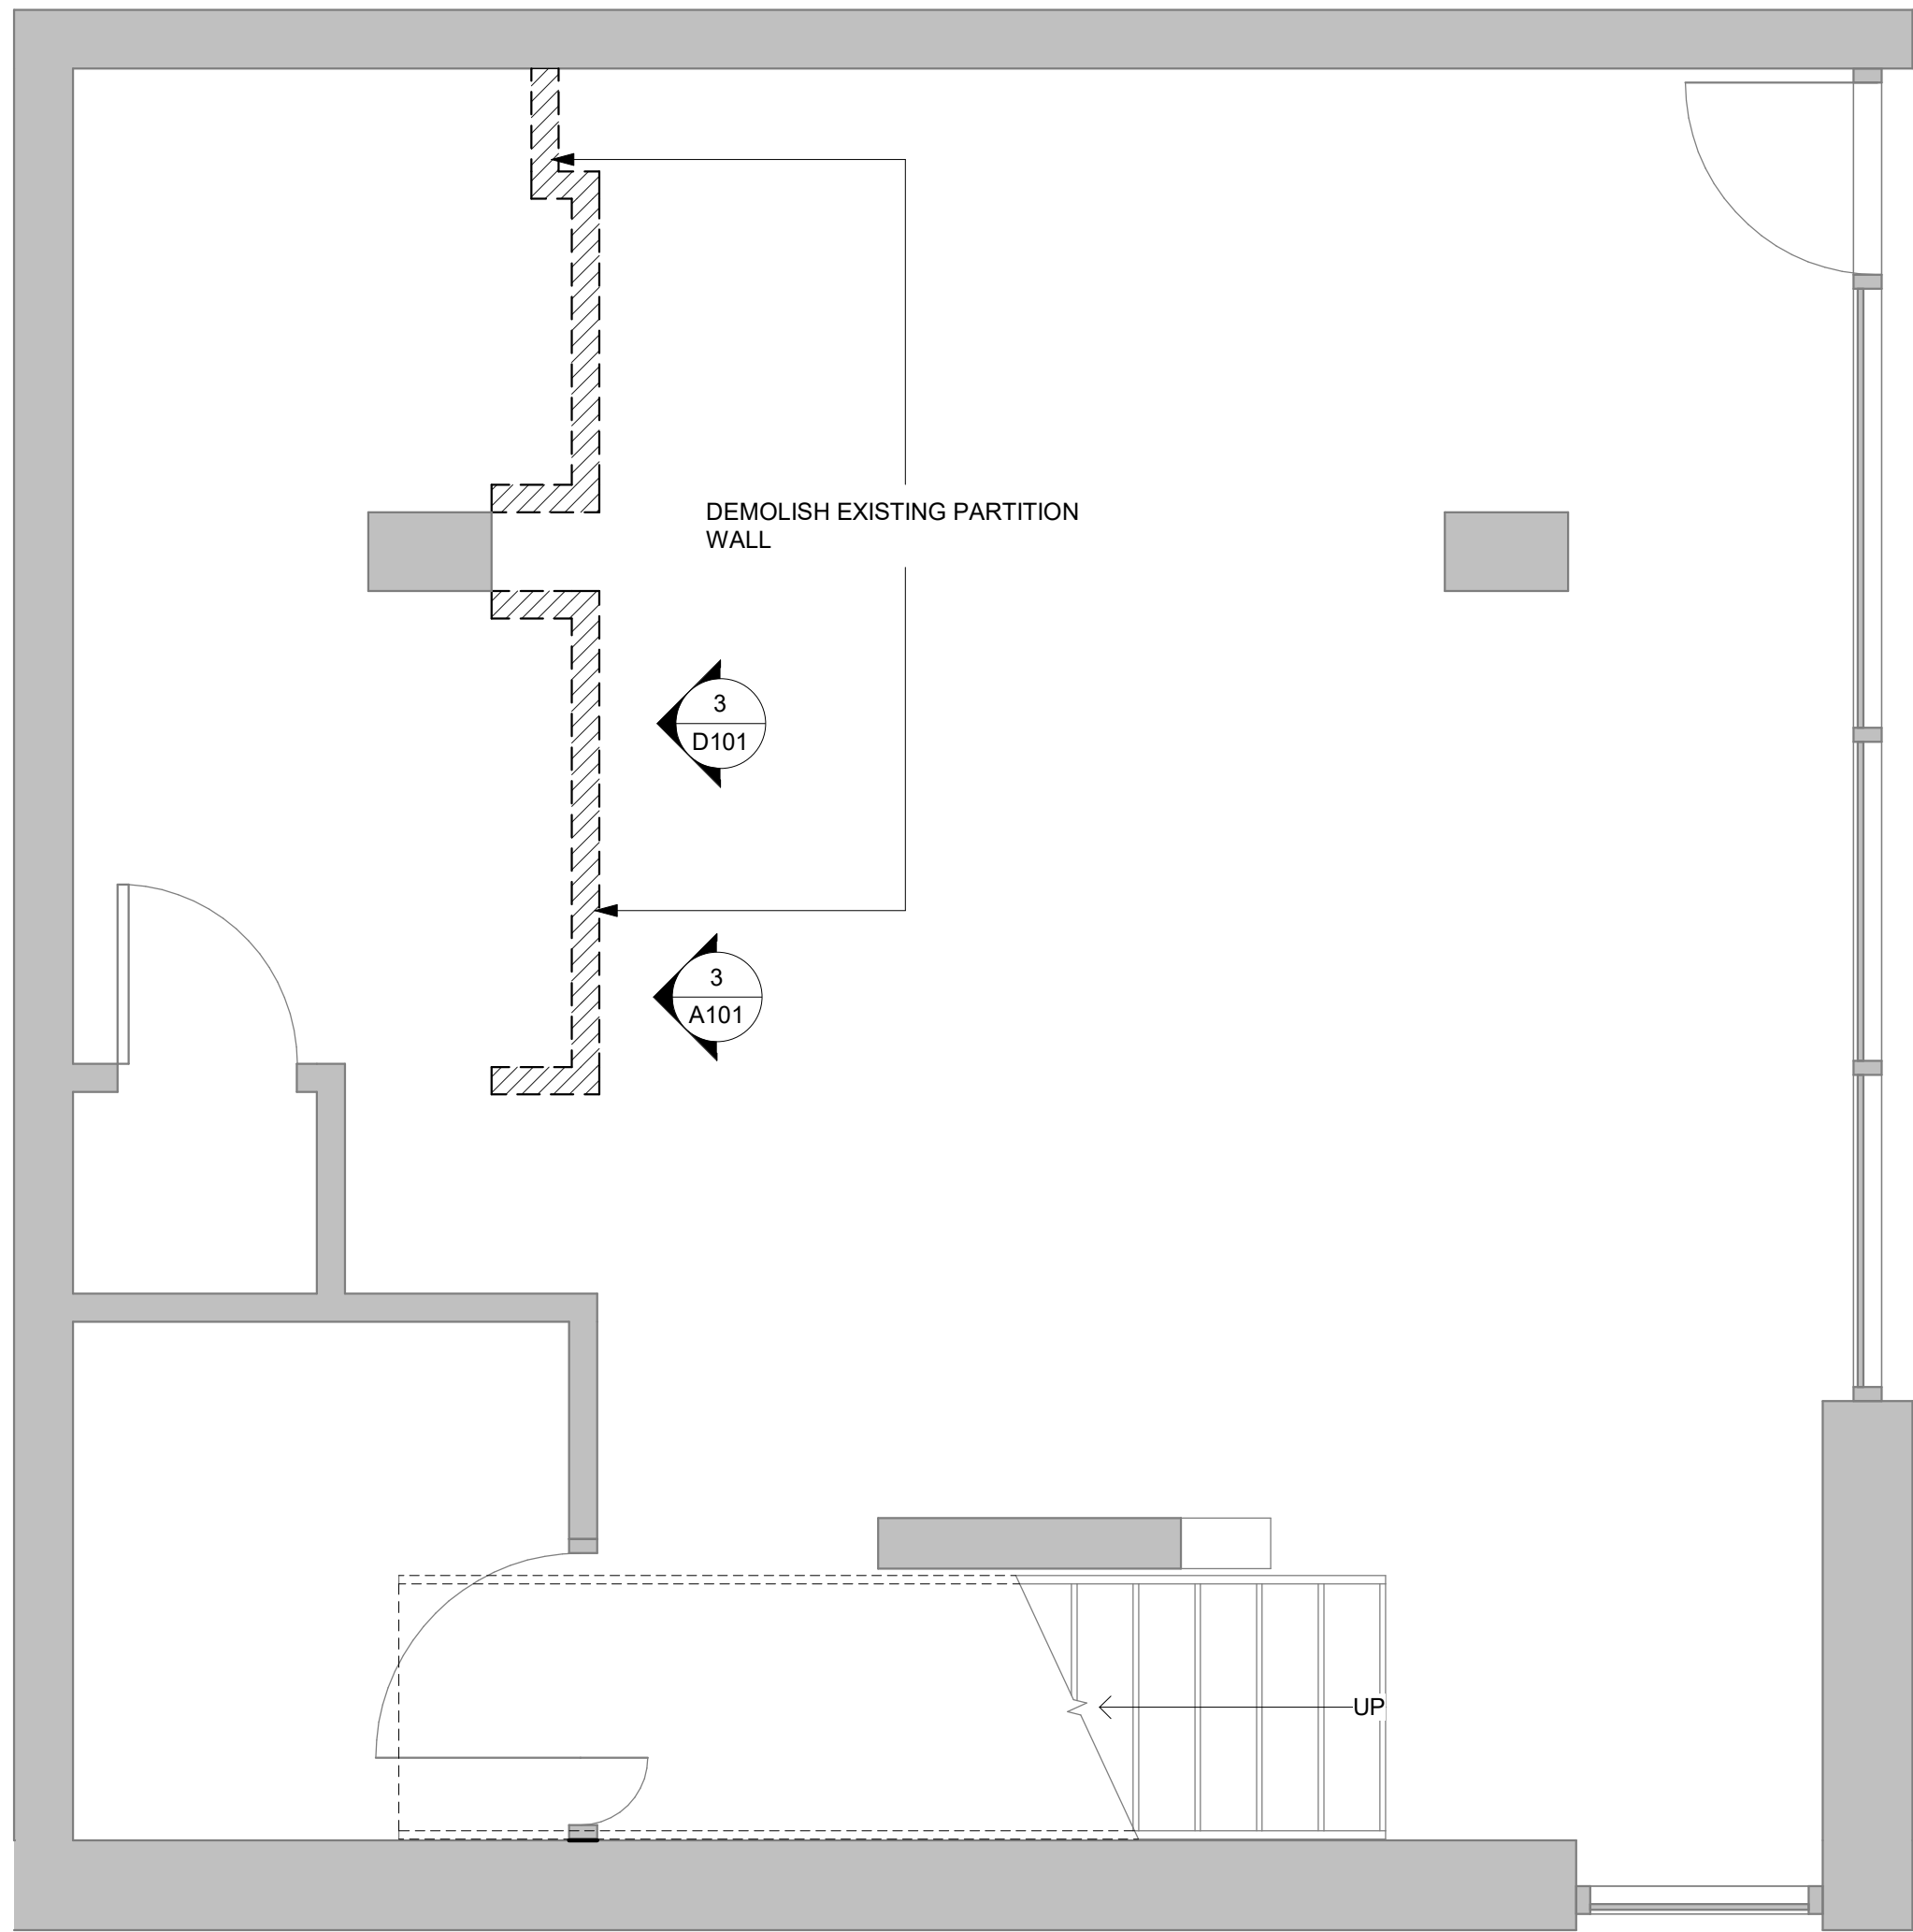

1 LEVEL 1 DEMO
3/8" = 1'-0"

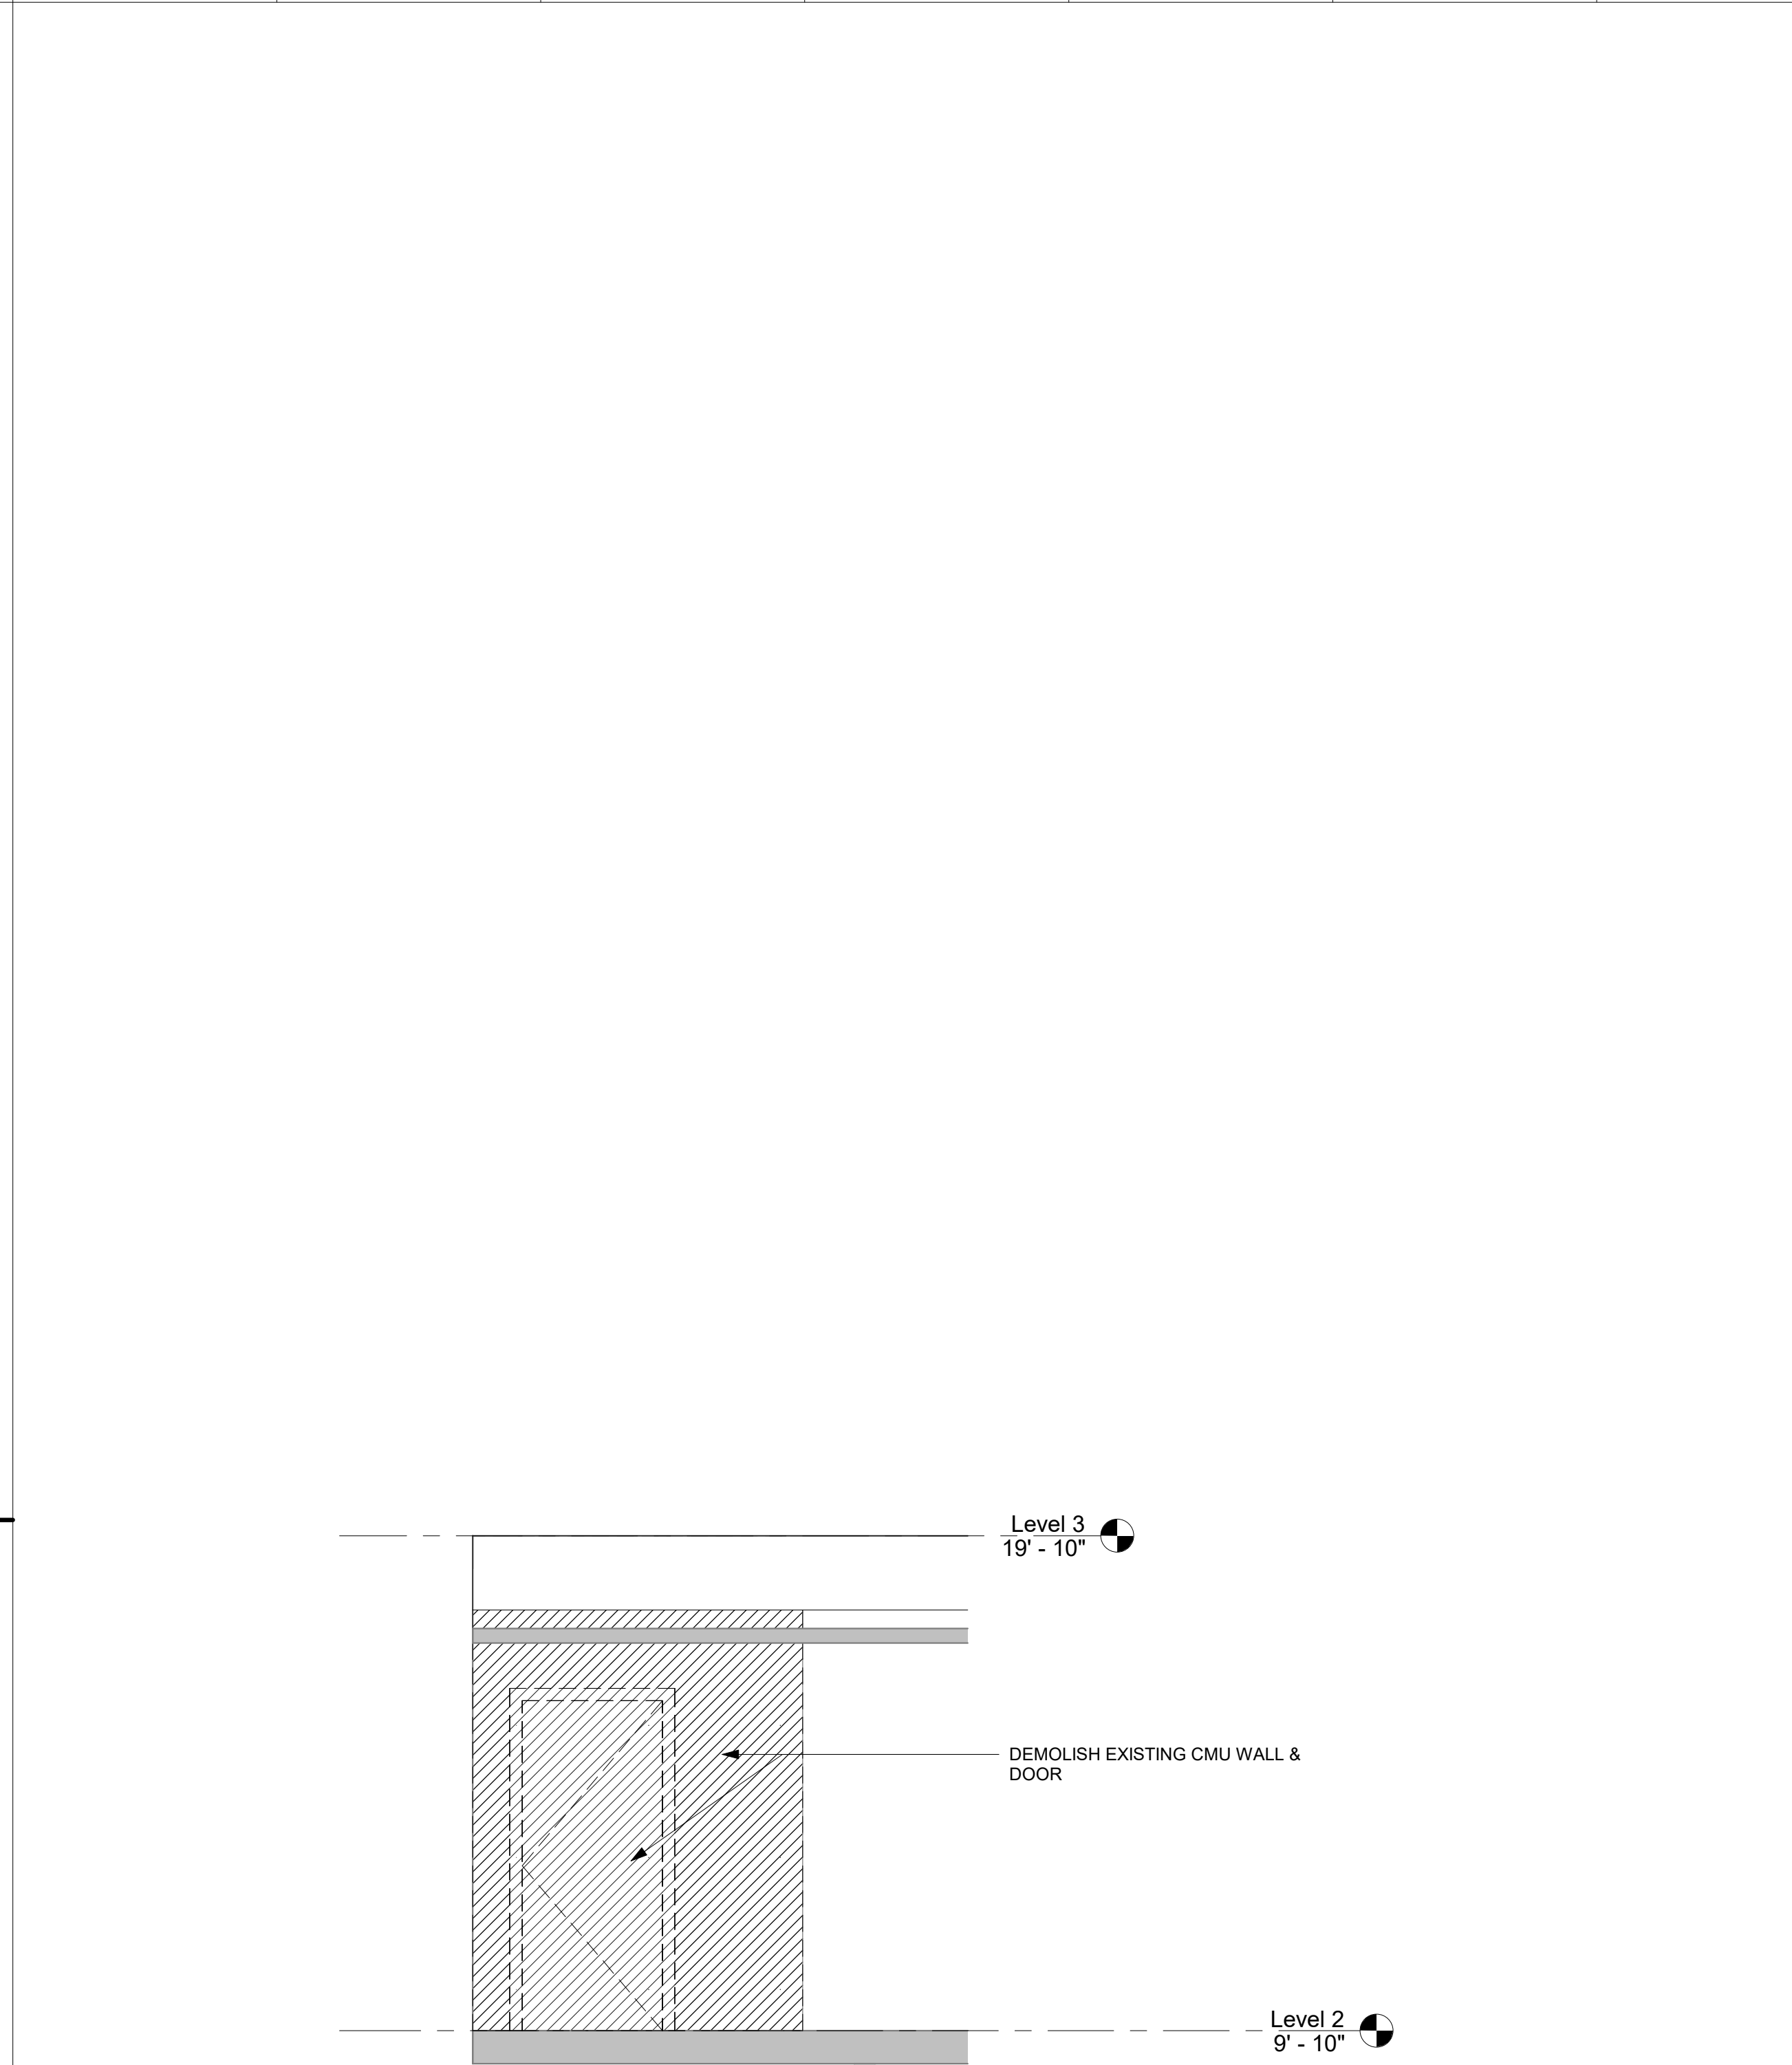


4 DEMO ELEVATION
3/8" = 1'-0"

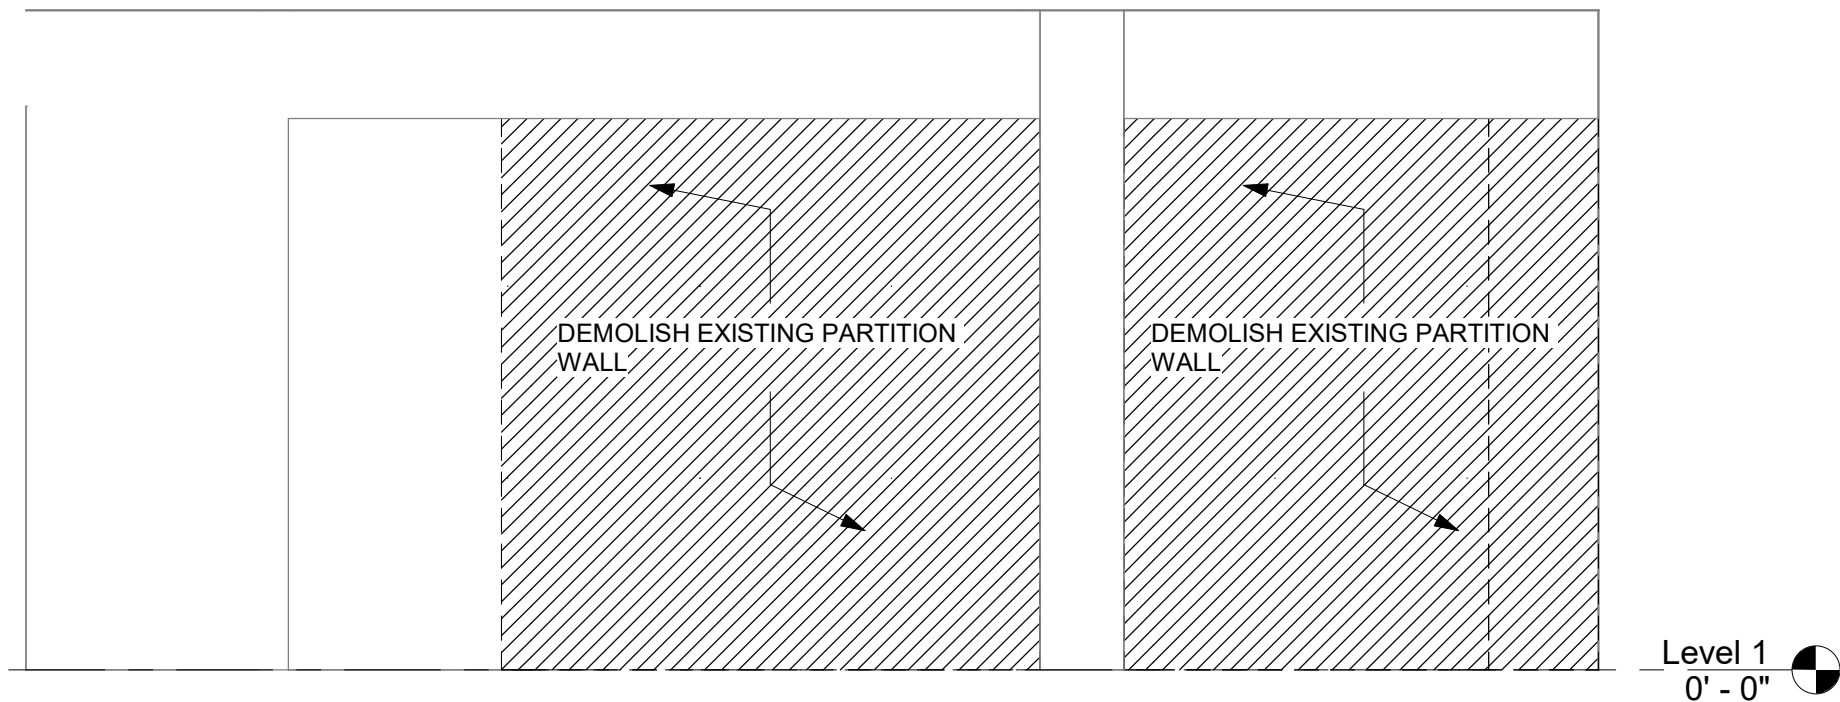


3 DEMO ELEVATION
3/8" = 1'-0"


Revision Schedule		
No.	Date	Description

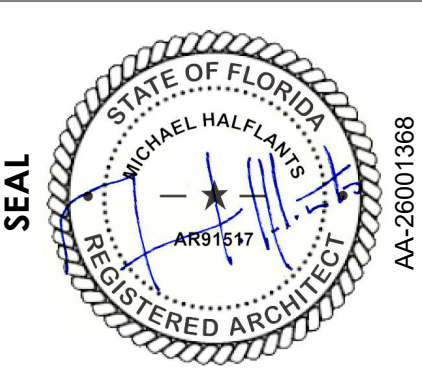


DATE	03/03/2026
PHASE	FOR CONSTR
PROJECT #	00-000

D101
DEMOLITION PLAN



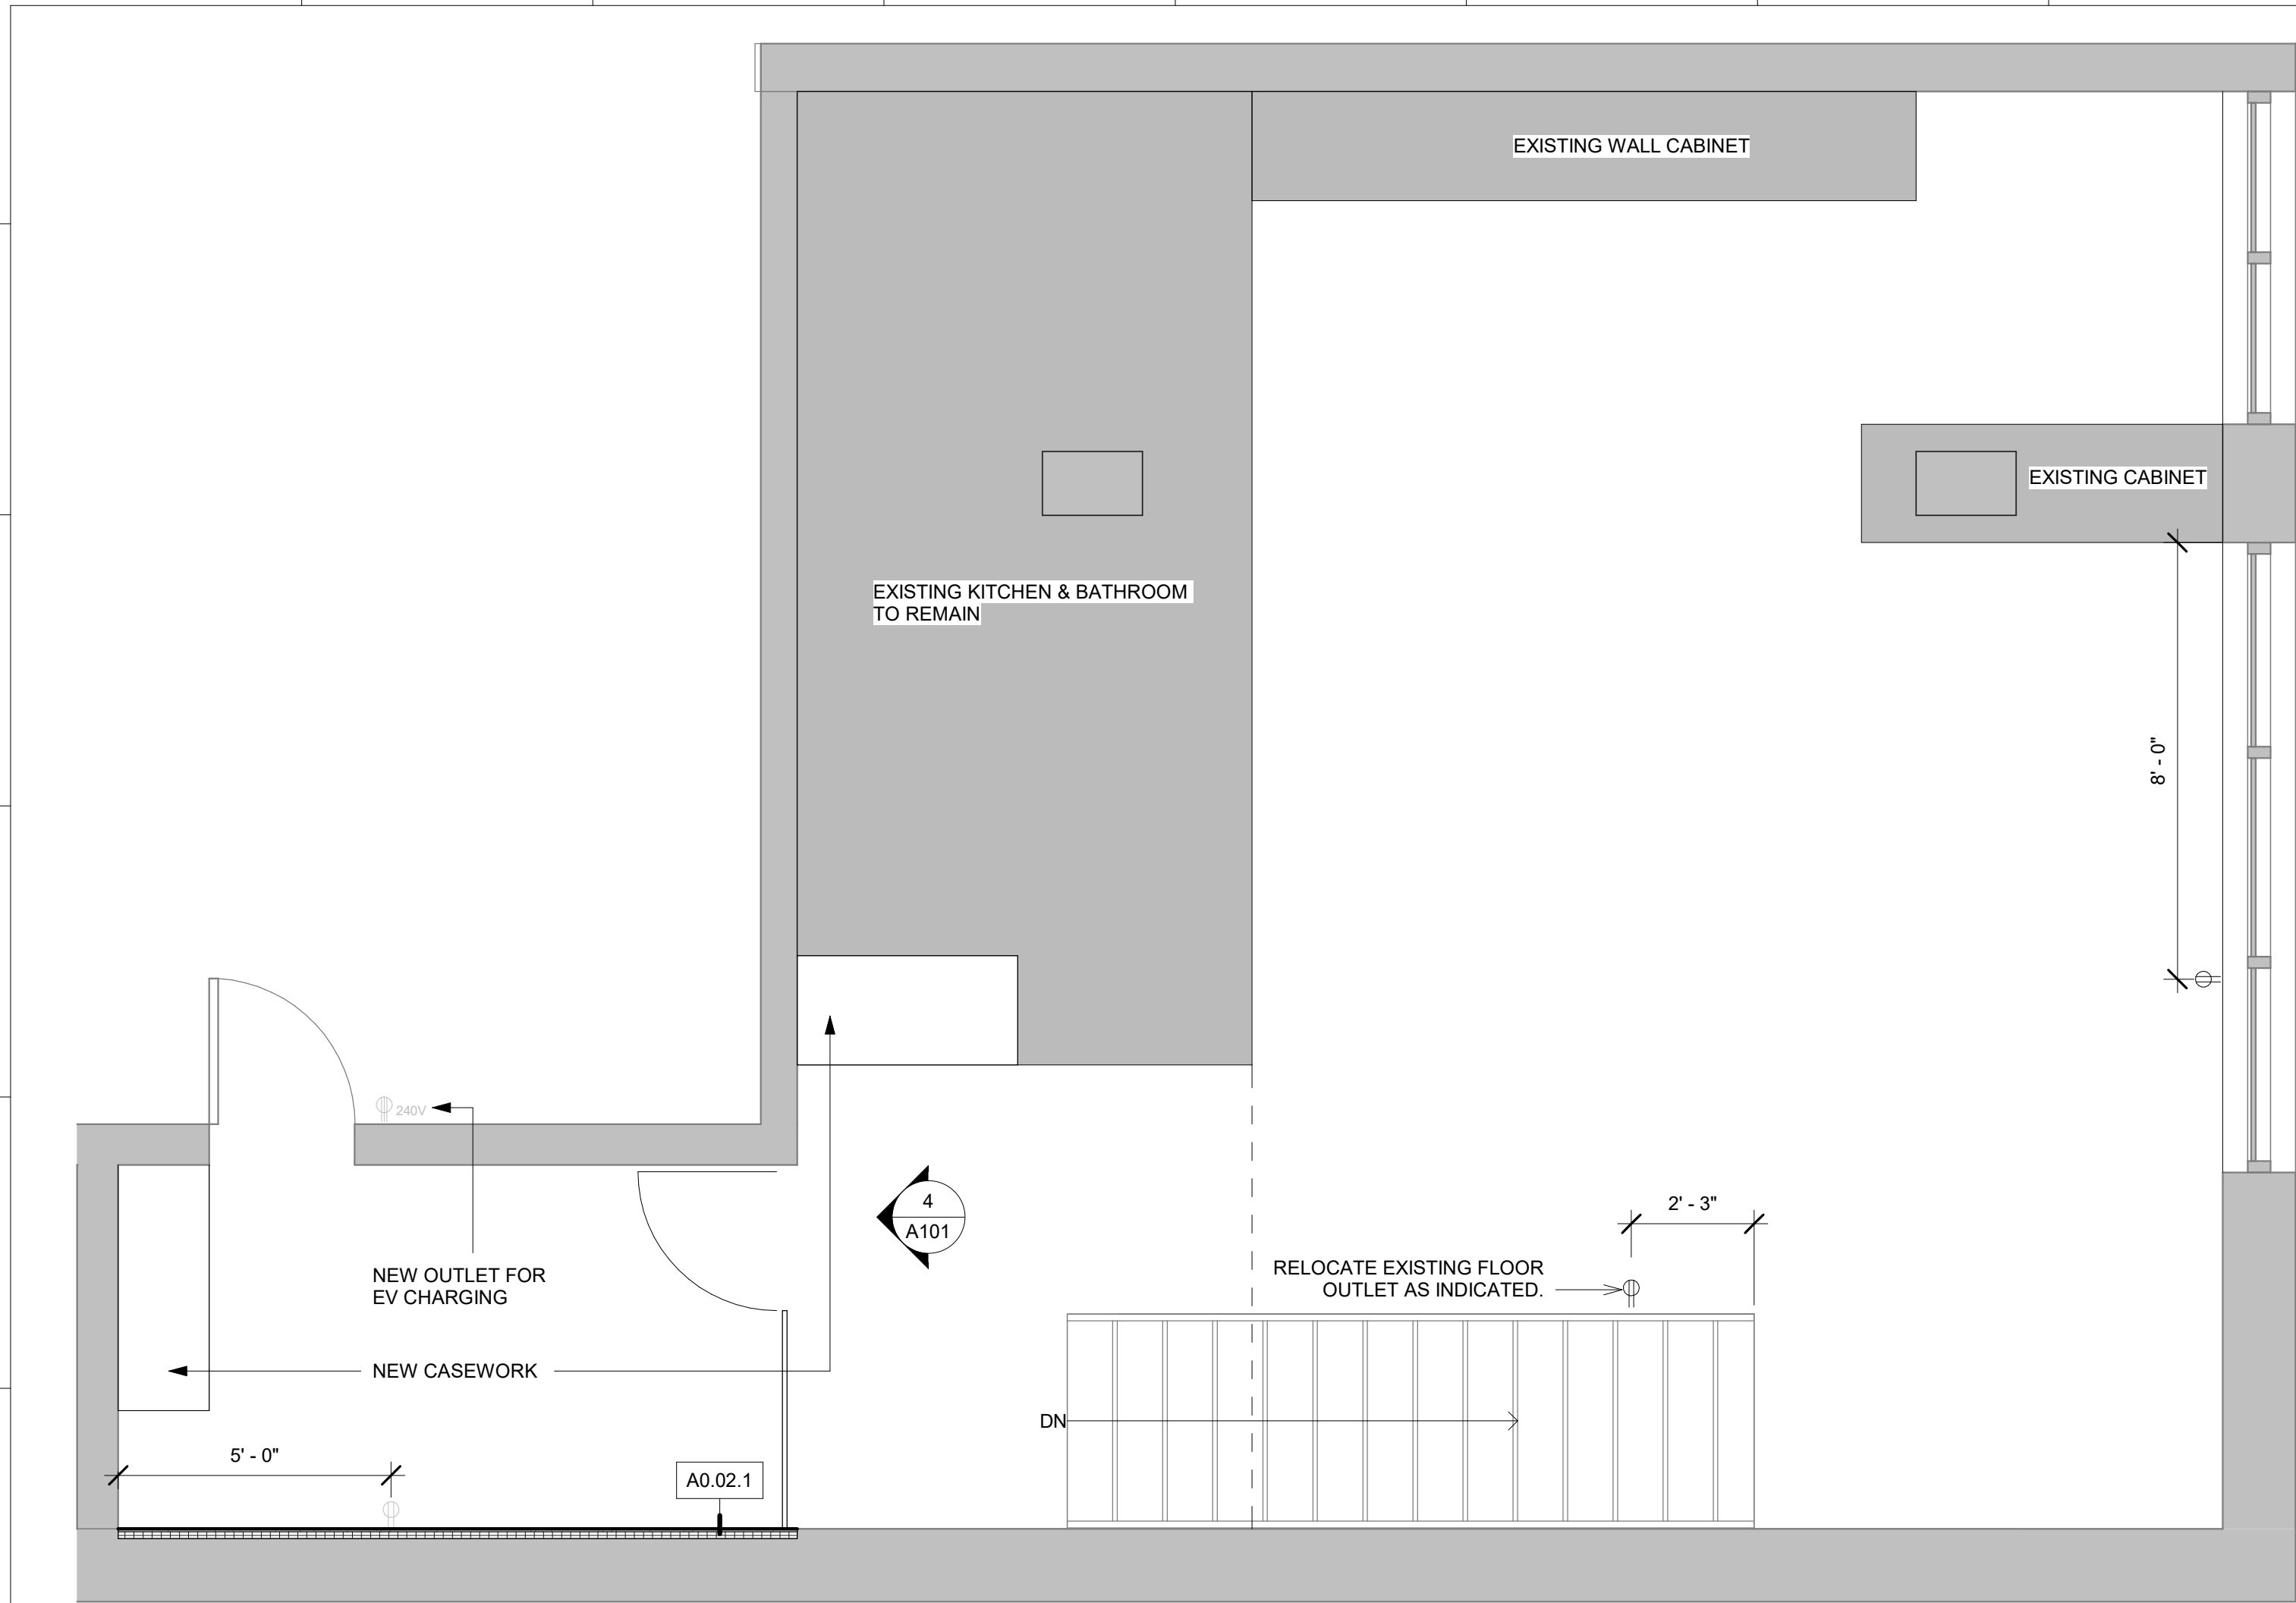

5 Level 2
3/8" = 1'-0"

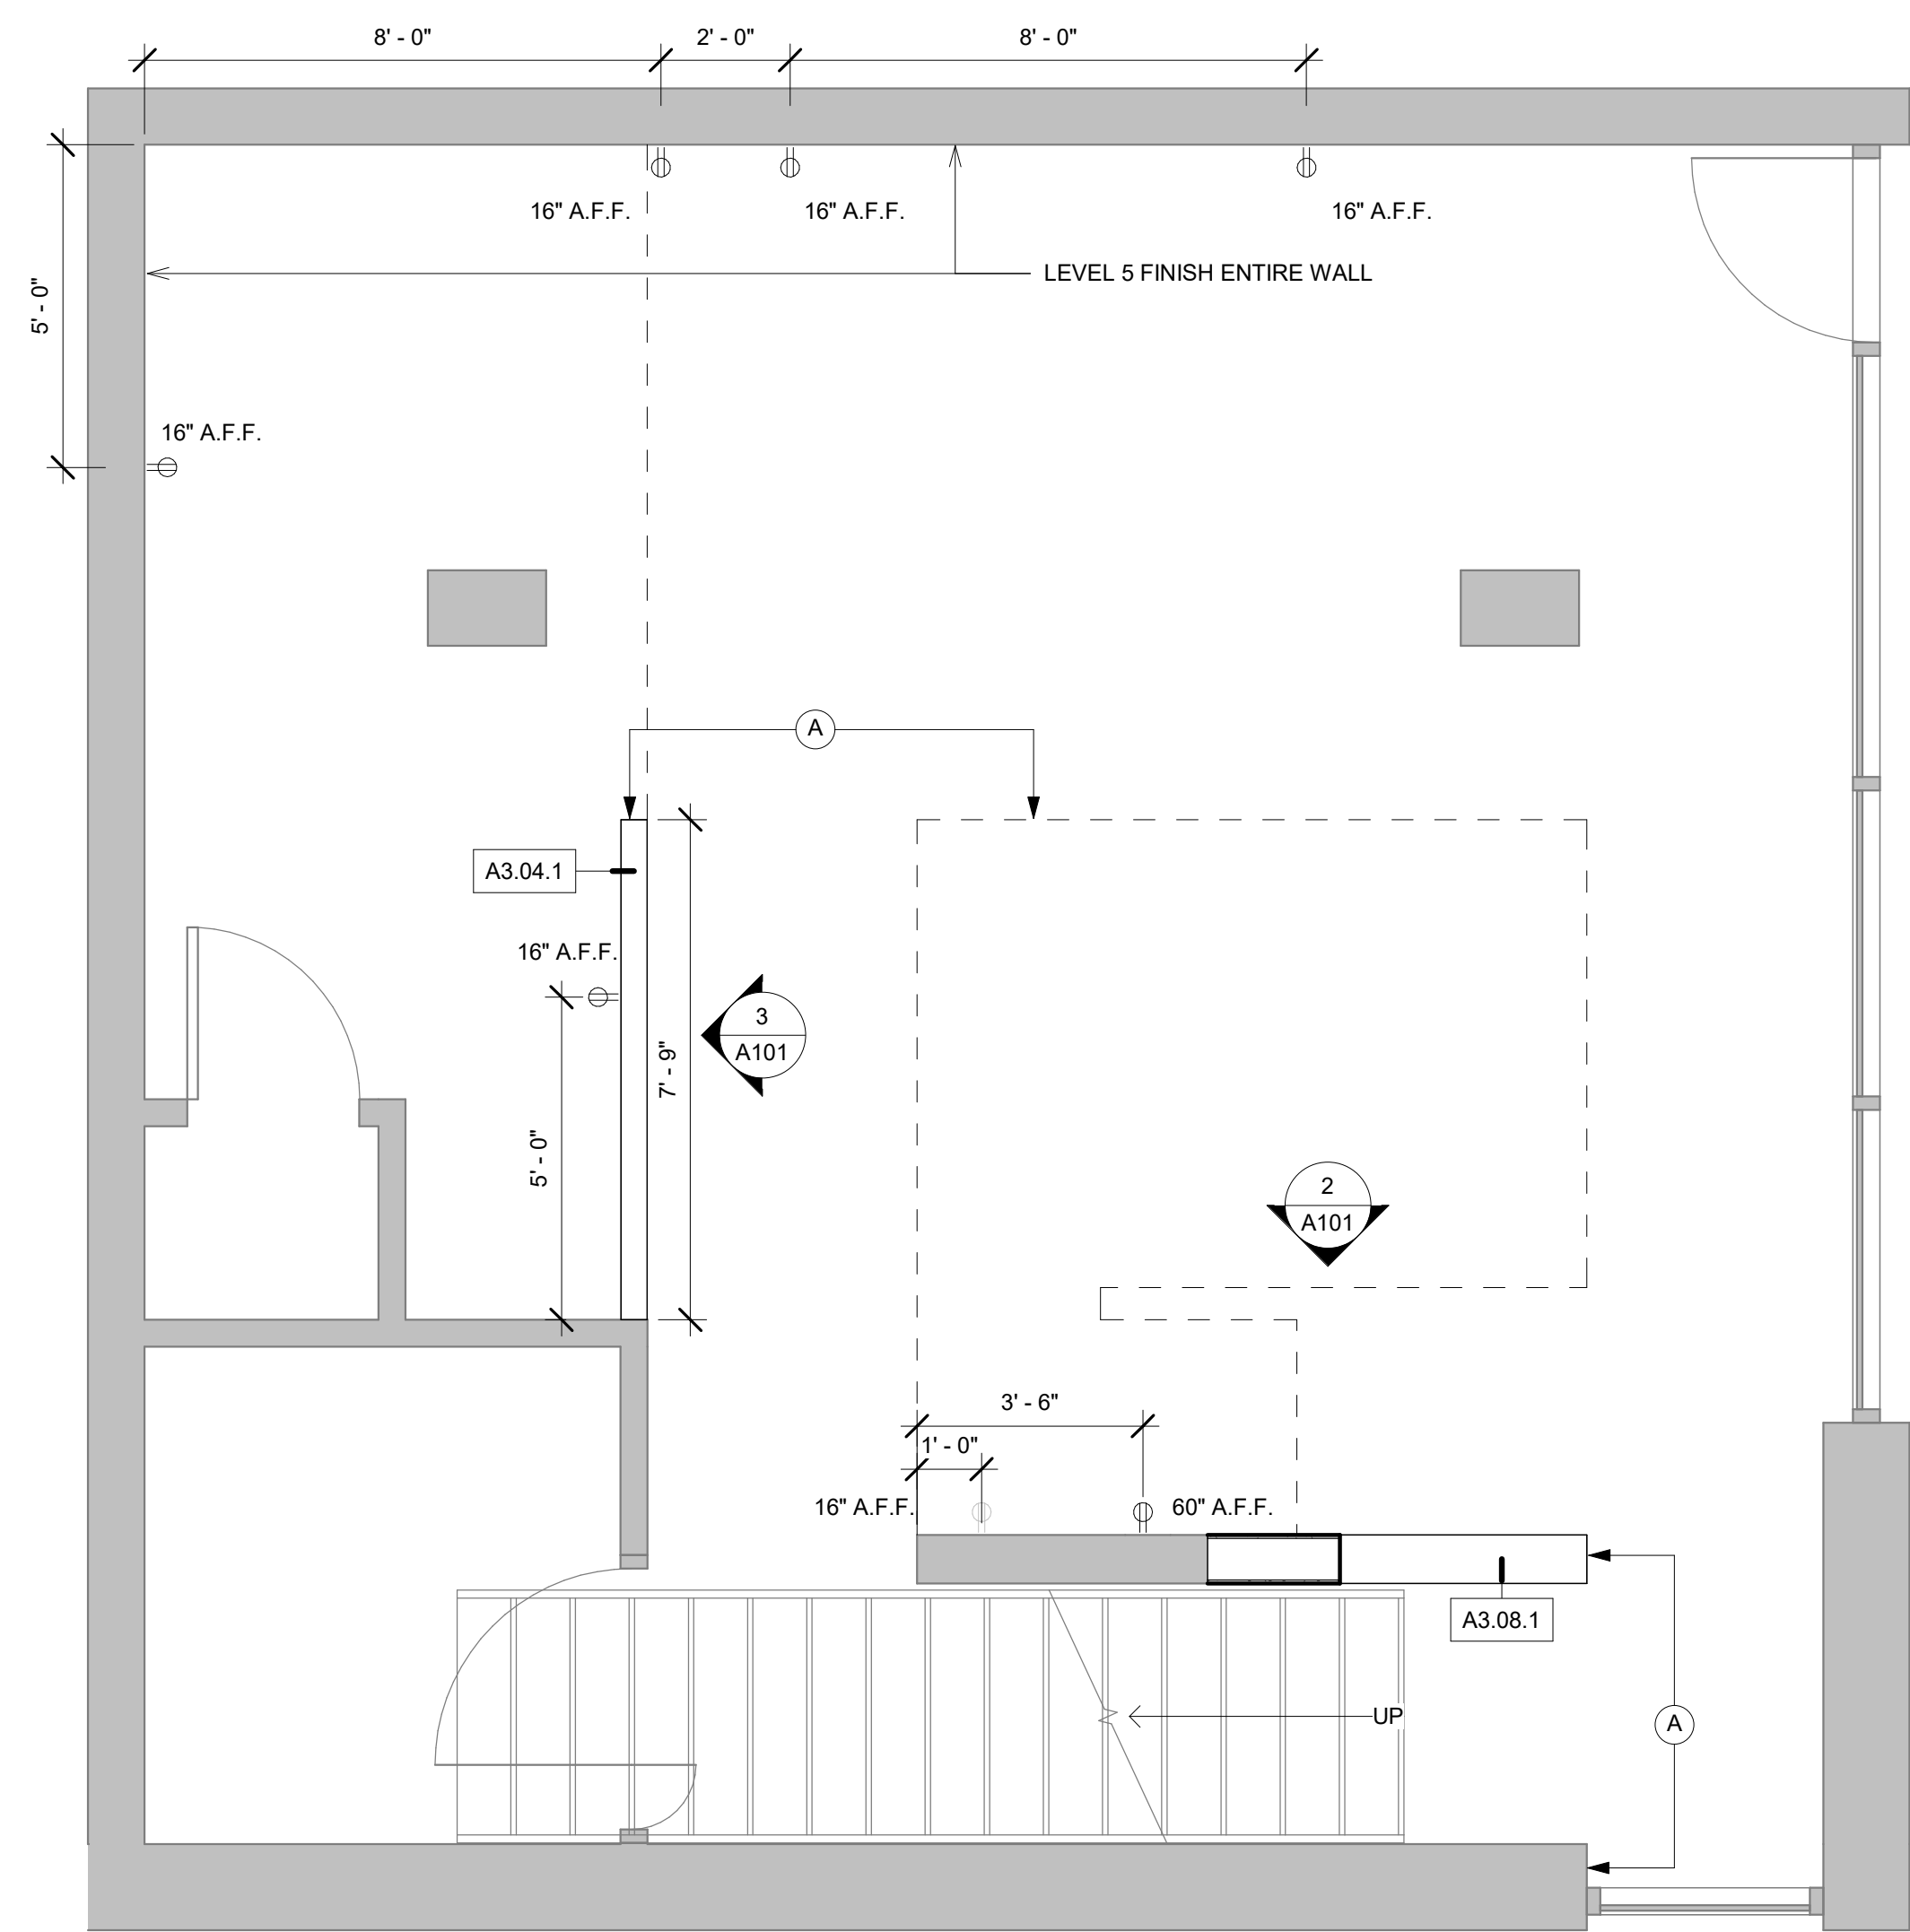


1 Level 1
3/8" = 1'-0"

**ALL OUTLET REMAIN ON SECOND FLOOR, CONTRACTOR TO ADD ADDITIONAL OUTLET AS SHOWN ON PLAN.
**TYPICAL GYP BOARD FINISH: LEVEL 3 WITH ORANGE PEEL FINISH AND SATIN PAINT, UNLESS OTHERWISE NOTED.


DUPLEX RECEPTACLE NEMA TYPE 5-20R CENTERLINE MOUNTED ABOVE CASEWORK BACKSPASH.
COORDINATE WITH ARCHITECTURAL DRAWINGS.

3 LOW PARTITION WALL
3/8" = 1'-0"

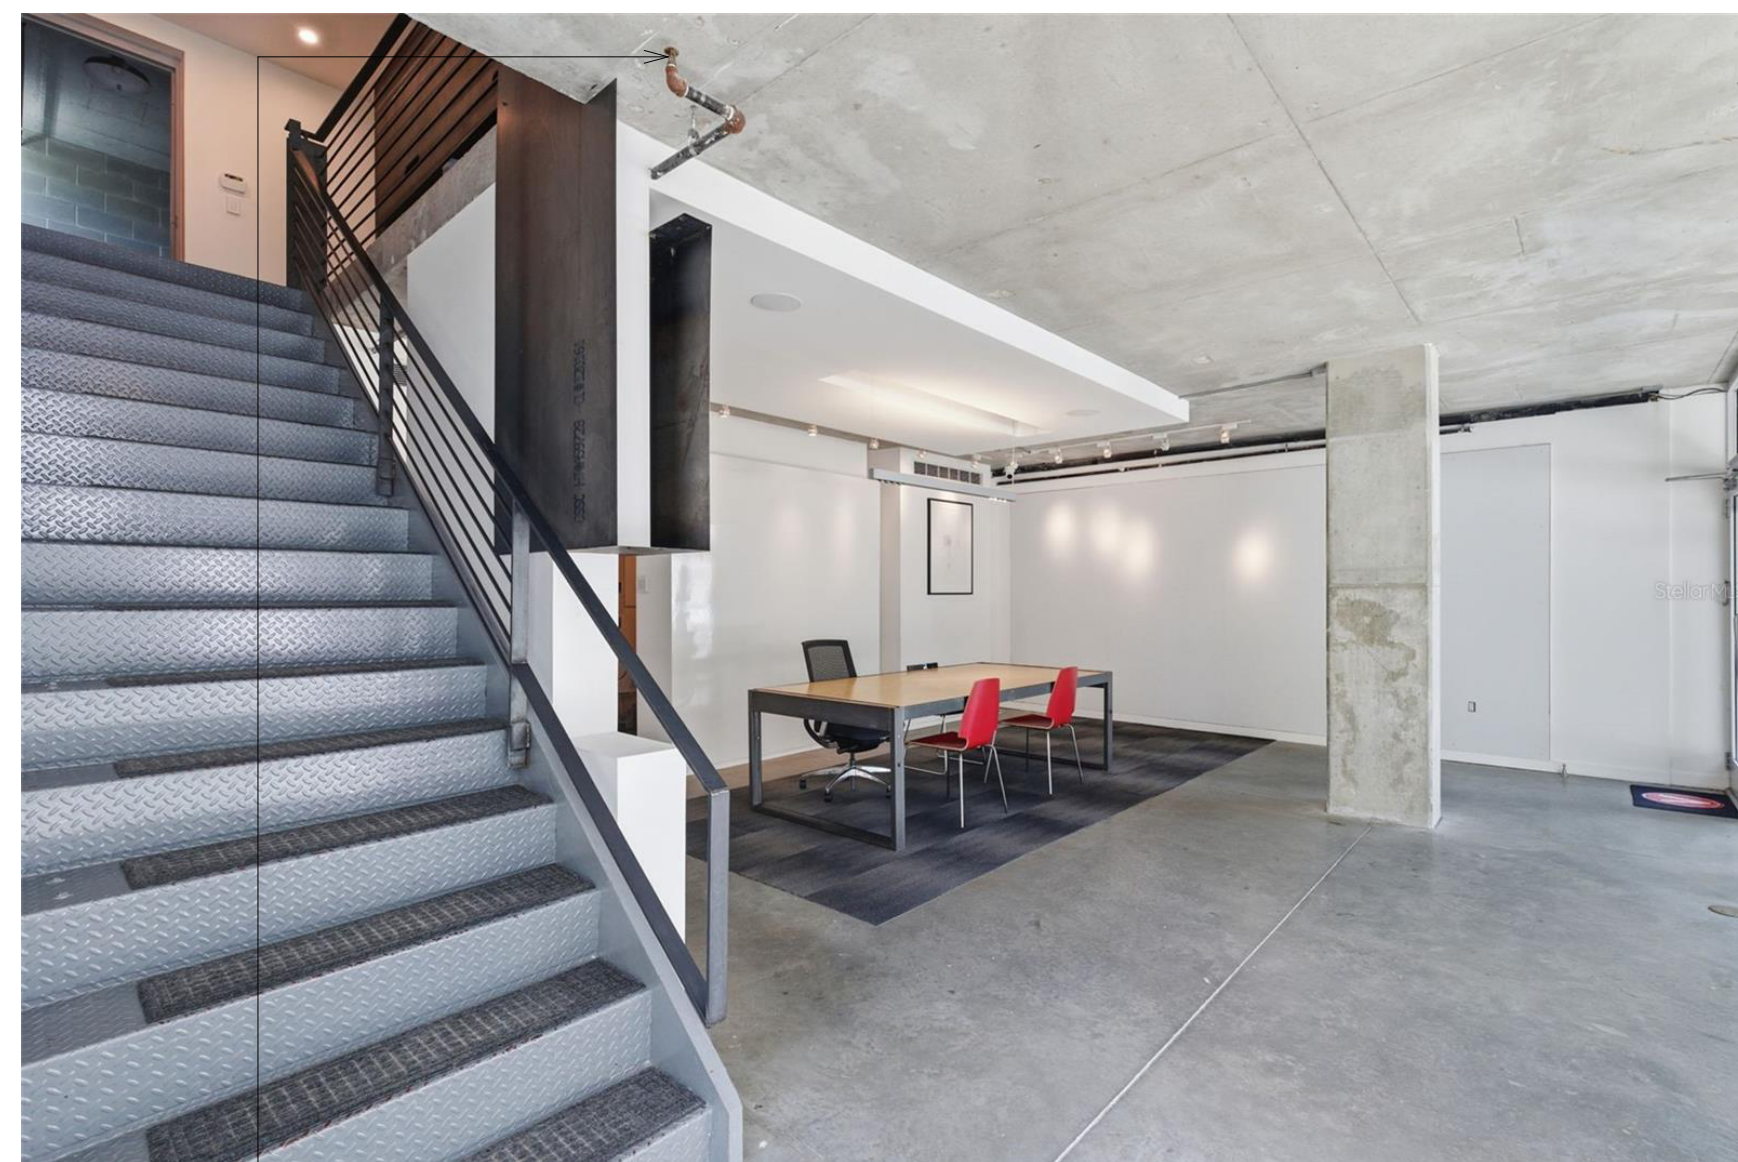


EXTEND FIRE SPRINKLER COVERAGE TO THE NEW PARTITION WALL. PROVIDE SIDE-WALL/FLUSH-MOUNTED SPRINKLER HEAD TO MAINTAIN UNIFORM COVERAGE AND CODE COMPLIANCE. WHITE FINISHES.

2 MEDIA WALL
3/8" = 1'-0"

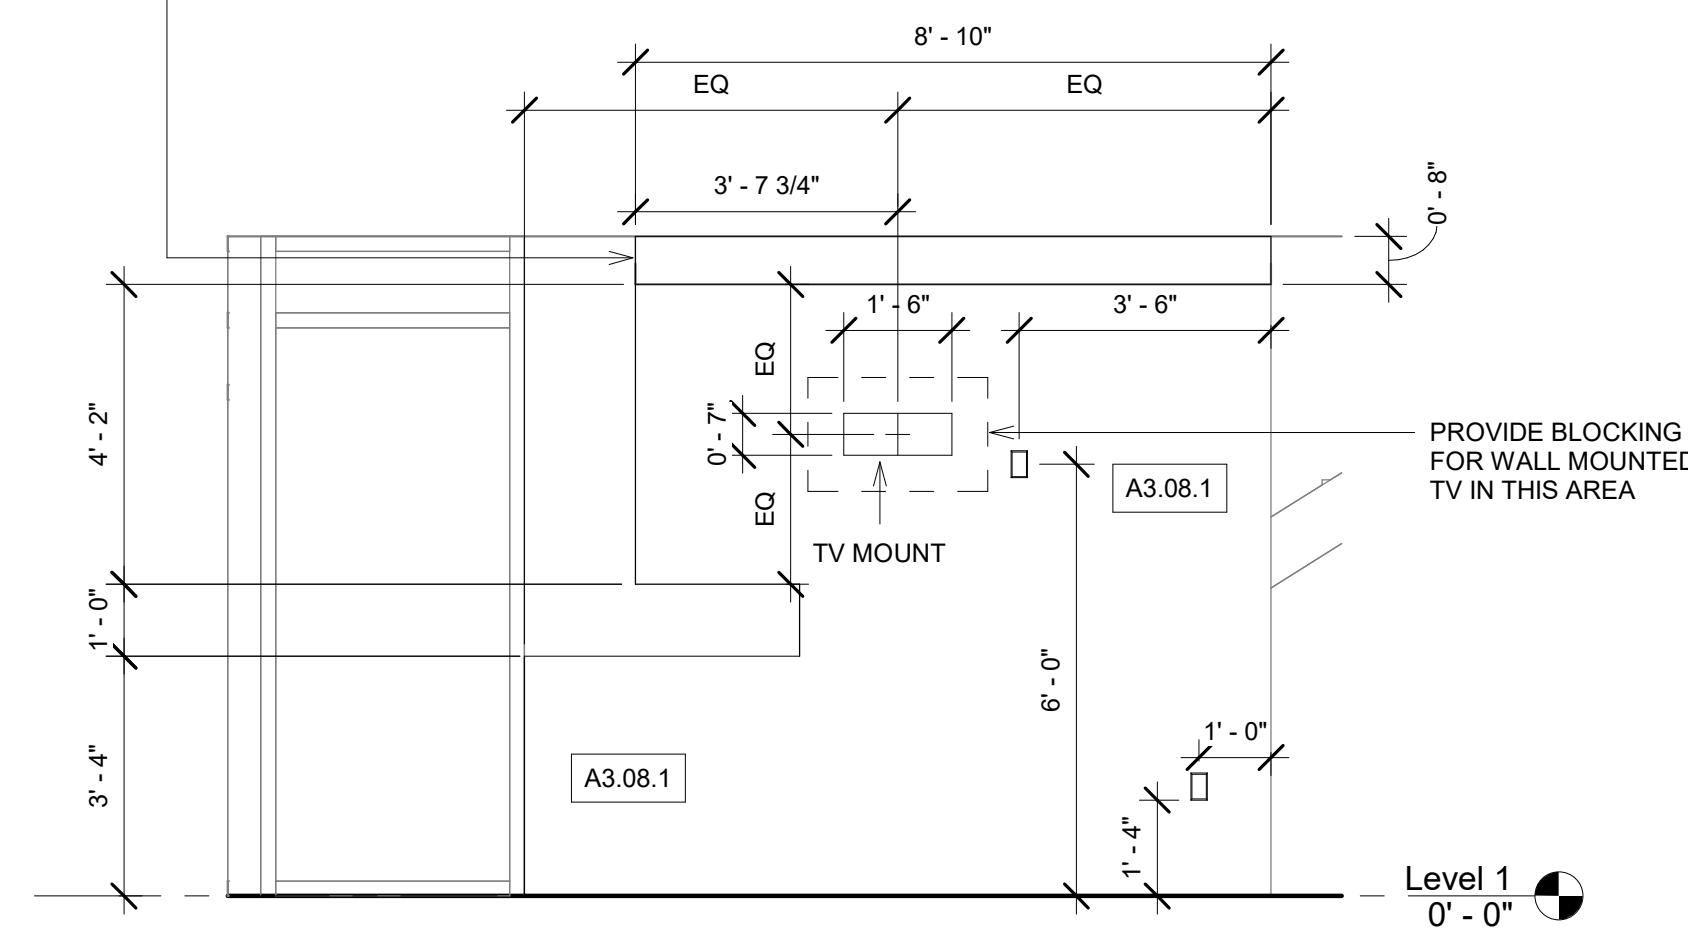


4 GLASS PARTITION
3/8" = 1'-0"

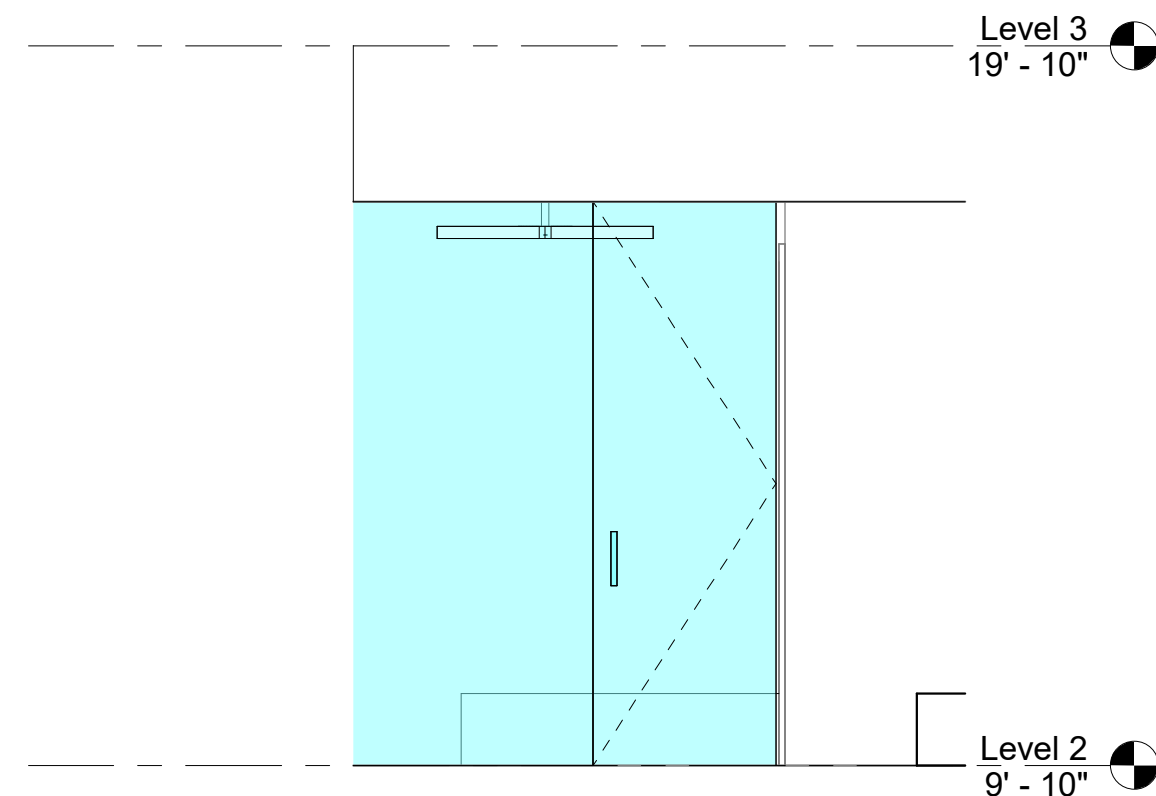


Revision Schedule		
No.	Date	Description


No.	Date	Description

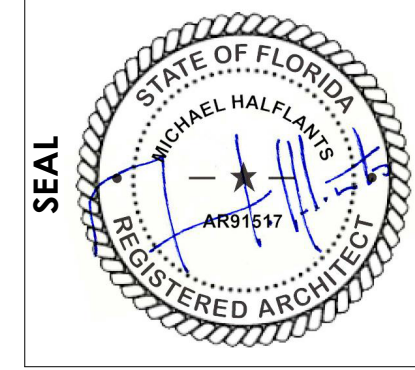

DATE	03/03/2026
PHASE	FOR CONSTR
PROJECT #	00-000

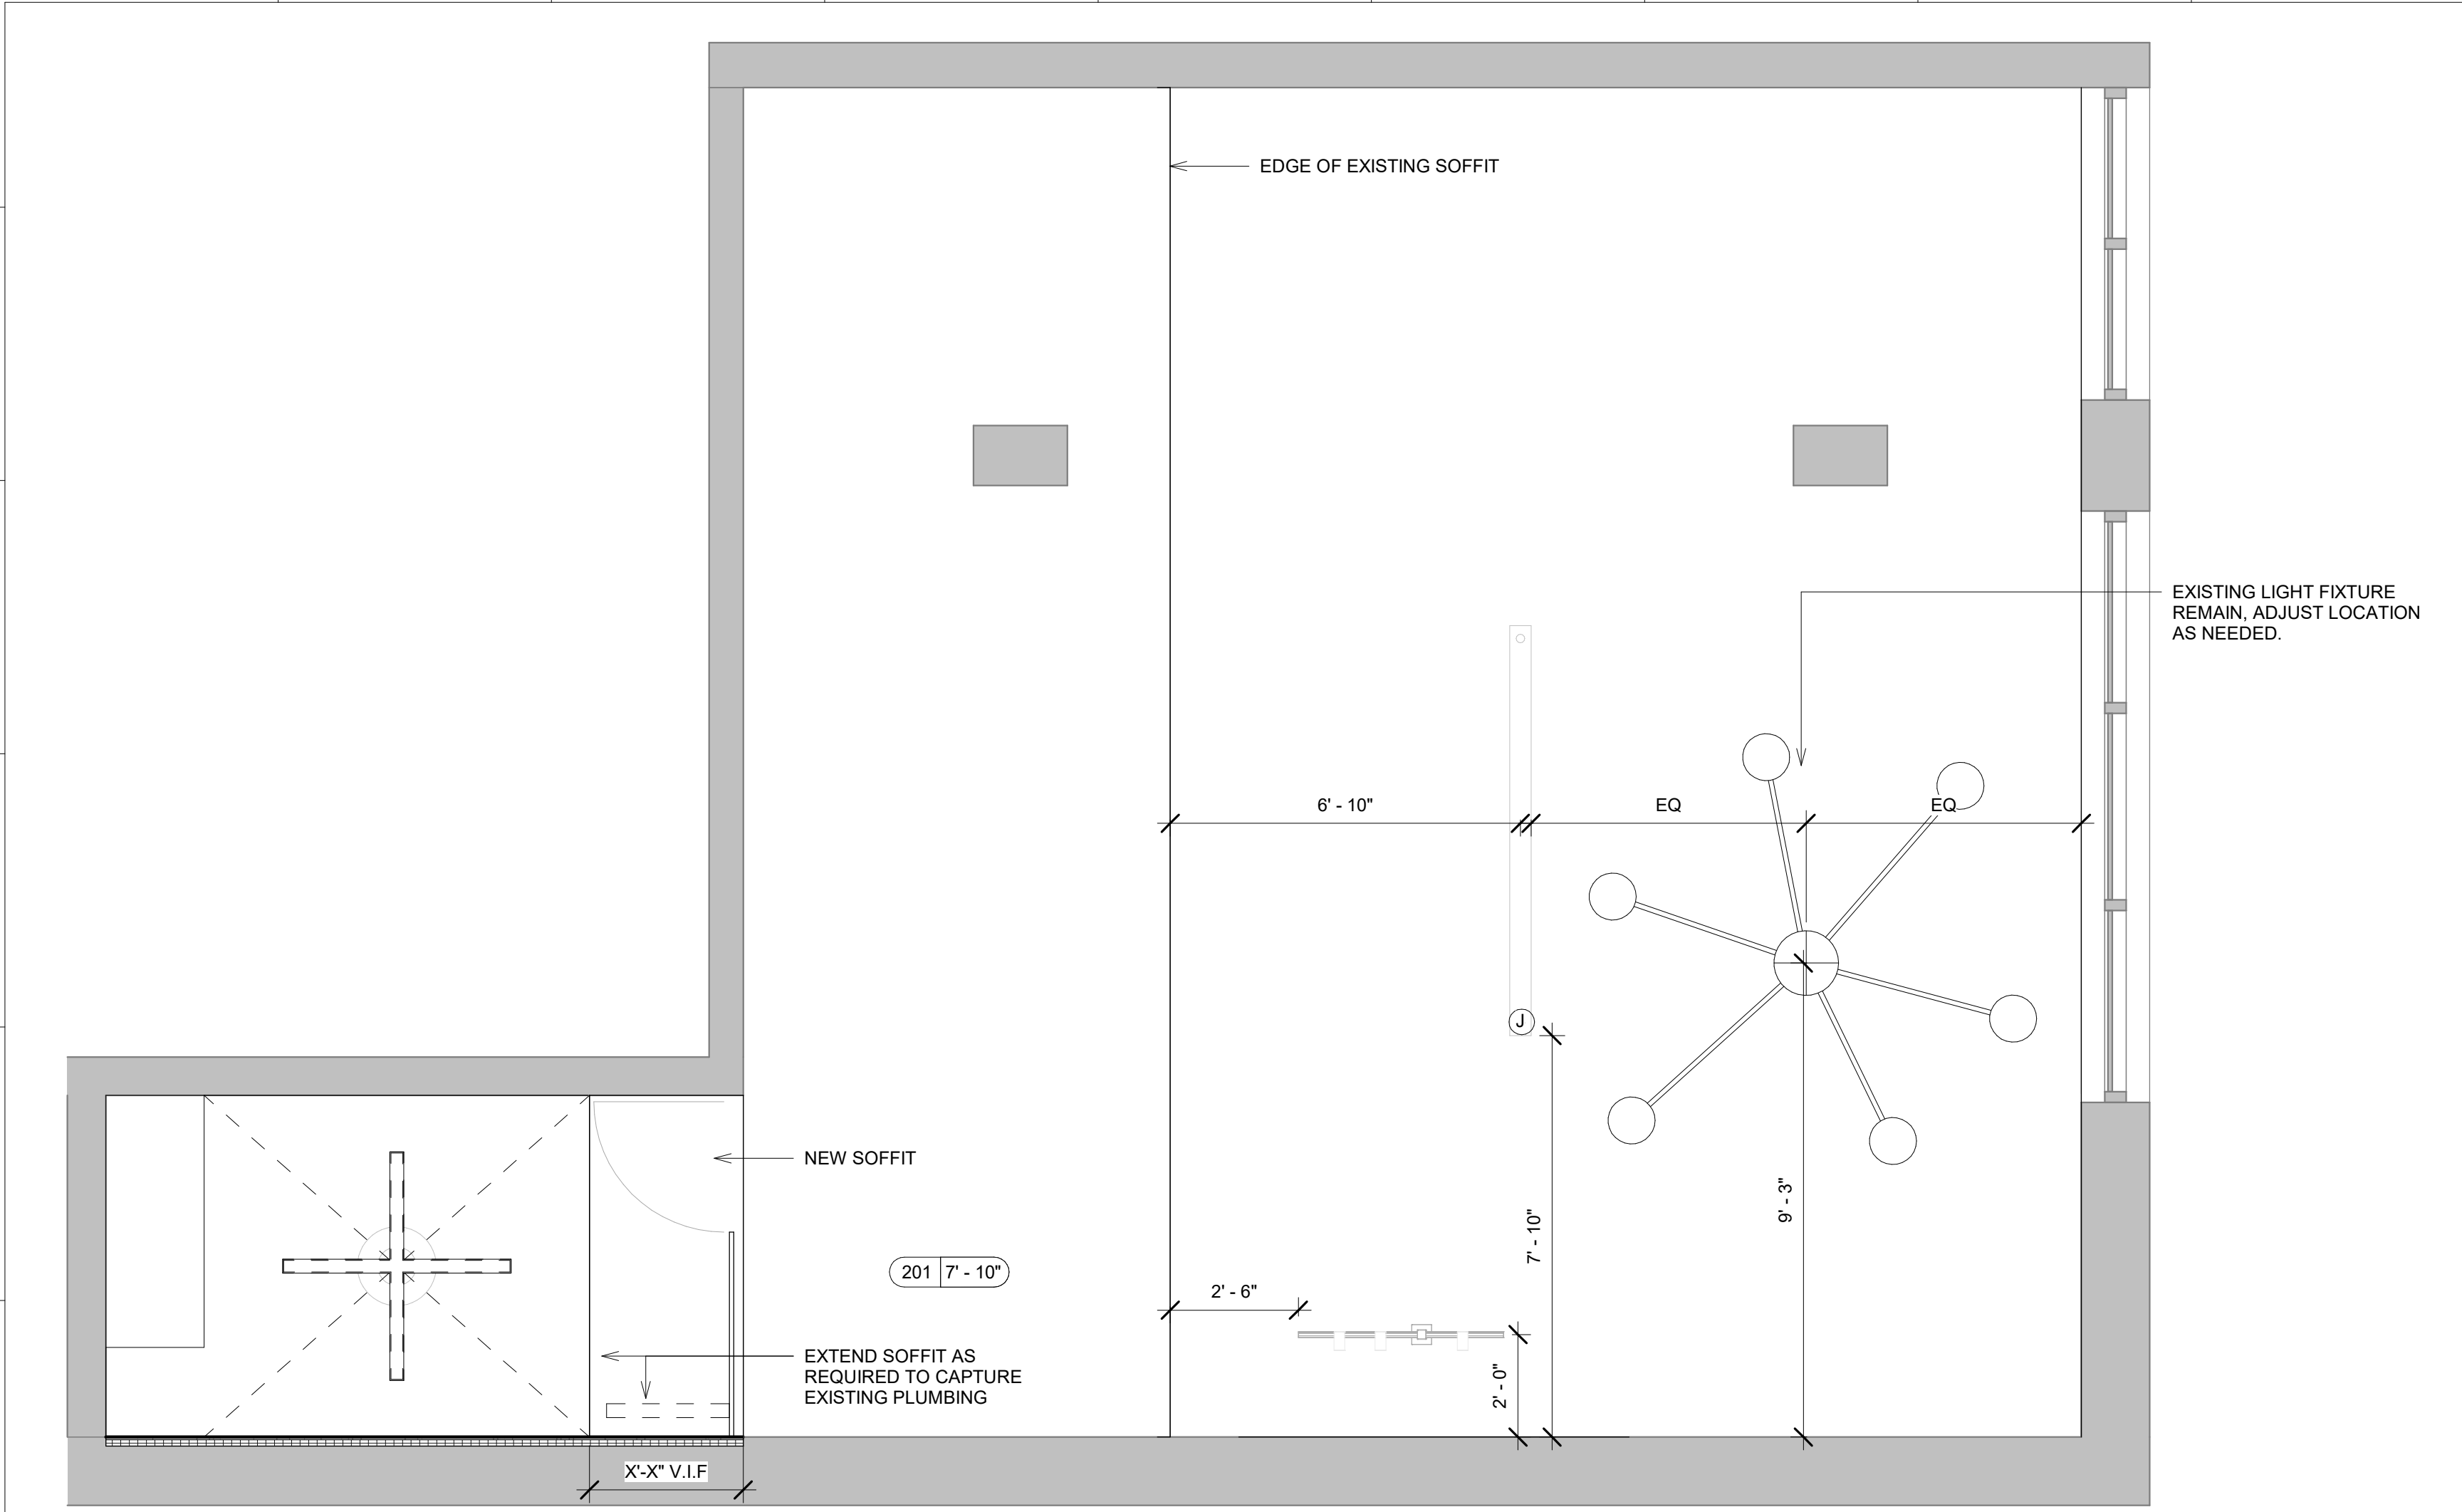

2 Level 2
3/8" = 1'-0"

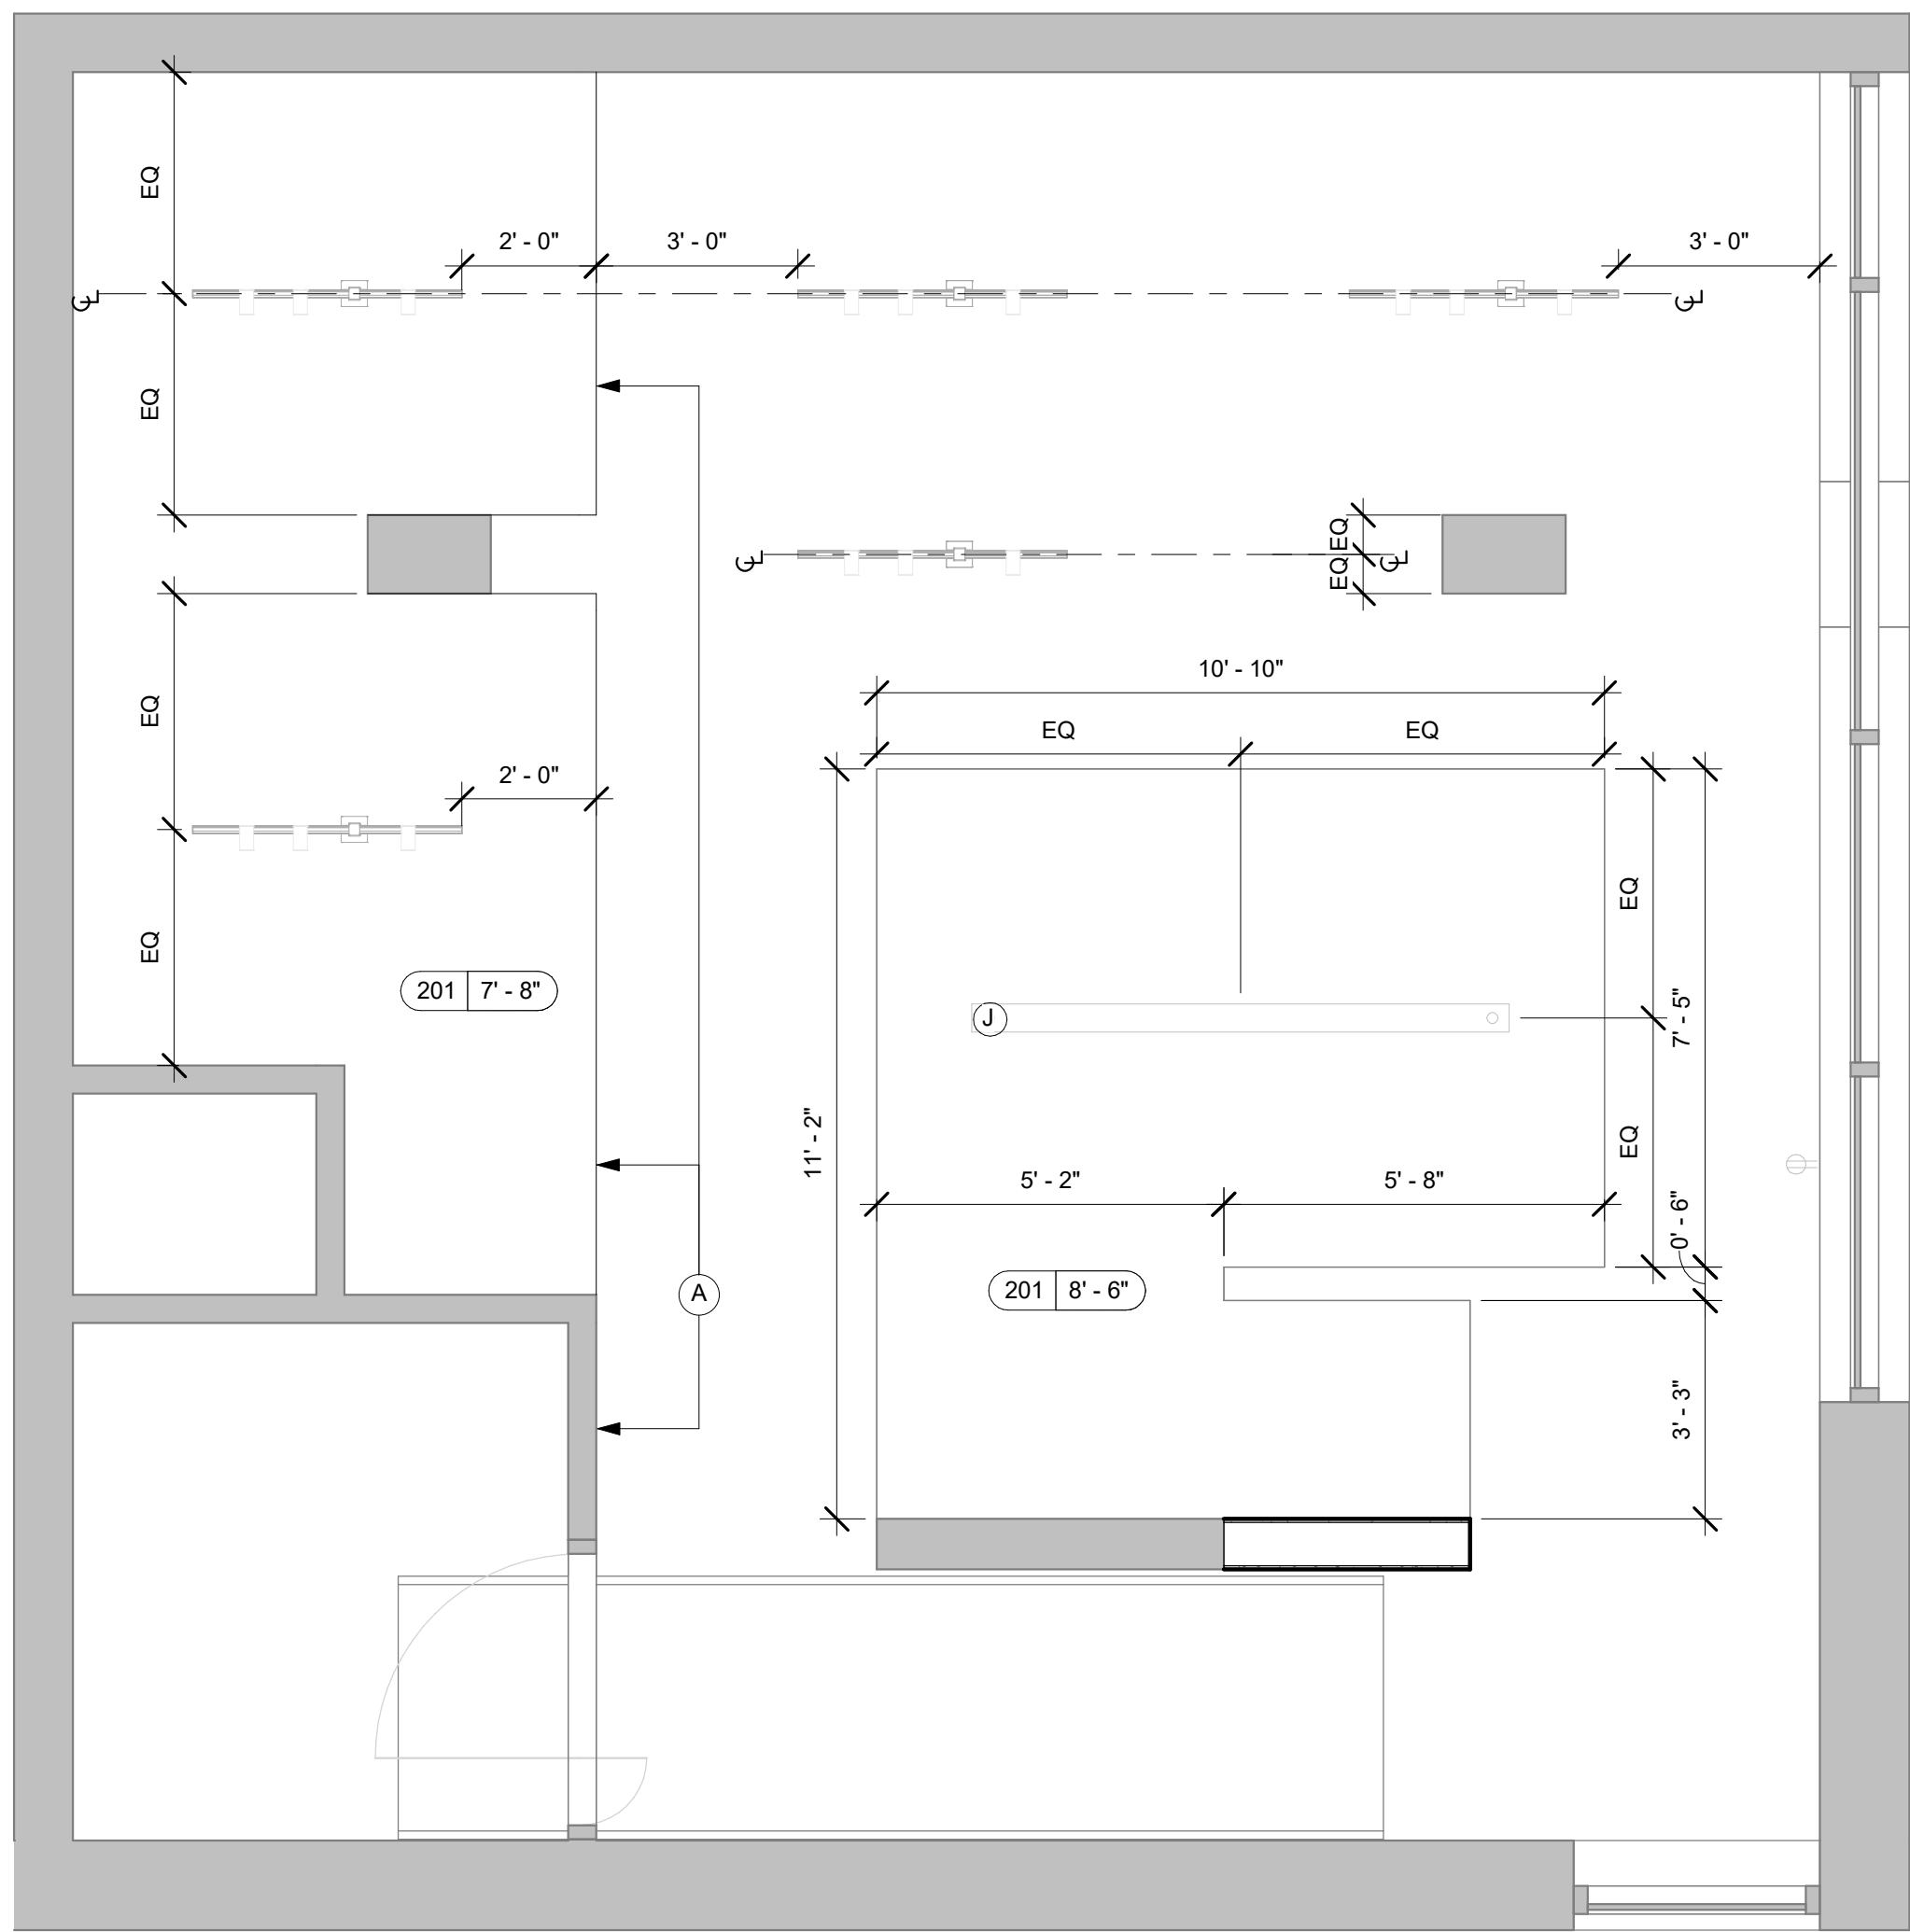

1 RCP LEVEL 1
3/8" = 1'-0"


RCP NOTES




PENDENT, PROVIDED BY OWNER J-BOX INDICATED ON RCP



TRACK LIGHTING, PROVIDED BY OWNER RUN CONDUIT TO FIXTURES

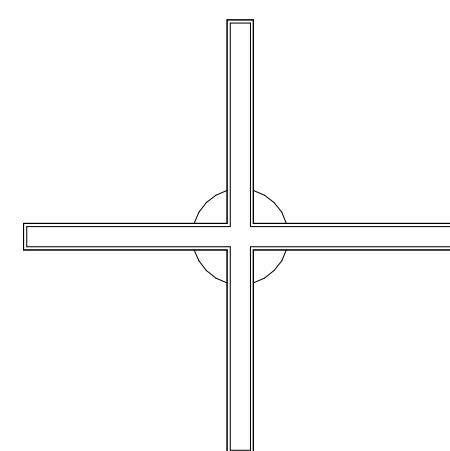

CROSS LIGHT, PROVIDED BY OWNER J-BOX CENTERED ON FIXTURE

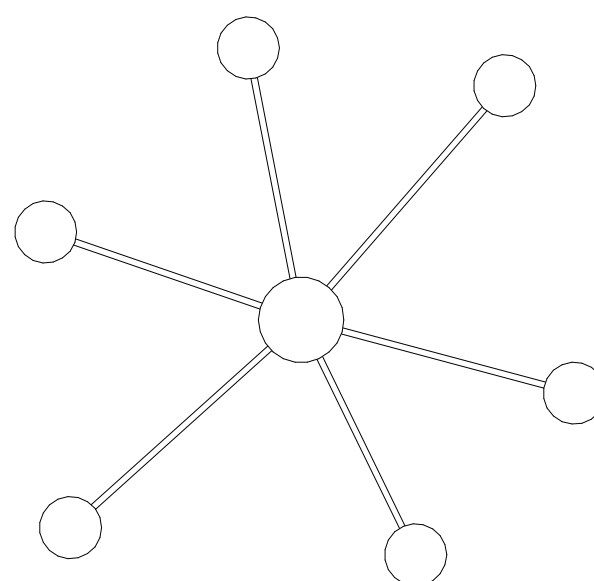


EXISTING CHANDELIER

****REMOVE ALL EXISTING LIGHT FIXTURES UNLESS OTHERWISE NOTED. EXISTING CHANDELIER TO REMAIN.**

CONTRACTOR TP REMOVE ALL EXISTING J-BOXES AND CONDUIT THAT ARE NOT SERVING A LIGHT FIXTURE BACK SOURCE

CONTRACTOR TO RELOCATE EXISTING J-BOXES AS REQUIRED FOR NEW LIGHTING FIXTURES

Revision Schedule		
No.	Date	Description

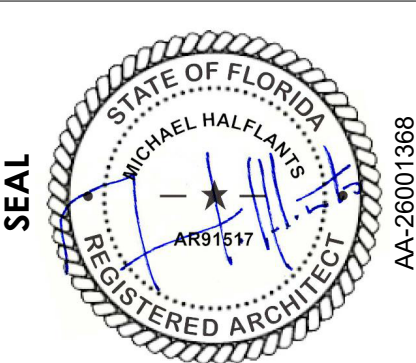

DATE	03/03/2026
PHASE	FOR CONSTR
PROJECT #	00-000