

DRAWINGS INDEX:

SHEET NUMBER	SHEET NAME
Sheet 001	COVER PAGE
Sheet 002	FLOOR PLAN
Sheet 003	PROPOSED FLOOR PLAN
Sheet 004	SITE PLAN
Sheet 005	ELECTRICAL 1ST FLOOR PLAN
Sheet 006	ELECTRICAL 2ND FLOOR PLAN
Sheet 007	PLUMBING PLAN
Sheet 008	ISOMETRIC VIEW
Sheet 009	DETAILS
Sheet 010	OTHER DETAILS
Sheet 011	NOTES
Sheet 012	
Sheet 013	
Sheet 014	
Sheet 015	

GENERAL NOTES:

- 1.- ALL STRUCTURAL LUMBER AND EXTERIOR FRAMING SHALL BE #2 SOUTHERN YELLOW PINE OR EQUIVALENT, UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
- 2.- ANY WOOD LOCATED BELOW THE REQUIRED BASE FLOOD ELEVATION SHALL BE TREATED WITH 0.40 CCA TREATMENT FOR FLOOD RESISTANCE.
- 3.- ALL WOOD FRAMING MUST ADHERE TO THE REQUIREMENTS OF THE FLORIDA BUILDING CODE, 7TH EDITION (2020), INCLUDING BUT NOT LIMITED TO CONNECTIONS, BRACING, BRIDGING, AND NAILING.
- 4.- CONTRACTOR SHALL INSTALL EQUIPMENT IN ACCORDANCE WITH MANUFACTURER INSTRUCTIONS & NOTHING IN THIS DOCUMENT SHALL BE INTERPRETED IN A WAY THAT OVERRIDES THEM.
- 5.- THE BUILDING CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL EXISTING CONDITIONS AS CLOSELY AS POSSIBLE. ANY DISCREPANCIES FOUND PRIOR TO OR DURING CONSTRUCTION SHOULD BE PROMPTLY REPORTED TO THE "ENGINEER."
- 6.- THE BUILDING CONTRACTOR IS RESPONSIBLE FOR REPAIRING TO ORIGINAL CONDITIONS, ANY AND ALL DAMAGE TO BUILDING SURFACES, EQUIPMENT, ETC. CAUSED DURING THE PERFORMANCE OF THE WORK.

NOTE:

- 1.- THE STRUCTURAL INTEGRITY OF THE BUILDING, AS DEPICTED IN THESE PLANS, IS CONTINGENT UPON COMPLETION ACCORDING TO THE SPECIFIED PLANS AND SPECIFICATIONS. STRUCTURAL MEMBERS ARE NOT SELF-SUPPORTED DURING CONSTRUCTION AND REQUIRE TEMPORARY BRACING UNTIL PERMANENTLY AFFIXED TO THE STRUCTURES AS DIRECTED.
- 2.- THE ENGINEER ASSUMES NO LIABILITY FOR THE STRUCTURE DURING CONSTRUCTION UNLESS THE CONSTRUCTION METHOD AND BRACING ARE EXPLICITLY INCLUDED IN THE PLANS AND SPECIFICATIONS OR SUPERVISED BY THE ENGINEER DURING CONSTRUCTION.
- 3.- THESE DRAWINGS PERTAIN SOLELY TO THE STRUCTURAL ASPECTS AND DO NOT ENCOMPASS ADDITIONAL INFORMATION SUCH AS ELECTRICAL, MECHANICAL, ARCHITECTURAL, OR PROPERTY SURVEY DETAILS. THIS SEAL ON THE DRAWINGS IS VALID FOR 12 MONTHS FROM THE DATE OF SIGNATURE. .
- 4.- INSTALLATION WILL NOT OBSTRUCT ANY PLUMBING, MECHANICAL, OR BUILDING ROOF VENTS.
- 5.- CONTRACTOR SHALL INSTALL EQUIPMENT IN ACCORDANCE WITH MANUFACTURER INSTRUCTIONS & NOTHING IN THIS DOCUMENT SHALL BE INTERPRETED IN A WAY THAT OVERRIDES THEM.
- 6.- CONTRACTOR IS RESPONSIBLE FOR VERIFICATION OF ALL CONDITIONS, DIMENSIONS & DETAILS IN THIS DOCUMENT. ALL DIMENSIONS SHALL BE VERIFIED BY SUBCONTRACTOR BEFORE INSTALLATION.
- 7.- WINDOWS SIZE TO MATCH EXISTING SO TO RETAIN EXISTING EXTERIOR FACADE
- 8.- PER FBC 8TH EDITION R318 TERMITE PROTECTION SHALL BE PROVIDED BY REGISTERED TERMITICIDES, INCLUDING SOIL APPLIED PERTICIDES, BAITING SYSTEMS, AND PESTACIDES APPLIED TO WOOD OR OTHERS METHODS. CONTRACTOR COMPLY WITH CHARTER 1 ALTERATIONS-LEVEL 1.
- 9.- ELECTRICAL REMOVED IN DEMO WALL TO BE REPLACED IN KIND, PER CURRENT BUILDING CODE NEC 2020 BY A LICENSED ELECTRICAL SUB CONTRACTOR.


HIILSBOROUGH COUNTY

14704 CARNATION AVE TAMPA FLORIDA 33613


EDUARDO MATOSINHO/100 FOLD RETURNS LLC

RENOVATION DRAWINGS
KITCHEN AND BATHS

ARIAL VIEW

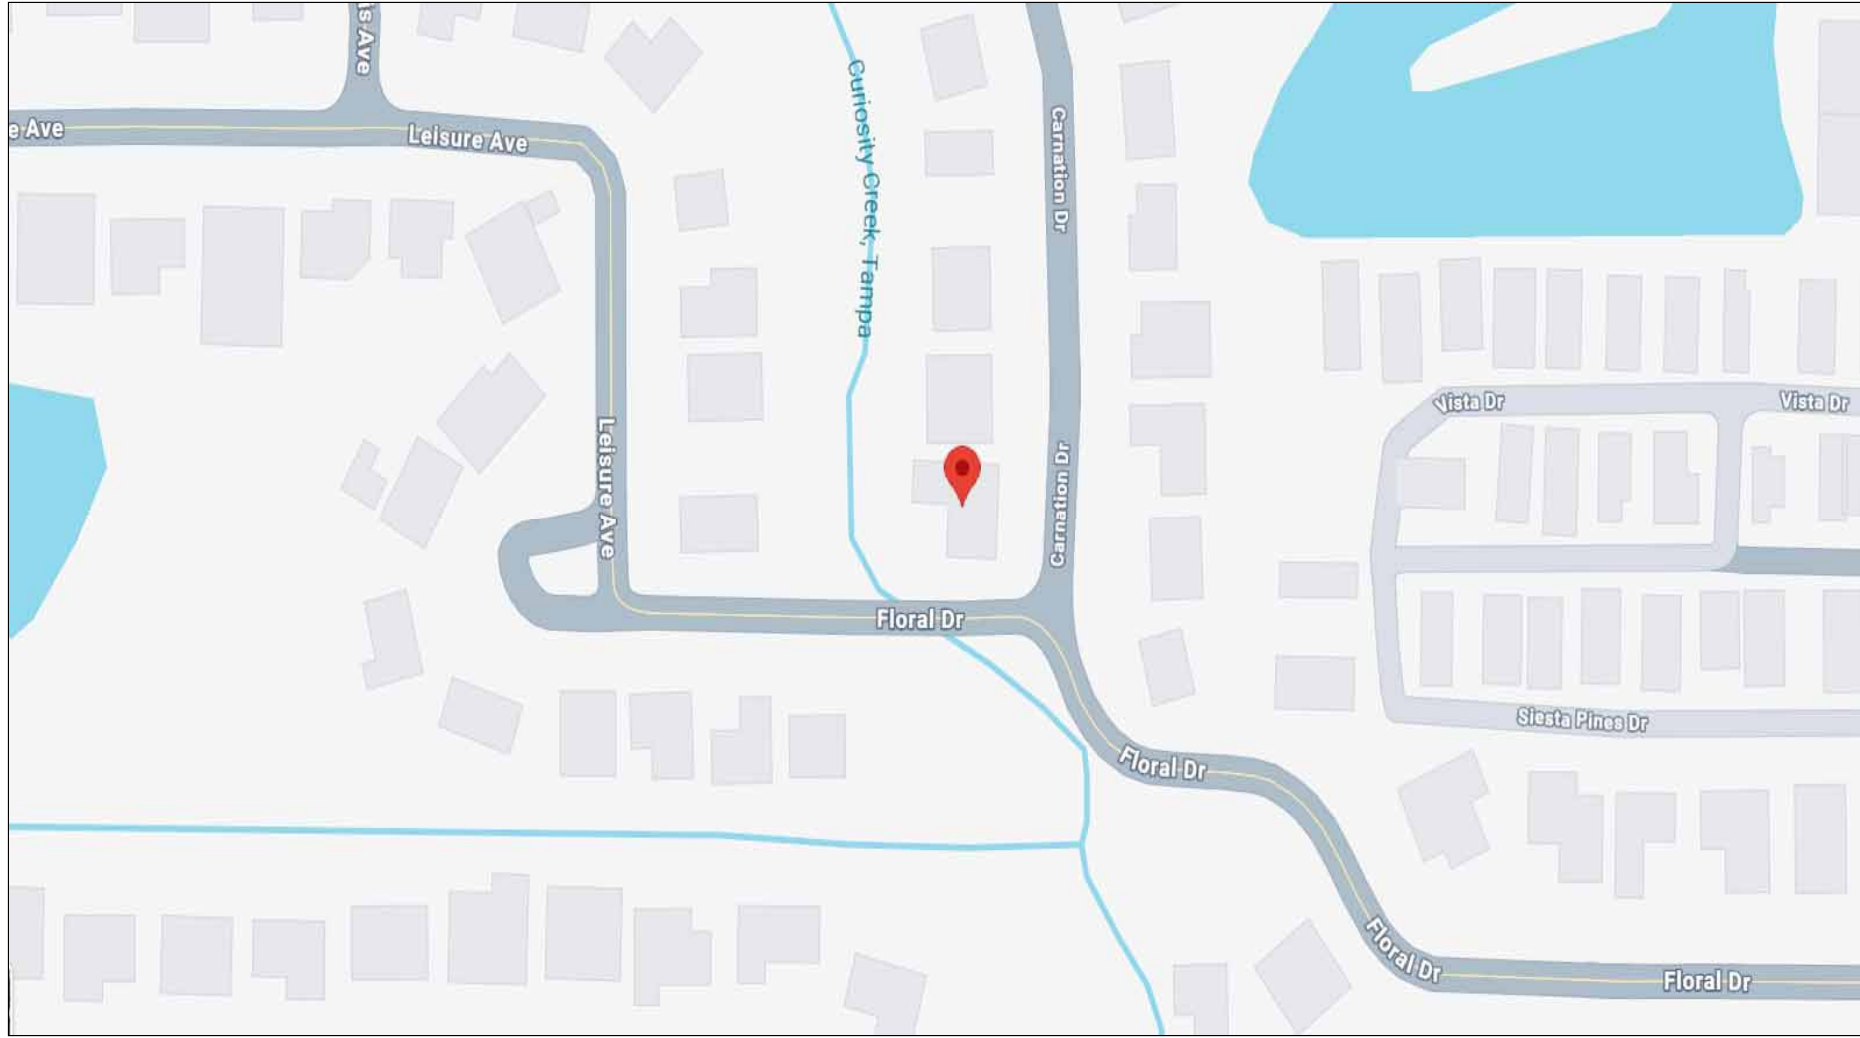

SATELITE VIEW

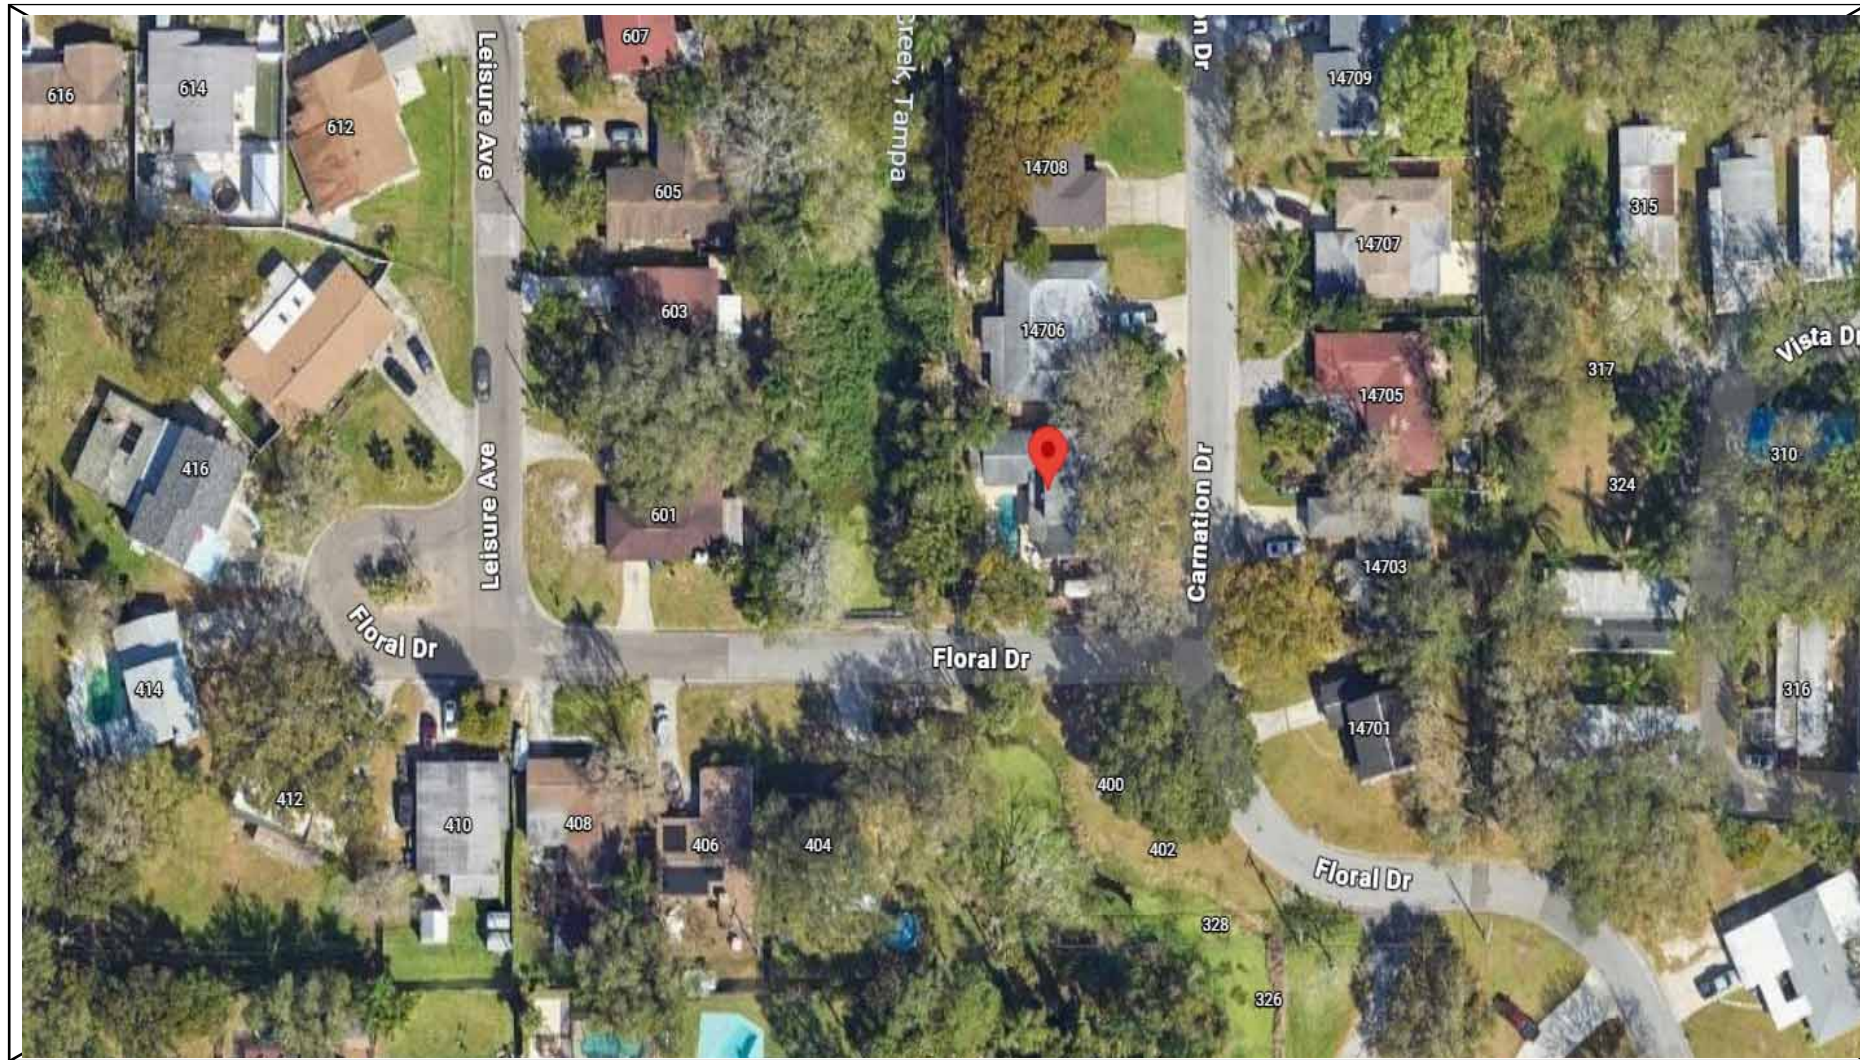

FRONT VIEW



PROJECT OVERVIEW:

THIS RENOVATION PROJECT INCLUDES A COMPLETE INTERIOR BATHROOM AND KITCHEN RECONFIGURATION AND SYSTEMS UPDATE DESIGNED TO IMPROVE FUNCTIONALITY EFFICIENCY AND OVERALL PROPERTY VALUE IN FULL COMPLIANCE WITH THE FLORIDA BUILDING CODE.

THE SCOPE OF WORK: CONSISTS OF RELOCATING THE LAUNDRY AREA MODIFICATION OF A MASTER BEDROOM CLOSET AND RECONFIGURING THE MASTER BATHROOM TO A REDUCED FOOTPRINT TO ALLOW THE ADDITION OF A NEW FULL BATHROOM. A NEW KITCHEN LAYOUT IS PROPOSED INCLUDING FULL RELOCATION OF PLUMBING AND ELECTRICAL SYSTEMS TO ACCOMMODATE UPDATED FIXTURES APPLIANCES AND CODE COMPLIANT INSTALLATIONS. THE PROJECT ALSO INCLUDES THE INSTALLATION OF A NEW SLIDING GLASS DOOR ASSOCIATED EXTERIOR OPENING MODIFICATIONS AND ALL REQUIRED INTERIOR FINISHES INCLUDING DRYWALL INSTALLATION SURFACE PREPARATION INTERIOR PAINTING GRANITE COUNTERTOPS AND NEW FLOORING THROUGHOUT DESIGNATED AREAS. HVAC SYSTEM NO CHANGES, ONLY REPLACING DAMAGE DUCT WORK REPLACING WITH FLEX.

DUE TO THE PROPERTY BEING LOCATED WITHIN A FLOOD ZONE ALL WORK SHALL ALSO COMPLY WITH ALL APPLICABLE FLOOD PLAIN MANAGEMENT REGULATIONS FEMA REQUIREMENTS AND LOCAL FLOOD ZONE CONSTRUCTION STANDARDS INCLUDING ELEVATION AND MATERIAL REQUIREMENTS WHERE APPLICABLE. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH APPROVED CONSTRUCTION DOCUMENTS REQUIRED ENGINEERING COORDINATION AND ALL APPLICABLE LOCAL AND STATE REGULATIONS TO ENSURE A SAFE DURABLE AND PERMIT READY RENOVATION.


ALL WORK WILL BE COMPLETED IN ACCORDANCE WITH FBC 2023 FOR STRUCTURAL PERFORMANCE, WATER-RESISTANCE, AND LONG-TERM DURABILITY.

APPLICABLE GOVERNING CODES& NOTES:

SYSTEMS SHALL BE INSTALLED UNDER THE FOLLOWING CODE STANDARDS:

- 2020 NATIONAL ELECTRIC CODE (NEC)
- 2023 FBC BUILDING (8TH EDITION)
- 2023 FBC RESIDENTIAL (8TH EDITION)
- 2020 NATIONAL ELECTRICAL CODE (NFPA 70)
- 2023 FBC FLORIDA PREVENTION CODE (8TH EDITION)

FLORIDA ULTIMATE DESIGN WIND SPEED

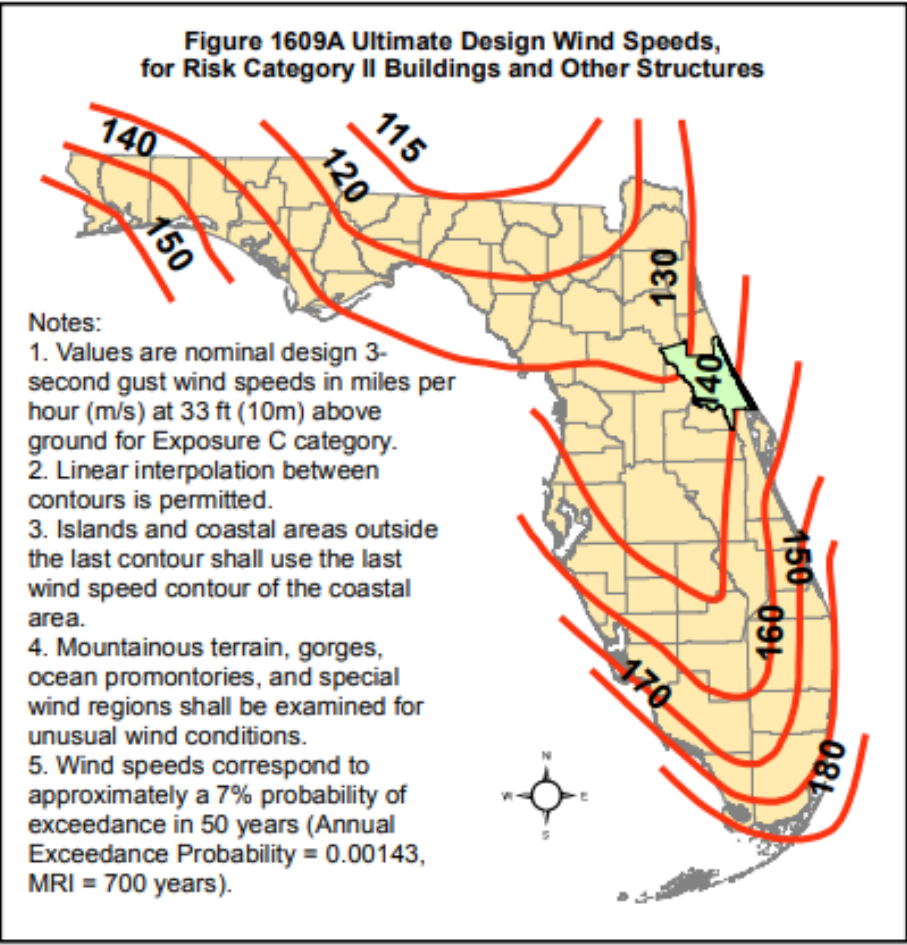

SOURCE: FLORIDA DEPARTMENT OF COMMUNITY AFFAIRS
CODE STANDARDS DIVISION; APPLIED RESEARCH
ASSOCIATES JUNE 28 2021 FLORIDA RESEARCH DATA

SITE SPECIFICATIONS:

CONSTRUCTION SINGLE FAMILY DWELLING (SFD)
ZONING RESIDENTIAL
NO. OF STORIES: TWO STORY EXPOSURE CATEGORY B,
RISK CATEGORY II
WIND SPEED (ASCE 7-22): 120 MPH
GROUND SNOW LOAD (ASCE 7-22): 0 lb/Sqft
ASHRAE EXTREM LOW: 1°C
ASHRAE HIGH TEMP (2% AVG): 34°C
ASHRAE STANCE ABOVE ROOF (7/8"): 56"
PARCEL ID: 017639-0000


This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA . 2025 Copyright .

SHEET TITLE	CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC	CUSTOMER INFORMATION Email: Foldreturns1@gmail.com Phone: (781) 420-5726		NICHOLSON ENGINEERING ASSOCIATES, INC. 7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167		REVISIONS		C 01		
	PROJECT ADDRESS : 14704 CARNATION AVE, TAMPA FLORIDA 33613	PROJECT OPEN DATE : JAN. 05 2026				PROJECT REVISED BY : MICHAEL D. JOHNSON	DRAWINGS REMARKS			
							1		01.07.26	RENOVATION
							2			
COVER PAGE						3				
						PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26		

REMODELING NOTES:

- 1 EXISTING 200 AMPS LOAD CENTER MODEL TLM2020CCU NEED TO BE RELOCATED TO OUTSIDE
- 2 EXISTING DRAIN 3 INCHES PIPE RUN ALL SECOND FLOOR PLUMBING EXISTING COPPER PIPE (TYP).
- 3 EXISTING CATHEDRAL CEILINGS: NO HURRICANE BRACKET INSTALL. ON THE FIRST FLOOR. NEED TO BE INSTALL H2.5A 18-GAUGE ZMAX GALVANIZED HURRICANE TIE. AND FOAM CLOSED CELL INSULATION R-30 VALUE
- 4 CMU WALL: INSTALL PT FURRING STRIP IN REQUIRE PLACES AND INSULATION AA2 MASONRY WALL INSULATION R-VALUE R5 (TYP)
- 5 WINDOWS: ALL WINDOWS TO BE REPLACED WITH IMPACT WINDOWS AMERICAN CRAFTSMAN 700'S SERIES IMPACT OR SIMILAR.
- 6 ENCLOSE WINDOW OPENING: FOR NEW DESIGN WINDOWS TO BE REMOVED AND ENCLOSE THE OPENING WITH PRESURE TREATED WOOD, PLYWOOD AND WEATHER BARRIER, AND STUCCO..

- 7 BUILT-UP BEAM MODIFICATION NOTE
EXISTING BUILT-UP WOOD BEAM CONSISTING OF (3)-PLY 2X8 MEMBERS WITH AN APPROXIMATE EXISTING SPAN OF 8'-4" SHALL BE EXTENDED AND REPLACED WITH A NEW BUILT-UP WOOD BEAM CONSISTING OF (4)-PLY 2X8 MEMBERS.
- NEW BUILT-UP BEAM SHALL HAVE A MAXIMUM CLEAR SPAN OF 14'-6" AND SHALL BE CONTINUOUS BETWEEN SUPPORTS.
- INCREASE IN SPAN FROM APPROX. 8'-4" TO 14'-6" IS ACCOMMODATED BY INCREASING THE NUMBER OF PLIES FROM THREE (3) TO FOUR (4), MAINTAINING MEMBER DEPTH AND MATERIAL TYPE.
- BEAM SHALL BE FABRICATED FROM SAME SPECIES AND GRADE LUMBER, FASTENED TO ACT AS A SINGLE STRUCTURAL MEMBER, AND INSTALLED TO MAINTAIN CONTINUOUS LOAD PATH.
- SUPPORT CONDITIONS AND BEARING LOCATIONS TO REMAIN AS SHOWN. NO CHANGE TO COLUMN LOCATIONS UNLESS NOTED OTHERWISE.

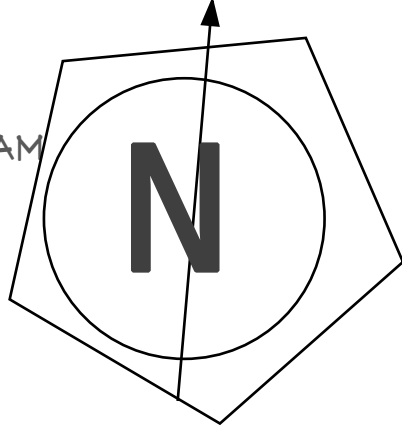


EXISTING FLOOR
PLAN LAYOUT


LEGEND:

- EXISTING WALL CMU BLOCK TO BE REMOVED
- EXISTING WINDOWS TO BE REPLACED WITH AMERICAN CRAFTSMAN IMPACT SERIES 700 OR EQUIVALENT
- EXISTING 3 PLY BEAM TO BE EXTENDED
- EXISTING WOOD WALL TO BE REMOVED NON STRUCTURAL

FIRST FLOOR
EXISTING

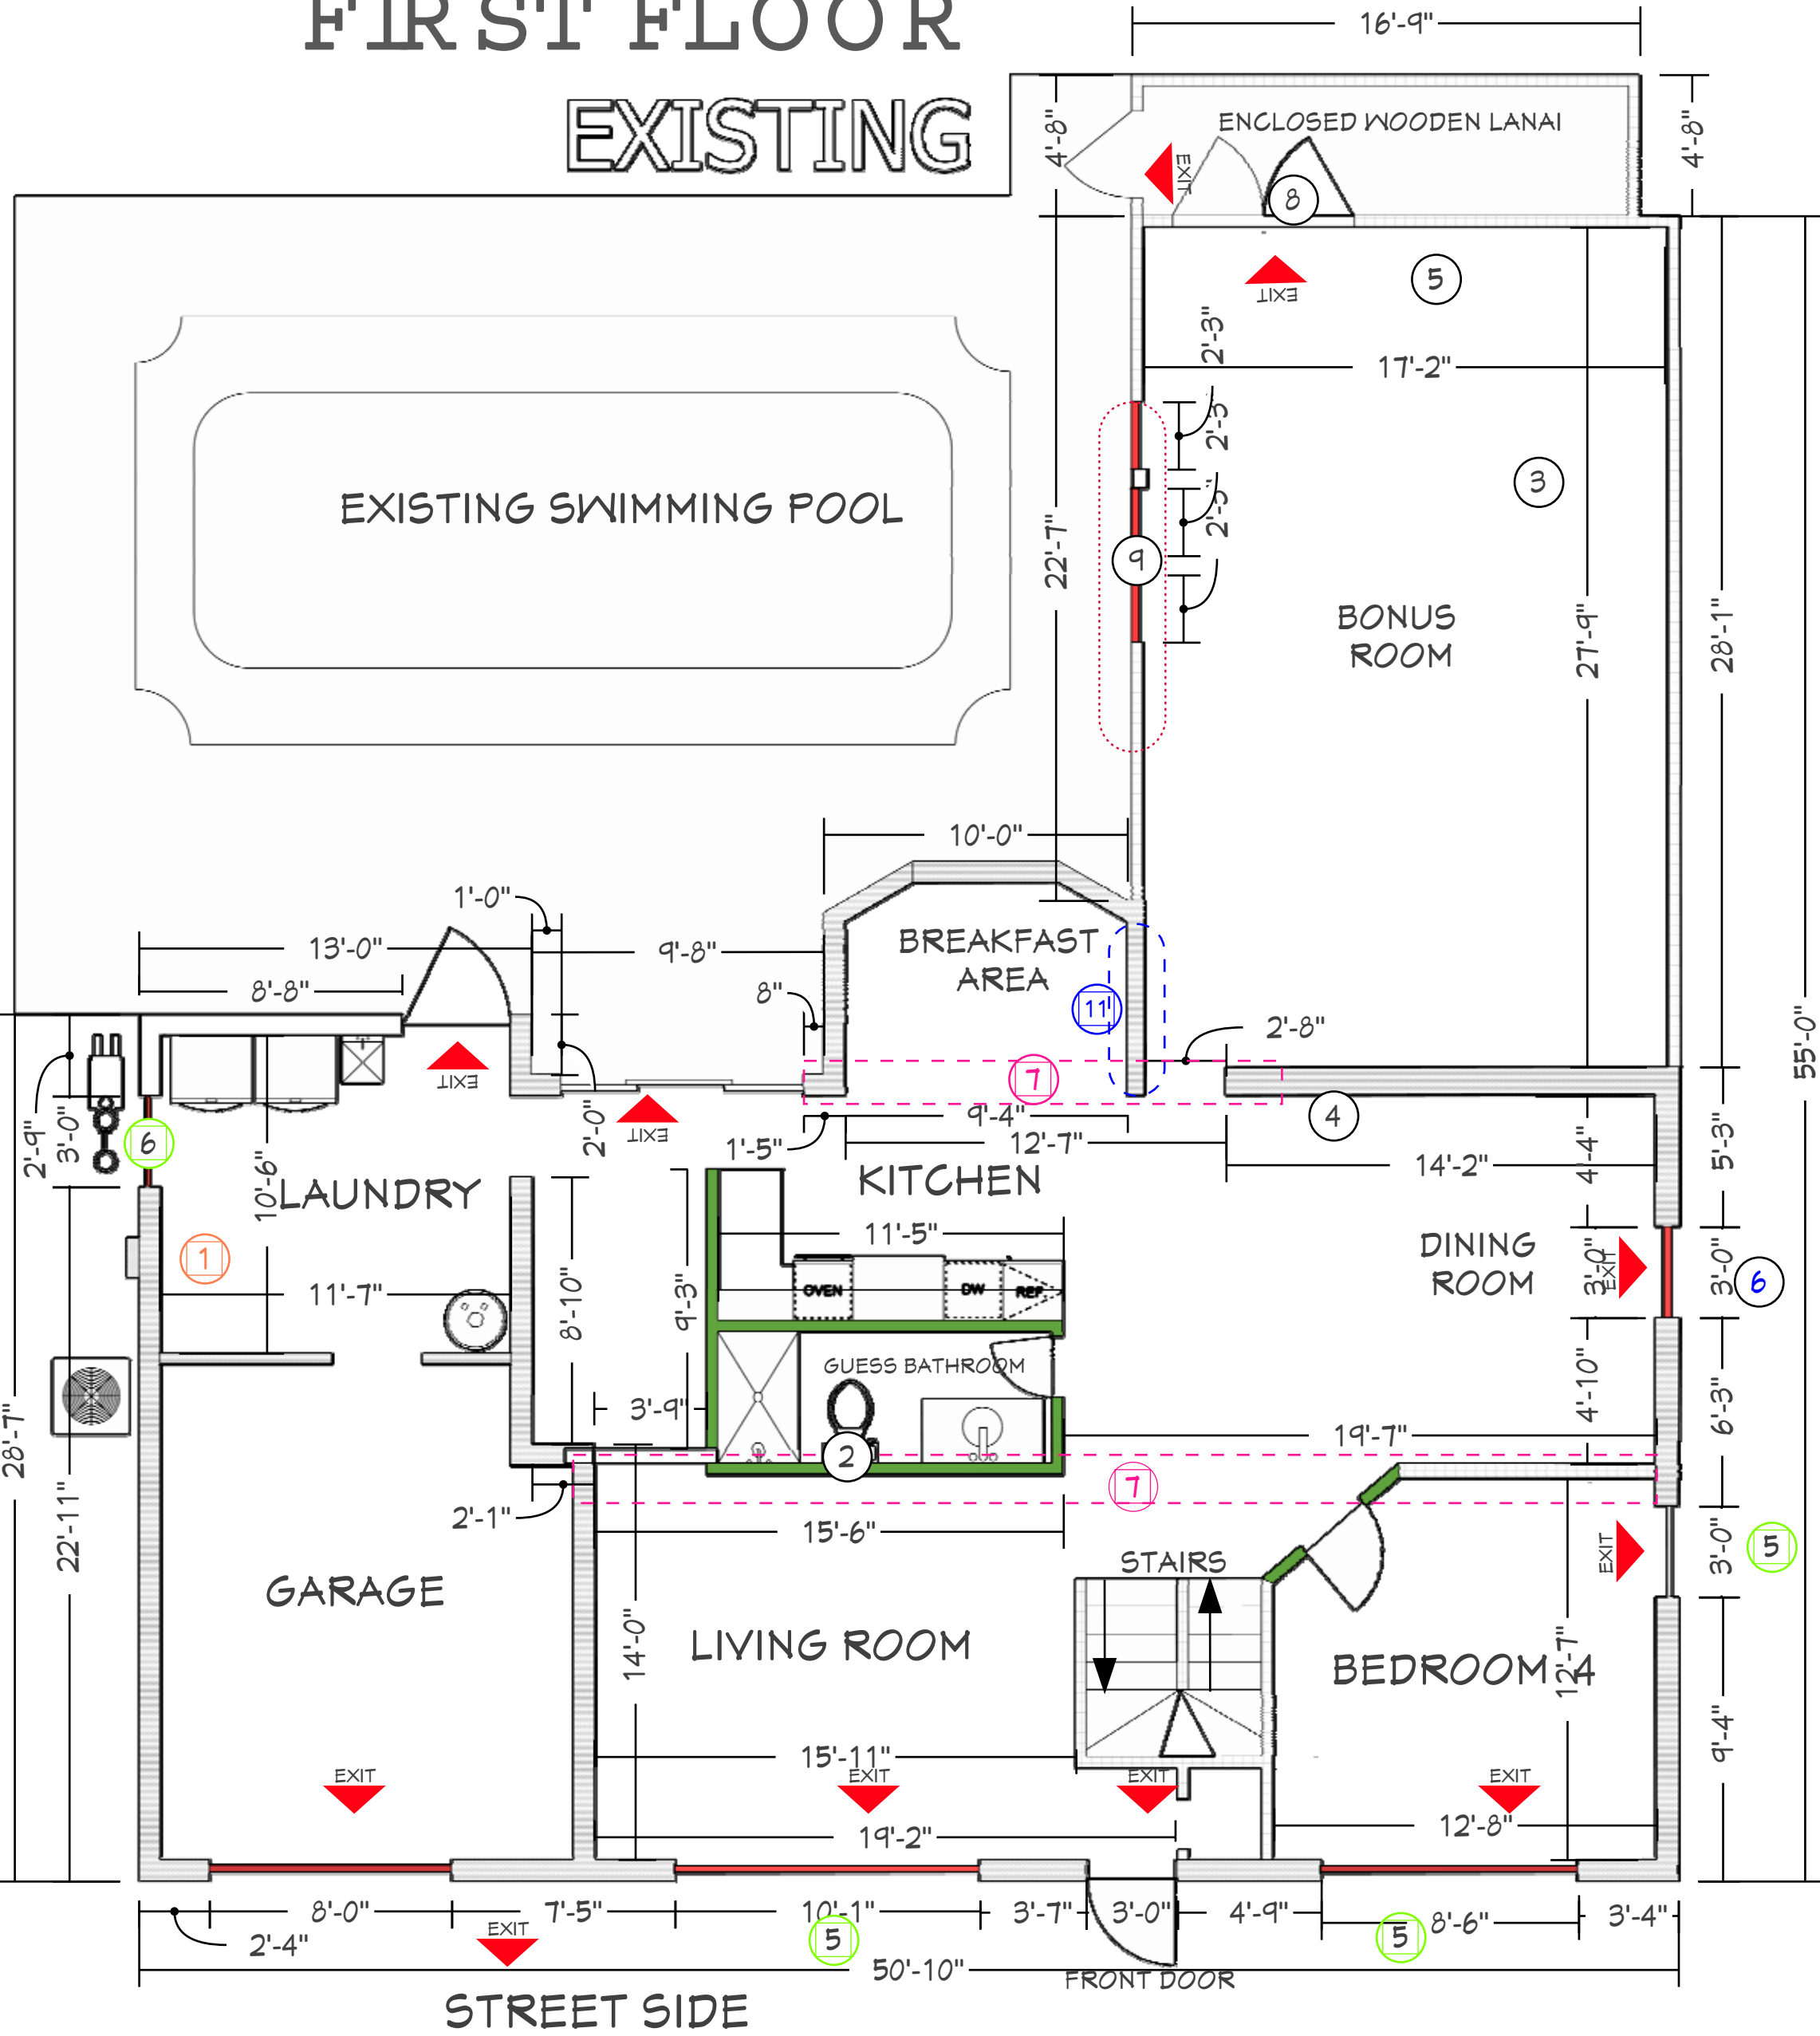


SECOND FLOOR
EXISTING

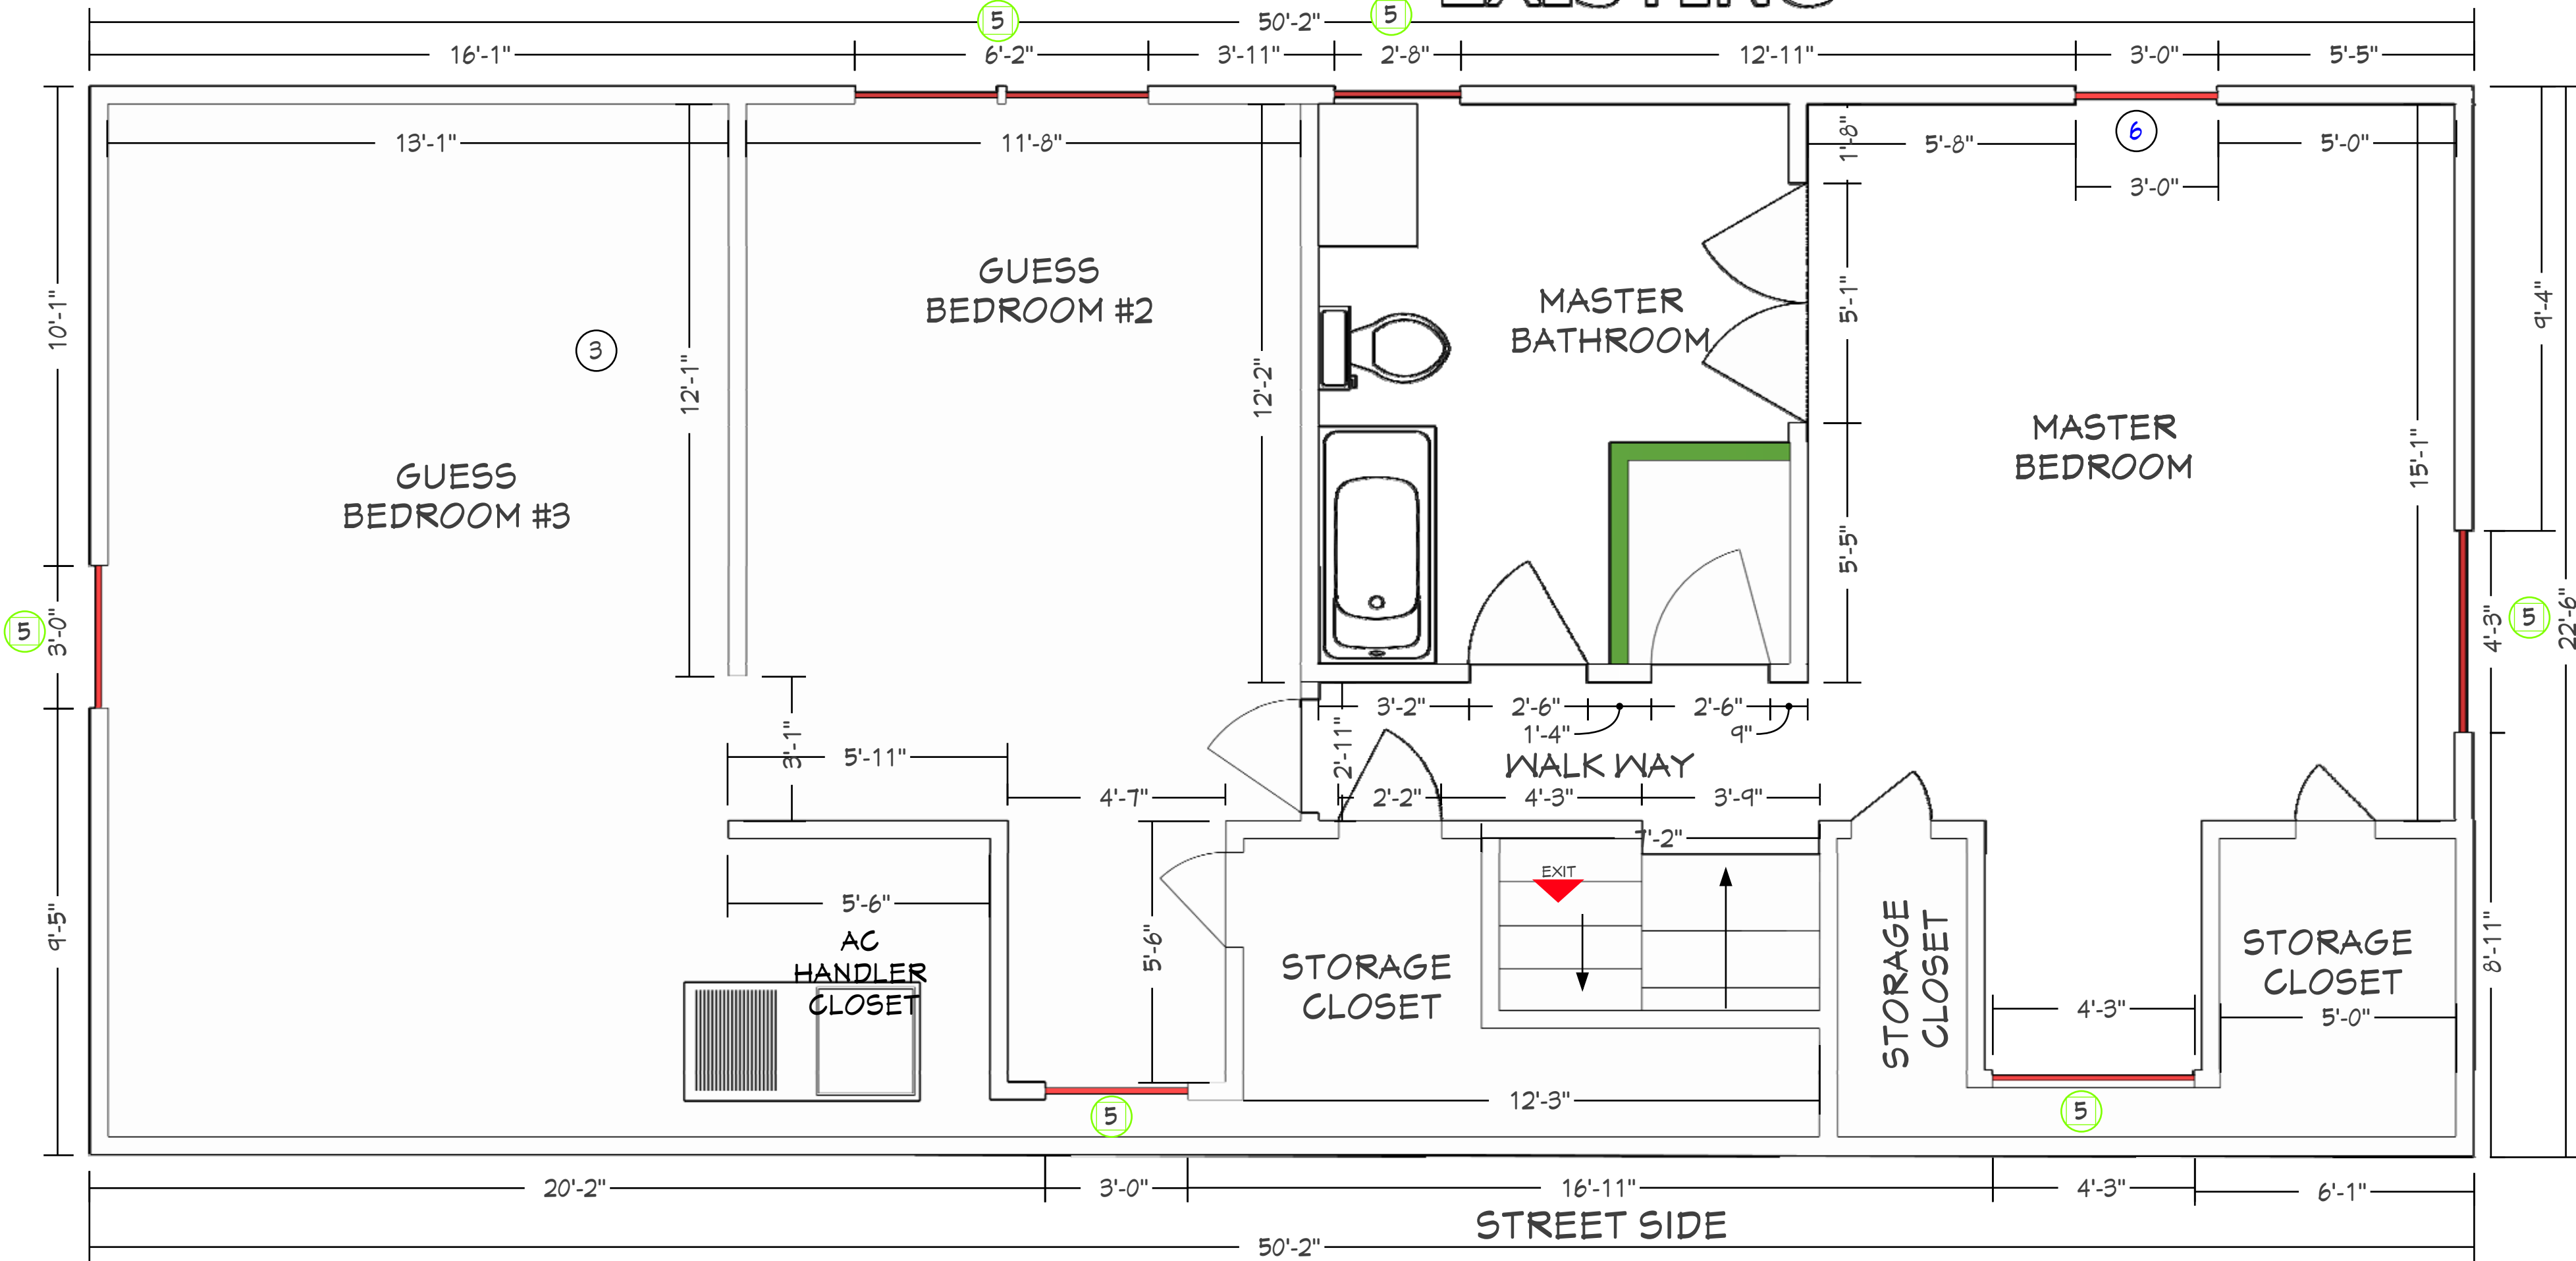

This drawing is the sole property of Seating Constructors USA. Unless otherwise provided for by contract, the contents of this drawing are confidential and shall not be transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright.

SHEET TITLE		CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC		CUSTOMER INFORMATION Email: Foldreturns1@gmail.com Phone: (781) 420-5726			NICHOLSON ENGINEERING ASSOCIATES, INC. 7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167			REVISIONS		
FLOOR PLAN		PROJECT ADDRESS : 14704 CARNATION AVE, TAMPA FLORIDA 33613		PROJECT OPEN DATE : JAN. 05 2026			DRAWINGS REMARKS					
				PROJECT REVISED BY : MICHAEL D. JOHNSON					PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26	


PROPOSED FLOOR
PLAN LAYOUT

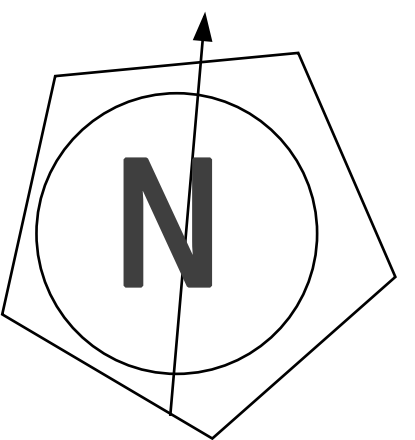


- LEYEND:
- EXISTING WALL CMU BLOCK TO BE REMOVE
 - EXISTING WINDOWS TO BE REPLACE WITH AMERICAN CRAFTMAN IMPACT SERIES 700 OR EQUIVELANT
 - EXISTING 3 PLY BEAM TO BE EXTENDED

PROPOSED FLOOR PLAN

FIRST FLOOR

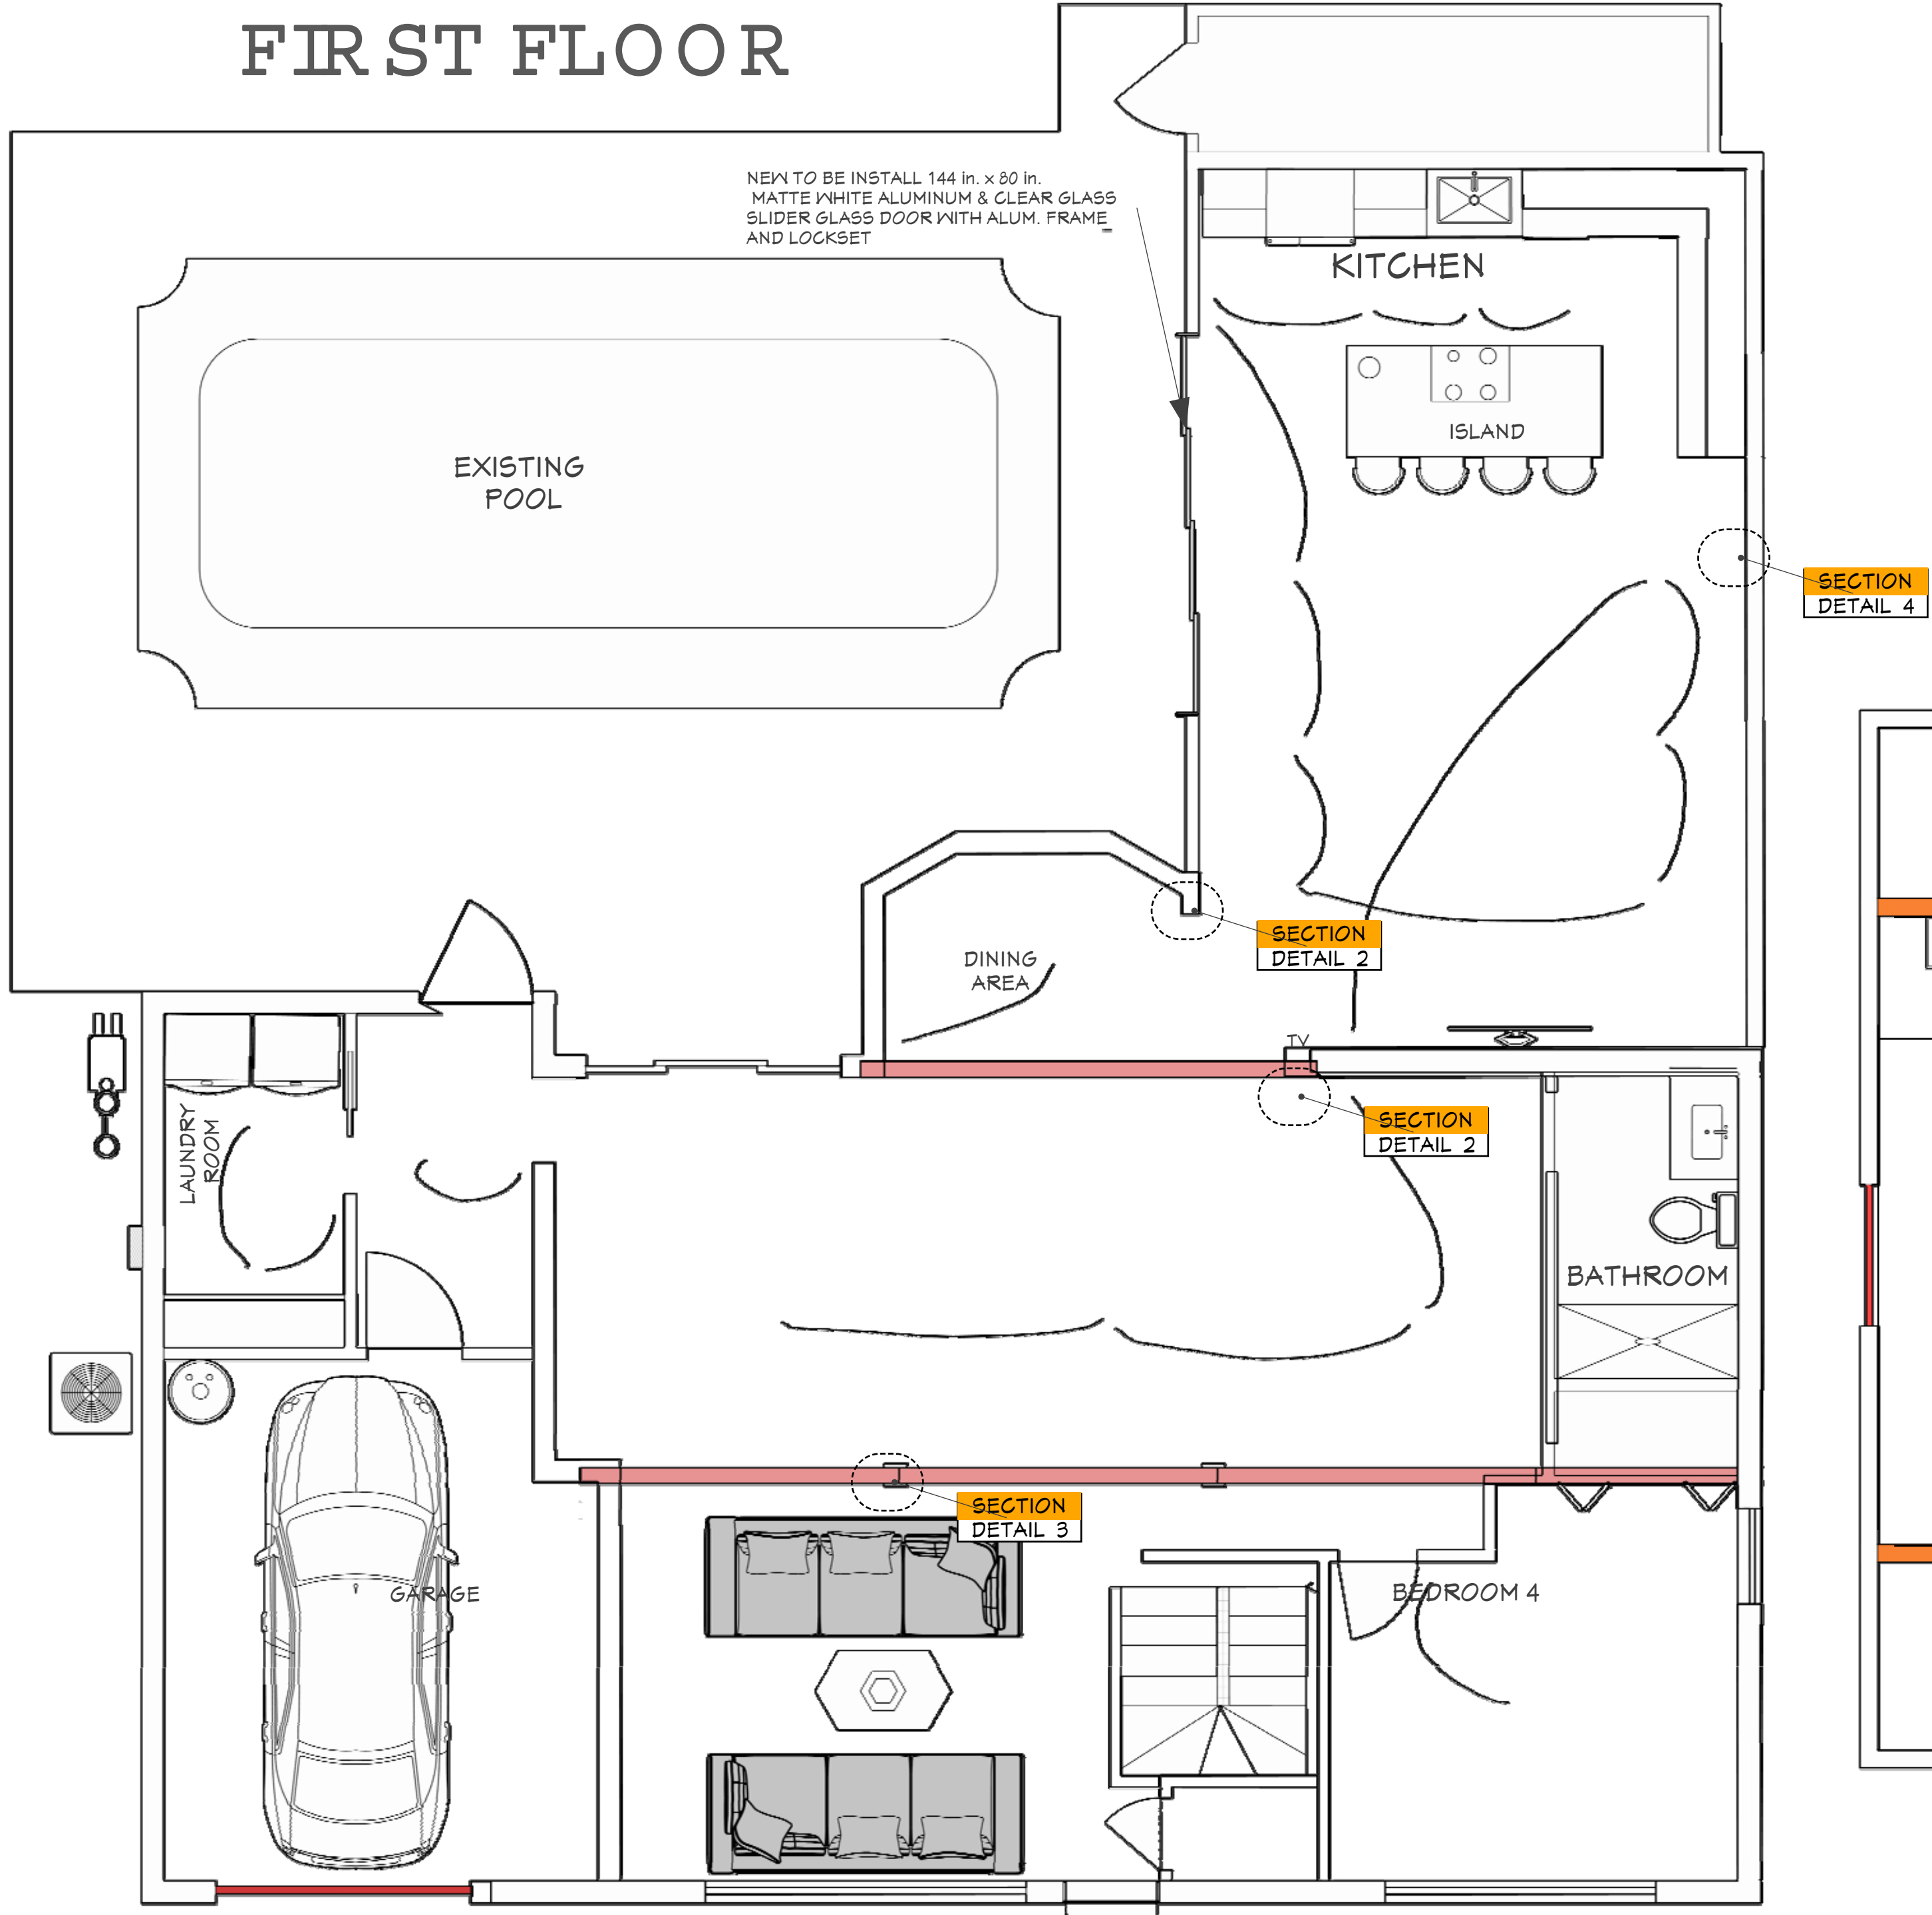



SECOND FLOOR
PROPOSED FLOOR PLAN

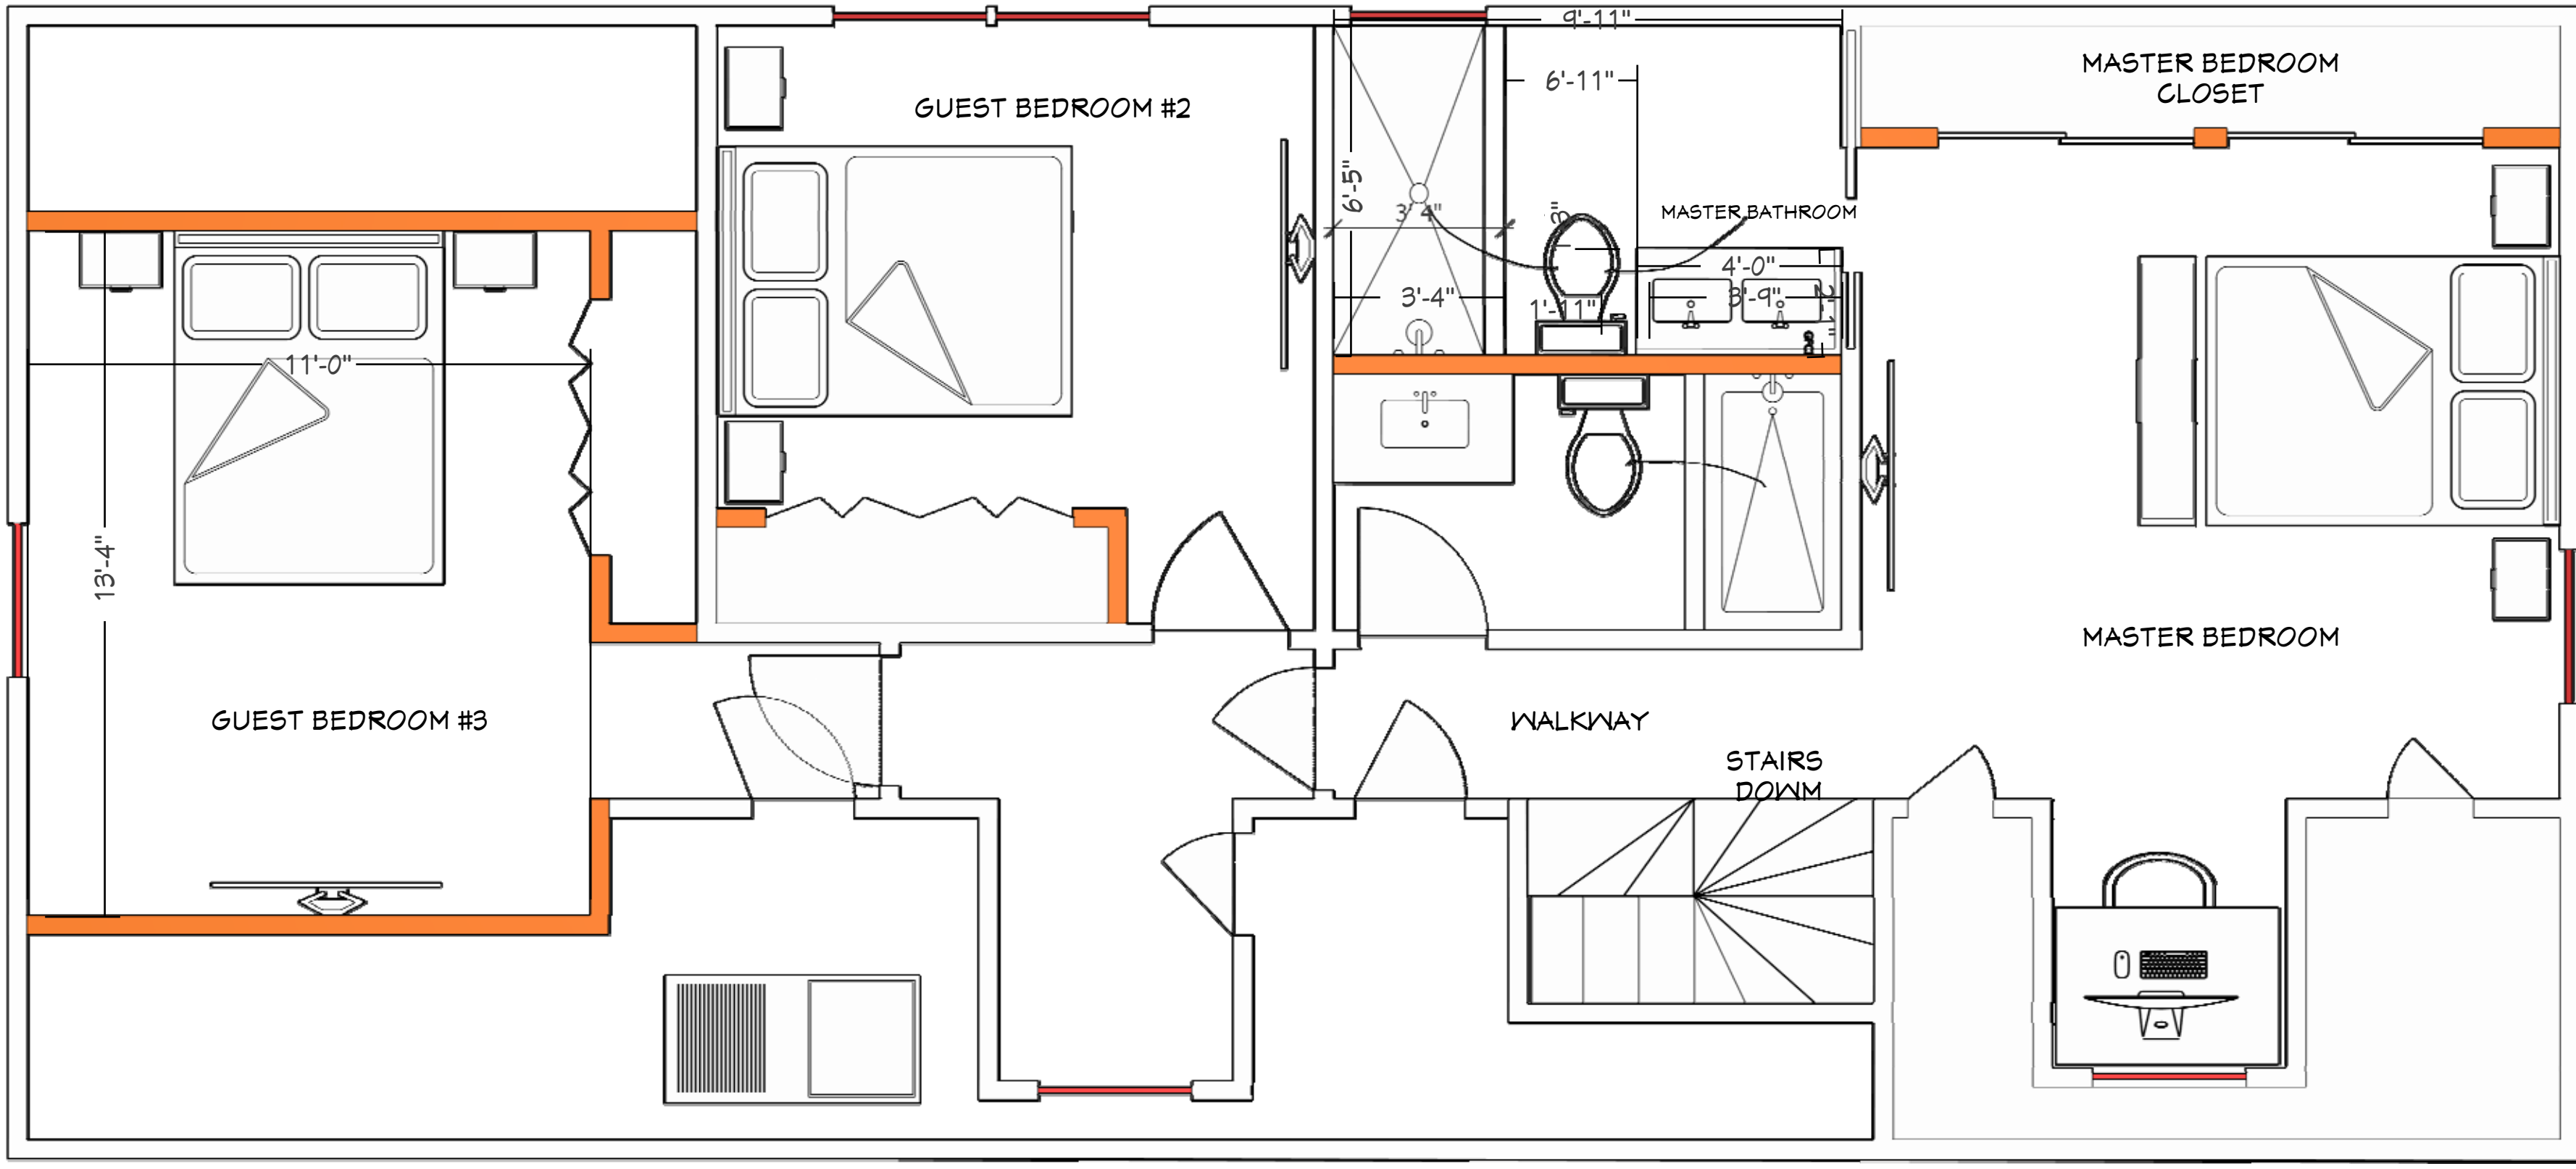


This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA . 20 25 Copyright .

SHEET TITLE PROPOSED FLOOR PLAN	CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC	CUSTOMER INFORMATION Email: Foldreturns1@gmail.com Phone: (781) 420-5726		NICHOLSON ENGINEERING ASSOCIATES, INC. 7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167		REVISIONS		
	PROJECT ADDRESS : 14704 CARNATION AVE, TAMPA FLORIDA 33613	PROJECT OPEN DATE : JAN. 05 2026				PROJECT REVISED BY : MICHAEL D. JOHNSON	DRAWINGS REMARKS	
PROJECT NUMBER: 0024599			DESIGN DATE: 01.07.26					

PROPOSED FLOOR
PLAN LAYOUT

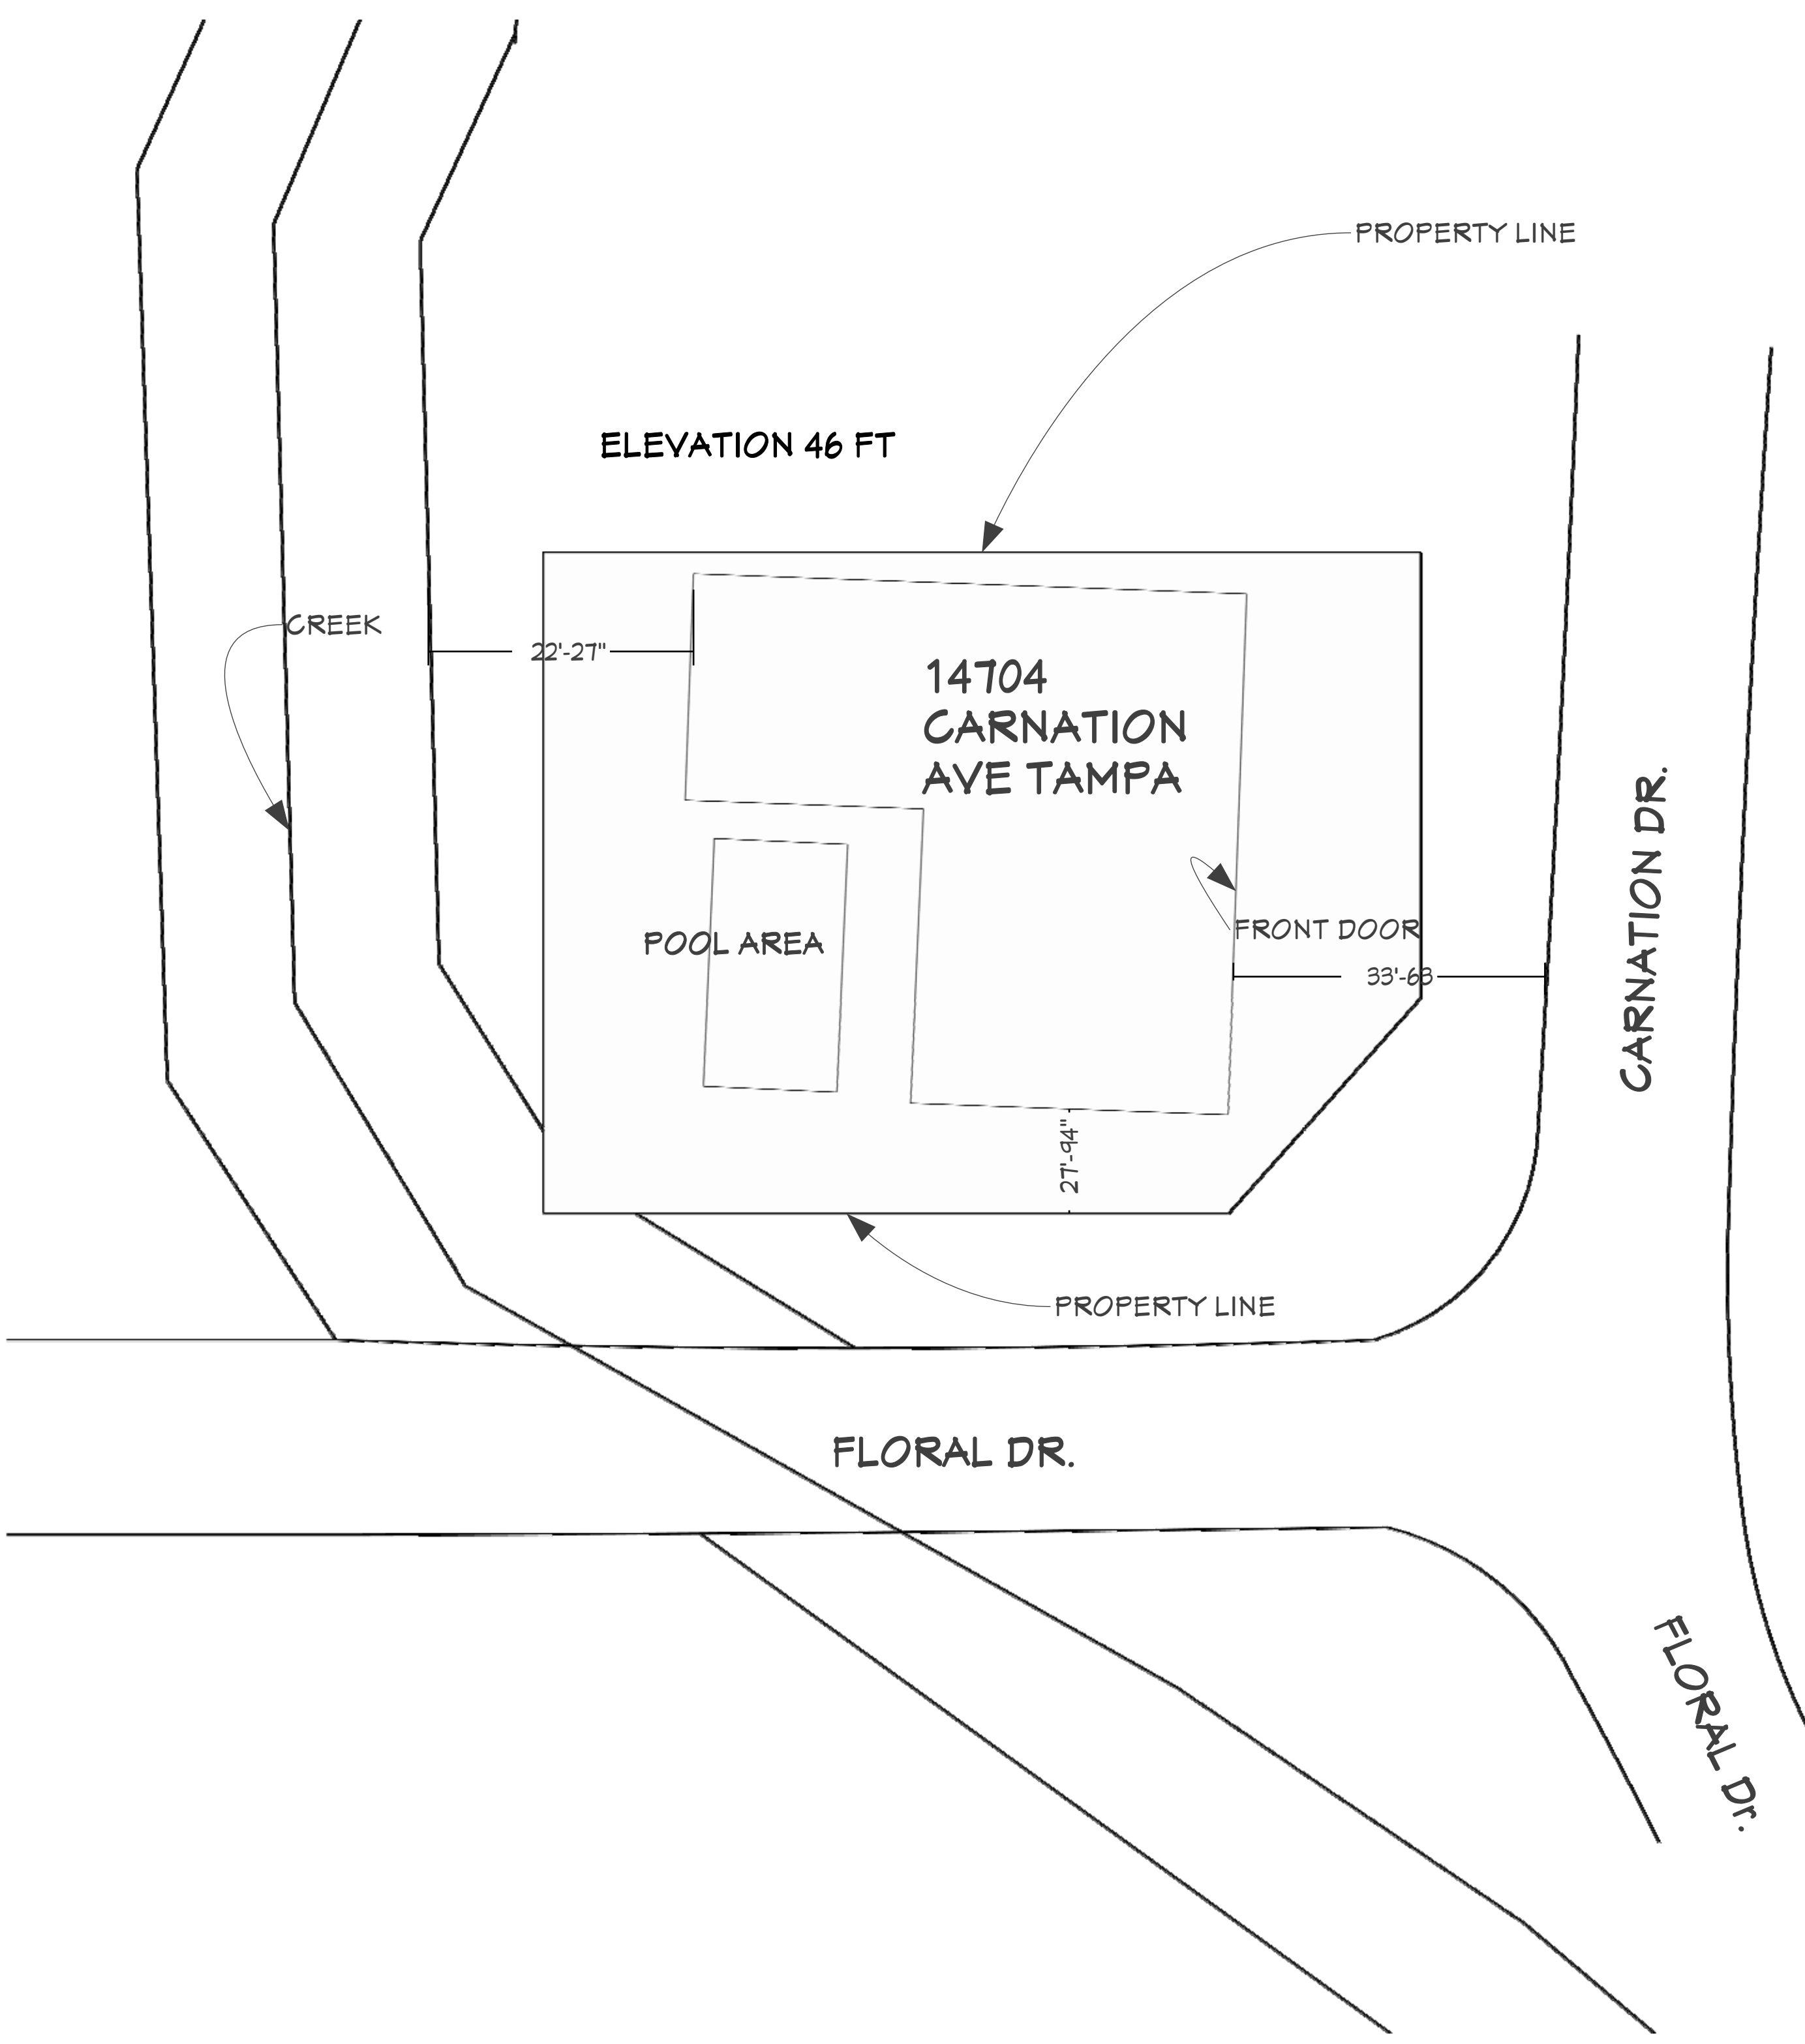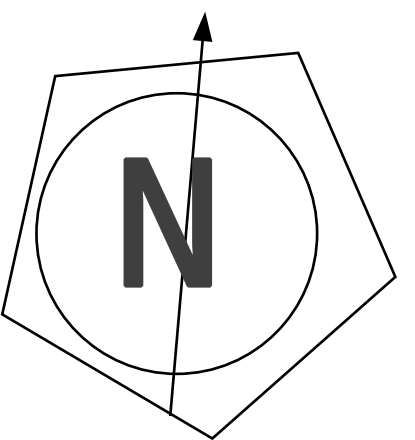

National Flood Hazard Layer FIRMette

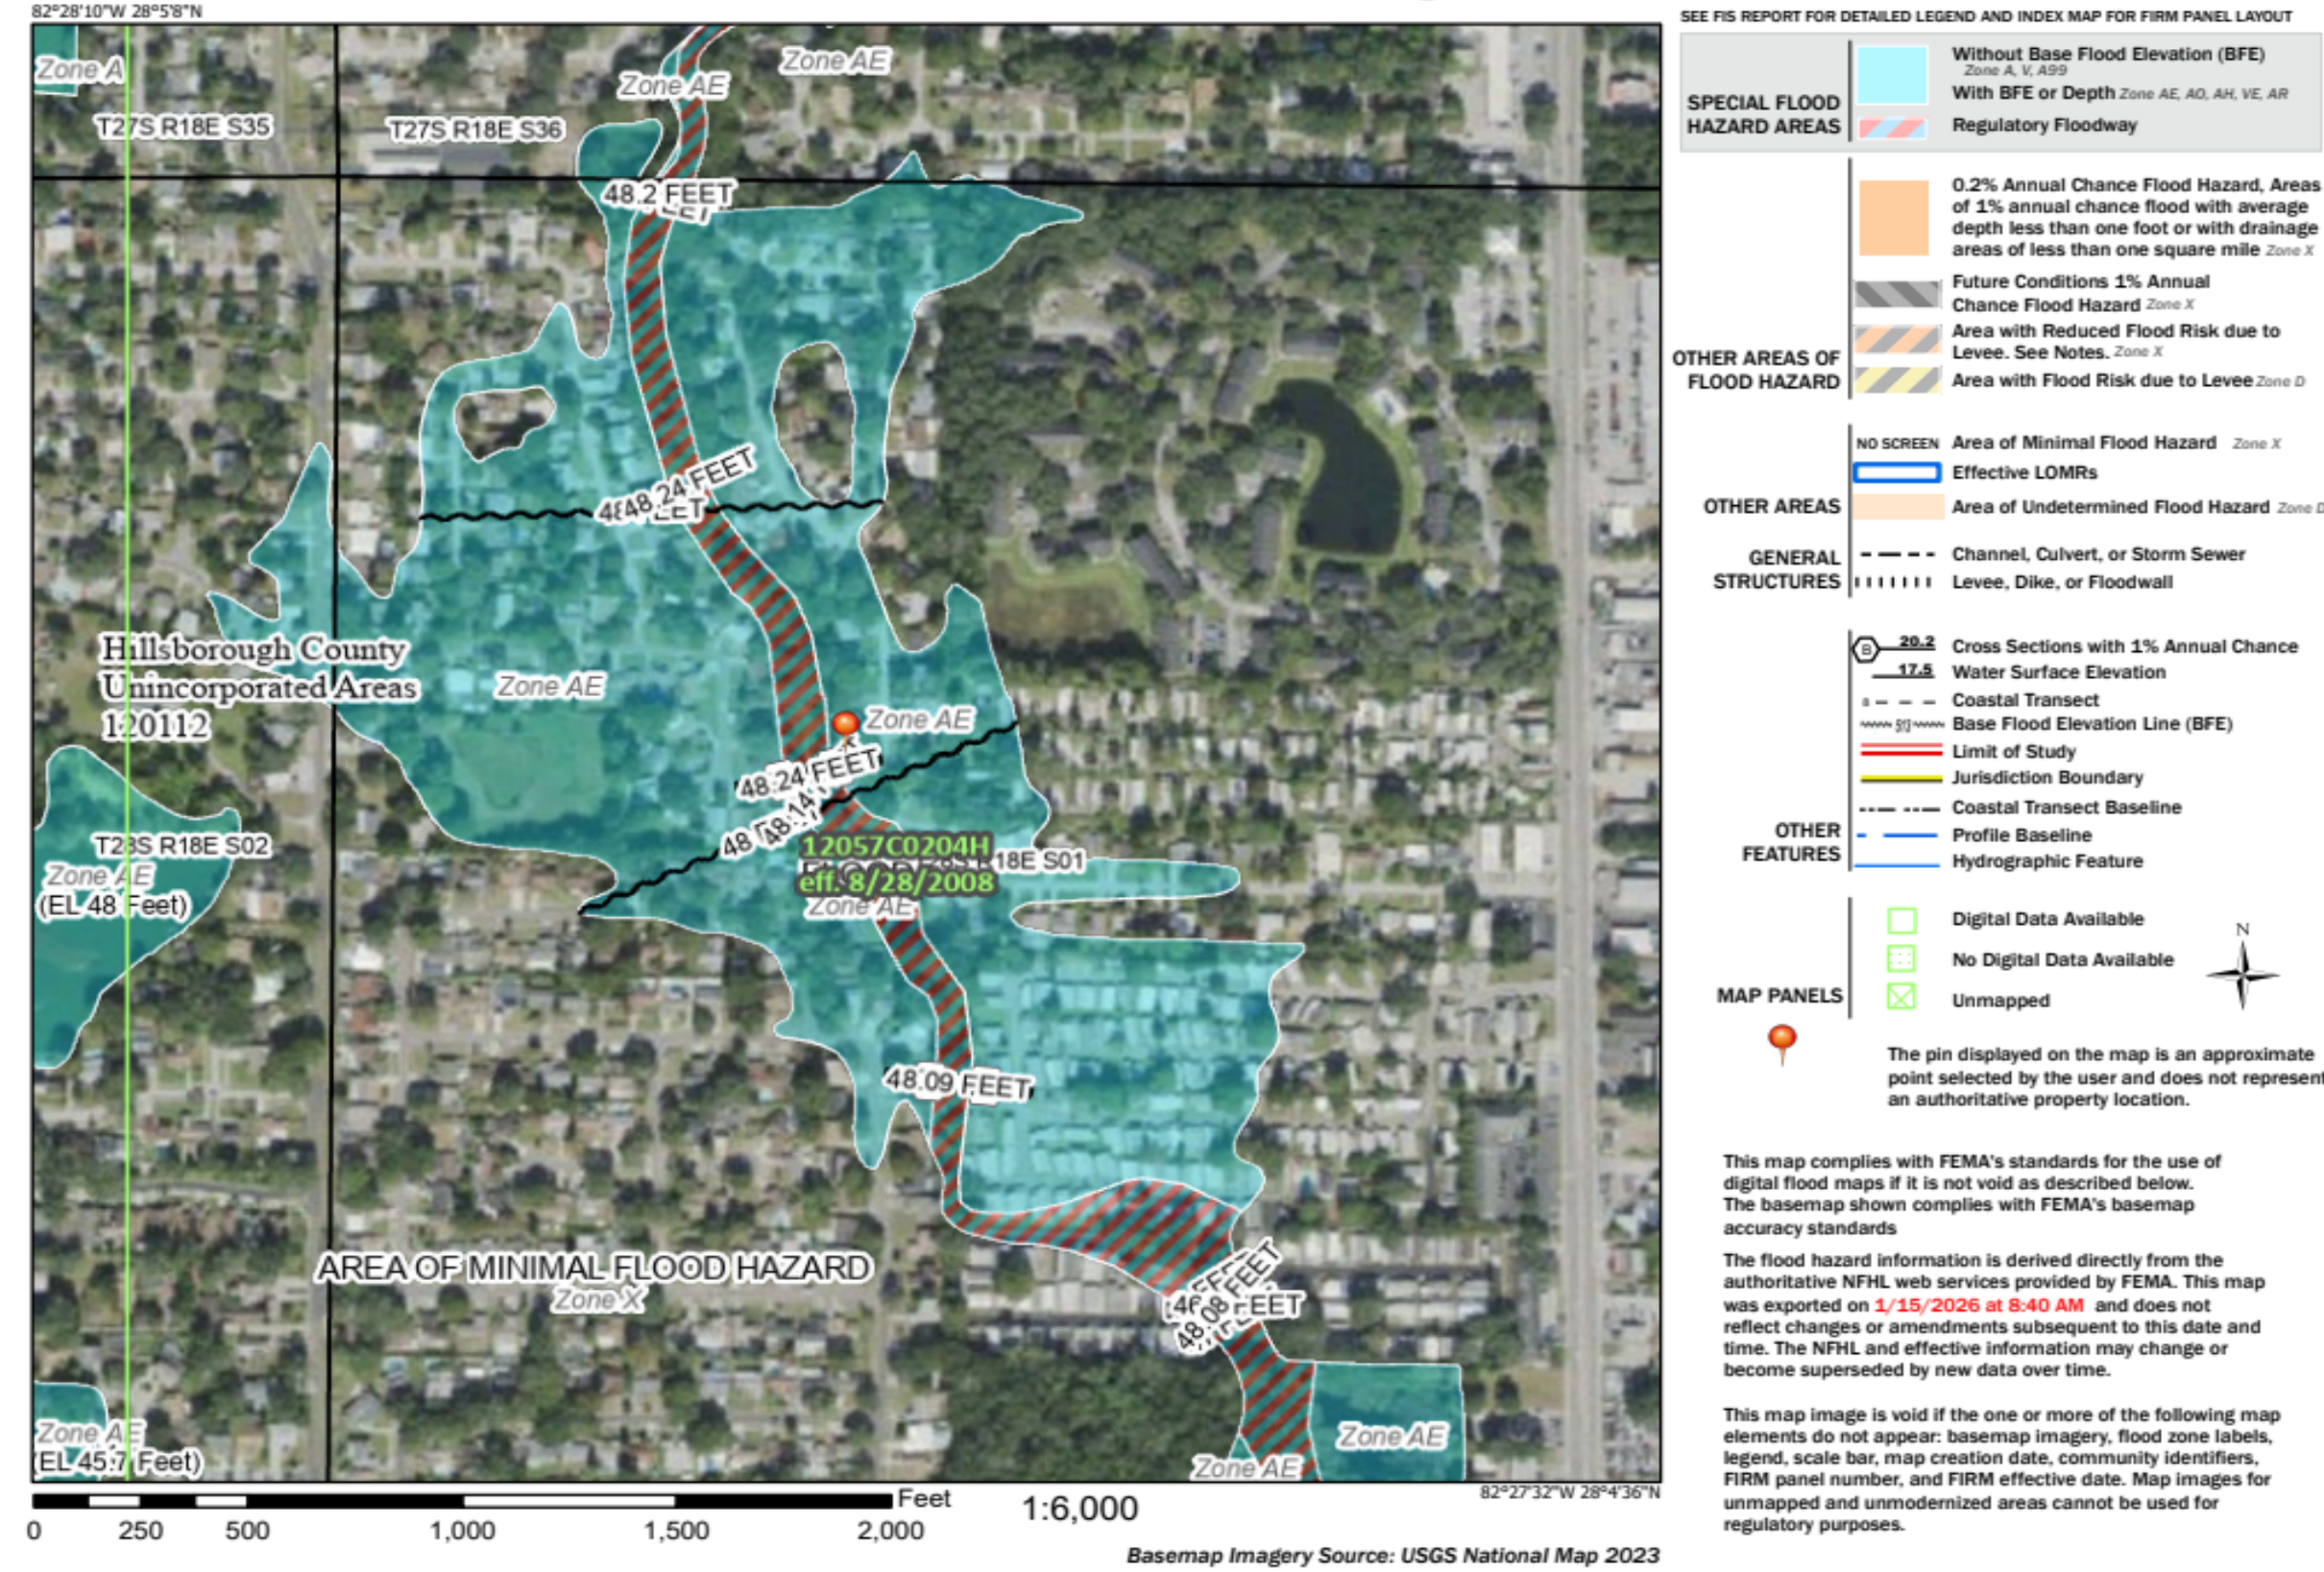

This drawing is the sole property of Seating Constructors USA. Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright.

SHEET TITLE		CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC		CUSTOMER INFORMATION Email: Foldreturns1@gmail.com Phone: (781) 420-5726			NICHOLSON ENGINEERING ASSOCIATES, INC.			REVISIONS				A 04
SITE PLAN		PROJECT ADDRESS : 14704 CARNATION AVE, TAMPA FLORIDA 33613		PROJECT OPEN DATE : JAN. 05 2026			7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167			MM/DD/Y DRAWINGS REMARKS				
										1 01.07.26 RENOVATION				
										2				
				PROJECT REVISED BY : MICHAEL D. JOHNSON				3						
										PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26		

GENERAL ELECTRICAL NOTES:

- 1
- THE ENTIRE INSTALLATION SHALL BE DONE IN ACCORDANCE WITH THE LATEST EDITION OF THE FBC 2023, NEC 2020 AND OF ALL LOCAL CODES, RULES AND ORDINANCES HAVING JURISDICTION.

- 2
- AS A MINIMUM, ALL EQUIPMENT SHALL MEET APPLICABLE STANDARDS, FOR TYPE OF EQUIPMENT AND INTENDED USE, OF THE FOLLOWING:

- a
- AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)
- b
- ILLUMINATING ENGINEERS SOCIETY (IES).
- c
- AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)
- d
- NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA).

NOTE: THESE STANDARDS ARE SUBORDINATE TO CODES AND STANDARDS SET BY U.L.

- 1
- IT SHALL BE UNDERSTOOD THAT ALL WORK PERFORMED SHALL BE BY A LICENSED ELECTRICAL CONTRACTOR IN A FIRST-CLASS WORKMANLIKE MANNER. SAID CONTRACTOR SHALL MEET ALL REQUIREMENTS SET FORTH BY ANY LOCAL ORDINANCE AND GOVERNING AUTHORITIES.
- 2
- THE CONTRACTOR SHALL PROVIDE ALL REQUIRED INSURANCE FOR PROTECTION AGAINST PUBLIC LIABILITY AND PROPERTY DAMAGE FOR THE DURATION OF THE WORK.
- 3
- THE CONTRACTOR SHALL GUARANTEE ALL MATERIALS AND WORKMANSHIP FREE FROM DEFECTS FOR A PERIOD OF NOT LESS THAN (1) YEAR FROM DATE OF ACCEPTANCE U.O.N.
- 4
- IT SHALL NOT BE THE INTENT OF THESE PLANS AND/OR SPECIFICATIONS TO SHOW EVERY MINOR DETAIL OF CONSTRUCTION. THE CONTRACTOR SHALL BE EXPECTED TO FURNISH AND INSTALL ALL ITEMS FOR A COMPLETE ELECTRICAL SYSTEM AND PROVIDE ALL REQUIREMENTS NECESSARY FOR EQUIPMENT TO BE PLACED IN PROPER WORKING ORDER.
- 5
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING TO ORIGINAL CONDITIONS ANY AND ALL DAMAGES TO BUILDING SURFACES, EQUIPMENT, ETC. CAUSED DURING THE PERFORMANCE OF WORK.
- 6
- CORRECTION OF ANY DEFECTS SHALL BE COMPLETED WITHOUT ADDITIONAL CHARGE OR DELAYS AND SHALL INCLUDE REPLACEMENT OR REPAIR OF ANY OTHER PHASE OF THE INSTALLATION WHICH MAY HAVE BEEN DAMAGED THEREBY.
- 7
- THE CONTRACTOR SHALL VISIT THE JOB SITE AND VERIFY ALL CONDITIONS, LOCATIONS DIMENSIONS AND COUNTS AS SHOWN OR NOTED ON THE DRAWINGS, PRIOR TO SUBMITTING BID.
- 8
- THE CONTRACTOR SHALL NOT SCALE THE ELECTRICAL DRAWINGS, REFER TO ARCHITECTURAL PLANS AND ELEVATIONS FOR EXACT LOCATIONS OF ALL EQUIPMENT UNLESS NOTED OTHERWISE.
- 9
- IT SHALL BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR TO PROVIDE ALL LABOR, MATERIALS AND SUPERVISION NECESSARY TO ACCOMPLISH THE WORK AS SHOWN AND/OR NOTED ON THE PLANS.
- 10
- IT SHALL BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR FOR THE ADVANCE ORDERING OF LONG LEAD ITEMS, AS TO NOT INTERFERE WITH THE PRODUCTION OF OTHER TRADES RESULTING IN ANY DOWN OR LAG TIME. THE CONTRACTOR SHALL NOT ORDER ANY ITEMS UNTIL APPROVED SHOP DRAWINGS ARE RETURNED TO HIM.
- 11
- THE CONTRACTOR SHALL KEEP ALL AREAS WHERE WORK IS BEING PERFORMED FREE FROM DEBRIS AT ALL TIMES AND SAID AREAS SHALL BE LEFT BROOM CLEAN AT THE END OF EACH WORKING DAY.
- 12
- ALL CONDUCTORS SHALL BE COPPER, TYPE THHN/THWN EXCEPT WHERE OTHERWISE BY U.L OR CODES. MINIMUM WIRE SIZE SHALL BE #12 AWG. EXCLUDING CONTROL WIRE.
- 13
- ALUMINUM CONDUCTORS ARE NOT PERMITTED ANYWHERE.
- 14
- ALL CONDUCTORS SHALL BE IN ½ IN. MINIMUM CONDUITS (U.O.N.) ALL CONDUITS SHALL BE GALVANIZED RIDGED STEEL (GRS) EXCEPT THAT:

a

PVC CONDUITS MAY BE USED UNDERGROUND PROVIDED ELBOWS AND RISERS ARE GRS, WHERE SUBJECT TO PHYSICAL DAMAGE

b

ELECTRICAL METALLIC TUBING (EMT) MAY BE USED IN OR ON WALLS OR CEILINGS WHERE NOT SUBJECT TO MECHANICAL DAMAGE, DAMP OR CORROSIVE CONDITIONS.

c

LIQUID TIGHT FLEXIBLE CONDUIT WHERE REQUIRED.

d

FLEXIBLE METALLIC CONDUIT WHERE REQUIRED IN DRY LOCATIONS ONLY ALL CONDUITS IN HAZARDOUS AREAS (PER NEC) SHALL MEET THE REQUIREMENTS OF NEC CH. 5.
- 15
- ALL CONDUIT RUNS ARE SHOWN DIAGRAMATICALLY. THE EXACT ROUTING SHALL BE DETERMINED IN THE FIELD, UNLESS NOTED OTHERWISE.
- 16
- WHERE CORE DRILLING OF FLOORS/WALLS IS REQUIRED, THE CONTRACTOR SHALL SEAL OPENINGS WATER-TIGHT AFTER UTILITIES HAVE BEEN INSTALLED. LOCATION OF CORED HOLES SHALL COORDINATE WITH LOCATION OF EQUIPMENT IN A MANNER THAT IS CLEAN AND FUNCTIONAL. THE CONTRACTOR SHALL INSTALL ONLY ONE CONDUIT PER HOLE AND SEAL THE OPENING AROUND THE CONDUIT.
- 17
- PROVIDE FIRE RETARDANT U.L. APPROVED SEALANT ON ALL PENETRATIONS, WALLS AND STRUCTURAL SLABS. IT SHALL BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR TO VERIFY PRIOR TO SUBMITTING BID, THE LOCATIONS OF ALL SUCH FIRE RATED PARTITIONS, WALLS, AND STRUCTURAL SLABS.
- 18
- UNLESS NOTED AS EXISTING, ALL EQUIPMENT, WIRING, DEVICES, ETC. SHALL BE NEW.
- 19
- ALL DISCONNECT SWITCHES SHALL BE SIZED BY NEC REQUIREMENTS TO ACCOMMODATE EQUIPMENT SERVED, INCLUDING REQUIRED FUSES U.O.N. SWITCHES SHALL BE HORSEPOWER RATED FOR MAX. HORSEPOWER, HEAVY DUTY TYPE.
- 20
- THE CONTRACTOR SHALL VERIFY CIRCUIT PROTECTIVE DEVICE RATINGS FOR EQUIPMENT PRIOR TO INSTALLATION.
- 21
- ALL FUSES SHALL BE CURRENT LIMITING, PER U.L., RATED 600V. OR 250V. AS REQUIRED, WITH: (a) NON TIME DELAY FUSES IN MAIN SWITCHES AND SWITCHES FEEDING PANELS. (b) TIME DELAY FUSES FOR MOTOR AND HVAC CIRCUITS.
- 22
- WIREWAYS SHALL BE SIZED AS REQUIRED, PER NEC, U.O.N.
- 23
- ALL CIRCUIT BREAKERS SHALL BE INVERSE TIME TYPE (THERMAL-MAGNETIC), TWO AND THREE POLE CIRCUIT BREAKERS SHALL BE COMMON TRIP. TIE HANDLES ARE NOT PERMITTED.
- 24
- ALL ELECTRICAL EQUIPMENT SHALL BE RAIN-TIGHT (NEMA 3R) WHERE EXPOSED TO THE WEATHER. ALL FLEX CONDUITS CONNECTED TO SUCH EQUIPMENT SHALL BE LIQUID-TIGHT.
- 25
- OUTLET BOXES SHALL BE PRESSED STEEL IN DRY LOCATIONS, CAST ALLOY WITH THREADED HUBS IN WET OR DAMP LOCATIONS AND SPECIAL ENCLOSURES AS REQUIRED FOR OTHER CLASSIFIED AREAS, U.O.N.
- 26
- ALL CONNECTIONS TO GROUND RODS SHALL BE MADE WITH U.L. APPROVED WELDED CONNECTIONS, UNLESS NOTED OTHERWISE. THE CONTRACTOR SHALL FORM A GROUNDING ELECTRODE SYSTEM AS PER NEC 250-50.
- 27
- THE CONTRACTOR SHALL SUBMIT 6 COPIES OF EQUIPMENT SHOP DRAWINGS FOR ELECTRICAL EQUIPMENT TO THE ENGINEER FOR REVIEW, PRIOR TO ORDERING SUCH EQUIPMENT.
- 28
- PROPER PLASTER RINGS SHALL BE USED WITH OUTLET BOXES. PLASTER RINGS SHALL BE A MAXIMUM OF 1/8" FROM THE FINISHED SURFACE OF THE DRYWALL. AFTER THE DRYWALL IS INSTALLED, PROPER COORDINATION BETWEEN THE ELECTRICAL CONTRACTOR AND THE GENERAL CONTRACTOR FOR RING INSTALLATION IS REQUIRED. NO "GOOF" RINGS WILL BE ALLOWED. ALL OUTLET BOXES SHALL BE SECURELY FASTENED, ANY AND ALL IMPROPERLY INSTALLED PLASTER RINGS OR OUTLET BOXES SHALL BE REMOVED AND A NEW RING OR OUTLET INSTALLED AT THE CONTRACTOR'S EXPENSE.
- 29
- FOR EMERGENCY EXIT SIGNS AND EMERGENCY BATTERY PACKS MAKE CONNECTION AHEAD OF ALL SWITCHES

ELECTRICAL LOAD CALCULATION – DWELLING UNIT
(NEC 2020 / FBC 2023)

PROJECT ADDRESS: 14704 CARNATION AVE, TAMPA, FL
HEATED/CONDITIONED FLOOR AREA (A/C): 2,105 SF
CALCULATION METHOD: NEC 2020 ARTICLE 220 – OPTIONAL METHOD (220.82)

GENERAL LIGHTING & GENERAL-USE RECEPTACLES (220.82(B)(1))
3 VA/5F x 2,105 SF = 6,315 VA (A1) 6,315 VA

SMALL APPLIANCE & LAUNDRY CIRCUITS (220.82(B)(2))
SMALL APPLIANCE CIRCUITS (2) @ 1,500 VA = 3,000 VA
LAUNDRY CIRCUIT (1) @ 1,500 VA = 1,500 VA
SUBTOTAL (A2) 4,500 VA

FASTENED-IN-PLACE APPLIANCES (220.82(B)(3)) (VERIFY NAMEPLATES)
RANGE/OVEN 8,000 VA
MICROWAVE/HOOD 1,000 VA
ELECTRIC WATER HEATER 4,500 VA
REFRIGERATOR 1,250 VA
CLOTHES WASHER 1,500 VA
CLOTHES DRYER 5,000 VA
DISHWASHER 1,500 VA
FOOD WASTE DISPOSER 600 VA
BATH FANS (2) @ 100 VA 200 VA
APPLIANCE SUBTOTAL (A3) 23,550 VA

TOTAL GENERAL + CIRCUITS + APPLIANCES
(A1) 6,315 + (A2) 4,500 + (A3) 23,550 = 34,365 VA (A) 34,365 VA.

DEMAND FACTOR (220.82(B))
FIRST 10,000 VA @ 100% 10,000 VA

REMAINDER: (34,365 – 10,000) = 24,365 VA @ 40% = 9,746 VA

DEMANDED GENERAL/APPLIANCE LOAD (DGA) 19,746 VA

HVAC / HEATING LOAD (220.82(C)) – LARGEST AT 100%
AIR HANDLER: GOODMAN MODEL ARUF48D14AC, 208/230V, 1PH
NAMEPLATE (ASSUMED HEAT KIT HK5C10XF): MCA = 48A, MOP = 60A
HVAC LOAD = MCA x 240V = 48A x 240V = 11,520 VA (HVAC) 11,520 VA
(ROUND UP FOR SERVICE CALC) (HVAC) 12,000 VA

TOTAL SERVICE LOAD (OPTIONAL METHOD)
(DGA) 19,746 VA + (HVAC) 12,000 VA = 31,746 VA (TSL) 31,746 VA

SERVICE AMPERES
31,746 VA ÷ 240V = 132.3 AMPS (SA) 132.3 A

SERVICE / PANEL SELECTION (DESIGN)
PROVIDE 200A, 120/240V, 1PH, 3W MAIN SERVICE AND PANELBOARD.
LOAD CALC INDICATES MINIMUM 150A SERVICE; 200A PROVIDED FOR REMODEL CAPACITY AND FUTURE LOADS (EV, ADDITIONAL APPLIANCES).


- NOTES:
- 1
- ALL APPLIANCE VA VALUES SHALL BE VERIFIED AGAINST FINAL MANUFACTURER NAMEPLATES PRIOR TO ROUGH-IN INSPECTION.
- 2
- HVAC LOAD BASED ON MANUFACTURER NAMEPLATE MCA. ELECTRIC HEAT IS THE GOVERNING LOAD WHEN INSTALLED (LARGEST OF HEAT OR COOL).
- 3
- CALCULATION PREPARED PER NEC 2020 ARTICLE 220 (OPTIONAL METHOD)

LEYEND:

	PRE - WIRE CLG. CEILING FAN WITH LIGHT (SPLIT SWITCH -OFF)
	EXHAUST FAN
	CEILING LIGHT FIXTURE
	110 VOLTS. DUPLEX RECEPTABLE
	110 VOLTS. GFCI OUTLET
	SMOKE DETECTOR WITH (ELECTRIC POWERED WITH BATTERIES BACK-UP)
	LIGHT SWITCH
	110 VOLTS TV OUTLET
	CHANDALIER LAMP

ELECTRICAL
PLAN LAYOUT
PROPOSED FLOOR PLAN

FIRST FLOOR

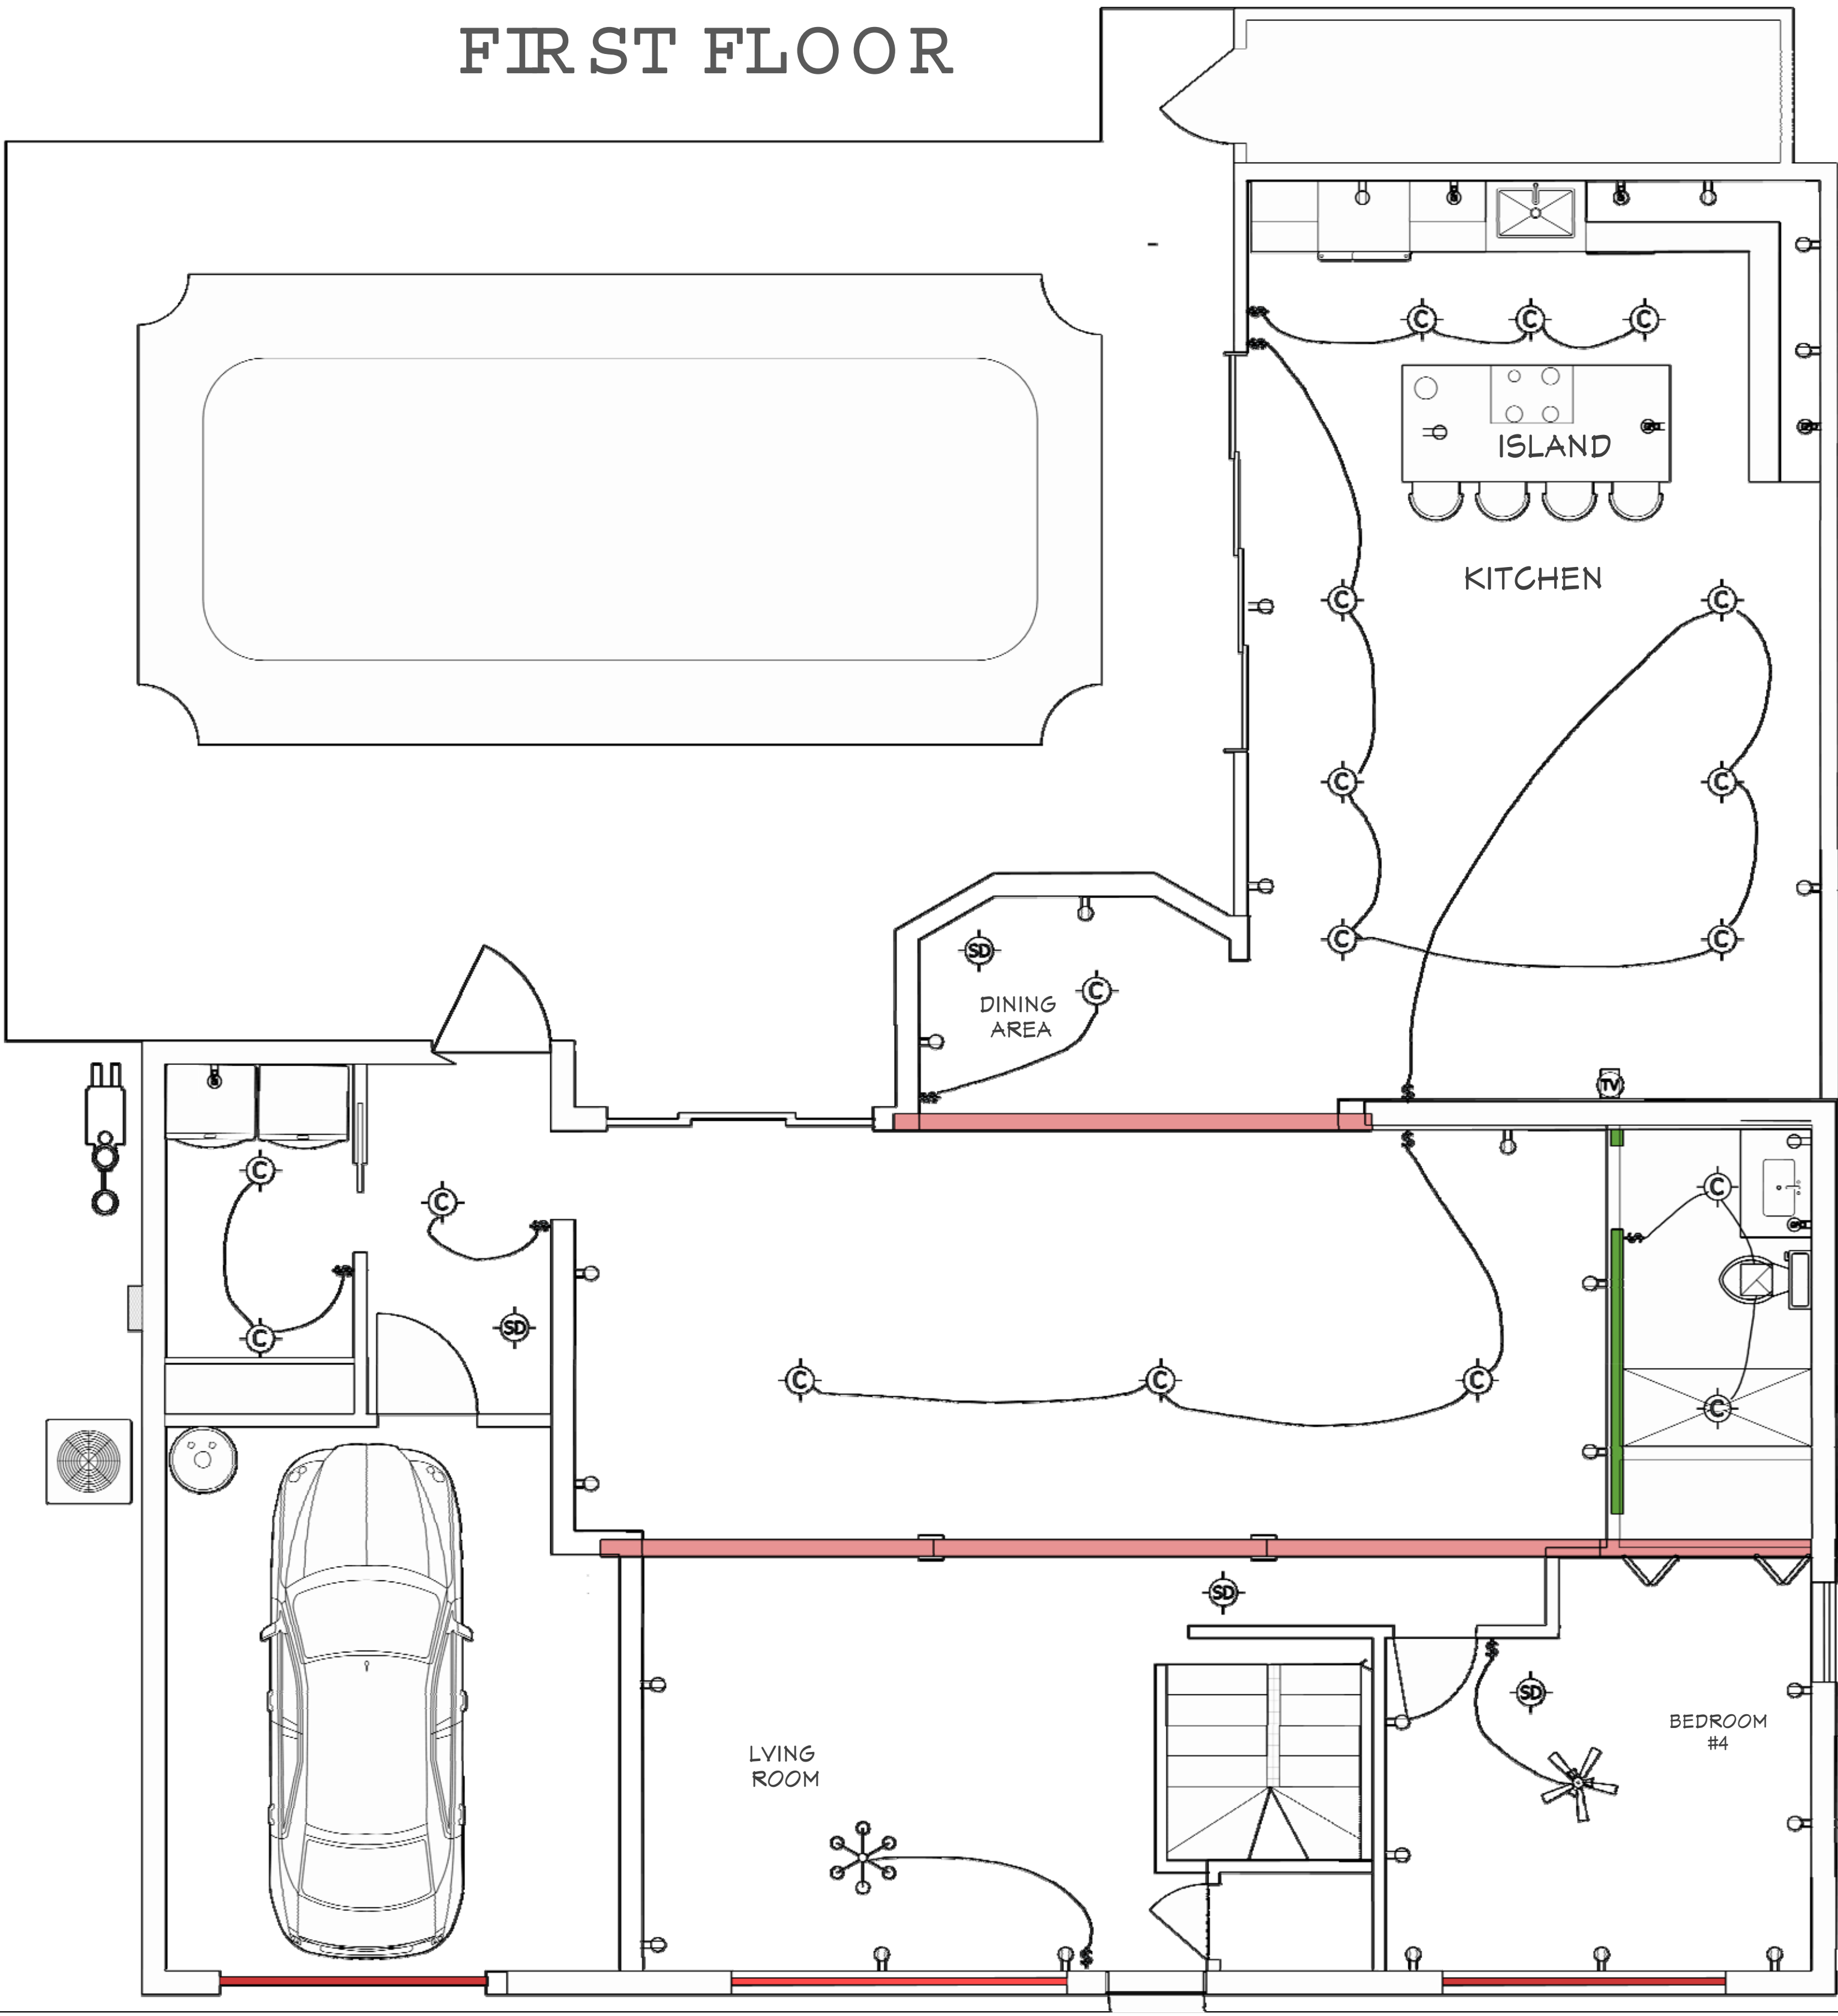

This drawing is the sole property of Seating ConstructorsUSA. Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice ContractorsUSA . 20 25 Copyright .

SHEET TITLE		CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC		CUSTOMER INFORMATION Email: Foldreturns1@gmail.com Phone: (781) 420-5726			NICHOLSON ENGINEERING ASSOCIATES, INC.			REVISIONS				A 05	
ELECTRICAL 1ST FLOOR PLAN		PROJECT ADDRESS : 14704 CARNATION AVE, TAMPA FLORIDA 33613		PROJECT OPEN DATE : JAN. 05 2026			DRAWINGS REMARKS								
							MM/DD/Y								
						1 01.07.26		RENOVATION							
				PROJECT REVISED BY : MICHAEL D. JOHNSON											
								7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167							
												PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26	

GENERAL ELECTRICAL NOTES:

- 1 THE ENTIRE INSTALLATION SHALL BE DONE IN ACCORDANCE WITH THE LATEST EDITION OF THE FBC 2023, NEC 2020 AND OF ALL LOCAL CODES, RULES AND ORDINANCES HAVING JURISDICTION.
- 2 AS A MINIMUM, ALL EQUIPMENT SHALL MEET AFFLIGABLE STANDARDS, FOR TYPE OF EQUIPMENT AND INTENDED USE, OF THE FOLLOWING:

- a AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)
- b ILLUMINATING ENGINEERS SOCIETY (IES).
- c AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)
- d NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA).


NOTE: THESE STANDARDS ARE SUBORDINATE TO CODES AND STANDARDS SET BY U.L.

- 1 IT SHALL BE UNDERSTOOD THAT ALL WORK PERFORMED SHALL BE BY A LICENSED ELECTRICAL CONTRACTOR IN A FIRST-CLASS WORKMANLIKE MANNER. SAID CONTRACTOR SHALL MEET ALL REQUIREMENTS SET FORTH BY ANY LOCAL ORDINANCE AND GOVERNING AUTHORITIES.
- 2 THE CONTRACTOR SHALL PROVIDE ALL REQUIRED INSURANCE FOR PROTECTION AGAINST PUBLIC LIABILITY AND PROPERTY DAMAGE FOR THE DURATION OF THE WORK.
- 3 THE CONTRACTOR SHALL GUARANTEE ALL MATERIALS AND WORKMANSHIP FREE FROM DEFECTS FOR A PERIOD OF NOT LESS THAN (1) YEAR FROM DATE OF ACCEPTANCE U.O.N.
- 4 IT SHALL NOT BE THE INTENT OF THESE PLANS AND/OR SPECIFICATIONS TO SHOW EVERY MINOR DETAIL OF CONSTRUCTION. THE CONTRACTOR SHALL BE EXPECTED TO FURNISH AND INSTALL ALL ITEMS FOR A COMPLETE ELECTRICAL SYSTEM AND PROVIDE ALL REQUIREMENTS NECESSARY FOR EQUIPMENT TO BE PLACED IN PROPER WORKING ORDER.
- 5 THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING TO ORIGINAL CONDITIONS ANY AND ALL DAMAGES TO BUILDING SURFACES, EQUIPMENT, ETC. CAUSED DURING THE PERFORMANCE OF WORK.
- 6 CORRECTION OF ANY DEFECTS SHALL BE COMPLETED WITHOUT ADDITIONAL CHARGE OR DELAYS AND SHALL INCLUDE REPLACEMENT OR REPAIR OF ANY OTHER PHASE OF THE INSTALLATION WHICH MAY HAVE BEEN DAMAGED THEREBY.
- 7 THE CONTRACTOR SHALL VISIT THE JOB SITE AND VERIFY ALL CONDITIONS, LOCATIONS DIMENSIONS AND COUNTS AS SHOWN OR NOTED ON THE DRAWINGS, PRIOR TO SUBMITTING BID.
- 8 THE CONTRACTOR SHALL NOT SCALE THE ELECTRICAL DRAWINGS, REFER TO ARCHITECTURAL PLANS AND ELEVATIONS FOR EXACT LOCATIONS OF ALL EQUIPMENT UNLESS NOTED OTHERWISE.
- 9 IT SHALL BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR TO PROVIDE ALL LABOR, MATERIALS AND SUPERVISION NECESSARY TO ACCOMPLISH THE WORK AS SHOWN AND/OR NOTED ON THE PLANS.
- 10 IT SHALL BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR FOR THE ADVANCE ORDERING OF LONG LEAD ITEMS, AS TO NOT INTERFERE WITH THE PRODUCTION OF OTHER TRADES RESULTING IN ANY DOWN OR LAG TIME. THE CONTRACTOR SHALL NOT ORDER ANY ITEMS UNTIL APPROVED SHOP DRAWINGS ARE RETURNED TO HIM.
- 11 THE CONTRACTOR SHALL KEEP ALL AREAS WHERE WORK IS BEING PERFORMED FREE FROM DEBRIS AT ALL TIMES AND SAID AREAS SHALL BE LEFT BROOM CLEAN AT THE END OF EACH WORKING DAY.
- 12 ALL CONDUCTORS SHALL BE COPPER, TYPE THHN/THWN EXCEPT WHERE OTHERWISE BY U.L OR CODES. MINIMUM WIRE SIZE SHALL BE #12 AWG. EXCLUDING CONTROL WIRE.
- 13 ALUMINUM CONDUCTORS ARE NOT PERMITTED ANYWHERE.
- 14 ALL CONDUCTORS SHALL BE IN ½ IN. MINIMUM CONDUITS (U.O.N.) ALL CONDUITS SHALL BE GALVANIZED RIDGED STEEL (GRS) EXCEPT THAT:
- a PVC CONDUITS MAY BE USED UNDERGROUND PROVIDED ELBOWS AND RISERS ARE GRS, WHERE SUBJECT TO PHYSICAL DAMAGE
- b ELECTRICAL METALLIC TUBING (EMT) MAY BE USED IN OR ON WALLS OR CEILINGS WHERE NOT SUBJECT TO MECHANICAL DAMAGE, DAMP OR CORROSIVE CONDITIONS.
- c LIQUID TIGHT FLEXIBLE CONDUIT WHERE REQUIRED.
- d FLEXIBLE METALLIC CONDUIT WHERE REQUIRED IN DRY LOCATIONS ONLY ALL CONDUITS IN HAZARDOUS AREAS (PER NEC) SHALL MEET THE REQUIREMENTS OF NEC CH. 5.
- 15 ALL CONDUIT RUNS ARE SHOWN DIAGRAMATICALLY. THE EXACT ROUTING SHALL BE DETERMINED IN THE FIELD, UNLESS NOTED OTHERWISE.
- 16 WHERE CORE DRILLING OF FLOORS/WALLS IS REQUIRED, THE CONTRACTOR SHALL SEAL OPENINGS WATER TIGHT AFTER UTILITIES HAVE BEEN INSTALLED. LOCATION OF CORED HOLES SHALL COORDINATE WITH LOCATION OF EQUIPMENT IN A MANNER THAT IS CLEAN AND FUNCTIONAL. THE CONTRACTOR SHALL INSTALL ONLY ONE CONDUIT PER HOLE AND SEAL THE OPENING AROUND THE CONDUIT.
- 17 PROVIDE FIRE RETARDANT U.L. APPROVED SEALANT ON ALL PENETRATIONS, WALLS AND STRUCTURAL SLABS. IT SHALL BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR TO VERIFY PRIOR TO SUBMITTING BID, THE LOCATIONS OF ALL SUCH FIRE RATED PARTITIONS, WALLS, AND STRUCTURAL SLABS.
- 18 UNLESS NOTED AS EXISTING, ALL EQUIPMENT, WIRING, DEVICES, ETC. SHALL BE NEW.
- 19 ALL DISCONNECT SWITCHES SHALL BE SIZED BY NEC REQUIREMENTS TO ACCOMMODATE EQUIPMENT SERVED, INCLUDING REQUIRED FUSES U.O.N. SWITCHES SHALL BE HORSEPOWER RATED FOR MAX. HORSEPOWER, HEAVY DUTY TYPE.
- 20 THE CONTRACTOR SHALL VERIFY CIRCUIT PROTECTIVE DEVICE RATINGS FOR EQUIPMENT PRIOR TO INSTALLATION.
- 21 ALL FUSES SHALL BE CURRENT LIMITING, PER U.L., RATED 600V. OR 250V. AS REQUIRED, WITH: (a) NON TIME DELAY FUSES IN MAIN SWITCHES AND SWITCHES FEEDING PANELS. (b) TIME DELAY FUSES FOR MOTOR AND HVAC CIRCUITS.
- 22 WIRERAYS SHALL BE SIZED AS REQUIRED, PER NEC, U.O.N.
- 23 ALL CIRCUIT BREAKERS SHALL BE INVERSE TIME TYPE (THERMAL-MAGNETIC), TWO AND THREE POLE CIRCUIT BREAKERS SHALL BE COMMON TRIP. TIE HANDLES ARE NOT PERMITTED.
- 24 ALL ELECTRICAL EQUIPMENT SHALL BE RAIN TIGHT (NEMA 3R) WHERE EXPOSED TO THE WEATHER. ALL FLEX CONDUITS CONNECTED TO SUCH EQUIPMENT SHALL BE LIQUID TIGHT.
- 25 OUTLET BOXES SHALL BE PRESSED STEEL IN DRY LOCATIONS, CAST ALLOY WITH THREADED HUBS IN WET OR DAMP LOCATIONS AND SPECIAL ENCLOSURES AS REQUIRED FOR OTHER CLASSIFIED AREAS, U.O.N.
- 26 ALL CONNECTIONS TO GROUND RODS SHALL BE MADE WITH U.L. APPROVED WELDED CONNECTIONS, UNLESS NOTED OTHERWISE. THE CONTRACTOR SHALL FORM A GROUNDING ELECTRODE SYSTEM AS PER NEC 250-50.
- 27 THE CONTRACTOR SHALL SUBMIT 6 COPIES OF EQUIPMENT SHOP DRAWINGS FOR ELECTRICAL EQUIPMENT TO THE ENGINEER FOR REVIEW, PRIOR TO ORDERING SUCH EQUIPMENT.
- 28 PROPER PLASTER RINGS SHALL BE USED WITH OUTLET BOXES. PLASTER RINGS SHALL BE A MAXIMUM OF 1/8" FROM THE FINISHED SURFACE OF THE DRYWALL. AFTER THE DRYWALL IS INSTALLED, PROPER COORDINATION BETWEEN THE ELECTRICAL CONTRACTOR AND THE GENERAL CONTRACTOR FOR RING INSTALLATION IS REQUIRED NO "GOOF" RINGS WILL BE ALLOWED. ALL OUTLET BOXES SHALL BE SECURELY FASTENED, ANY AND ALL IMPROPERLY INSTALLED PLASTER RINGS OR OUTLET BOXES SHALL BE REMOVED AND A NEW RING OR OUTLET INSTALLED AT THE CONTRACTOR'S EXPENSE.
- 29 FOR EMERGENCY EXIT SIGNS AND EMERGENCY BATTERY PACKS MAKE CONNECTION AHEAD OF ALL SWITCHES

SECOND FLOOR

PROPOSED FLOOR PLAN

ELECTRICAL PLAN LAYOUT

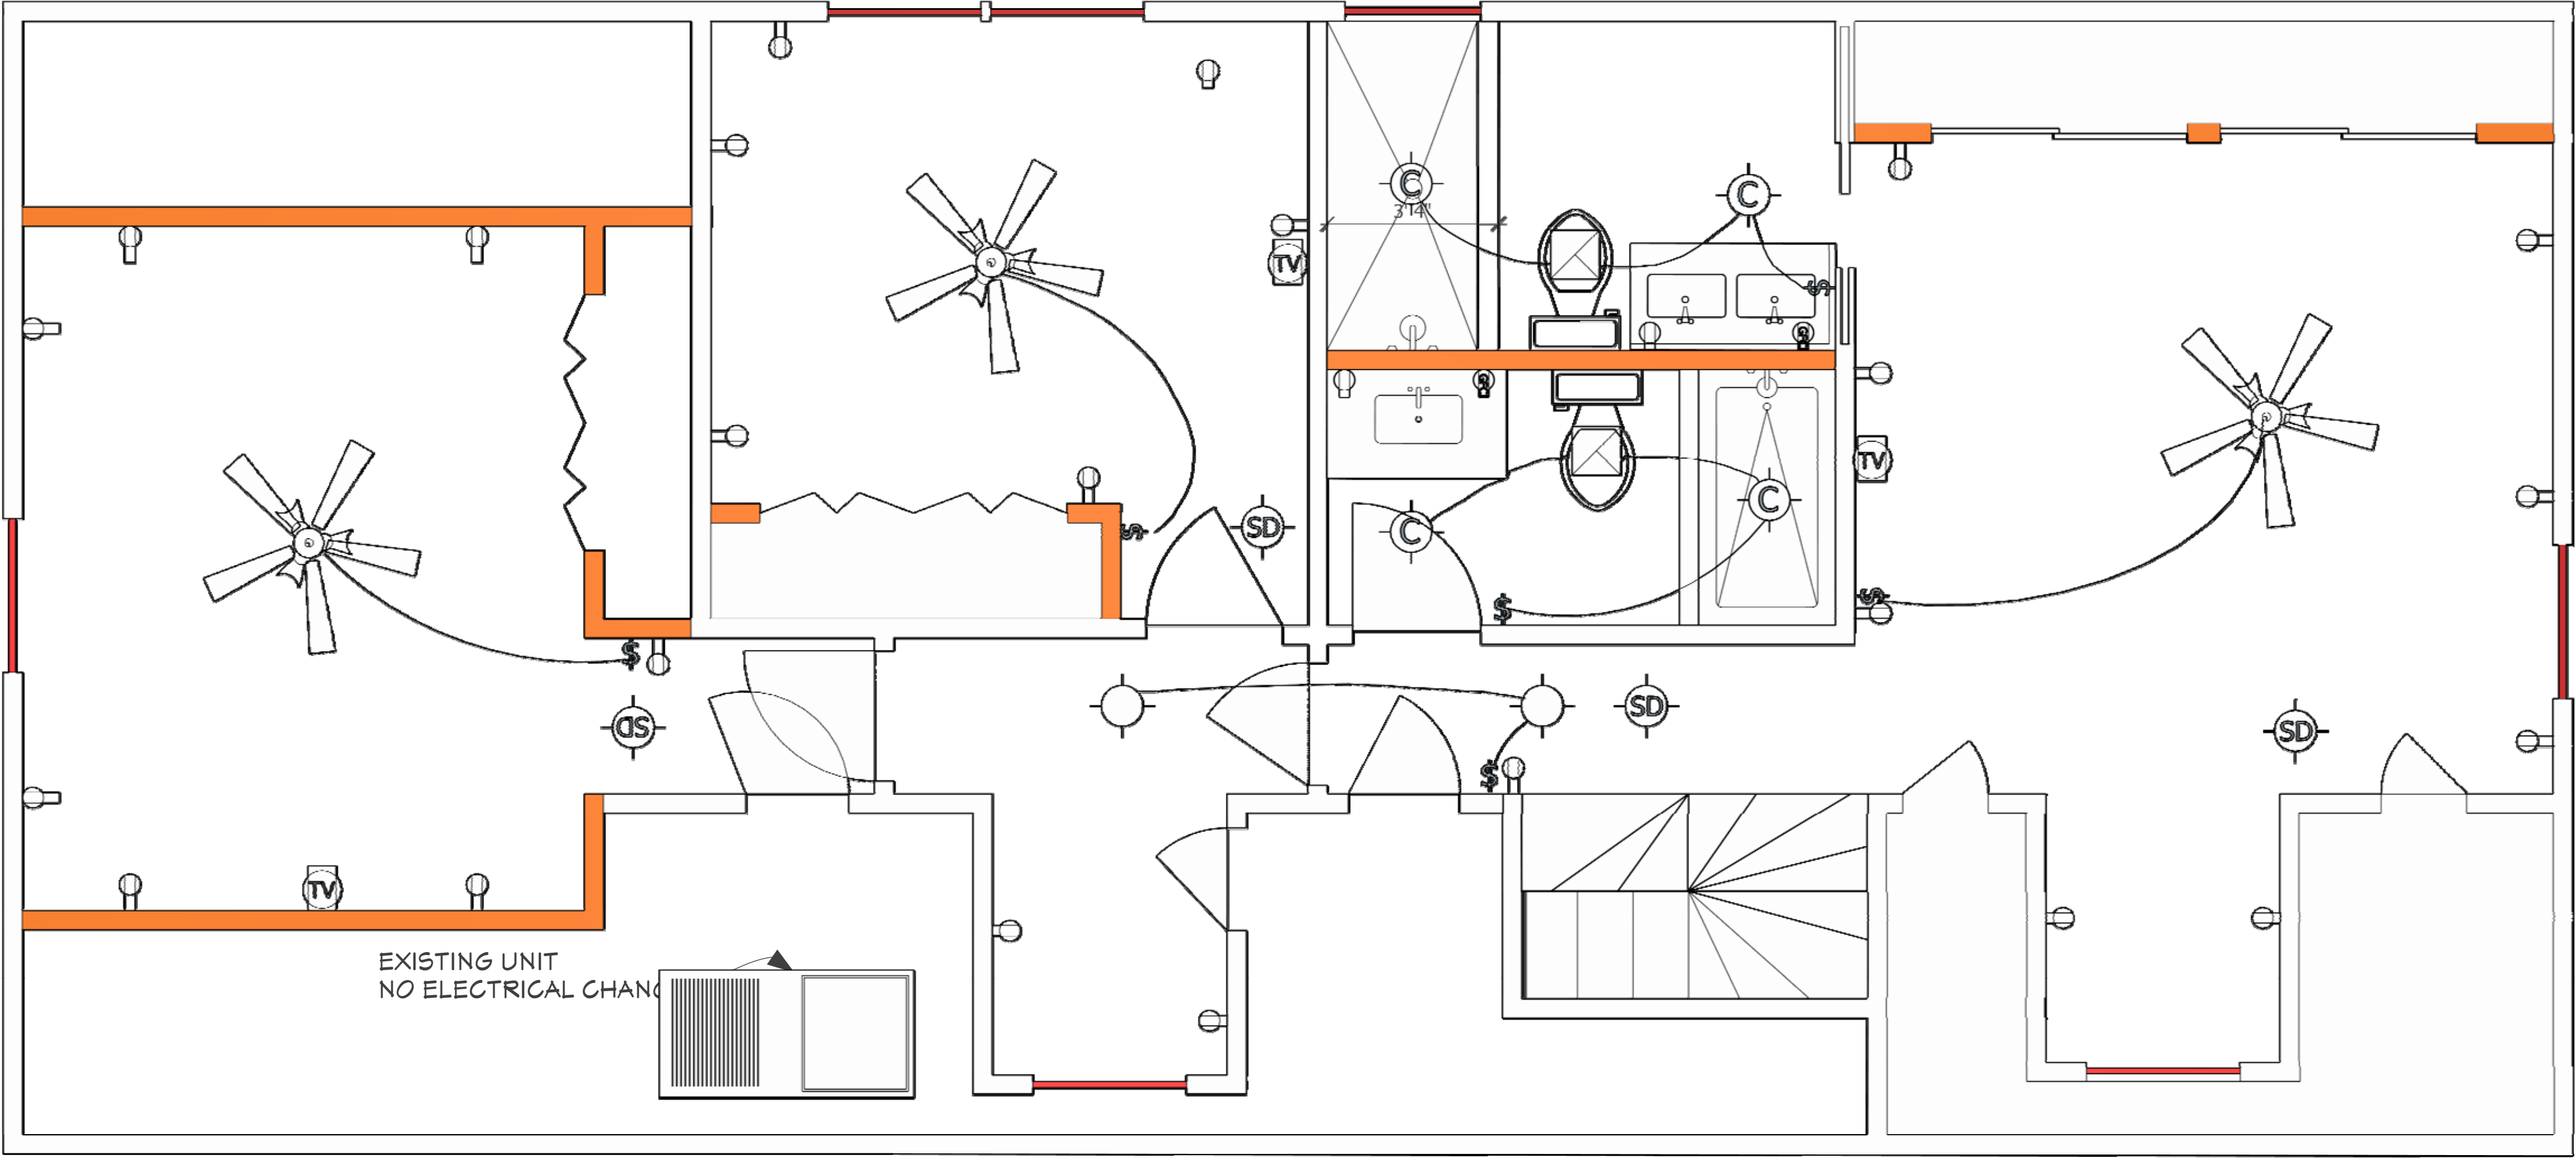

LEGEND:

	PRE - WIRE CLG. CEILING FAN WITH LIGHT (SPLIT SWITCH -OFF)
	EXHAUST FAN
	CEILING LIGHT FIXTURE
	110 VOLTS. DUPLEX RECEPTABLE
	110 VOLTS. GFCI OUTLET
	SMOKE DETECTOR WITH (ELECTRIC POWERED WITH BATTERIES BACK-UP)
	LIGHT SWITCH
	110 VOLTS TV OUTLET
	CHANDALIER LAMP

ELECTRICAL LOAD CALCULATION – DWELLING UNIT (NEC 2020 / FBC 2023)

PROJECT ADDRESS: 14704 CARNATION AVE, TAMPA, FL
HEATED/CONDITIONED FLOOR AREA (A/C): 2,105 SF
CALCULATION METHOD: NEC 2020 ARTICLE 220 – OPTIONAL METHOD (220.82)

GENERAL LIGHTING & GENERAL-USE RECEPTACLES (220.82(B)(1))
3 VA/SF x 2,105 SF = 6,315 VA (A1) 6,315 VA

SMALL APPLIANCE & LAUNDRY CIRCUITS (220.82(B)(2))
SMALL APPLIANCE CIRCUITS (2) @ 1,500 VA = 3,000 VA
LAUNDRY CIRCUIT (1) @ 1,500 VA = 1,500 VA
SUBTOTAL (A2) 4,500 VA

FASTENED-IN-PLACE APPLIANCES (220.82(B)(3)) (VERIFY NAMEPLATES)
RANGE/OVEN 8,000 VA
MICROWAVE/HOOD 1,000 VA
ELECTRIC WATER HEATER 4,500 VA
REFRIGERATOR 1,250 VA
CLOTHES WASHER 1,500 VA
CLOTHES DRYER 5,000 VA
DISHWASHER 1,500 VA
FOOD WASTE DISPOSER 600 VA
BATH FANS (2) @ 100 VA 200 VA
APPLIANCE SUBTOTAL (A3) 23,550 VA

TOTAL GENERAL + CIRCUITS + APPLIANCES
(A1) 6,315 + (A2) 4,500 + (A3) 23,550 = 34,365 VA (A) 34,365 VA.

DEMAND FACTOR (220.82(B))
FIRST 10,000 VA @ 100% 10,000 VA

REMAINDER: (34,365 – 10,000) = 24,365 VA @ 40% = 9,746 VA

DEMANDED GENERAL/APPLIANCE LOAD (DGA) 19,746 VA

HVAC / HEATING LOAD (220.82(C)) – LARGEST AT 100%
AIR HANDLER: GOODMAN MODEL ARUF48D14AC, 208/230V, 1PH
NAMEPLATE (ASSUMED HEAT KIT HKSC10XF): MCA = 48A, MOP = 60A
HVAC LOAD = MCA x 240V = 48A x 240V = 11,520 VA (HVAC) 11,520 VA
(ROUND UP FOR SERVICE CALC) (HVAC) 12,000 VA

TOTAL SERVICE LOAD (OPTIONAL METHOD)
(DGA) 19,746 VA + (HVAC) 12,000 VA = 31,746 VA (TSL) 31,746 VA

SERVICE AMPERES
31,746 VA ÷ 240V = 132.3 AMPS (SA) 132.3 A

SERVICE / PANEL SELECTION (DESIGN)
PROVIDE 200A, 120/240V, 1PH, 3W MAIN SERVICE AND PANELBOARD.
LOAD CALC INDICATES MINIMUM 150A SERVICE; 200A PROVIDED FOR REMODEL CAPACITY AND FUTURE LOADS (EV, ADDITIONAL APPLIANCES).

- NOTES:
1. ALL APPLIANCE VA VALUES SHALL BE VERIFIED AGAINST FINAL MANUFACTURER NAMEPLATES PRIOR TO ROUGH-IN INSPECTION.
2. HVAC LOAD BASED ON MANUFACTURER NAMEPLATE MCA. ELECTRIC HEAT IS THE GOVERNING LOAD WHEN INSTALLED (LARGEST OF HEAT OR COOL).
3. CALCULATION PREPARED PER NEC 2020 ARTICLE 220 (OPTIONAL METHOD)

This drawing is the sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA . 2025 Copyright .

SHEET TITLE	CUSTOMER NAME:		CUSTOMER INFORMATION			NICHOLSON ENGINEERING ASSOCIATES, INC.		REVISIONS		
	EDUARDO MATOSINHO/100 FOLD RETURNS LLC		Email: Foldreturns1@gmail.com Phone: (781) 420-5726					DRAWINGS REMARKS		
ELECTRICAL 2ND FLOOR PLAN	PROJECT ADDRESS :		PROJECT OPEN DATE :							
	14704 CARNATION AVE,		JAN. 05 2026		1	01.07.26	RENOVATION			
	TAMPA FLORIDA 33613		PROJECT REVISED BY :		2					
			MICHAEL D. JOHNSON		3					
						PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26		

PLUMBING GENERAL NOTES:

(SECOND FLOOR – TWO BATHROOMS):

- 1)
- ALL PLUMBING WORK SHALL COMPLY WITH THE FLORIDA BUILDING CODE – PLUMBING (FBC-P 2013), FLORIDA BUILDING CODE – RESIDENTIAL, AND ALL APPLICABLE CITY OF TAMPA / HILLSBOROUGH COUNTY REQUIREMENTS.
- 2)
- A PLUMBING PERMIT IS REQUIRED FOR ALL RELOCATED AND NEW PLUMBING FIXTURES AND ASSOCIATED PIPING.
- 3)
- CONTRACTOR SHALL VERIFY ALL EXISTING PIPE SIZES, VENT LOCATIONS, ELEVATIONS, AND CONNECTION POINTS PRIOR TO ROUGH-IN. ANY CONFLICTS SHALL BE REPORTED TO THE DESIGNER AND AHJ BEFORE CONTINUING WORK.
- 4)
- ALL PLUMBING MATERIALS, FITTINGS, VALVES, AND FIXTURES SHALL BE LISTED, LABELED, AND APPROVED AND INSTALLED PER MANUFACTURER'S INSTRUCTIONS.
- 5)
- PROVIDE ACCESSIBLE SHUTOFF VALVES FOR EACH FIXTURE AND EACH BATHROOM GROUP.
- 6)
- ALL NEW OR MODIFIED DRAIN, WASTE, VENT (DWV) AND WATER PIPING SHALL BE TESTED IN ACCORDANCE WITH CODE PRIOR TO CONCEALMENT.
- 7)
- NO PLUMBING INSTALLATION SHALL COMPROMISE STRUCTURAL MEMBERS. ALL DRILLING AND NOTCHING SHALL COMPLY WITH STRUCTURAL AND MANUFACTURER LIMITATIONS.
- 8)
- PROVIDE FIREBLOCKING AND SEALING AT ALL FLOOR AND WALL PENETRATIONS PER FBC REQUIREMENTS.
- 9)
- ALL PLUMBING FIXTURES SHALL BE INSTALLED TO MAINTAIN REQUIRED CLEARANCES AND ACCESSIBILITY.
- 10)
- ALL WORK SHALL BE SUBJECT TO ROUGH-IN, PAN, AND FINAL INSPECTIONS BY THE CITY OF TAMPA.

FIXTURE SCOPE (PER PLAN):

- RELOCATE (2) TOILETS.
- RELOCATE (2) SHOWERS.
- INSTALL (1) DOUBLE LAVATORY VANITY – MASTER BATHROOM.
- INSTALL (1) SINGLE LAVATORY VANITY – GUEST BATHROOM.

NO INCREASE IN TOTAL FIXTURE COUNT.

BATHROOMS (TOILET) NOTES – (2 TOTAL):

- 1)
- TOILETS SHALL DISCHARGE INTO A MINIMUM 3-INCH SANITARY DRAIN, UNLESS EXISTING CONDITIONS ARE VERIFIED AND APPROVED BY THE AHJ.
- 2)
- EACH TOILET SHALL BE INDIVIDUALLY TRAPPED AND PROPERLY VENTED PER FBC-P.
- 3)
- PROVIDE AN ACCESSIBLE ¼-TURN ANGLE STOP AT EACH TOILET SUPPLY.
- 4)
- MAINTAIN MINIMUM CLEARANCES:

*15 INCHES MINIMUM FROM TOILET CENTERLINE TO SIDE WALL OR FIXTURE.
*21 INCHES MINIMUM CLEAR SPACE IN FRONT OF TOILET.
- 5)
- TOILET FLANGE SHALL BE INSTALLED FLUSH WITH FINISHED FLOOR AND SECURELY ANCHORED.

SHOWER NOTES – (2 TOTAL):

- 1)
- SHOWERS SHALL BE PROVIDED WITH LISTED PRESSURE-BALANCED OR THERMOSTATIC MIXING VALVES (ANTI-SCALD).
- 2)
- SHOWER DRAINS SHALL BE MINIMUM 2 INCHES IN DIAMETER.
- 3)
- EACH SHOWER SHALL BE INDIVIDUALLY TRAPPED AND VENTED.
- 4)
- PROVIDE A CODE-APPROVED SHOWER PAN OR WATERPROOFING SYSTEM.
- 5)
- SHOWER PAN SHALL BE WATER-TESTED PRIOR TO CONCEALMENT AND INSPECTED BY AHJ.
- 6)
- ALL PENETRATIONS THROUGH WATERPROOFING SHALL BE PROPERLY SEALED.

LAVATORY NOTES – MASTER BATHROOM (DOUBLE SINK):

- 1)
- TWO LAVATORIES SHALL BE INSTALLED AS SHOWN ON PLANS.
- 2)
- EACH LAVATORY SHALL BE INDIVIDUALLY TRAPPED.
- 3)
- COMMON VENTING IS PERMITTED ONLY IF CODE-COMPLIANT AND PROPERLY SIZED.
- 4)
- PROVIDE HOT AND COLD WATER SUPPLIES WITH INDIVIDUAL ANGLE STOPS AT EACH LAVATORY.
- 5)
- DRAIN AND VENT PIPING SHALL BE SIZED BASED ON FIXTURE UNIT REQUIREMENTS.
- 6)
- COORDINATE WITH ELECTRICAL PLANS FOR REQUIRED GFCI RECEPTACLES AT VANITY.

LAVATORY NOTES – GUEST BATHROOM (SINGLE SINK):

- 1)
- LAVATORY SHALL BE INDIVIDUALLY TRAPPED AND VENTED.
- 2)
- PROVIDE HOT AND COLD WATER SUPPLIES WITH ACCESSIBLE SHUTOFF VALVES.
- 3)
- DRAIN PIPING SHALL CONNECT TO SANITARY SYSTEM USING APPROVED FITTINGS ONLY.
- 4)
- MAINTAIN REQUIRED CLEARANCES AND SERVICE ACCESS.

VENTING NOTES:

- 1)
- ALL FIXTURES SHALL BE VENTED TO PREVENT SIPHONAGE AND BACKPRESSURE.
- 2)
- VENT PIPING SHALL TERMINATE TO THE EXTERIOR IN ACCORDANCE WITH CODE.
- 3)
- NO S-TRAPS OR FLAT VENTS PERMITTED.
- 4)
- HORIZONTAL VENT RUNS SHALL MAINTAIN REQUIRED SLOPE.
- 5)
- WATER SUPPLY NOTES:

WATER SUPPLY NOTES:

- 1)
- WATER DISTRIBUTION PIPING SHALL BE SIZED TO MAINTAIN ADEQUATE PRESSURE AT THE MOST REMOTE FIXTURE.
- 2)
- WATER HAMMER ARRESTORS SHALL BE INSTALLED WHERE QUICK-CLOSING VALVES ARE USED.
- 3)
- HOT WATER PIPING SHALL COORDINATE WITH FBC ENERGY REQUIREMENTS.
- 4)
- ALL PIPING SHALL BE PROPERLY SUPPORTED AND PROTECTED.

CLEANOUT NOTES:


PROVIDE CLEANOUTS AT:
BASE OF EACH STACK.
CHANGES OF DIRECTION GREATER THAN 45 DEGREES.
LOCATIONS REQUIRED FOR MAINTENANCE ACCESS.
CLEANOUTS SHALL REMAIN ACCESSIBLE AFTER CONSTRUCTION.

SECOND FLOOR / MULTI-STORY COORDINATION NOTES:

- 1)
- ALL FLOOR AND WALL PENETRATIONS SHALL BE SEALED AND FIREBLOCKED.
- 2)
- PLUMBING ROUTING SHALL BE COORDINATED WITH STRUCTURAL FRAMING.
- 3)
- ACCESS PANELS SHALL BE PROVIDED WHERE REQUIRED FOR VALVES OR SERVICEABLE COMPONENTS.
- 4)
- CEILING AND WALL ASSEMBLIES SHALL BE RESTORED TO ORIGINAL FIRE AND SOUND RATINGS WHERE APPLICABLE.

PERMIT REVIEWER NOTE:

THIS PROJECT CONSISTS OF RELOCATING PLUMBING FIXTURES WITHIN EXISTING SECOND-FLOOR BATHROOMS. NO INCREASE IN FIXTURE COUNT. WORK INCLUDES NEW SANITARY, VENT, AND WATER CONNECTIONS TIED INTO EXISTING APPROVED SYSTEMS. ALL WORK SHALL COMPLY WITH FLORIDA BUILDING CODE – PLUMBING AND CITY OF TAMPA REQUIREMENTS



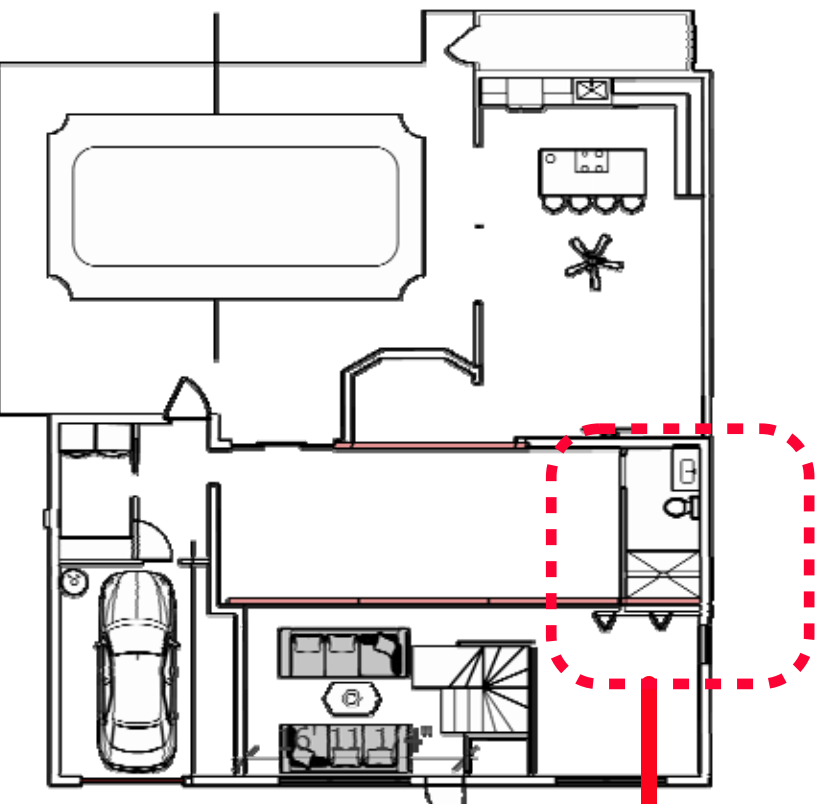


A) DRAINAGE FIXTURE UNIT (DFU) LOAD SUMMARY (TYPICAL)

FIXTURE	QTY	TYPICAL DFU / EA	TOTAL DFU	MIN TRAP / DRAIN CONNECTION	
TOILET (PRIVATE, TANK TYPE)	2	3	6	3" MIN DRAIN	
SHOWER	2	2	4	2" MIN DRAIN	
LAVATORY (MASTER DOUBLE)	2	1	2	1-1/4" TRAP, 1-1/2" DRAIN	
LAVATORY (GUEST SINGLE)	1	1	1	1-1/4" TRAP, 1-1/2" DRAIN	
TOTAL	5 FIXTURES		13 DFU		

B) WATER SUPPLY FIXTURE UNIT (WSFU) LOAD SUMMARY (TYPICAL)


FIXTURE	QTY	TYPICAL WSFU / EA	TOTAL WSFU	BRANCH SUPPLY MIN (TYPICAL)
TOILET (COLD ONLY)	2	2.5	5.0	3/8" STOP, 1/2" BRANCH TYP
SHOWER (HOT/COLD)	2	2.0	4.0	1/2" BRANCH
LAVATORY	3	1.0	3.0	1/2" BRANCH, 3/8" STOPS
TOTAL			12.0 WSFU	

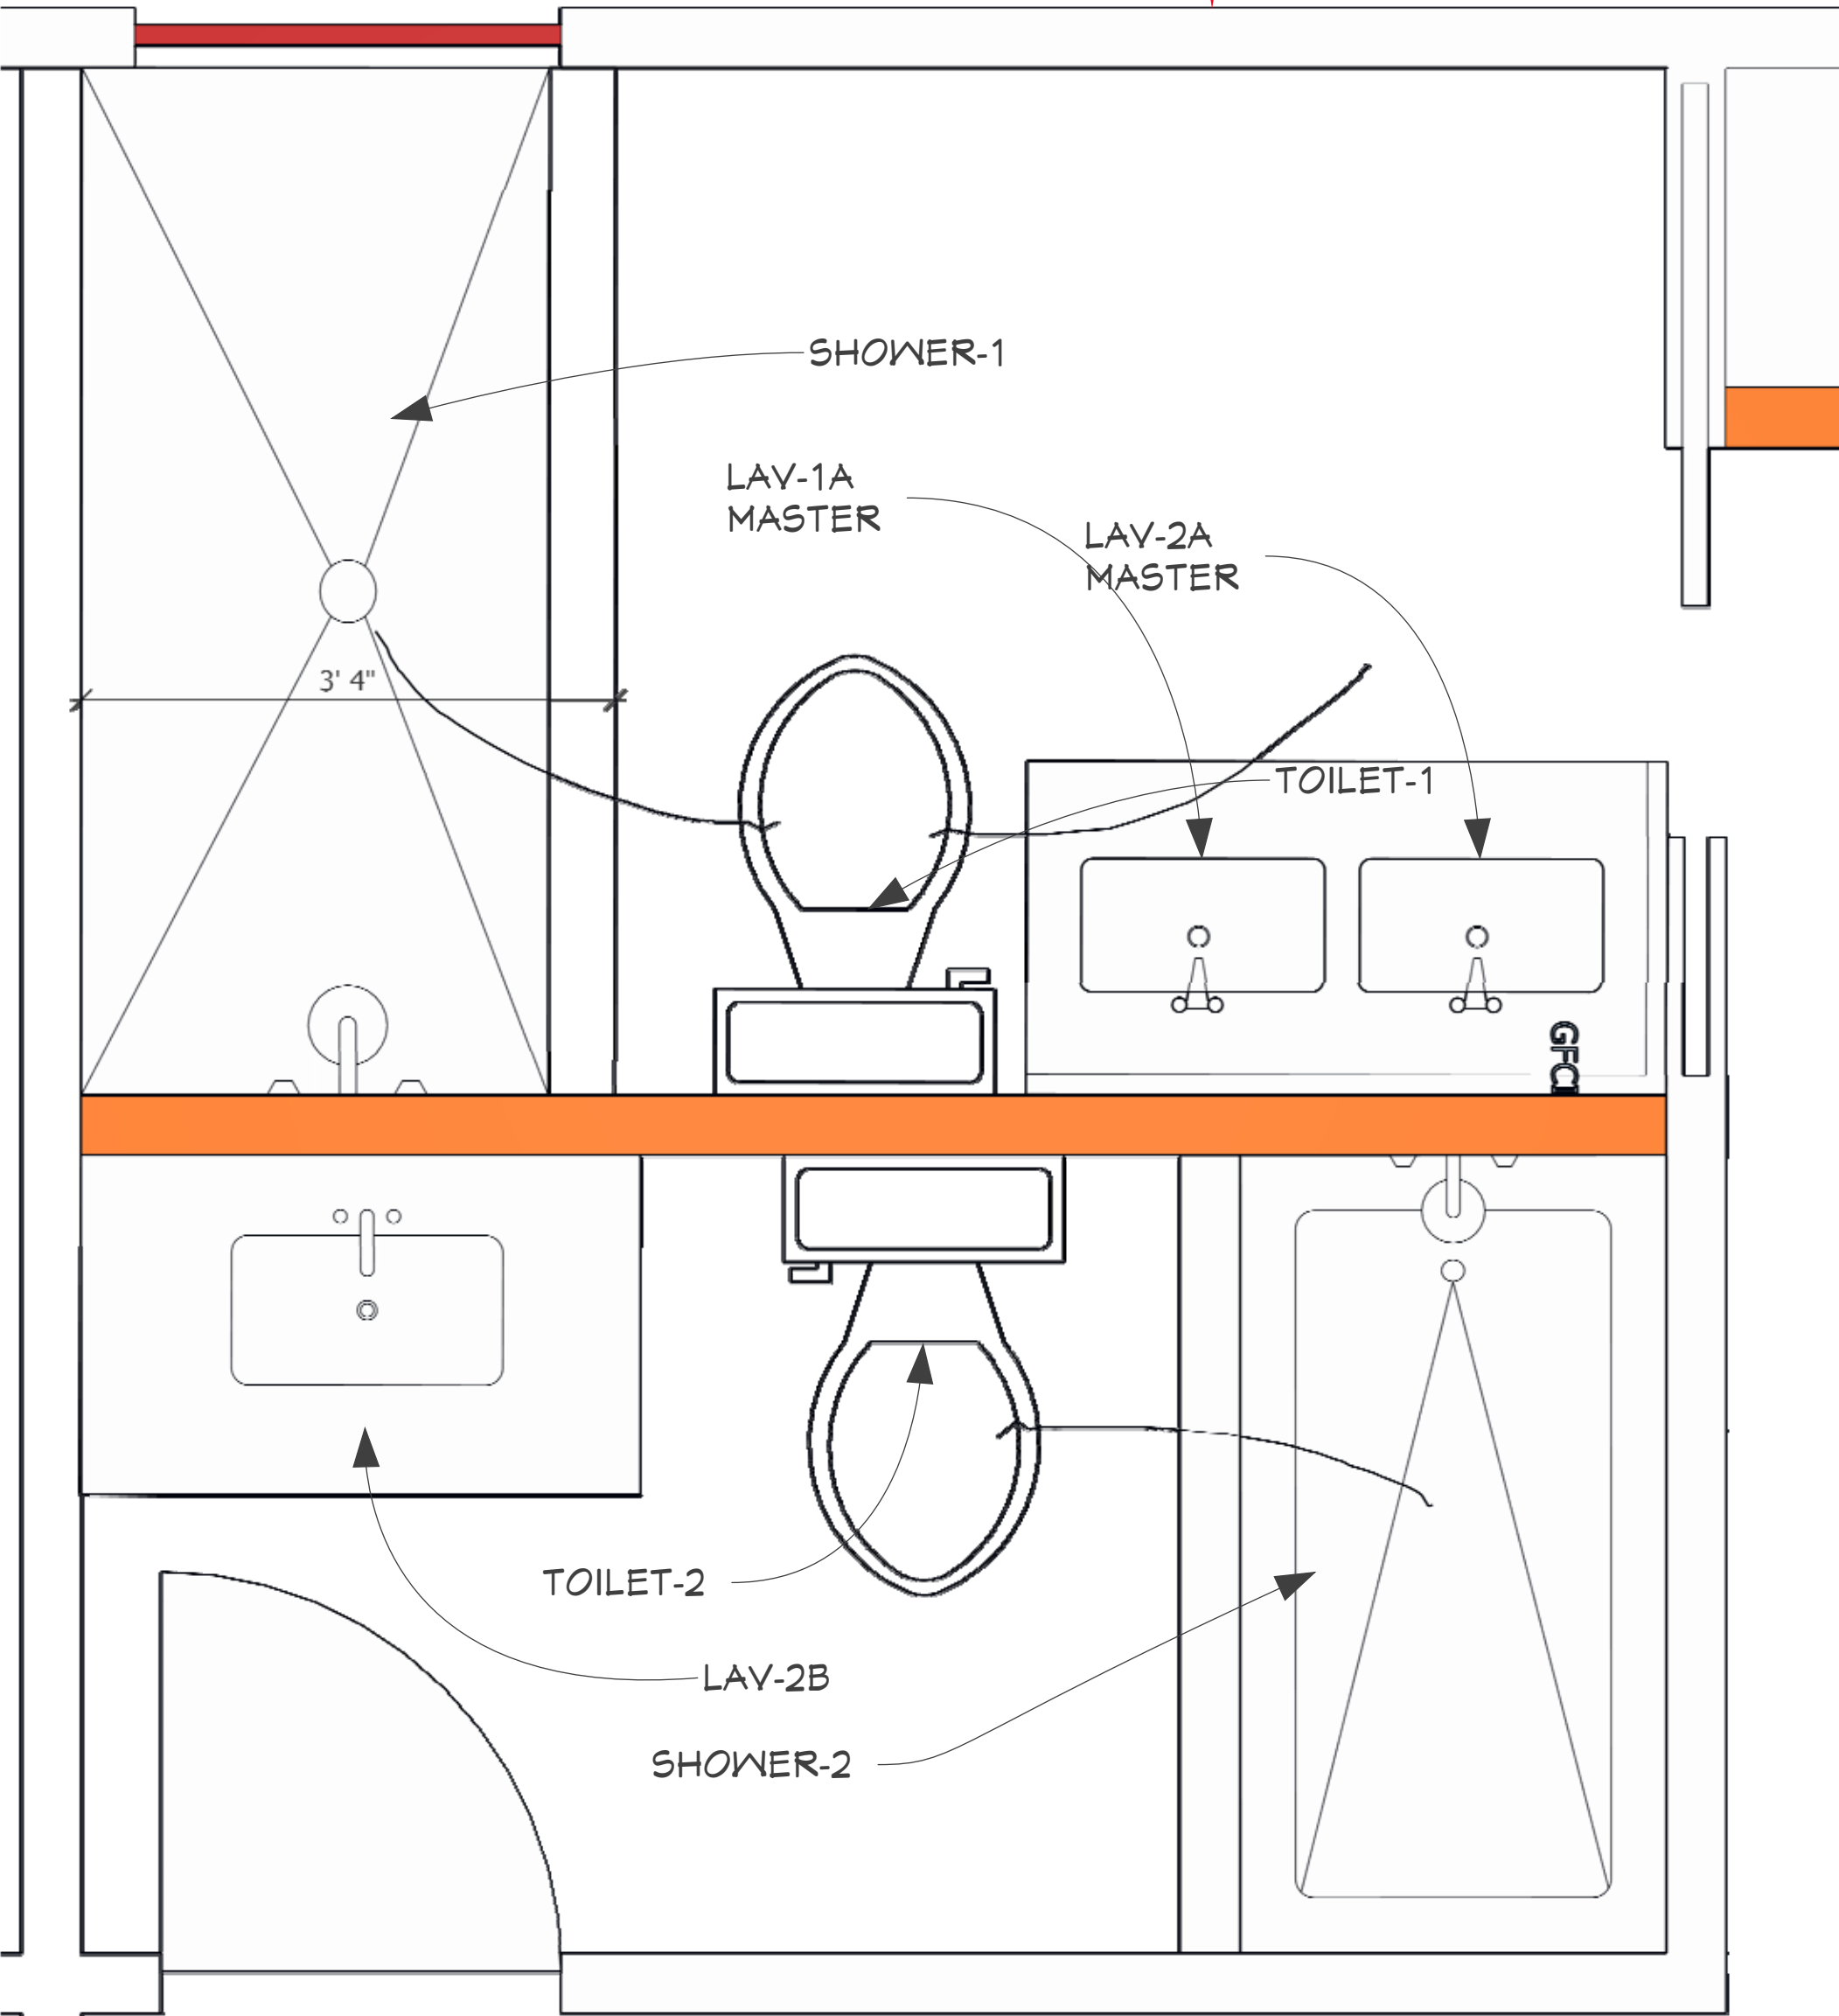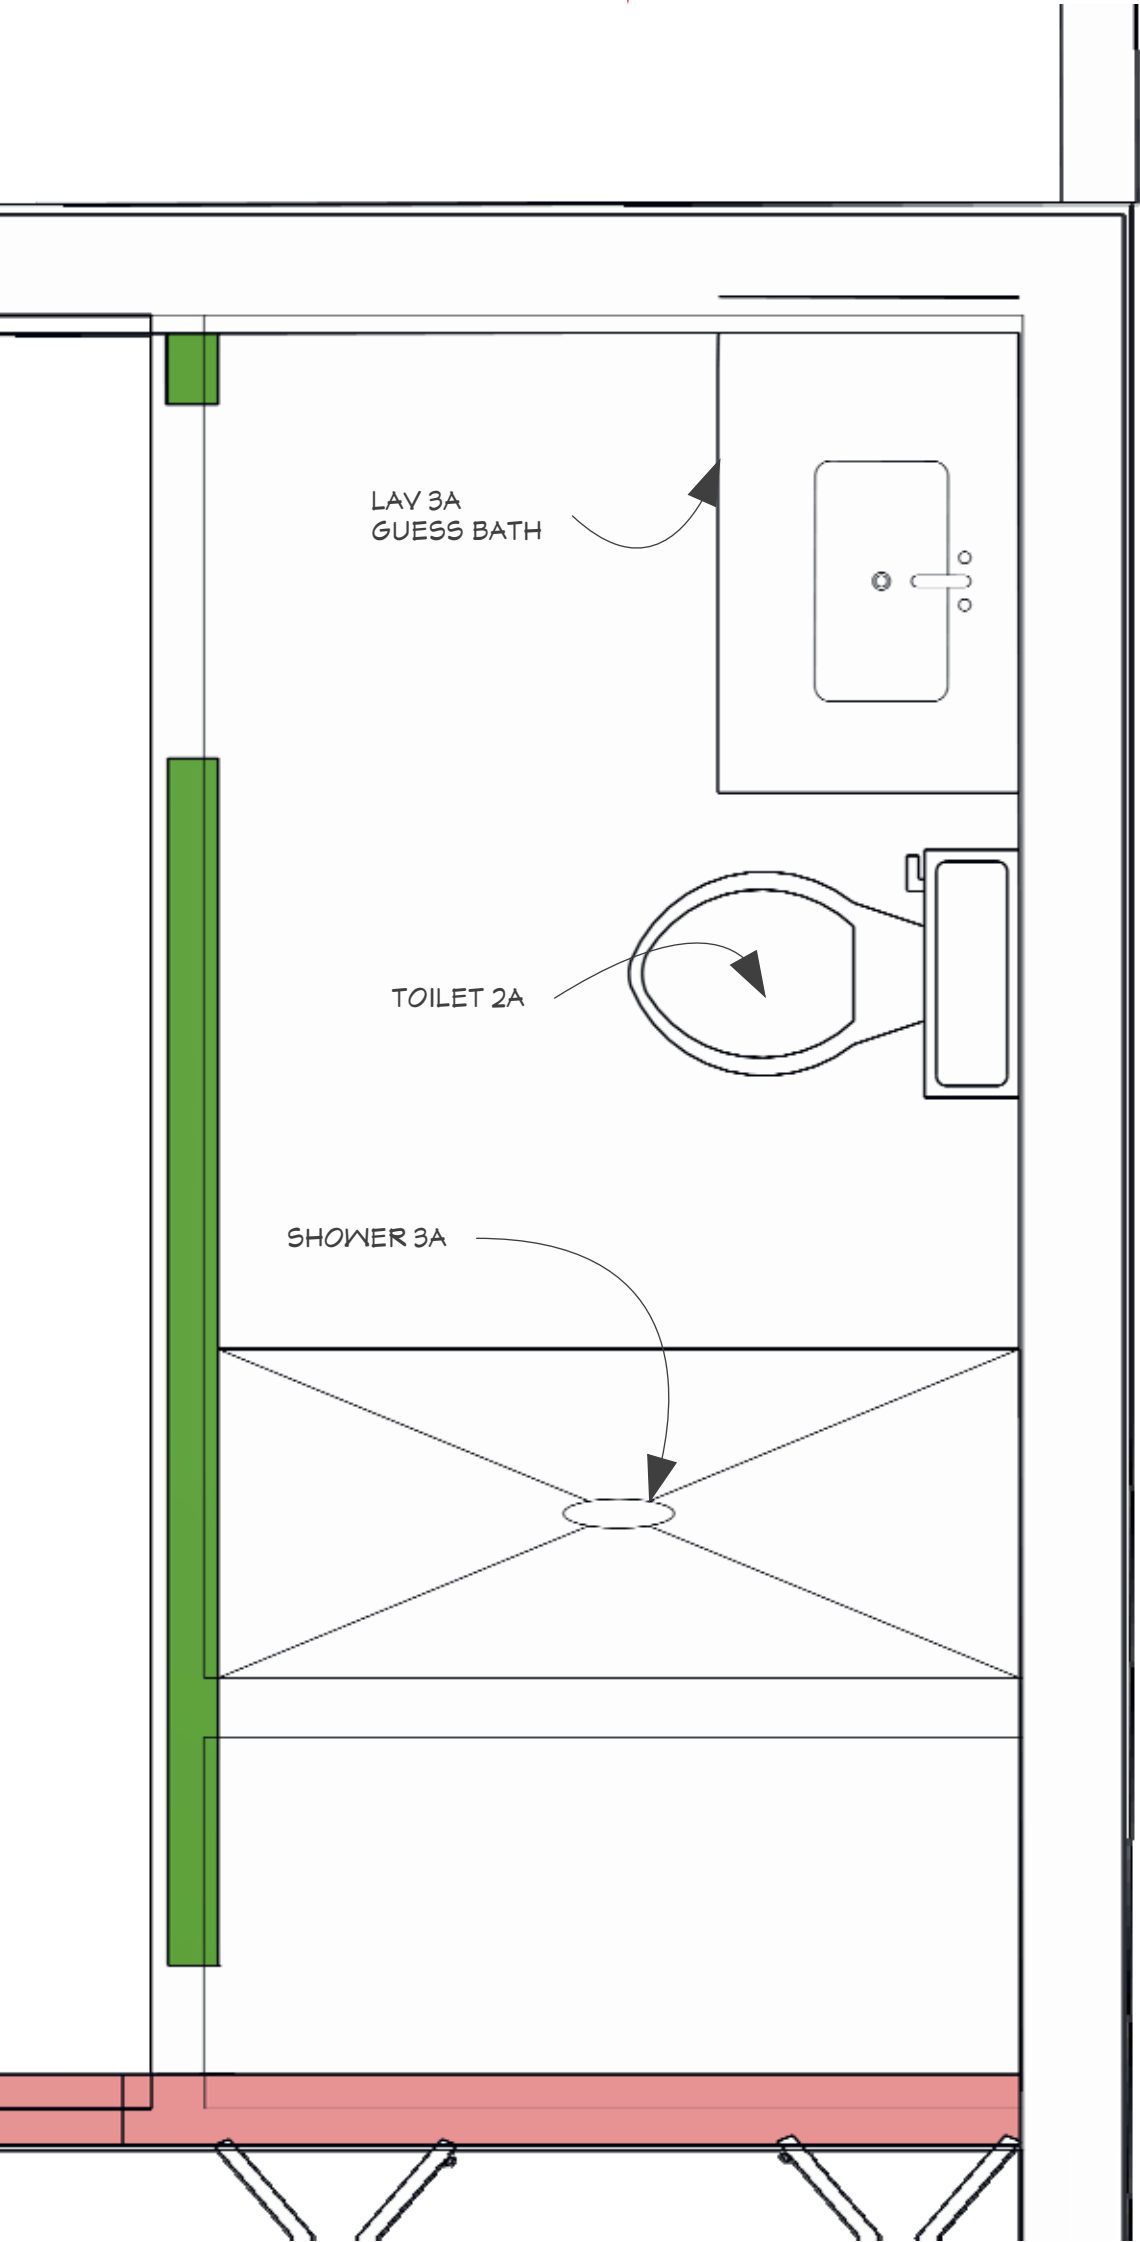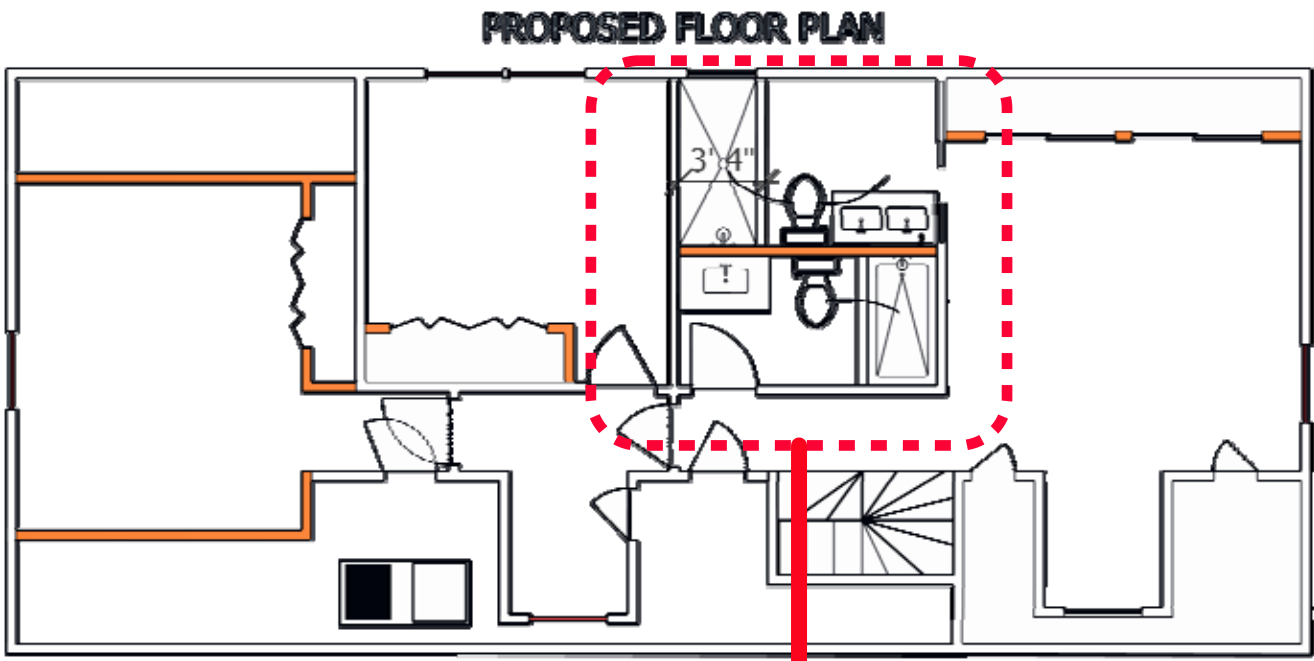

This drawings are sole property of Seating ConstructorsUSA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice ContractorsUSA . 2025 Copyright .

SHEET TITLE		CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC		CUSTOMER INFORMATION Email: Foldreturns1@gmail.com Phone: (781) 420-5726			NICHOLSON ENGINEERING ASSOCIATES, INC.			REVISIONS				A 07
PLUMBING PLAN		PROJECT ADDRESS : 14704 CARNATION AVE, TAMPA FLORIDA 33613		PROJECT OPEN DATE : JAN. 05 2026			7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167			DRAWINGS REMARKS				
										MM/DD/Y				
										1 01.07.26		RENOVATION		
								3						
				PROJECT REVISED BY : MICHAEL D. JOHNSON						PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26		



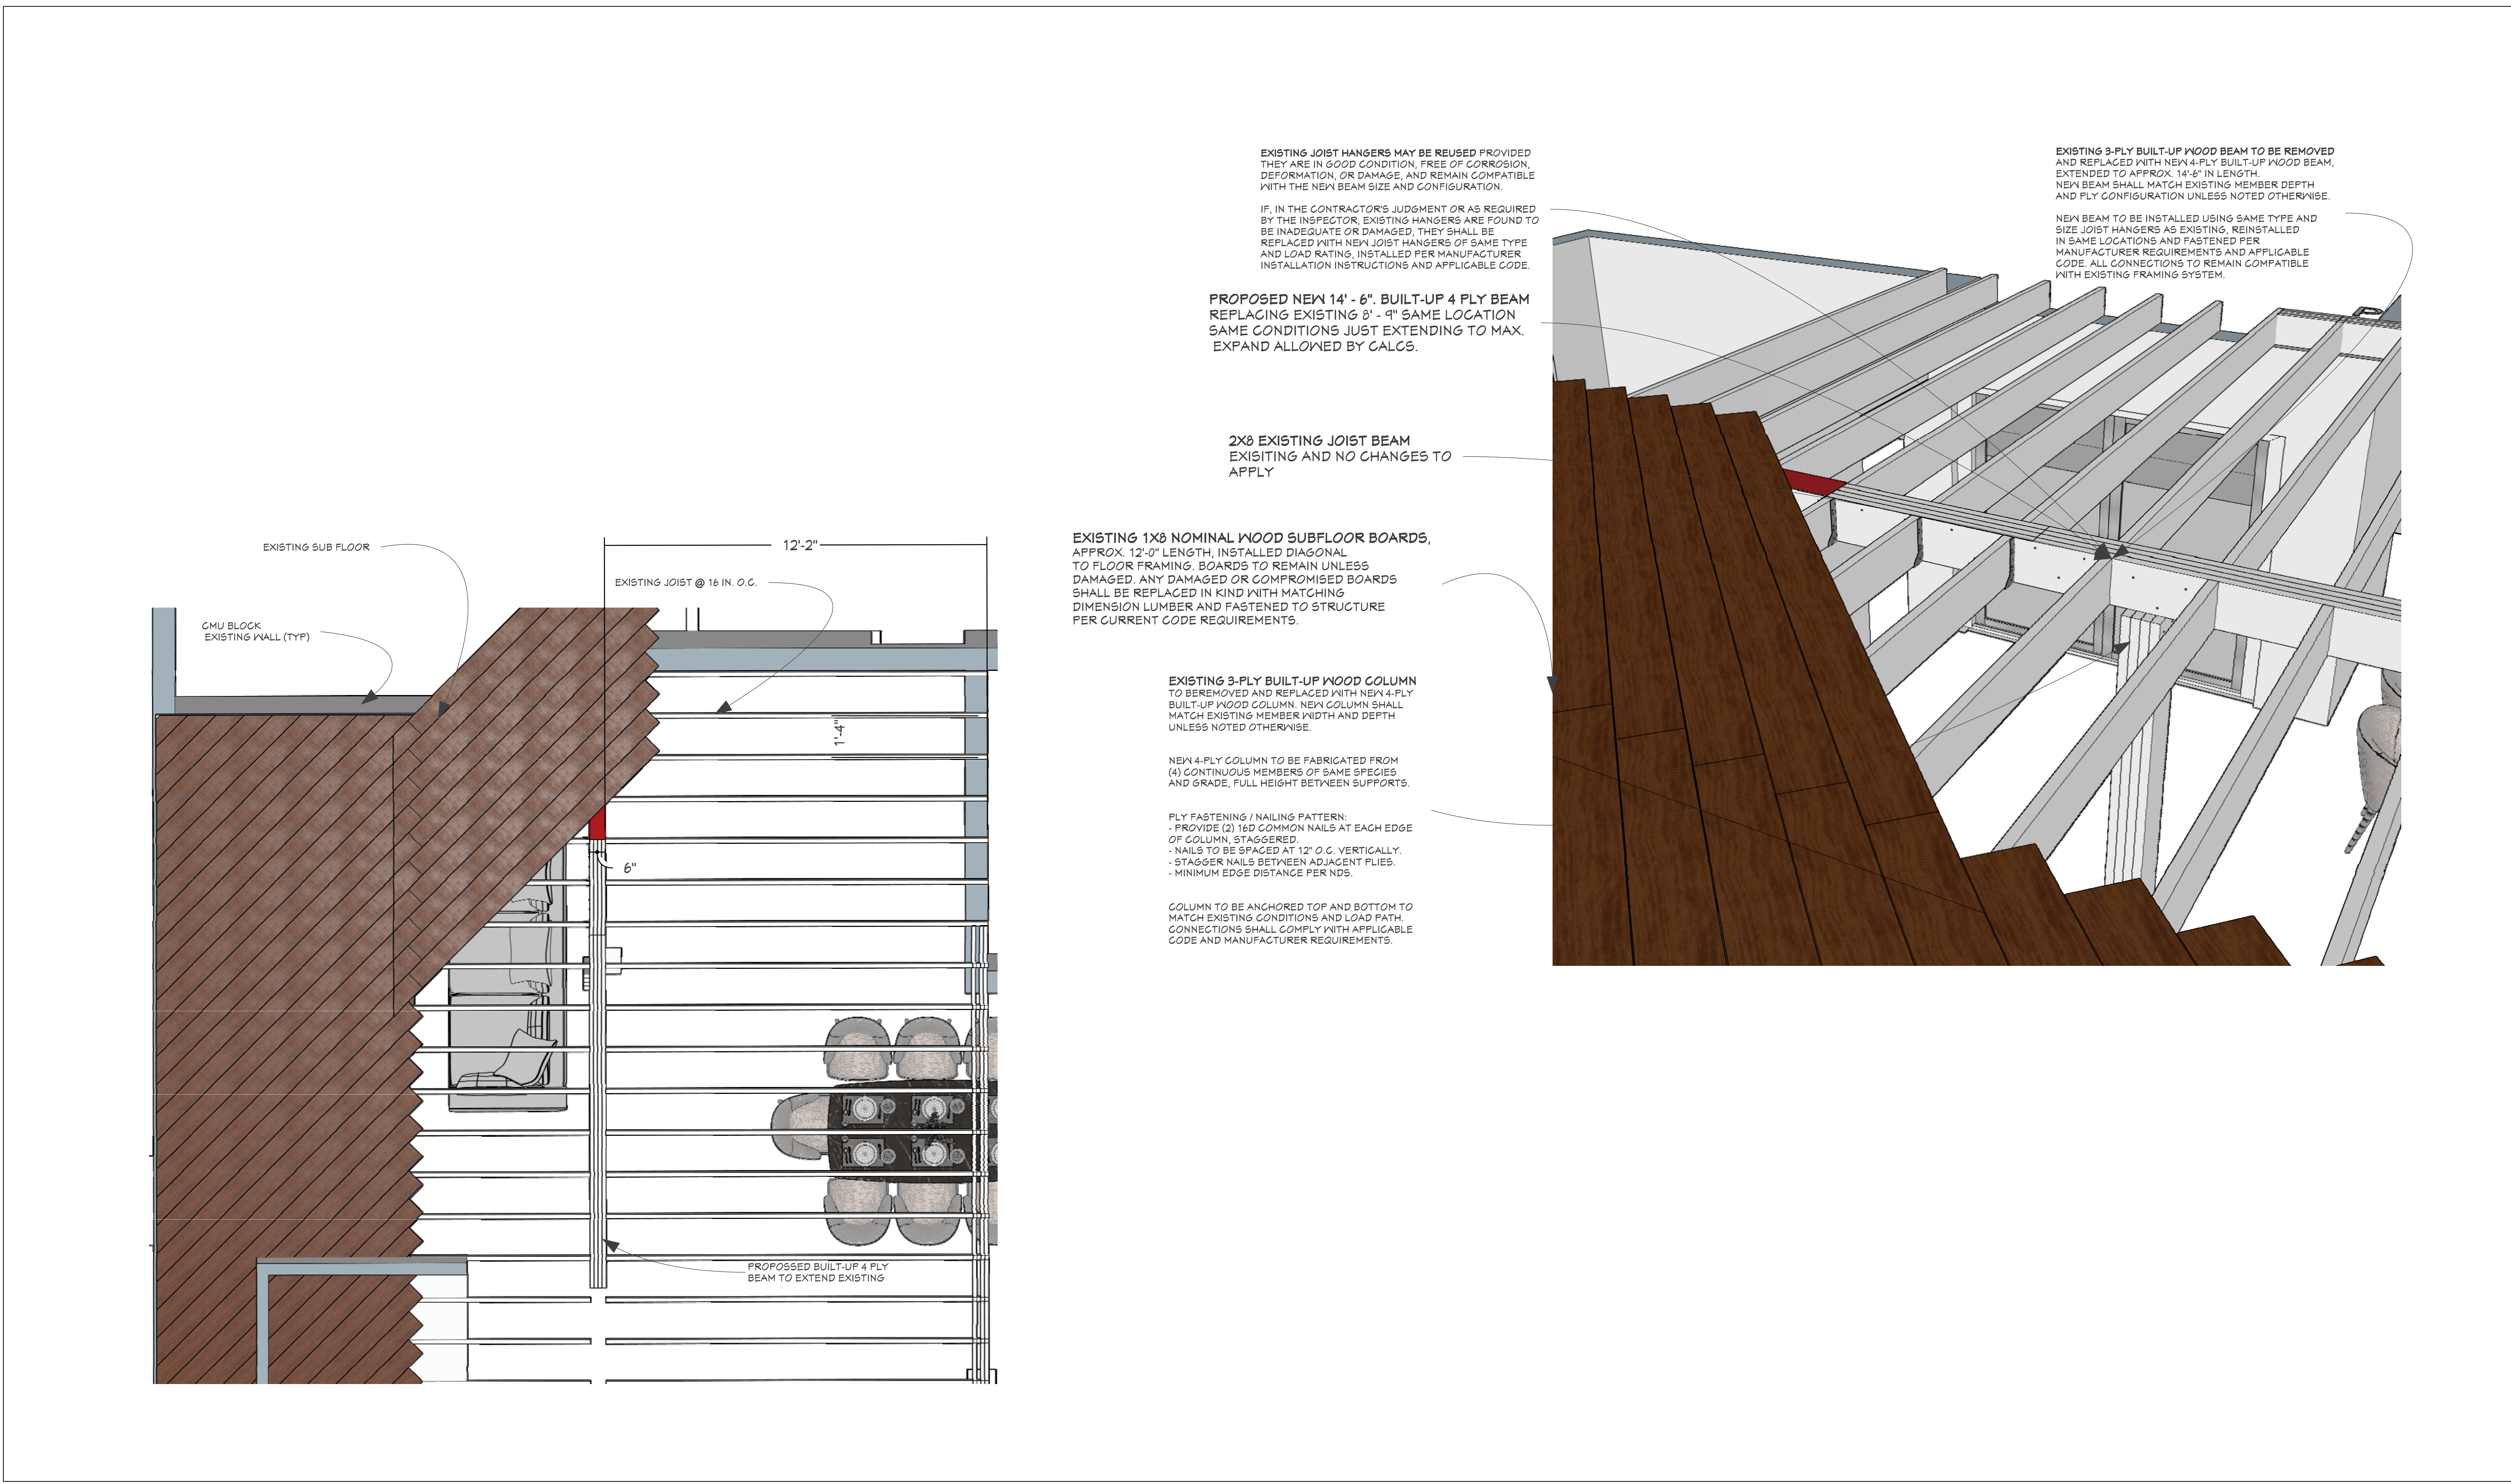


This drawing is the sole property of Seating Constructors USA. Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA . 2025 Copyright .

SHEET TITLE		CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC		CUSTOMER INFORMATION Email: Foldreturns1@gmail.com Phone: (781) 420-5726			NICHOLSON ENGINEERING ASSOCIATES, INC. 7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167			REVISIONS				A 08
ISOMETRIC VIEW		PROJECT ADDRESS : 14704 CARNATION AVE, TAMPA FLORIDA 33613		PROJECT OPEN DATE : JAN. 05 2026 PROJECT REVISED BY : MICHAEL D. JOHNSON			DRAWINGS REMARKS							
							1 01.07.26 RENOVATION							
							2							
						3								
						PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26		A				

TOP PLATE HURRICANE TIE DETAIL

MUST BE INSTALL IN EVERY TRUSSES IN THE BONUS ROOM IN BOTH SIDES WALLS AND MUST HAVE A QTY. OF (8) NAILS # 8 PER TIE INSTALLED

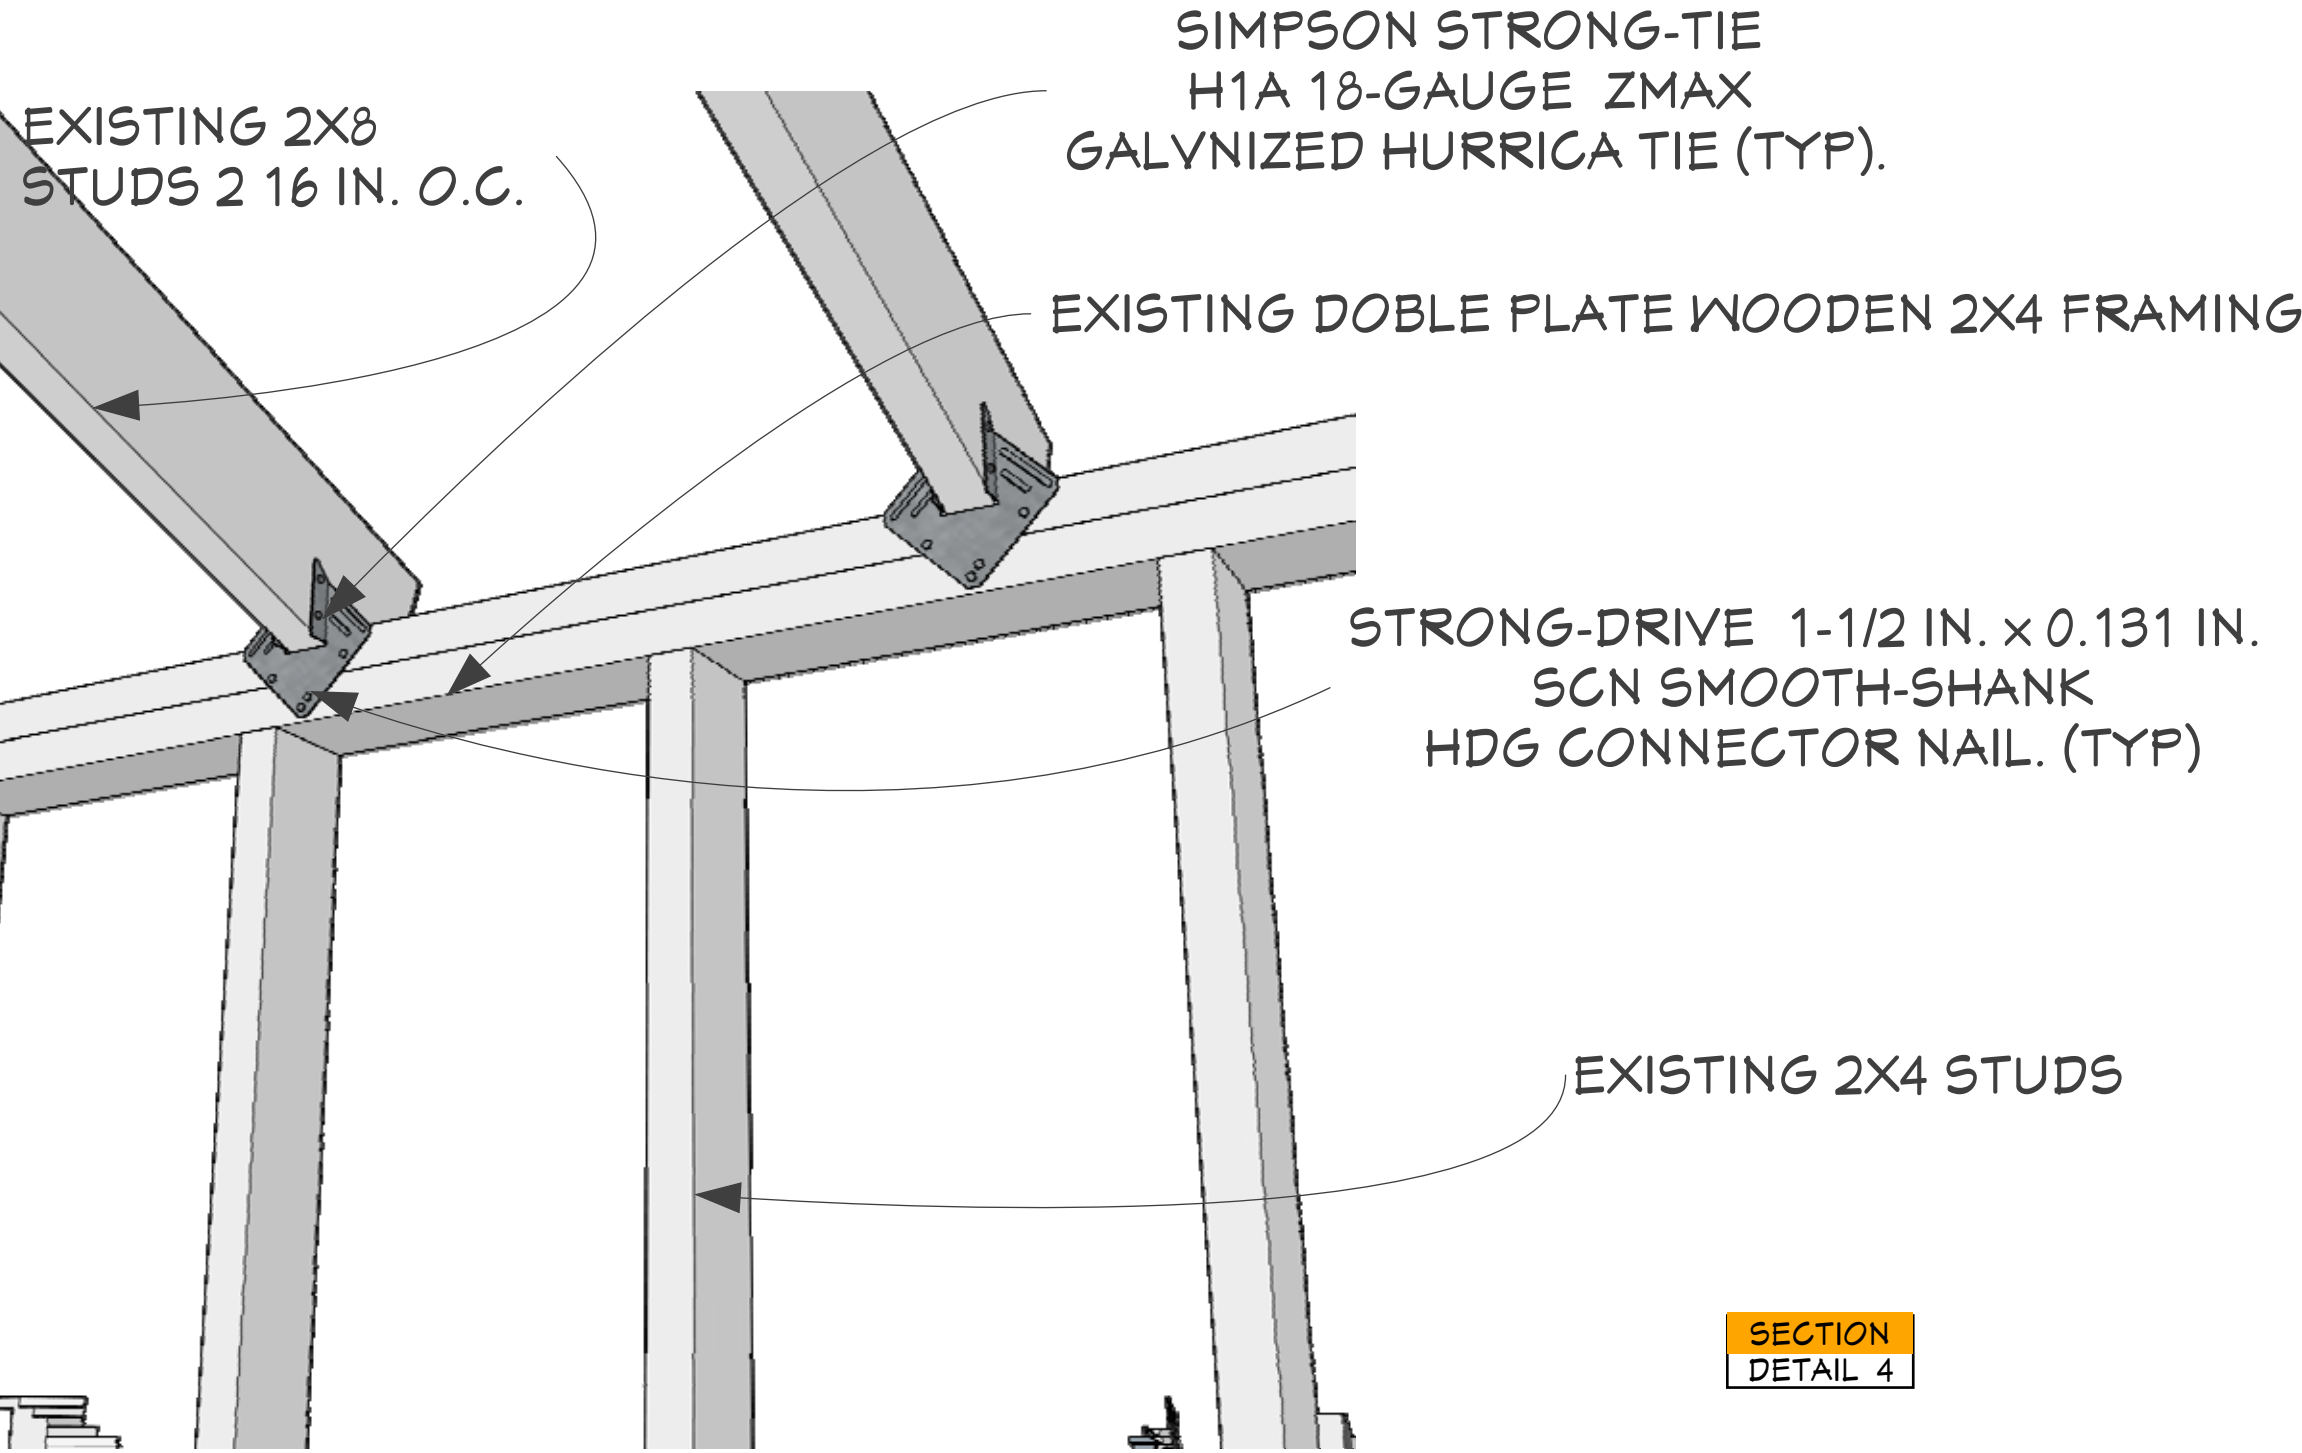


SECTION
DETAIL 4

BEAM BEARING / CONNECTION NOTES:

- 1) PROVIDE SOLID GROUTED BEARING SURFACE AT TOP OF CMU WALL
- 2) PROVIDE STEEL BEAM SEAT, POST BASE, OR APPROVED CONNECTOR AS DETAILED
- 3) PROVIDE MINIMUM 3 INCHES BEAM BEARING ON MASONRY OR PER ENGINEER DESIGN
- 4) SEPARATE WOOD FROM MASONRY USING: PRESSURE-TREATED WOOD, AND/OR APPROVED MOISTURE BARRIER OR STEEL PLATE

GROUT / CONCRETE FILL NOTES (CMU):


- 1) FULLY GROUT ALL CMU CELLS AT LOAD-BEARING LOCATIONS
- 2) GROUT SHALL BE: MINIMUM 3,000 PSI
- 3) FINE OR COARSE GROUT PER ACI 530
- 4) CONSOLIDATE GROUT TO ELIMINATE VOIDS
- 5) DO NOT PLACE GROUT IN LIFTS EXCEEDING CODE LIMITS WITHOUT CONSOLIDATION

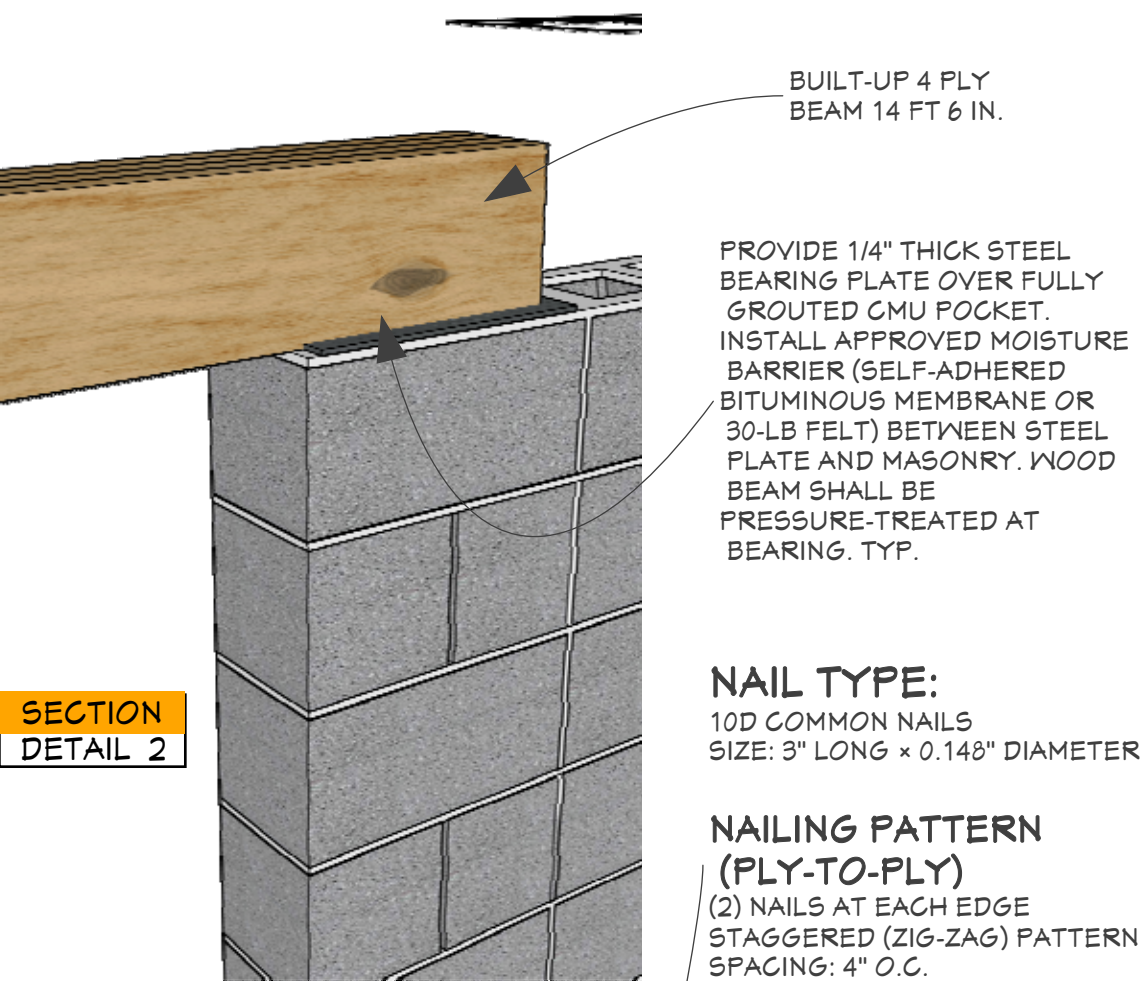

SECTION
DETAIL 2

BUILT-UP BEAM

(3) 2x8 SPF #2 BUILT-UP GIRDER, EXISTING SPAN 9'-6", (TYP) CONTINUOUSLY NAILED BEAM NAILING PATTERN (FIELD ASSEMBLED) FASTENERS: 16D COMMON NAILS (0.162" DIA x 3 1/2" LONG) TRANSFORMED TO A 14 FT. 6 IN. (4) 2x8 SPF #2 BUILT-UP GIRDER. PER INGENIEER CALCS.

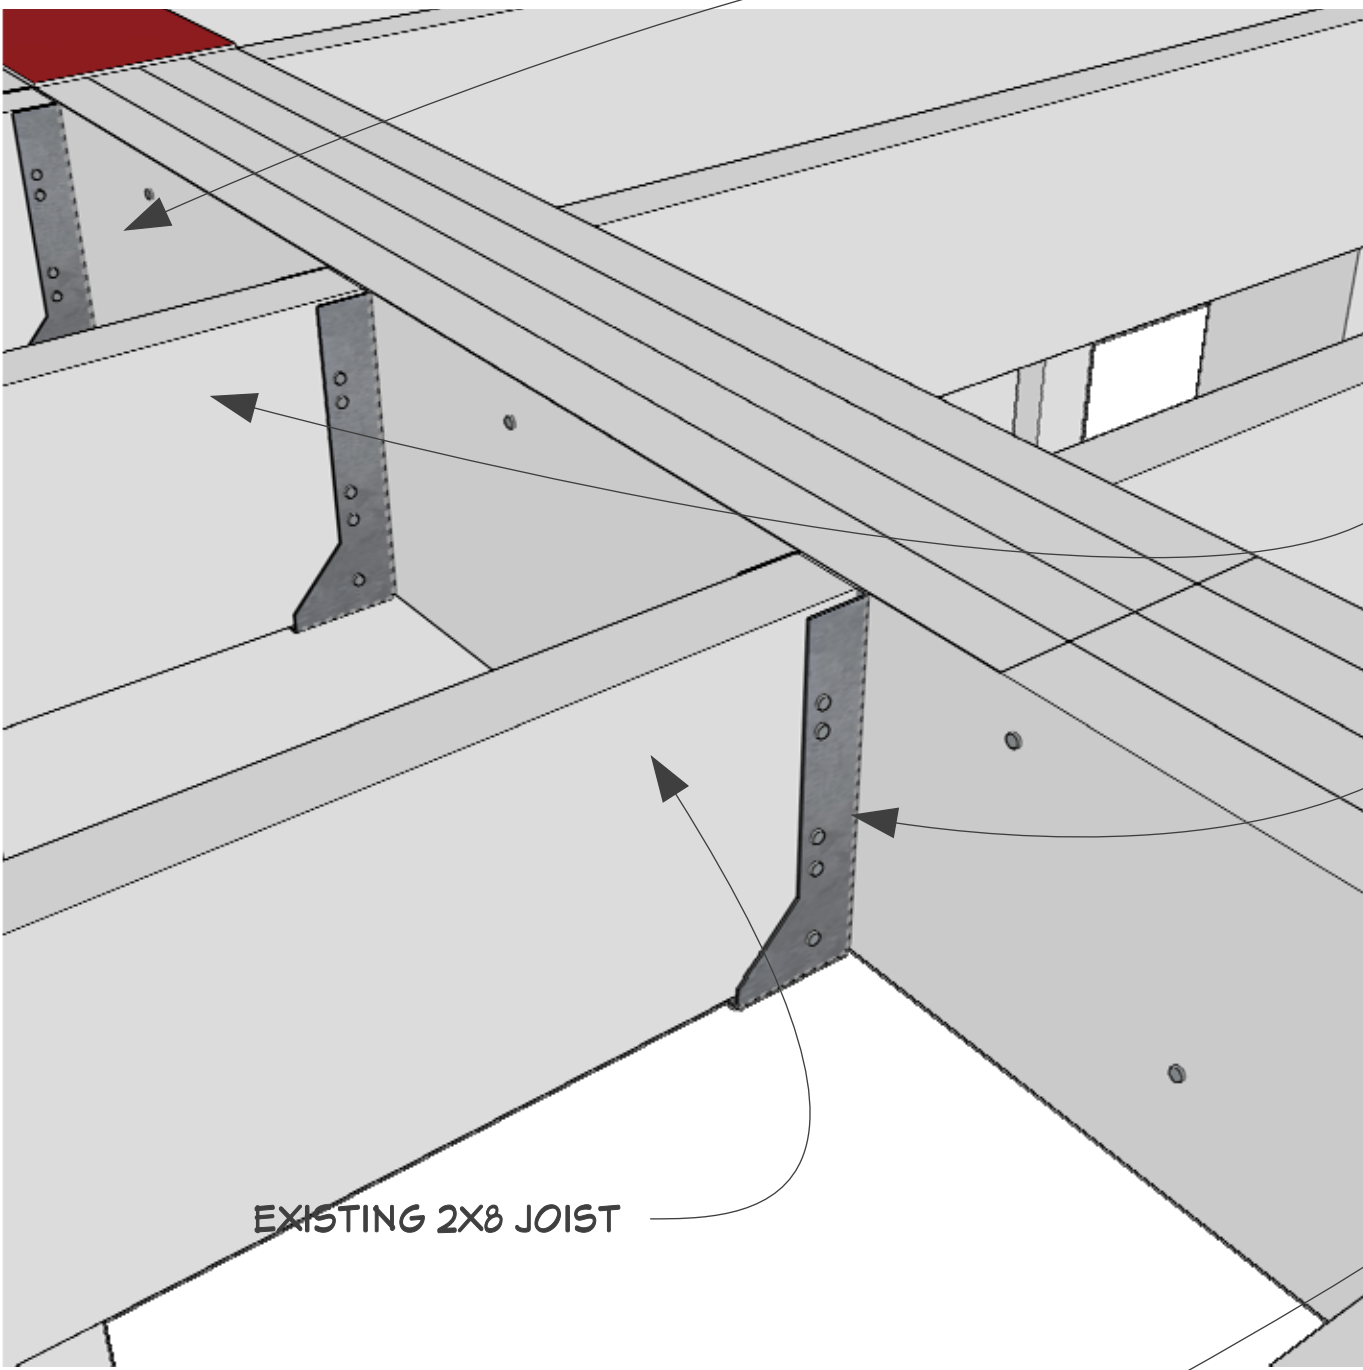

NAILING TYPE:

"FASTEN SIMPSON STRONG-TIE HUC3.25 JOIST HANGERS USING SIMPSON D10 (1-1/2" x 0.148") HOT-DIPPED GALVANIZED JOIST HANGER NAILS IN ALL DESIGNATED HOLES, TYPICAL. FASTENER SUBSTITUTIONS NOT PERMITTED. INSTALL PER MANUFACTURER INSTALLATION INSTRUCTIONS AND FLORIDA PRODUCT APPROVAL FL10531 RT

SECTION
DETAIL 3

(4) 2x8 SPF #2 BUILT-UP WOOD GIRDER (TYP.) BEAM

PROVIDE SIMPSON STRONG-TIE HUC3.25 SERIES HEAVY CONCEALED FLANGE FACE-MOUNT JOIST HANGERS AT ALL JOIST-TO-BEAM CONNECTIONS. INSTALL PER MANUFACTURER INSTRUCTIONS AND FASTENER SCHEDULE. CONNECTORS SHALL COMPLY WITH FLORIDA PRODUCT APPROVAL FL10531 RT (ESR-2552) AND BE CAPABLE OF SUPPORTING DESIGN LOADS SHOWN.

NAIL TYPE:


10D COMMON NAILS
SIZE: 3" LONG x 0.148" DIAMETER

NAILING PATTERN (PLY-TO-PLY)

(2) NAILS AT EACH EDGE
STAGGERED (ZIG-ZAG) PATTERN
SPACING: 4" O.C.
NAIL FROM BOTH SIDES
PROVIDE NAILS WITHIN 2"-4" OF BEAM ENDS


BOTTOM PLATE HURRICANE TIE DETAIL

MUST BE INSTALL IN EVERY 2X4 SPF #2 STUD @ 16 IN. O.C (TYP) IN THE BONUS ROOM IN BOTH SIDES WALLS AND MUST HAVE A QTY. OF (10) # 8 NAILS PER TIE INSTALLED

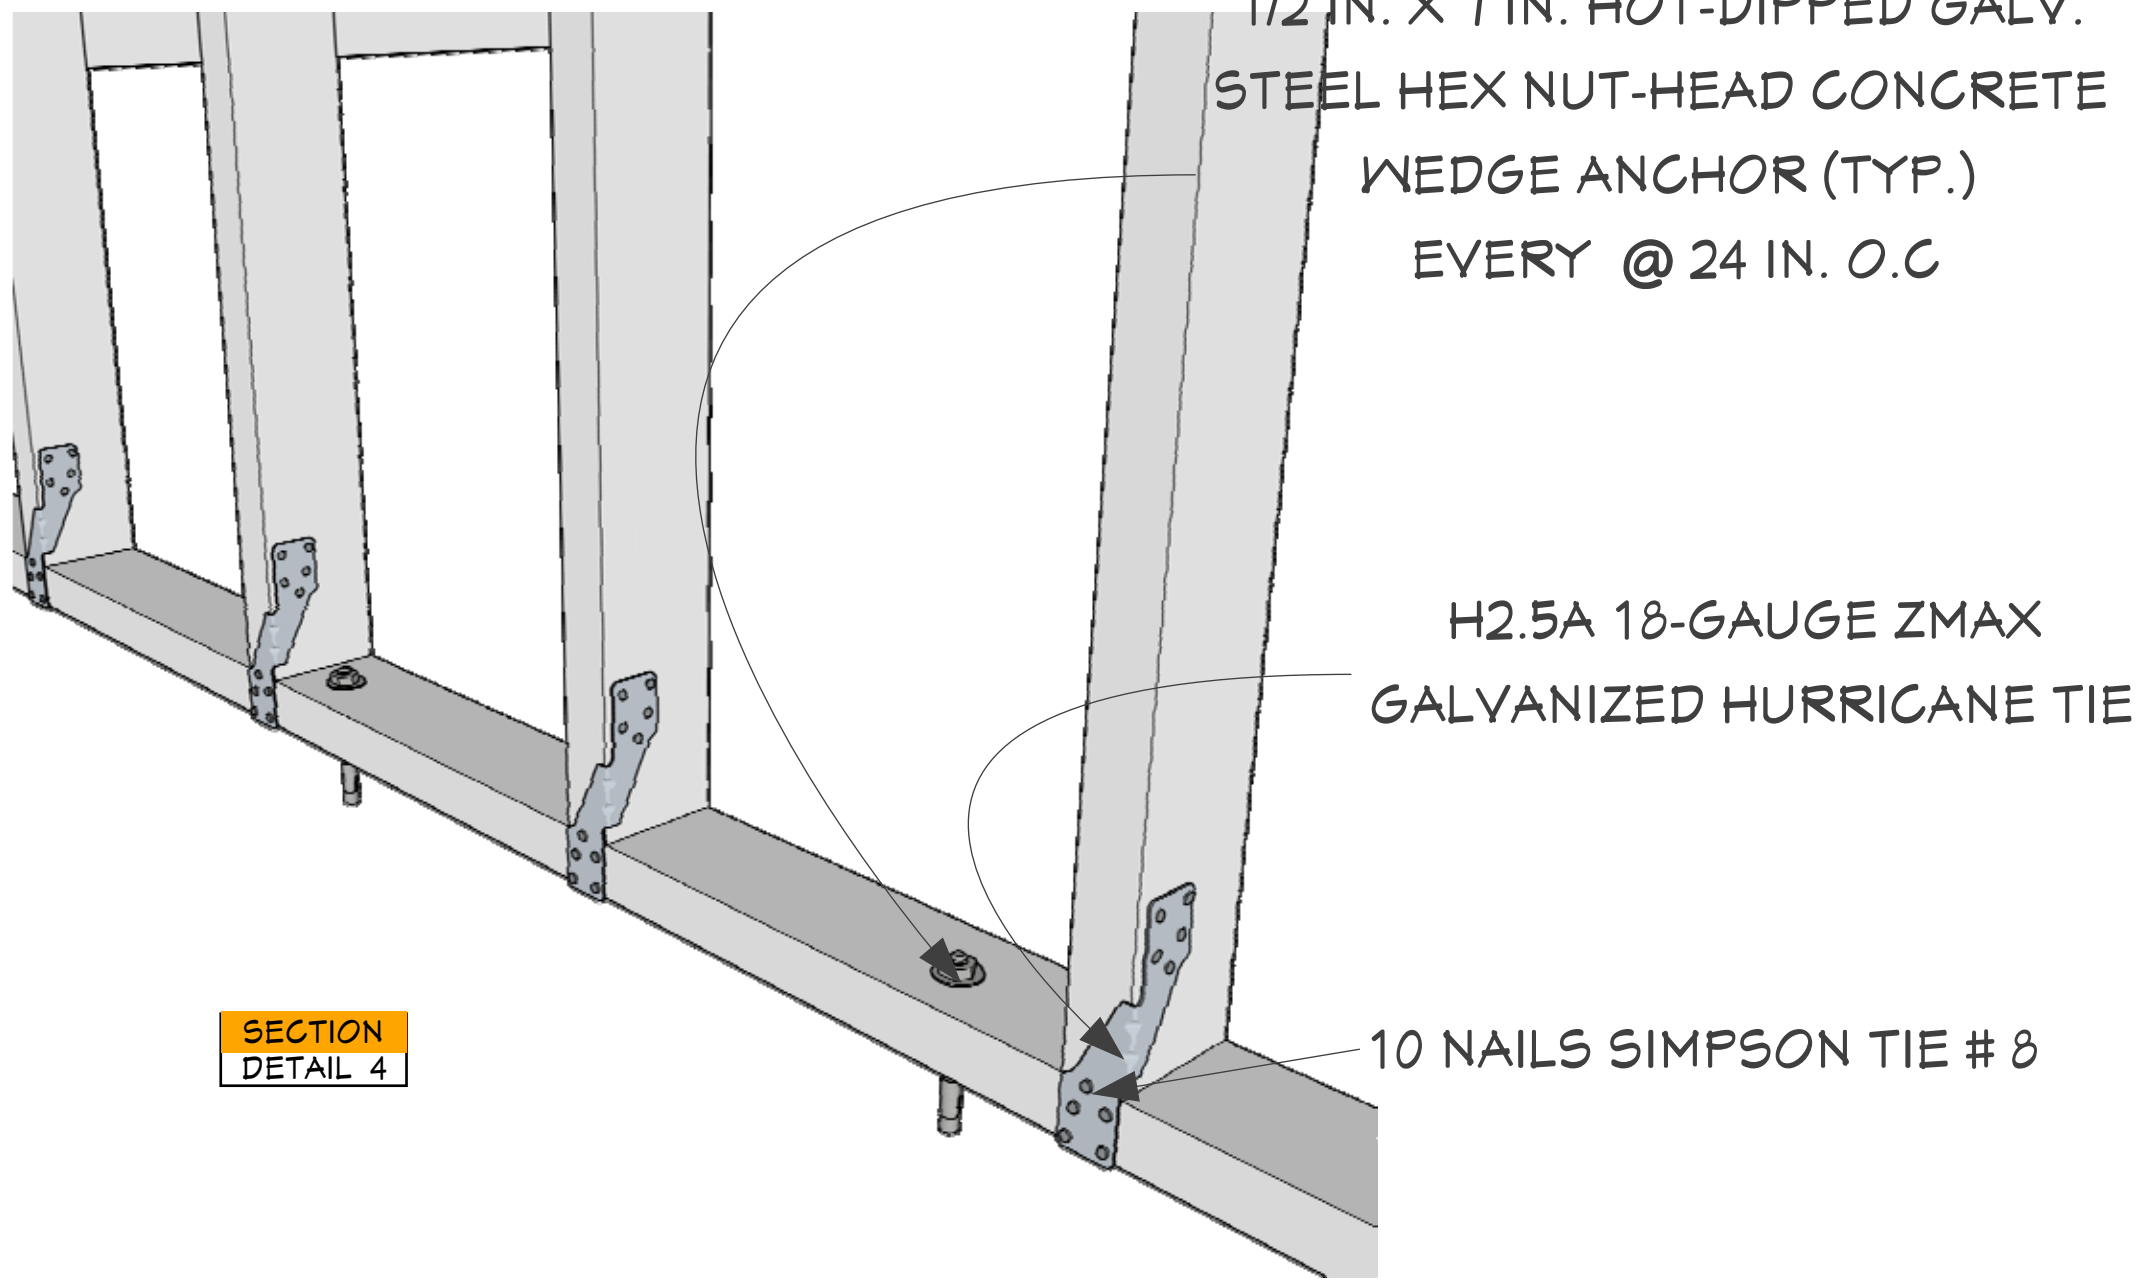

SECTION
DETAIL 4

COLUMN / POST SUPPORT
(FOR 2x8 BEAMS)
(4) 2x8 SPF #2 BUILT-UP WOOD COLUMN, PER STRUCTURAL CALCS

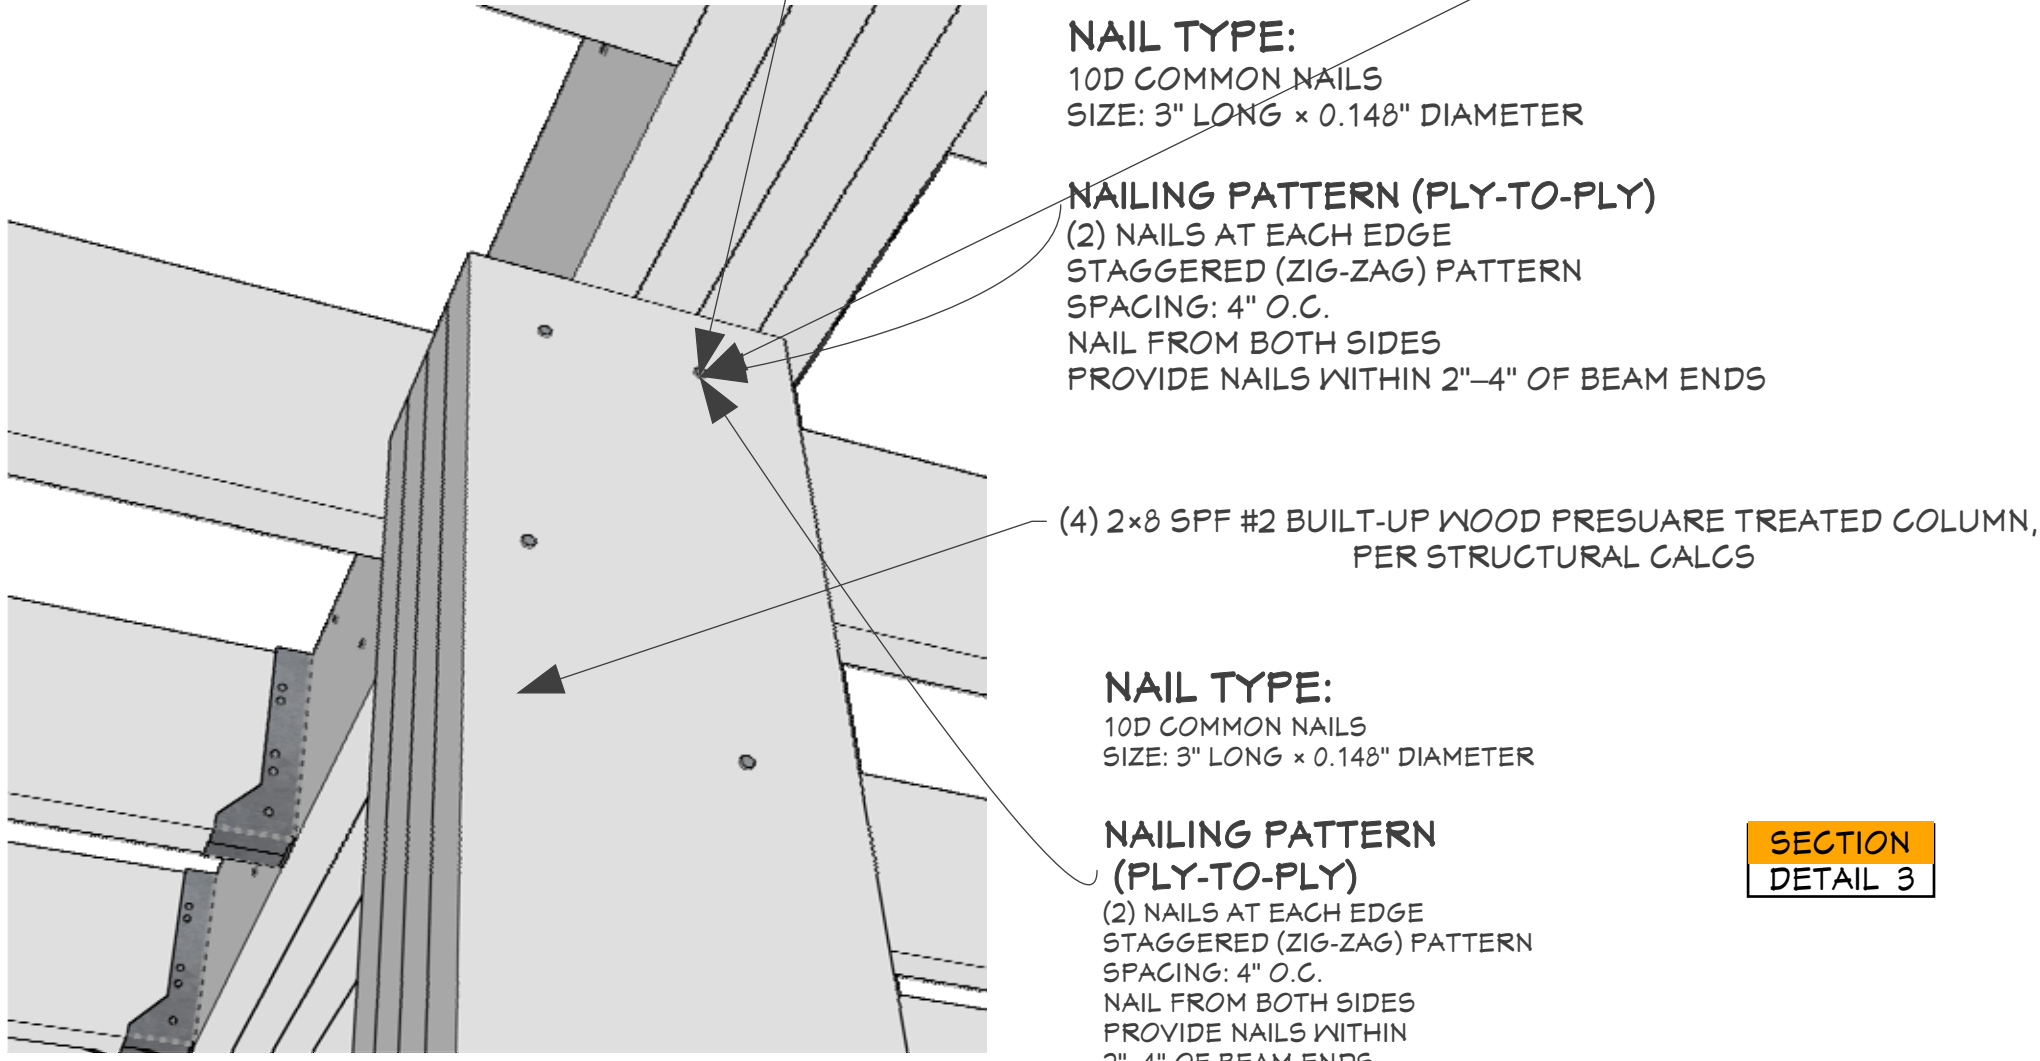

FIELD MODIFICATIONS:

No substitutions, additional plies, plywood laminations, or fastener changes shall be made without written approval from the Engineer of Record.

NAIL TYPE:

10D COMMON NAILS
SIZE: 3" LONG x 0.148" DIAMETER

NAILING PATTERN (PLY-TO-PLY)

(2) NAILS AT EACH EDGE
STAGGERED (ZIG-ZAG) PATTERN
SPACING: 4" O.C.
NAIL FROM BOTH SIDES
PROVIDE NAILS WITHIN 2"-4" OF BEAM ENDS

NAIL TYPE:

10D COMMON NAILS
SIZE: 3" LONG x 0.148" DIAMETER


NAILING PATTERN (PLY-TO-PLY)

(2) NAILS AT EACH EDGE
STAGGERED (ZIG-ZAG) PATTERN
SPACING: 4" O.C.
NAIL FROM BOTH SIDES
PROVIDE NAILS WITHIN 2"-4" OF BEAM ENDS

SECTION
DETAIL 3

GENERAL STRUCTURAL NOTE – CMU FILLED COLUMN / END WALL:

CONCRETE MASONRY UNIT (CMU) END WALL SHALL BE FULLY GROUT-FILLED AND REINFORCED TO SUPPORT (4)-PLY BUILT-UP WOOD BEAM, PER FLORIDA BUILDING CODE 2023 (8TH EDITION), ACI 530 / TMS 402, AND ACI 318.

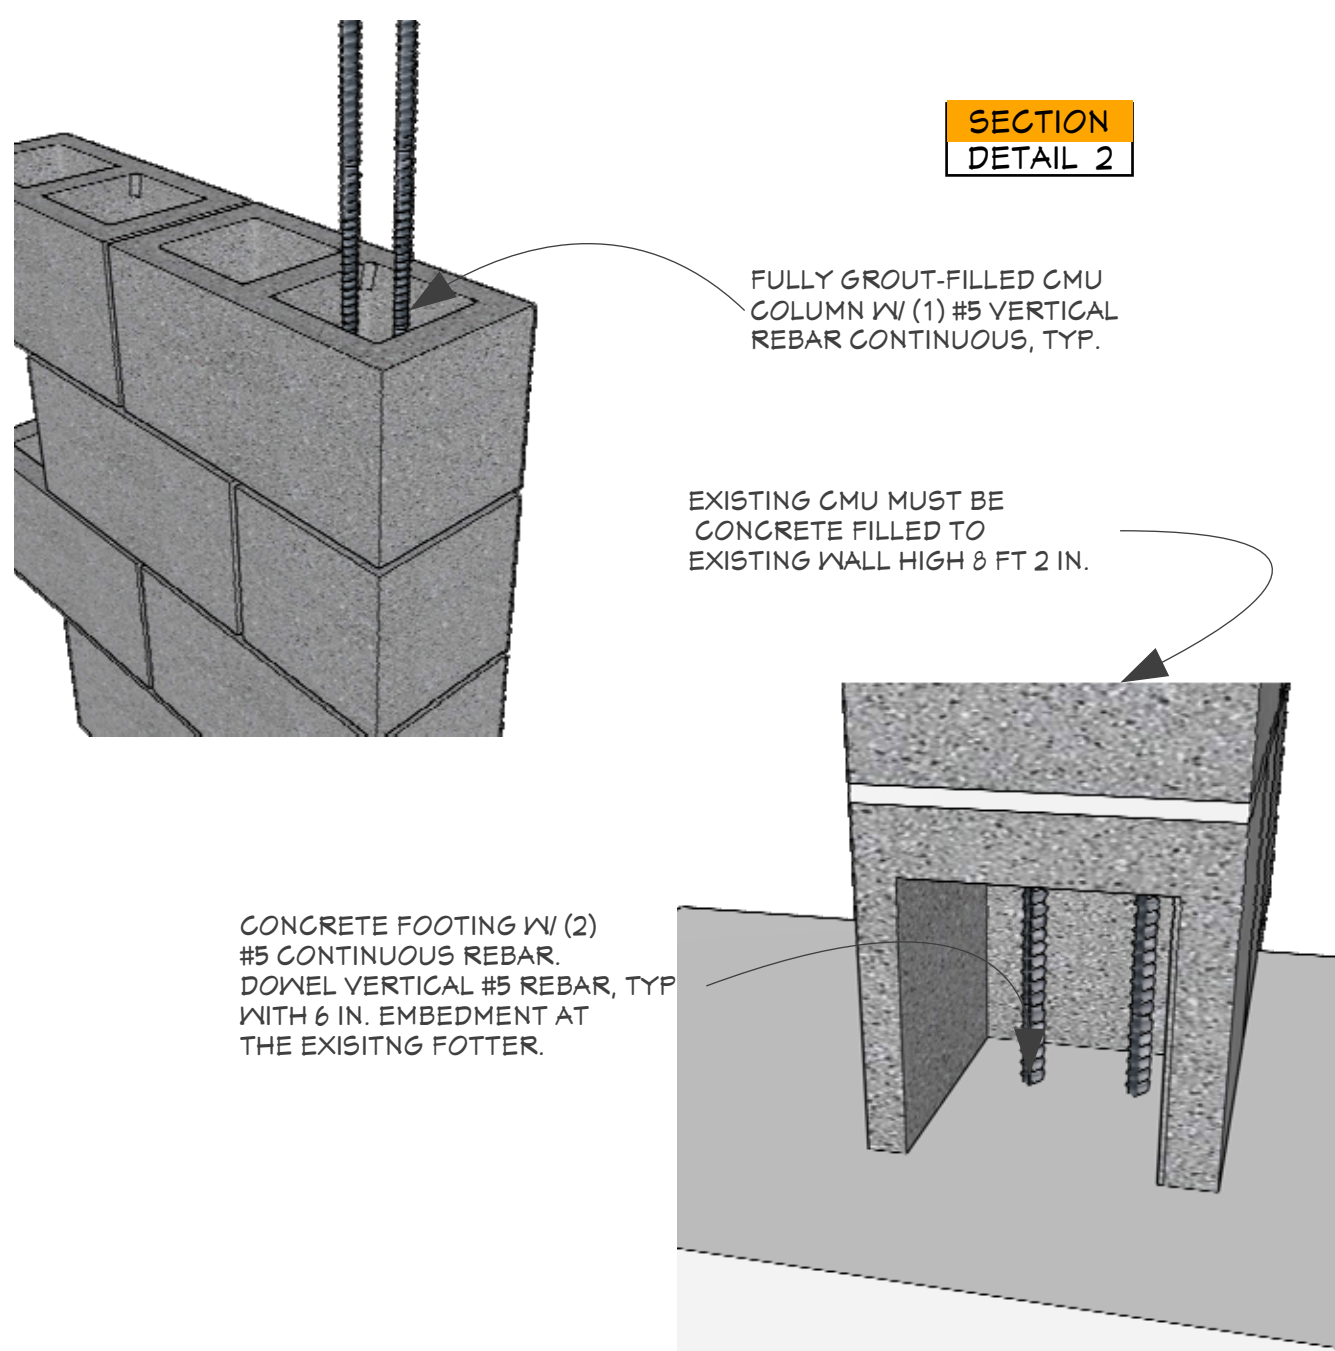

SECTION
DETAIL 2

This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA . 2025 Copyright .

SHEET TITLE

DETAILS

CUSTOMER NAME:
EDUARDO MATOSINHO/100 FOLD RETURNS
LLC

PROJECT ADDRESS :
14704 CARNATION AVE,
TAMPA FLORIDA 33613

CUSTOMER INFORMATION

Email: Foldreturns1@gmail.com
Phone: (781) 420-5726

PROJECT OPEN DATE :
JAN. 05 2026

PROJECT REVISED BY :
MICHAEL D. JOHNSON



NICHOLSON ENGINEERING
ASSOCIATES, INC.




7468 Horse Lake Rd,
Brooksville, FL 34601
Phone: 352.799.0170
Fax: 352.754.9167



REVISIONS

MM/DD/Y		DRAWINGS REMARKS	
1	01.07.26	RENOVATION	
2			
3			
PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26	




09
A

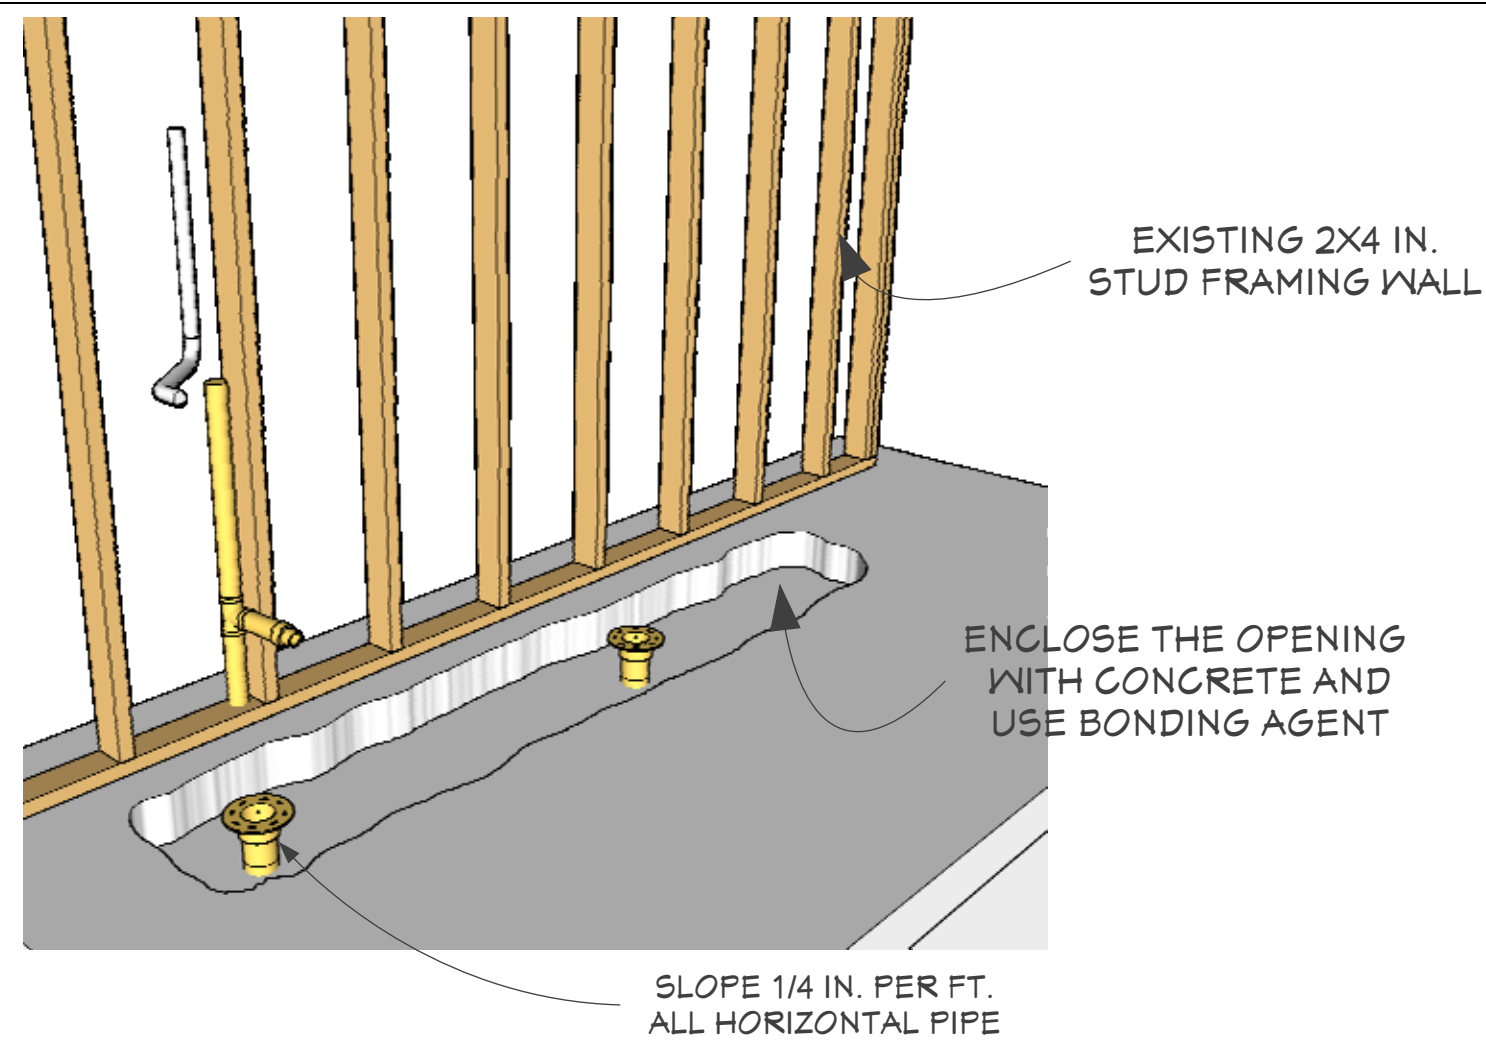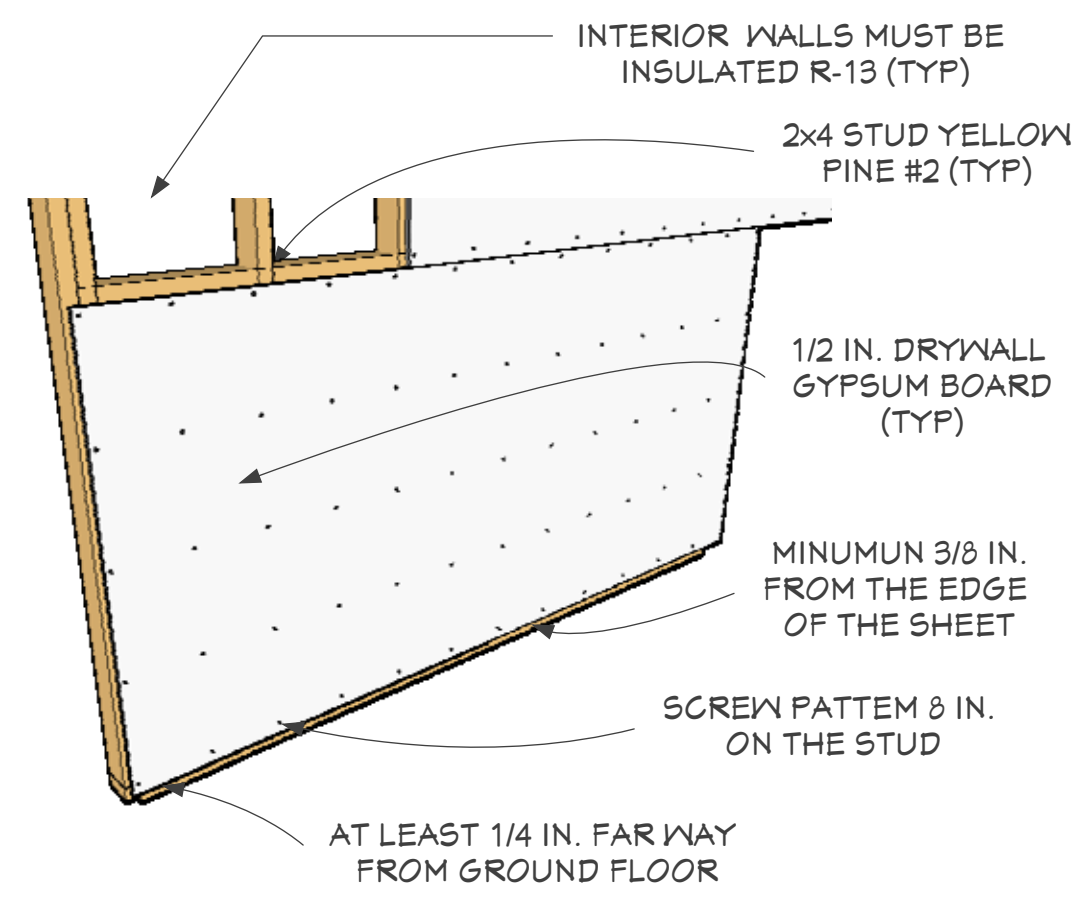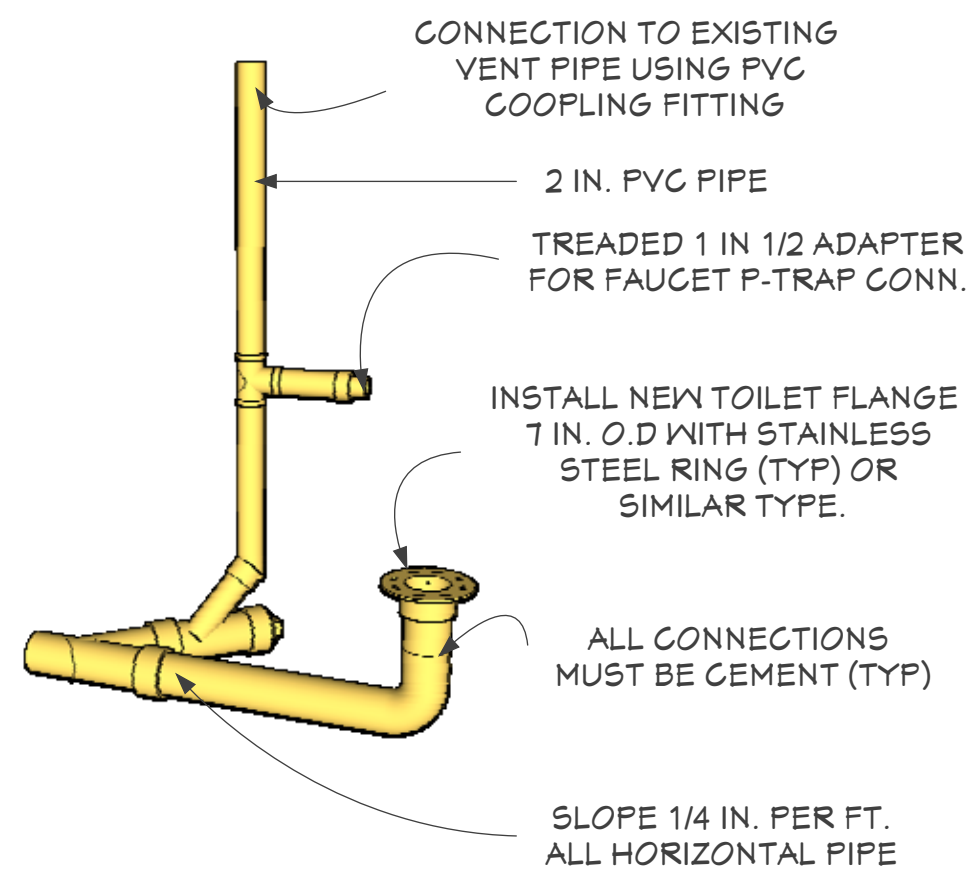

PLUMBING DRAIN PIPE DETAIL

INTERIOR WALL DETAIL (TYP.)


PLUMBING UNDERGROUND PIPE DETAIL (TYP.)

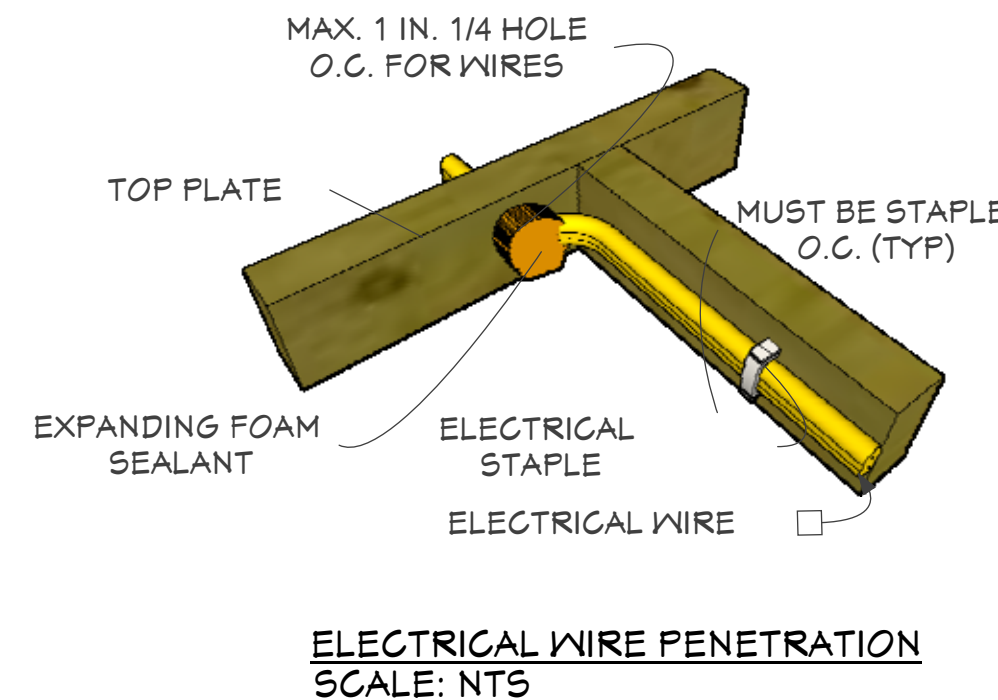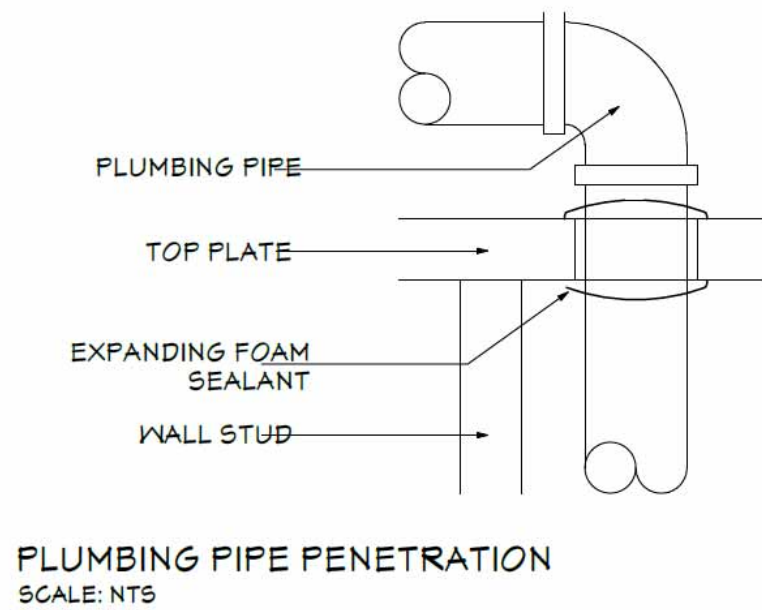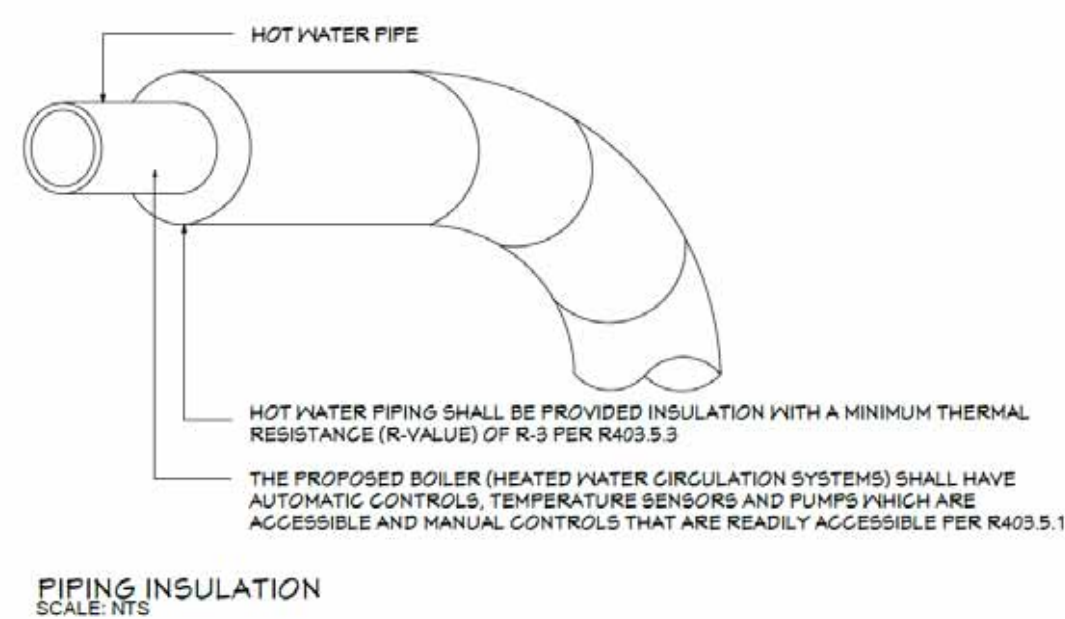

COLUMN / POST SUPPORT
(FOR 2x8 BEAMS)


(4) 2x8 SPF #2 BUILT-UP WOOD
COLUMN, PER STRUCTURAL CALCS

FIELD MODIFICATIONS:
No substitutions, additional plies, plywood laminations,
or fastener changes shall be made without written
approval from the Engineer of Record.

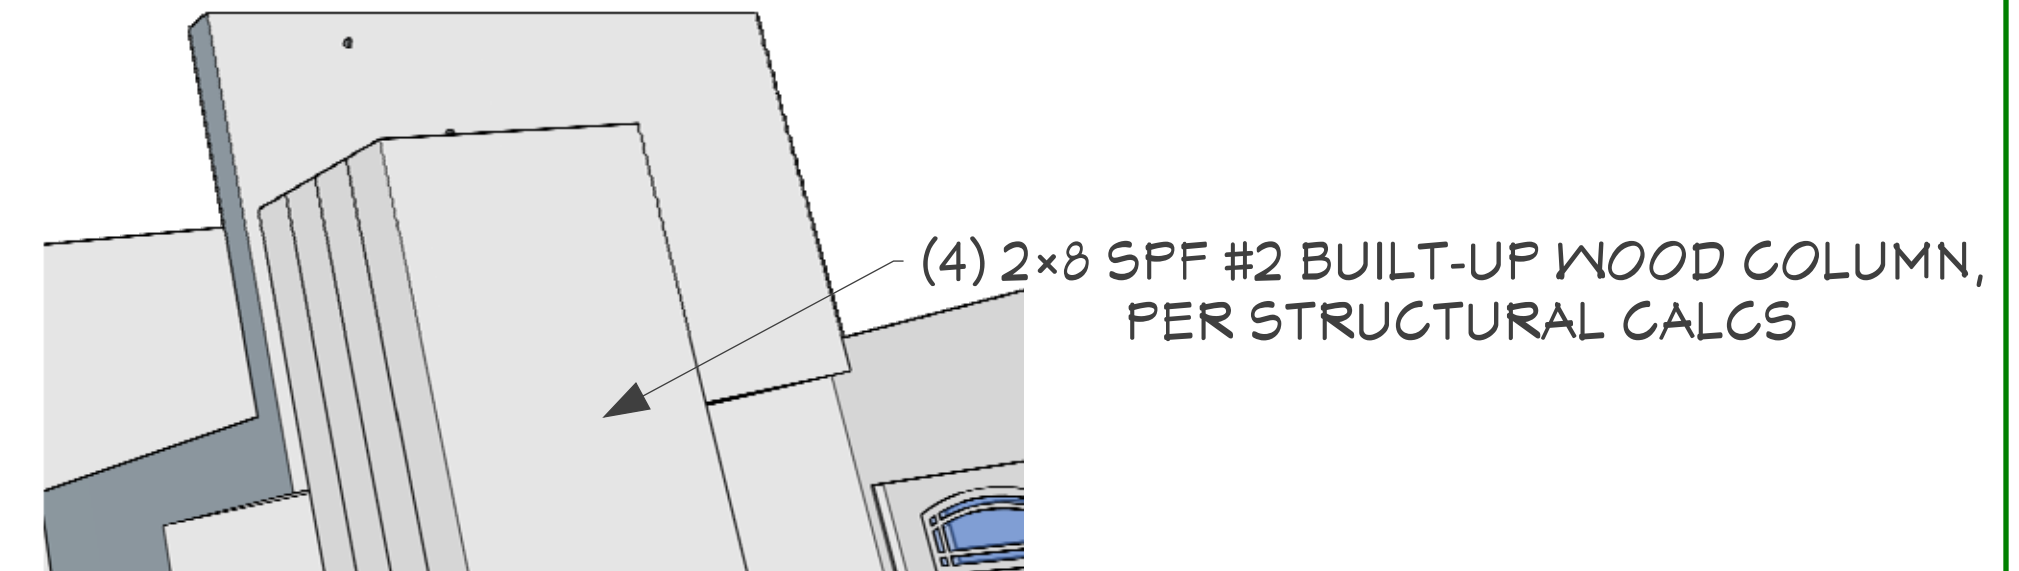


BOTTOM PLATE HURRICANE TIE DETAIL

MUST BE INSTALL IN EVERY 2X4 SPF #2 STUD @ 16 IN. O.C. (TYP) IN
THE BONUS ROOM IN BOTH SIDES WALLS AND MUST HAVE A QTY. OF
(10) # 8 NAILS PER TIE INSTALLED

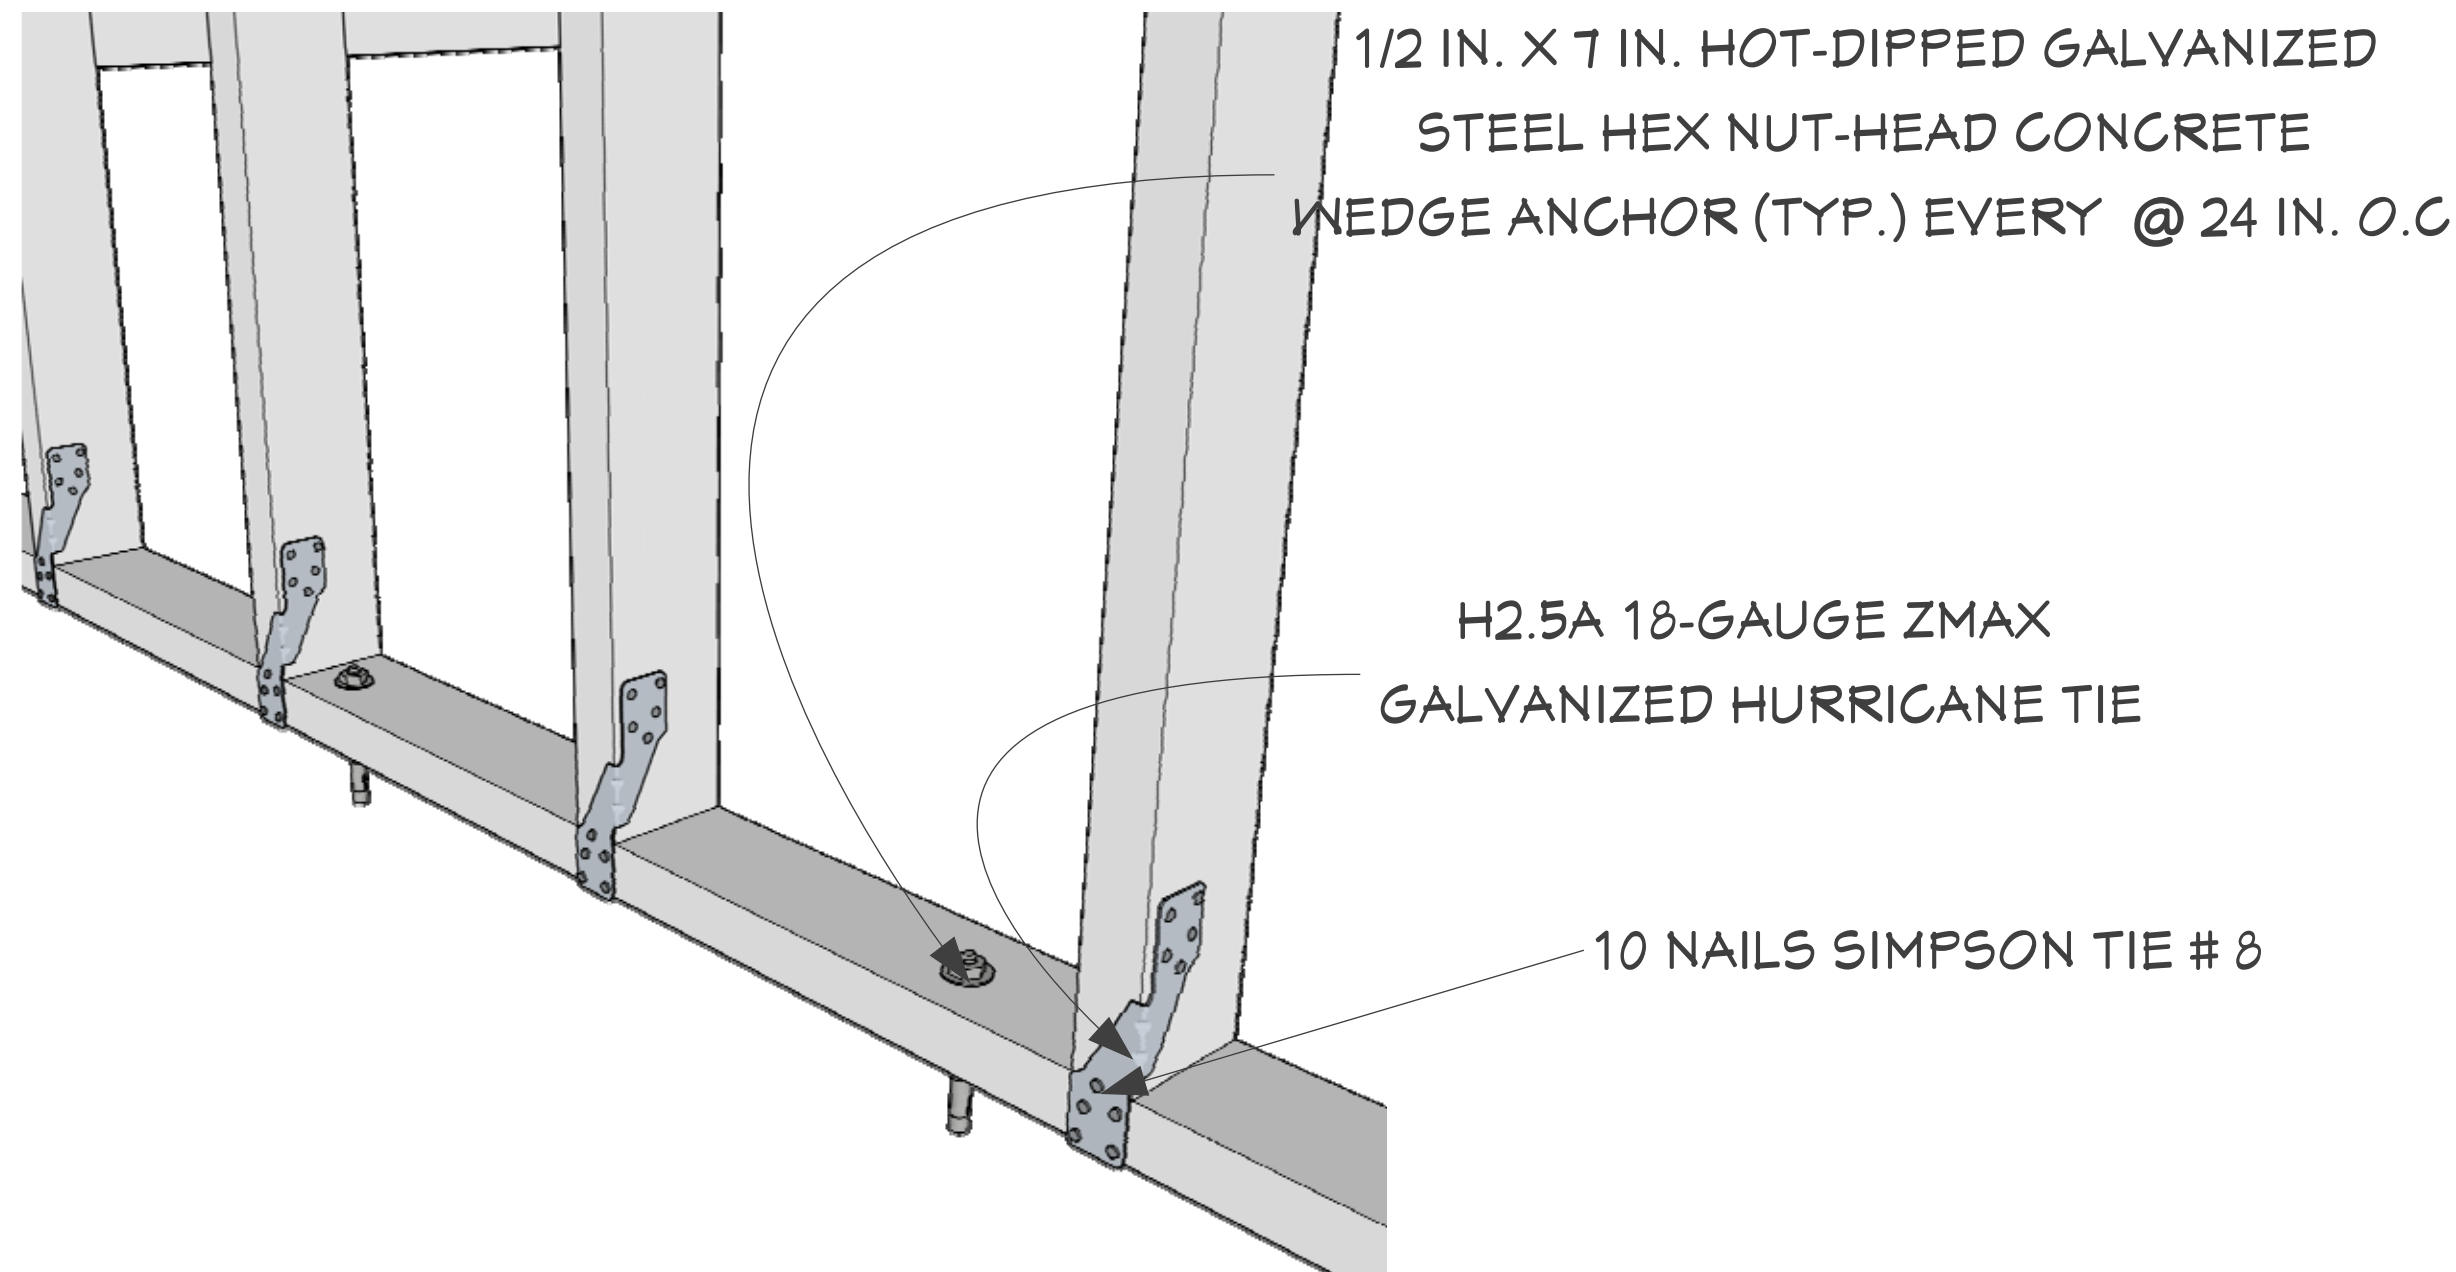

NOTE: HEADERS OVER 6'-0"
PROVIDE SOLID BLOCKING AT MAXIMUM 4'-0" INTERVALS;
INSULATION SHALL NOT BE CONTINUOUS THROUGH HEADER.

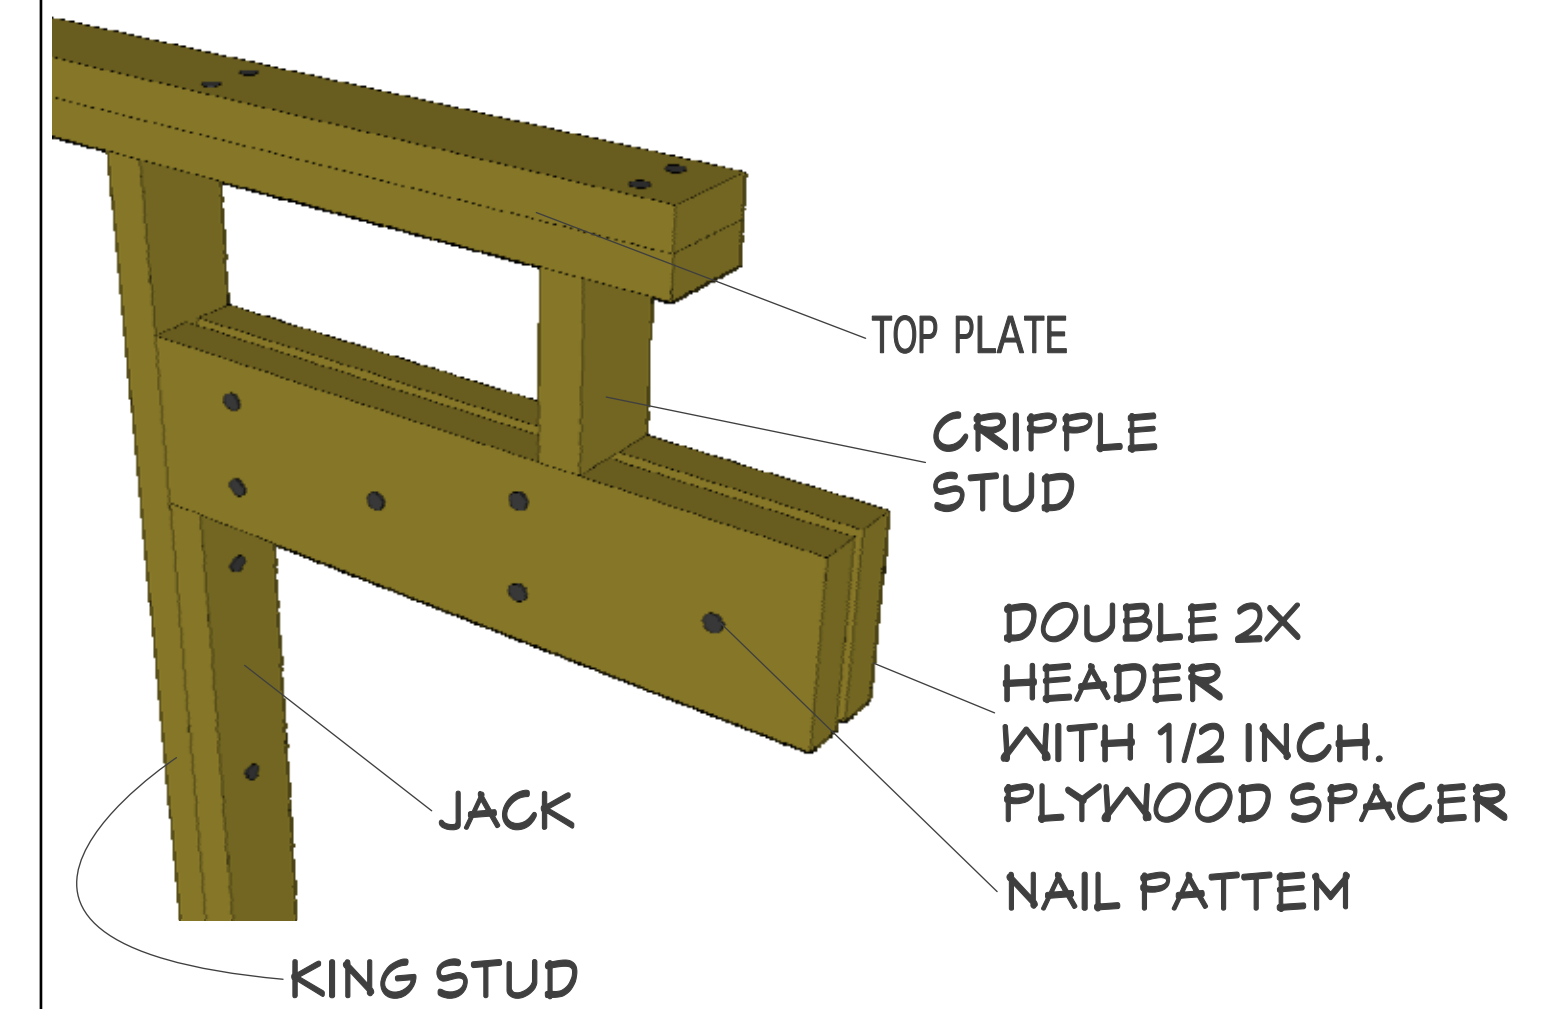

DOOR HEADER DETAIL S-4

This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright.

SHEET TITLE


OTHER DETAILS

CUSTOMER NAME:
EDUARDO MATOSINHO/100 FOLD RETURNS
LLC

PROJECT ADDRESS :
14704 CARNATION AVE,
TAMPA FLORIDA 33613

CUSTOMER INFORMATION
Email: Foldreturns1@gmail.com
Phone: (781) 420-5726

PROJECT OPEN DATE :
JAN. 05 2026
PROJECT REVISED BY :
MICHAEL D. JOHNSON

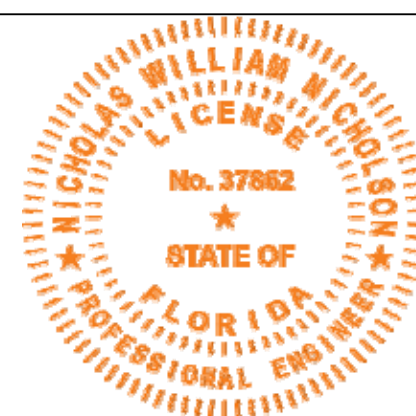

NICHOLSON ENGINEERING
ASSOCIATES, INC.

7468 Horse Lake Rd,
Brooksville, FL 34601
Phone: 352.799.0170
Fax: 352.754.9167



REVISIONS

MM/DD/Y		DRAWINGS REMARKS	
1	01.07.26	RENOVATION	
2			
3			
PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26	

A 10

GENERAL CONSTRUCTION NOTES:

- 1.- BEFORE STARTING THE WORK ON THE PROJECT, THE CONTRACTOR WILL HAVE TO VERIFY THE EXISTING CONDITIONS & DIMENSIONS.
2. ANY DISCREPANCIES SHALL BE REPORTED TO THE ENGINEER.
3. THE CONTRACTOR NEEDS TO COMPLY WITH ALL CONSTRUCTION CODES AND REGULATIONS ESTABLISHEDBY FLORIDA STATE.
- THE CONTRACTOR NEEDS TO APPLY A GROUND TERMITE TREATMENT ACCORDING TO FLORIDA BUILDING CODE.
5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING TO ORIGINAL CONDITIONS, ANY DAMAGES TO BUILDING SURFACES, EQUIPMENT, ETC. CAUSED DURING THE CONSTRUCTION.
6. THE CONTRACTOR SHALL KEEP ALL AREAS WHERE WORK IS BEING PERFORMED FREE FROM DEBRIS AT ALL TIMES. AREA SHALL BE LEFT BROOM CLEAN AT THE END OF EACH WORKING DAY.
7. ALL LUMBER (INTERIOR) SHALL BE COVERED WITH GYPSUM BOARD, 1/2" THICKNESS.
8. THE CONTRACTOR NEEDS TO COORDINATE WITH THE ELECTRICIAN FOR THE ELECTRICAL WORKS.
9. THE CONTRACTOR NEEDS TO COORDINATE WITH THE PLUMBER FOR THE PLUMBING WORKS.
10. THE CONTRACTOR NEEDS TO COORDINATE WITH HIS CONSULTANTS FOR THE A/C SYSTEM, ENERGY CALCULATION, ETC.
11. THE CONTRACTOR NEEDS TO COORDINATE WITH THE OWNER THE FINISHED FLOOR PRODUCT OF HOUSE
12. THE CONTRACTOR NEEDS TO COORDINATE WITH THE OWNER FOR THE CABINET DIMENSIONS, LAYOUT, OR OTHER INFORMATION. THE CONTRACTOR HAS TO RELOCATE THE HOT & COLD WATER PIPE, THE DISCHARGE PIPES AND THE ELECTRICAL RECEPTACLES ACCORDING TO THE OWNERS LAYOUT. THE CONTRACTOR WILL HAVE TO VERIFY THE EQUIPMENTS (REFRIGERATOR, SINK, DRYER/WASHER) THAT THE OWNER WILL PROVIDE TO DETERMINE THE EXACT LOCATION OF WATER SUPPLY, DISCHARGE PIPE OR ENERGY SUPPLY.
13. ALL WINDOWS & GLASS DOORS SHALL HAVE IMPACT RESISTANT GLAZING OR INSTALLED WITH APPROVED HURRICANE SHUTTERS/PANELS OR HIGH WIND BOARD-UP PROTECTION. IF HURRICANE SHUTTERS/PANELS OR HIGH WIND BOARD-UP PROTECTION ARE TO BE USED, ALL INSTALLATION HARDWARE & SHUTTERS/PANELS SHALL BE KEPT ONSITE
14. IF THE ROOTS OR BRANCHES OF THE EXISTING TREE NEED TO TRIMMED IT MUST BE DONE BY A PROFESSIONAL TREE TRIMMING COMPANY.
15. THE CONTRACTOR NEEDS TO INSTALL IN THE EXTERIOR WALL A FIBERGLASS INSULATION R-13
16. THE ROOF CEILING WILL BE 1/2" GYPSUM BOARD AND INSULATED WITH FIBERGLASS INSULATION R-30.
17. ANY LUMBER IN CONTACT WITH CONCRETE SHALL BE PRESSURE TREATED OR SHALL NEED A SILL GASKET TO AVOID MOISTURE INTRUSION

STRUCTURAL NOTES:

1. BEFORE STARTING CONSTRUCTION, THE CONTRACTOR NEEDS TO VERIFY THE EXISTING CONDITION & DIMENSIONS.
2. ALL HORIZONTAL OR MEMBERS SHALL BE CONNECTED USING STRAP CONNECTORS AND NAILS.
3. ALL PLYWOOD USED TO REINFORCING TRUSSES SHALL BE CDX PLYWOOD.
4. THTE REINFORCING STEEL SHALL BE GRADE 60, ASTM A-615.
5. CONSTRUCTION JOINTS SHALL BE SPACED NO GREATER THAN 16" O.C.
6. ALL JOINT REINFORCEMENT, TIES & OTHER ACCESSORIES SHALL BE RESISTANT TO CORROSION.
7. THE CONTRACTOR SHALL USE A HOT-DIPPED ZINC-COATED GALVANIZED STEEL BOLTS FOR PRESSURE TREATED WOOD.
8. THEN FASTEN 1"x2" WOOD FURRING STRIPS TO THE EXTERIOR WALL AT 16" O.C. AND FASTEN SHEET ROCK.

STENGTH OF MATERIALS:

1. CONCRETE FOOTINGS, SLAB OF BEAM	fc = 3,000 psi
2. REINFORCING STEEL	60,000 psi
1. REINFORCED MASONRY	1,500 psi
4. MASONRY GROUT	fc =3,000 psi
5i SOIL BEARING (ASSUMED, TO BE VERIFIED)	2,000 psf
6. BOLTS FOR STEEL & WOOD CONNECTIONS	A307
7. FRAMING LUMBER	#2 SYP
8. SHEATHING DIAPHRAGM (ROOF)	18/32 APA RATED SHEATHING
8.1. UNLOCKED DIAPHRAGM	ALLOWABLE SHEAR=285 POUNDS PER FOOT 10d DEFORMED NAILS 06" O.C. AT ALL ENDS, EDGES, CUTS & TERMINATIONS & 0 12" O.C. AT INTERIOR SUPPORTS.
9. SHEATHING DIAPHRAGM (WALLS)	18/32 APA RATED SHEATHING
9.1. UNBLOCKED DIAPHRAGM	ALLOWABLE SHEAR=310 POUNDS PER FOOT 10d DEFORMED NAILS 06" O.C. AT ALL ENDS, EDGES, CUTS & TERMINATIONS & 0 12" O.C. AT INTERIOR SUPPORTS.
10. DECK DIAPHRACHA (FLOORS)	18/32 APA RATED SHEATHING
10.1. UNBLOCKED DIAPHRAGH.	ALLOWABLE SHEAR=325 POUNDS PER FOOT CONSTRUCTION ADHESIVE & (2) ROWS OF 10d DEFORMED NAILS @6" O.C. AT ALL ENDS, EDGES, CUTS & TERMINATIONS & 0 12" O.C. AT INTERIOR SUPPORTS.

TERMINE NOTES:

- 1.- A PERMANENT SIGN WHICH IDENTIFIES THE TERMITE TREATMENT PROVIDER AND NEED FOR RE-INSPECTION & TREATMENT CONTRACT RENEWAL SHALL BE PROVIDED. THE SIGN SHALL BEPOSTED NEAR THE WATER HEATER OR ELECTRIC PANEL.
- 2.- TO PROVIDE FOR INSPECTION FOR TERMITE INFESTATION THE DISTANCE BETWEEN WALL COVERING & FINAL EARTH GRADE SHALL NOT BE LESS THAN 6". EXCEPTION: PAINT OR DECORATIVE CONTENTIOUS
- FINISH LESS THAN 5/8" THICK ADHERED DIRECTLY TO THE FOUNDATION WALL.
- 3.- INITIAL TREATMENT SHALL BE DONE AFTER ALL EXCAVATION AND BACKFILL IS COMPLETE. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 1816.1.1
4. SOIL DISTRIBUTED AFTER THE INITIAL TREATMENT SHALL BE RE-TREATED INCLUDING SPACES BOXED & FORMED. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 1816.1.2
- 5.- AREAS IN CONCRETE FLOORS FOR SUBSEQUENT INSTALLATIONS OF TRAPS, ETC., SHALL BE MADE WITH PERMANENT METAL OR PLASTIC FORMS. PERMANENT FORMS MUST BE THE SIZE AND DEPTH THAT WILL ELIMINATE THE DISTURBANCE OF SOIL AFTER THE INITIAL TREATMENT. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11
- 6.- MINIMUM 6 MIL RETARDER MUST BE INSTALLED TO PROTECT AGAINST RAINFALL DILUTION. IF RAINFALL OCCURS BEFORE VAPOR RETARDER PLACEMENT, RETREATMENT IS REQUIRED. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
- 7.- ONCRETE OVER FOUR AND MORTAR ALONG THE FOUNDATION PERIMETER MUST BE REMOVED BEFORE EXTERIOR SOIL TREATMENT. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
- 8.- SOIL TREATMENT MUST BE APPLIED UNDER ALL EXTERIOR CONCRETE OR GRADE WITHIN 1'-0" OF THE STRUCTURE SIDEWALLS. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
12. ALL BUILDING ARE REQUIRED TO HAVE PRE-CONSTRUCTION TREATMENT. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
- 9.- A CERTIFICATE OF COMPLIANCE MUST BE ISSUED TO THE BUILDING DEPARTMENT BY A LICENSED PEST CONTROL COMPANY BEFORE A CERTIFICATE OF OCCUPANCY WILL BE ISSUED. THE CERTIFICATE OF COMPLIANCE SHALL STATE: "THE BUILDING HAS RECEIVED A COMPLETE TREATMENT FOR THE PREVENTION OF SUBTERRANEAN TERMITES THE TREATMENT IS IN ACCORDANCE WITH THE RULES & LAWS OF THE FLORIDA DEPARTMENT OF AGRICULTURE & CONSUMER SERVICES." IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
- 10.- AFTER ALL WORK IS COMPLETED, LOOSE WOOD AND FILL MUST BE REMOVED FROM BELOW AND WITHIN 1'-0" OF THE BUILDING. THIS INCLUDES ALL GRADE STAKES, TUB TRAP BOXES, FORMS, SHORING OR OTHER CELLULOSE CONTAINING MATERIAL.
- 11.- NO WOOD, VEGETATION, STUMPS, CARDBOARD, TRASH, ETC., SHALL BE BURIED WITHIN 15'-0" OF ANY BUILDING OR PROPOSED BUILDING.

DESIGN CRITERIA:

CODE APPLIED = FLORIDA BUILDING CODE 8 TH EDITION (2023)	
1.- LIVE LOAD	20 PSF
ROOF	40 PSF
FLOOR	
2.- DEAD LOAD	15 PSF
ROOF	175 MPH (ULTIMATE)
3.- WIND LOADS	2
RISK CATEGORY	"B"
EXPOSURE	
CATEGORY	
INTERNAL PRESSURE	* 0.18, ENCLOSED STRUCTURE
COEFFICIENTS; GC pi	* 0.55, PARTIALLY ENCLOSED STRUCTURE
	* 0.0 OPEN STRUCTURE
BASIC WIND	q=53.8 PSF
PRESSURE	
4.- SOIL BEARING	Sb= 2000 PSF
(ASSUMED TO BE	ALTERATION LEVEL 2
VERIFIED)	TYPE V-B
5.- CLASSIFICATION OF WORK	
6.- TYPE OF CONSTRUCTION:	
APPLICABLE CODES	
2023 FLORIDA BUILDING CODE 8 TH EDITION.	
2023 FLORIDA BUILDING CODE, PLUMBING	
2023 FLORIDA BUILDING CODE, MECHANICAL	
ROZO FLORIDA BUILDING CODE FOR BUILDING CONSTRUCTION	
2023 FLORIDA BUILDING CODE EXISTING BUILDING	
2023 FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION	
2020 NATIONAL ELECTRICAL CODE	

PRODUCT APPROVAL LIST WINDOWS & DOORS:

MARK	TYPE	LOCATION / USE	NOMINAL SIZE (W x H)	UNIT SIZE (IN.)	GLASS	FL APPROVAL #
W1	WINDOW (SH)	GENERAL AREA	36" x 37"	35.875 x 37.25	CLEAR	FL14911.5
W2	WINDOW (SH)	GENERAL AREA	36" x 52"	35.875 x 49.5	CLEAR	FL14911.5
W3	WINDOW (SH)	BATHROOM	36" x 25"	35.875 x 24.875	OBSCUR	FL14911.5
W4	WINDOW (SH)	CLOSET	52" x 36"	51.875 x 35.5	CLEAR	FL14911.5
D1	SLIDING PATIO DOOR (SGD)	99 Ask ChatGPT	72" x 80"	72 x 80	CLEAR	FL14998.4
D2	SLIDING PATIO DOOR (SGD)		72" x 96"	72 x 96	CLEAR	FL14998.4

PRODUCT APPROVAL LIST & HARDWARE:

ITEM #	PRODUCT MODEL	SUB CATEGORY	MANUFACTURE	FLORIDA APPROVAL #	EXPERATION DATE:
1	HUC3.25 SERIES HEAVY CONCEALED FLANGE FACE-MOUNT JOIST HANGERS.	JOIST HANGER	SIMPSON TIE	FL # FL10531 R7	11/21/2023
2	H1A 18-GAUGE ZMAX GALVANIZED HURRICANE TIE	HURRICANE TIE	SIMPSON TIE	FL # FL10456-R8	11/21/2023
3	IE H8 18-GAUGE GALVANIZED HURRICANE TIE	HURRICANE TIE	SIMPSON TIE	FL # FL10456-R8	11/21/2023

This drawings are sole property of: Seating ConstructorsUSA, Unless otherwise provided for by contract, or the wording means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice ContractorsUSA . 2025 Copyright .

SHEET TITLE		CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC		CUSTOMER INFORMATION Email: Foldreturns1@gmail.com Phone: (781) 420-5726			NICHOLSON ENGINEERING ASSOCIATES, INC. 7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167			REVISIONS			
NOTES		PROJECT ADDRESS : 14704 CARNATION AVE, TAMPA FLORIDA 33613		PROJECT OPEN DATE : JAN. 05 2026			DRAWINGS REMARKS						
							MM/DD/Y						
				PROJECT REVISED BY : MICHAEL D. JOHNSON						101.07.26		RENOVATION	
										PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26	