

HIILSBOROUGH COUNTY

14704 CARNATION AVE TAMPA FLORIDA 33613

EDUARDO MATOSINHO/100 FOLD RETURNS LLC

REMODELING DRAWINGS FULL HOUSE RENOVATION

DRAWINGS INDEX:

SHEET NUMBER	SHEET NAME
Sheet 001	COVER PAGE
Sheet 002	FLOOR PLAN
Sheet 003	PROPOSED FLOOR PLAN
Sheet 004	ELECTRICAL PLAN
Sheet 005	PLUMBING PLAN
Sheet 006	ISOMETRIC VIEW
Sheet 007	DETAILS
Sheet 008	OTHER DETAILS
Sheet 009	NOTES
Sheet 010	
Sheet 011	
Sheet 012	
Sheet 013	
Sheet 014	
Sheet 015	


GENERAL NOTES:

- ALL STRUCTURAL LUMBER AND EXTERIOR FRAMING SHALL BE #2 SOUTHERN YELLOW PINE OR EQUIVALENT, UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
- ANY WOOD LOCATED BELOW THE REQUIRED BASE FLOOD ELEVATION SHALL BE TREATED WITH 0.40 CCA TREATMENT FOR FLOOD RESISTANCE.
- ALL WOOD FRAMING MUST ADHERE TO THE REQUIREMENTS OF THE FLORIDA BUILDING CODE, 7TH EDITION (2020), INCLUDING BUT NOT LIMITED TO CONNECTIONS, BRACING, BRIDGING, AND NAILING.
- CONTRACTOR SHALL INSTALL EQUIPMENT IN ACCORDANCE WITH MANUFACTURER INSTRUCTIONS & NOTHING IN THIS DOCUMENT SHALL BE INTERPRETED IN A WAY THAT OVERRIDES THEM.
- THE BUILDING CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL EXISTING CONDITIONS AS CLOSELY AS POSSIBLE. ANY DISCREPANCIES FOUND PRIOR TO OR DURING CONSTRUCTION SHOULD BE PROMPTLY REPORTED TO THE "ENGINEER."
- THE BUILDING CONTRACTOR IS RESPONSIBLE FOR REPAIRING TO ORIGINAL CONDITIONS, ANY AND ALL DAMAGE TO BUILDING SURFACES, EQUIPMENT, ETC. CAUSED DURING THE PERFORMANCE OF THE WORK.


NOTE:

- THE STRUCTURAL INTEGRITY OF THE BUILDING, AS DEPICTED IN THESE PLANS, IS CONTINGENT UPON COMPLETION ACCORDING TO THE SPECIFIED PLANS AND SPECIFICATIONS. STRUCTURAL MEMBERS ARE NOT SELF-SUPPORTED DURING CONSTRUCTION AND REQUIRE TEMPORARY BRACING UNTIL PERMANENTLY AFFIXED TO THE STRUCTURES AS DIRECTED.
- THE ENGINEER ASSUMES NO LIABILITY FOR THE STRUCTURE DURING CONSTRUCTION UNLESS THE CONSTRUCTION METHOD AND BRACING ARE EXPLICITLY INCLUDED IN THE PLANS AND SPECIFICATIONS OR SUPERVISED BY THE ENGINEER DURING CONSTRUCTION.
- THESE DRAWINGS PERTAIN SOLELY TO THE STRUCTURAL ASPECTS AND DO NOT ENCOMPASS ADDITIONAL INFORMATION SUCH AS ELECTRICAL, MECHANICAL, ARCHITECTURAL, OR PROPERTY SURVEY DETAILS. THIS SEAL ON THE DRAWINGS IS VALID FOR 12 MONTHS FROM THE DATE OF SIGNATURE. .
- INSTALLATION WILL NOT OBSTRUCT ANY PLUMBING, MECHANICAL, OR BUILDING ROOF VENTS.
- CONTRACTOR SHALL INSTALL EQUIPMENT IN ACCORDANCE WITH MANUFACTURER INSTRUCTIONS & NOTHING IN THIS DOCUMENT SHALL BE INTERPRETED IN A WAY THAT OVERRIDES THEM.
- CONTRACTOR IS RESPONSIBLE FOR VERIFICATION OF ALL CONDITIONS, DIMENSIONS & DETAILS IN THIS DOCUMENT. ALL DIMENSIONS SHALL BE VERIFIED BY SUBCONTRACTOR BEFORE INSTALLATION.

ARIAL VIEW

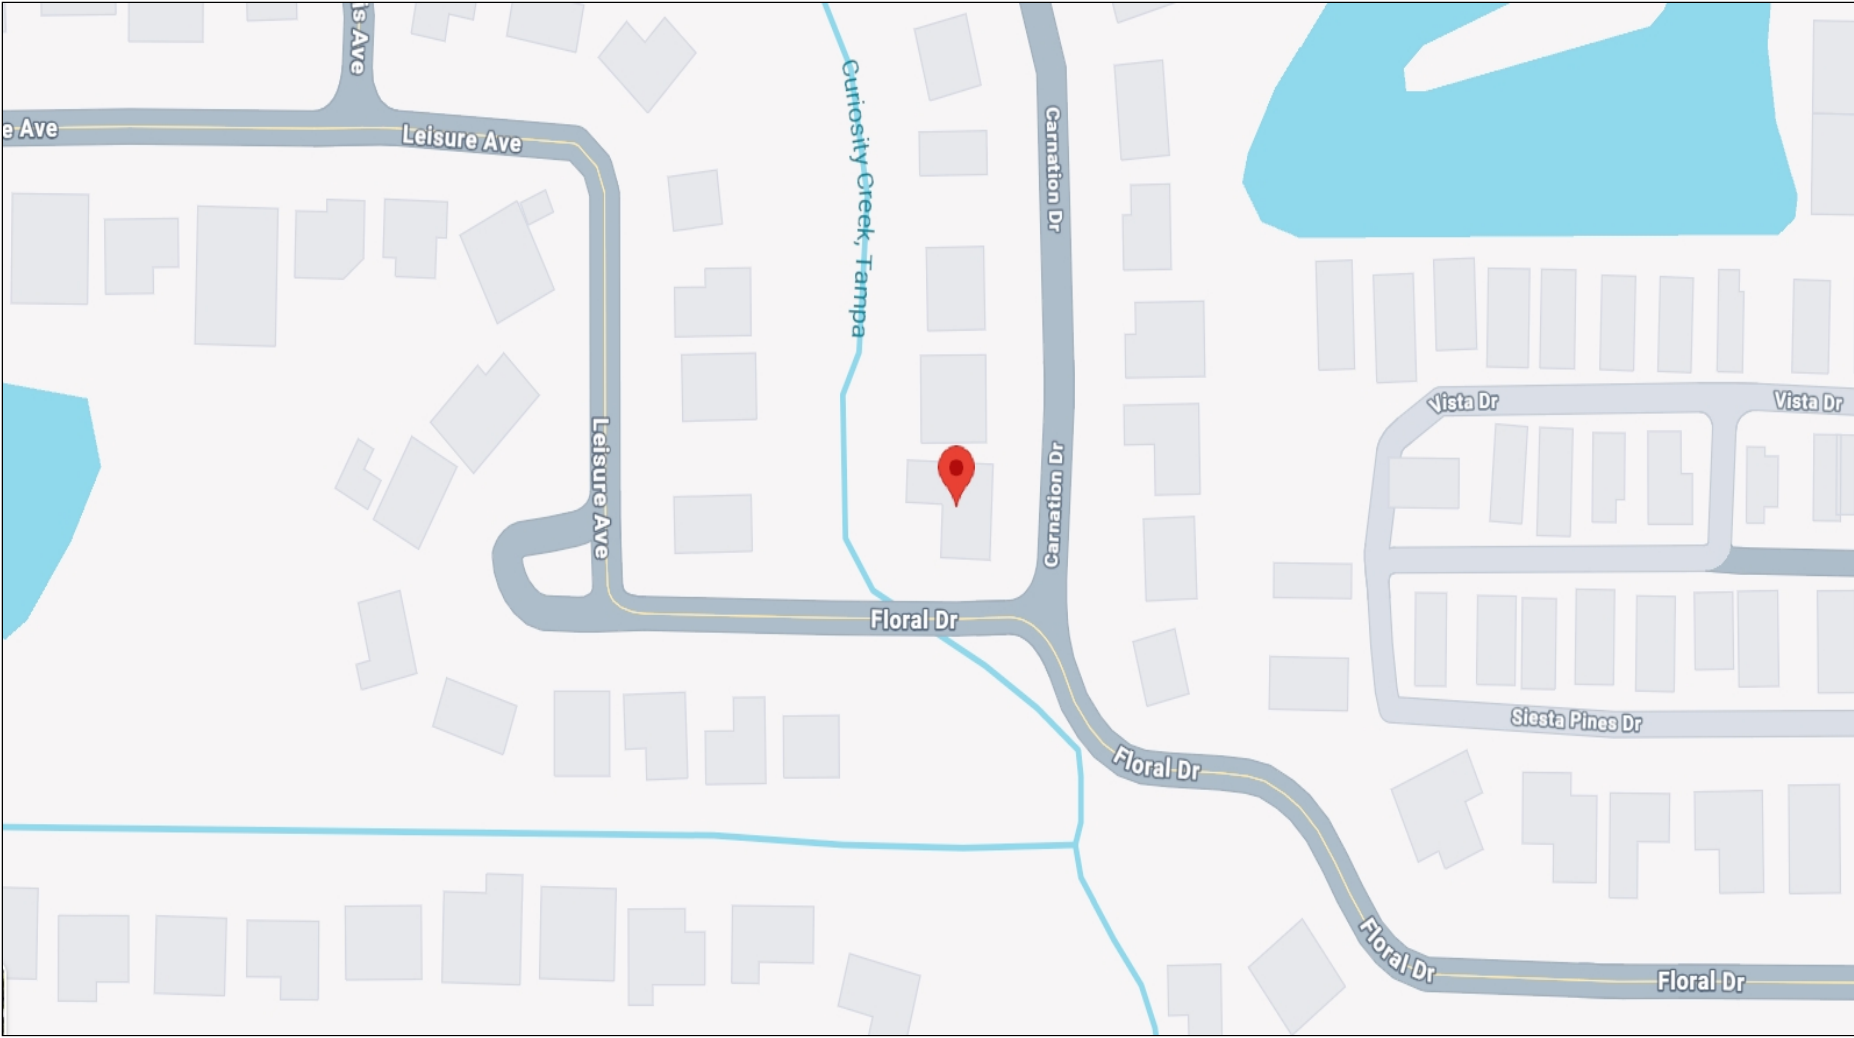


SATELITE VIEW

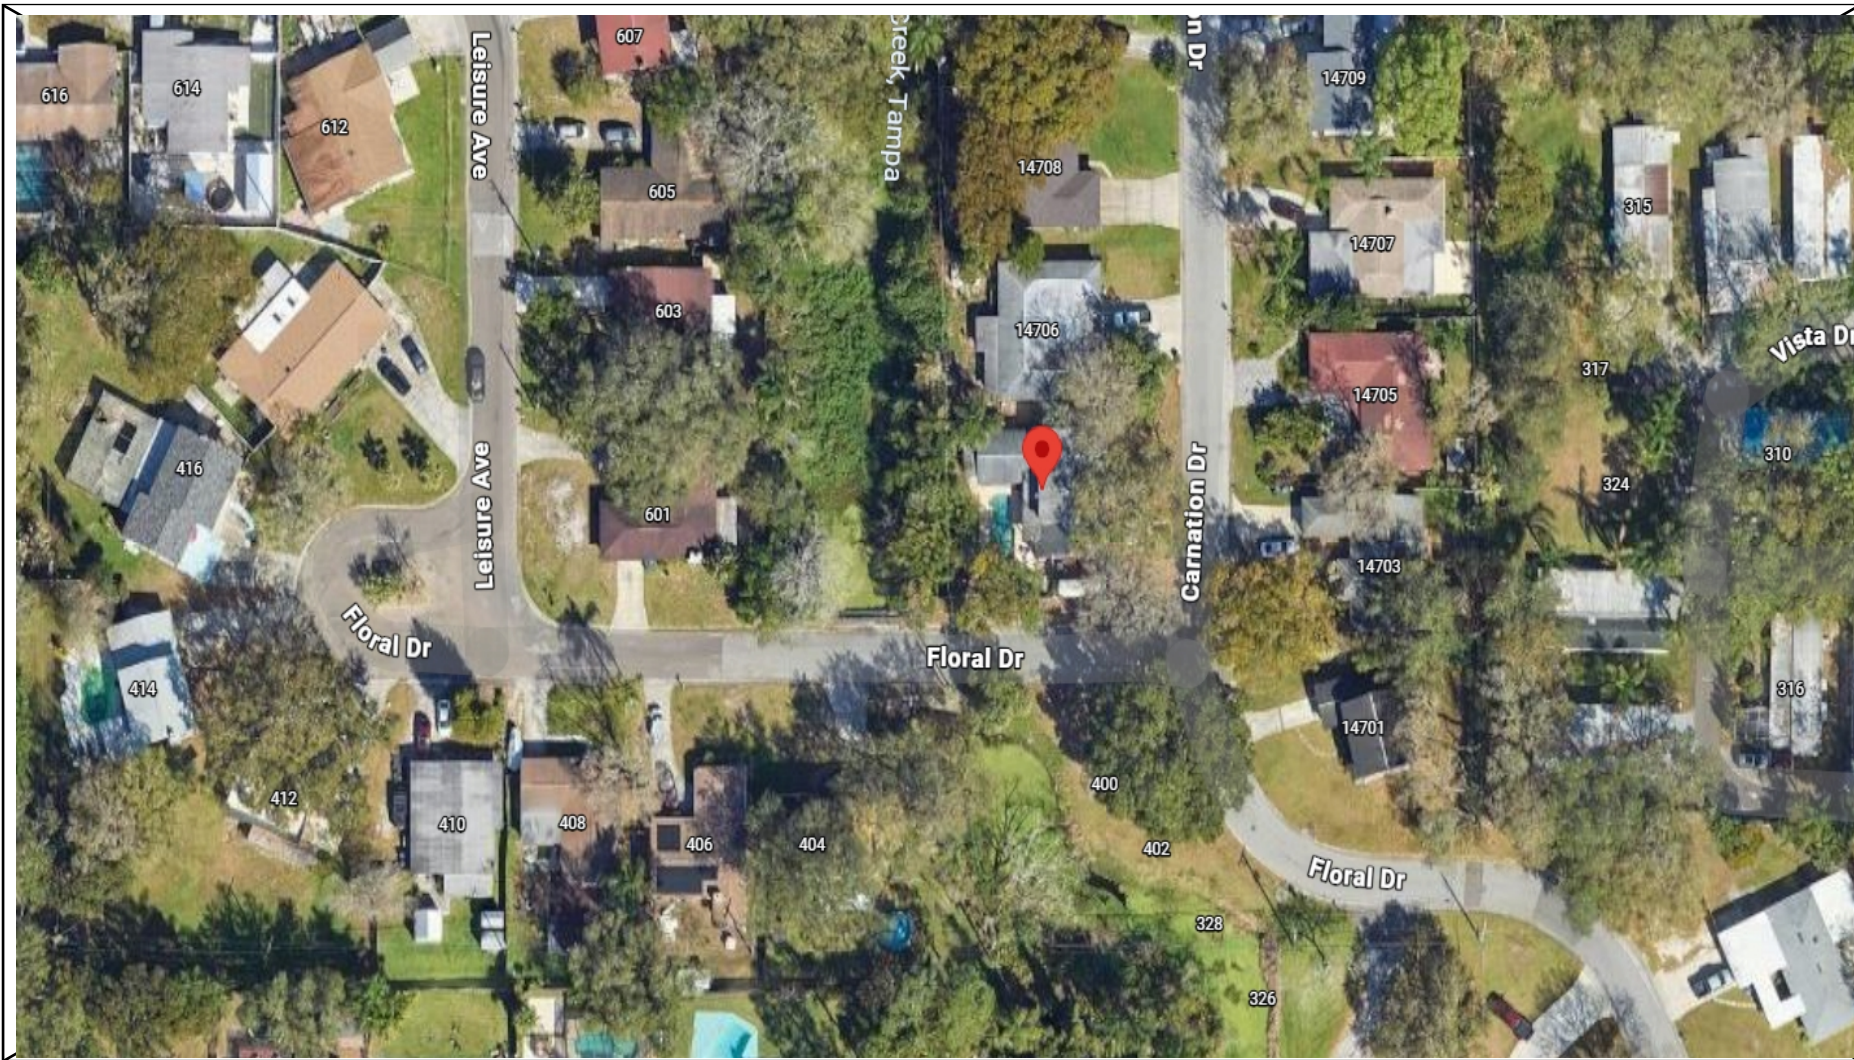

FRONT VIEW



FLORIDA ULTIMATE DESIGN WIND SPEED

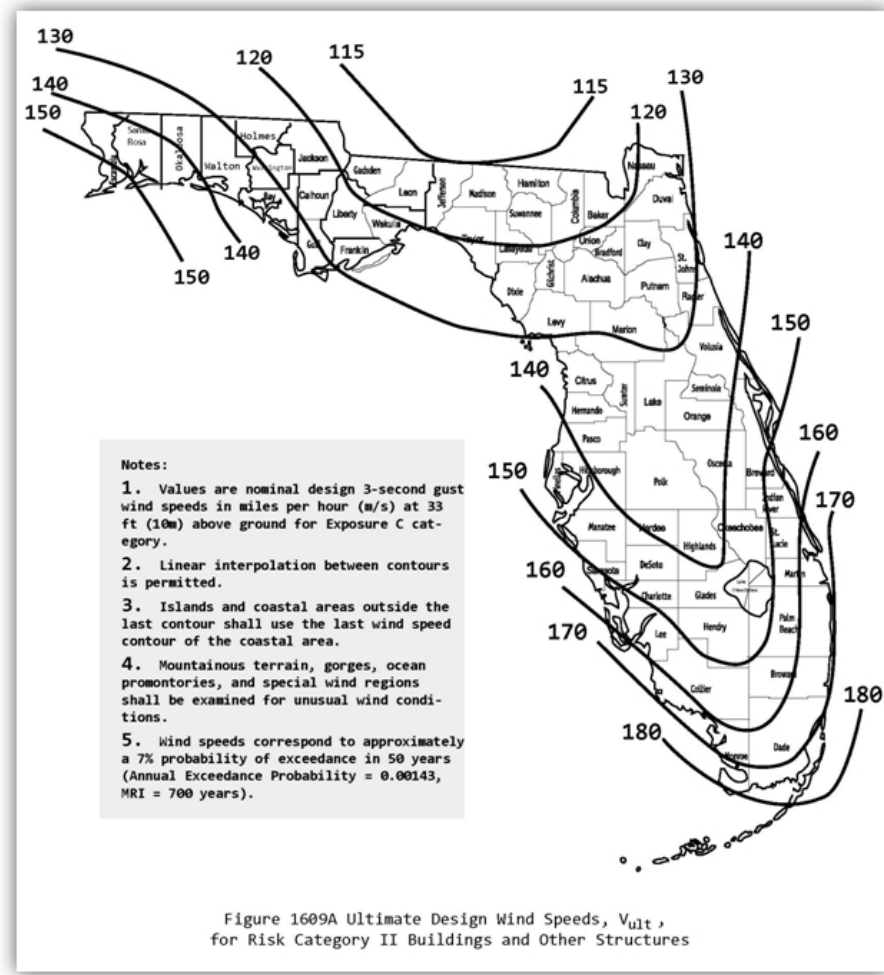

PROJECT OVERVIEW:

THIS RENOVATION PROJECT INCLUDES A COMPLETE INTERIOR RECONFIGURATION AND SYSTEMS UPGRADE DESIGNED TO IMPROVE FUNCTIONALITY EFFICIENCY AND OVERALL PROPERTY VALUE IN FULL COMPLIANCE WITH THE FLORIDA BUILDING CODE. THE SCOPE OF WORK CONSISTS OF RELOCATING THE LAUNDRY AREA, CONSTRUCTING A NEW MASTER BEDROOM CLOSET AND RECONFIGURING THE MASTER BATHROOM TO A REDUCED FOOTPRINT TO ALLOW THE ADDITION OF A NEW FULL BATHROOM. A NEW KITCHEN LAYOUT IS PROPOSED INCLUDING FULL RELOCATION OF PLUMBING AND ELECTRICAL SYSTEMS TO ACCOMMODATE UPDATED FIXTURES APPLIANCES AND CODE COMPLIANT INSTALLATIONS. THE PROJECT ALSO INCLUDES THE INSTALLATION OF A NEW SLIDING GLASS DOOR ASSOCIATED EXTERIOR OPENING MODIFICATIONS AND ALL REQUIRED INTERIOR FINISHES INCLUDING DRYNALL INSTALLATION SURFACE PREPARATION INTERIOR PAINTING GRANITE COUNTERTOPS AND NEW FLOORING THROUGHOUT DESIGNATED AREAS. DUE TO THE PROPERTY BEING LOCATED WITHIN A FLOOD ZONE ALL WORK SHALL ALSO COMPLY WITH ALL APPLICABLE FLOODPLAIN MANAGEMENT REGULATIONS FEMA REQUIREMENTS AND LOCAL FLOOD ZONE CONSTRUCTION STANDARDS INCLUDING ELEVATION AND MATERIAL REQUIREMENTS WHERE APPLICABLE. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH APPROVED CONSTRUCTION DOCUMENTS REQUIRED ENGINEERING COORDINATION AND ALL APPLICABLE LOCAL AND STATE REGULATIONS TO ENSURE A SAFE DURABLE AND PERMIT READY RENOVATION.

ALL WORK WILL BE COMPLETED IN ACCORDANCE WITH FBC 2023 FOR STRUCTURAL PERFORMANCE, WATER-RESISTANCE, AND LONG-TERM DURABILITY.

APPLICABLE GOVERNING CODES& NOTES:

SYSTEME SHALL BE INSTALL UNDER THE FOLLOWING CODE STANDARDS:

- 2020 NATIONAL ELECTRIC CODE (N.E.C)
- 2023 FBC BUILDING (8TH EDITION)
- 2023 FBC RESIDENTIAL (8TH EDITION)
- 2020 NATIONAL ELECTRICAL CODE (NFPA 70)
- 2023 FPFC FLORIDA PREVENTION CODE 8TH EDITION.

SITE SPECIFICATIONS:

CONSTRUCTION: SINGLE FAMILY DWELLING (SFD)
ZONING: RESIDENTIAL
NO. OF STORY: TWO STORY EXPOSURE CATEGORY: B,
RISK CATEGORY: II
WIND SPEED (ASCE 7-22): **120 MPH**
GROUND SNOW LOAD (ASCE 7-22): 0 Lb/Sqft
ASHRAE EXTREME LOW: 1°C
ASHRAE HIGH TEMP (2% AVG): 34°C
ASHRAE DISTANCE ABOVE ROOF (7/8"): 56"
PARCEL ID: **017659-0000**

SITE INFORMATION:

Customer Name:

EDUARDO MATOSINHO/100 FOLD
RETURNS LLC

Project Address:

14704 CARNATION AVE,
TAMPA FLORIDA 33613

Customer Phone Number:

(781) 420-5126

Customer Email:

Foldreturns1@gmail.com

CONTRACTOR INFORMATION:


SEATING CONTRACTORS USA.
14815 STATE ROAD 52
LAND O LAKES Florida 34637
813-505-7560
CSC - 1505749
(813) 505-7650
Phil@seatingusa.com

OTHER DETAILS:

PROPERTY SEA LEVEL ELEVATION: 60 FT.
PROPERTY GEO LOCATION CODENATES:
28.188° N latitude and 82.593° W longitude
ATC HAZARD ASCE 7-22
RISK CATEGORY: II

This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright .

SHEET TITLE	CUSTOMER NAME: MATOSINHO/100 FOLD	CUSTOMER INFORMATION Email: Foldreturns1@gmail.com Phone: (781) 420-5726			NICHOLSON ENGINEERING ASSOCIATES, INC. 7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167		REVISIONS		01		
	COVER PAGE	PROJECT ADDRESS : 14704 CARNATION AVE, TAMPA FLORIDA 33613	PROJECT OPEN DATE : JAN. 05 2026				PROJECT REVISED BY : MICHAEL D. JOHNSON	DRAWINGS REMARKS			
								1		01.07.26	FULL HOUSE RENOVATION
								2			
3											
PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26									

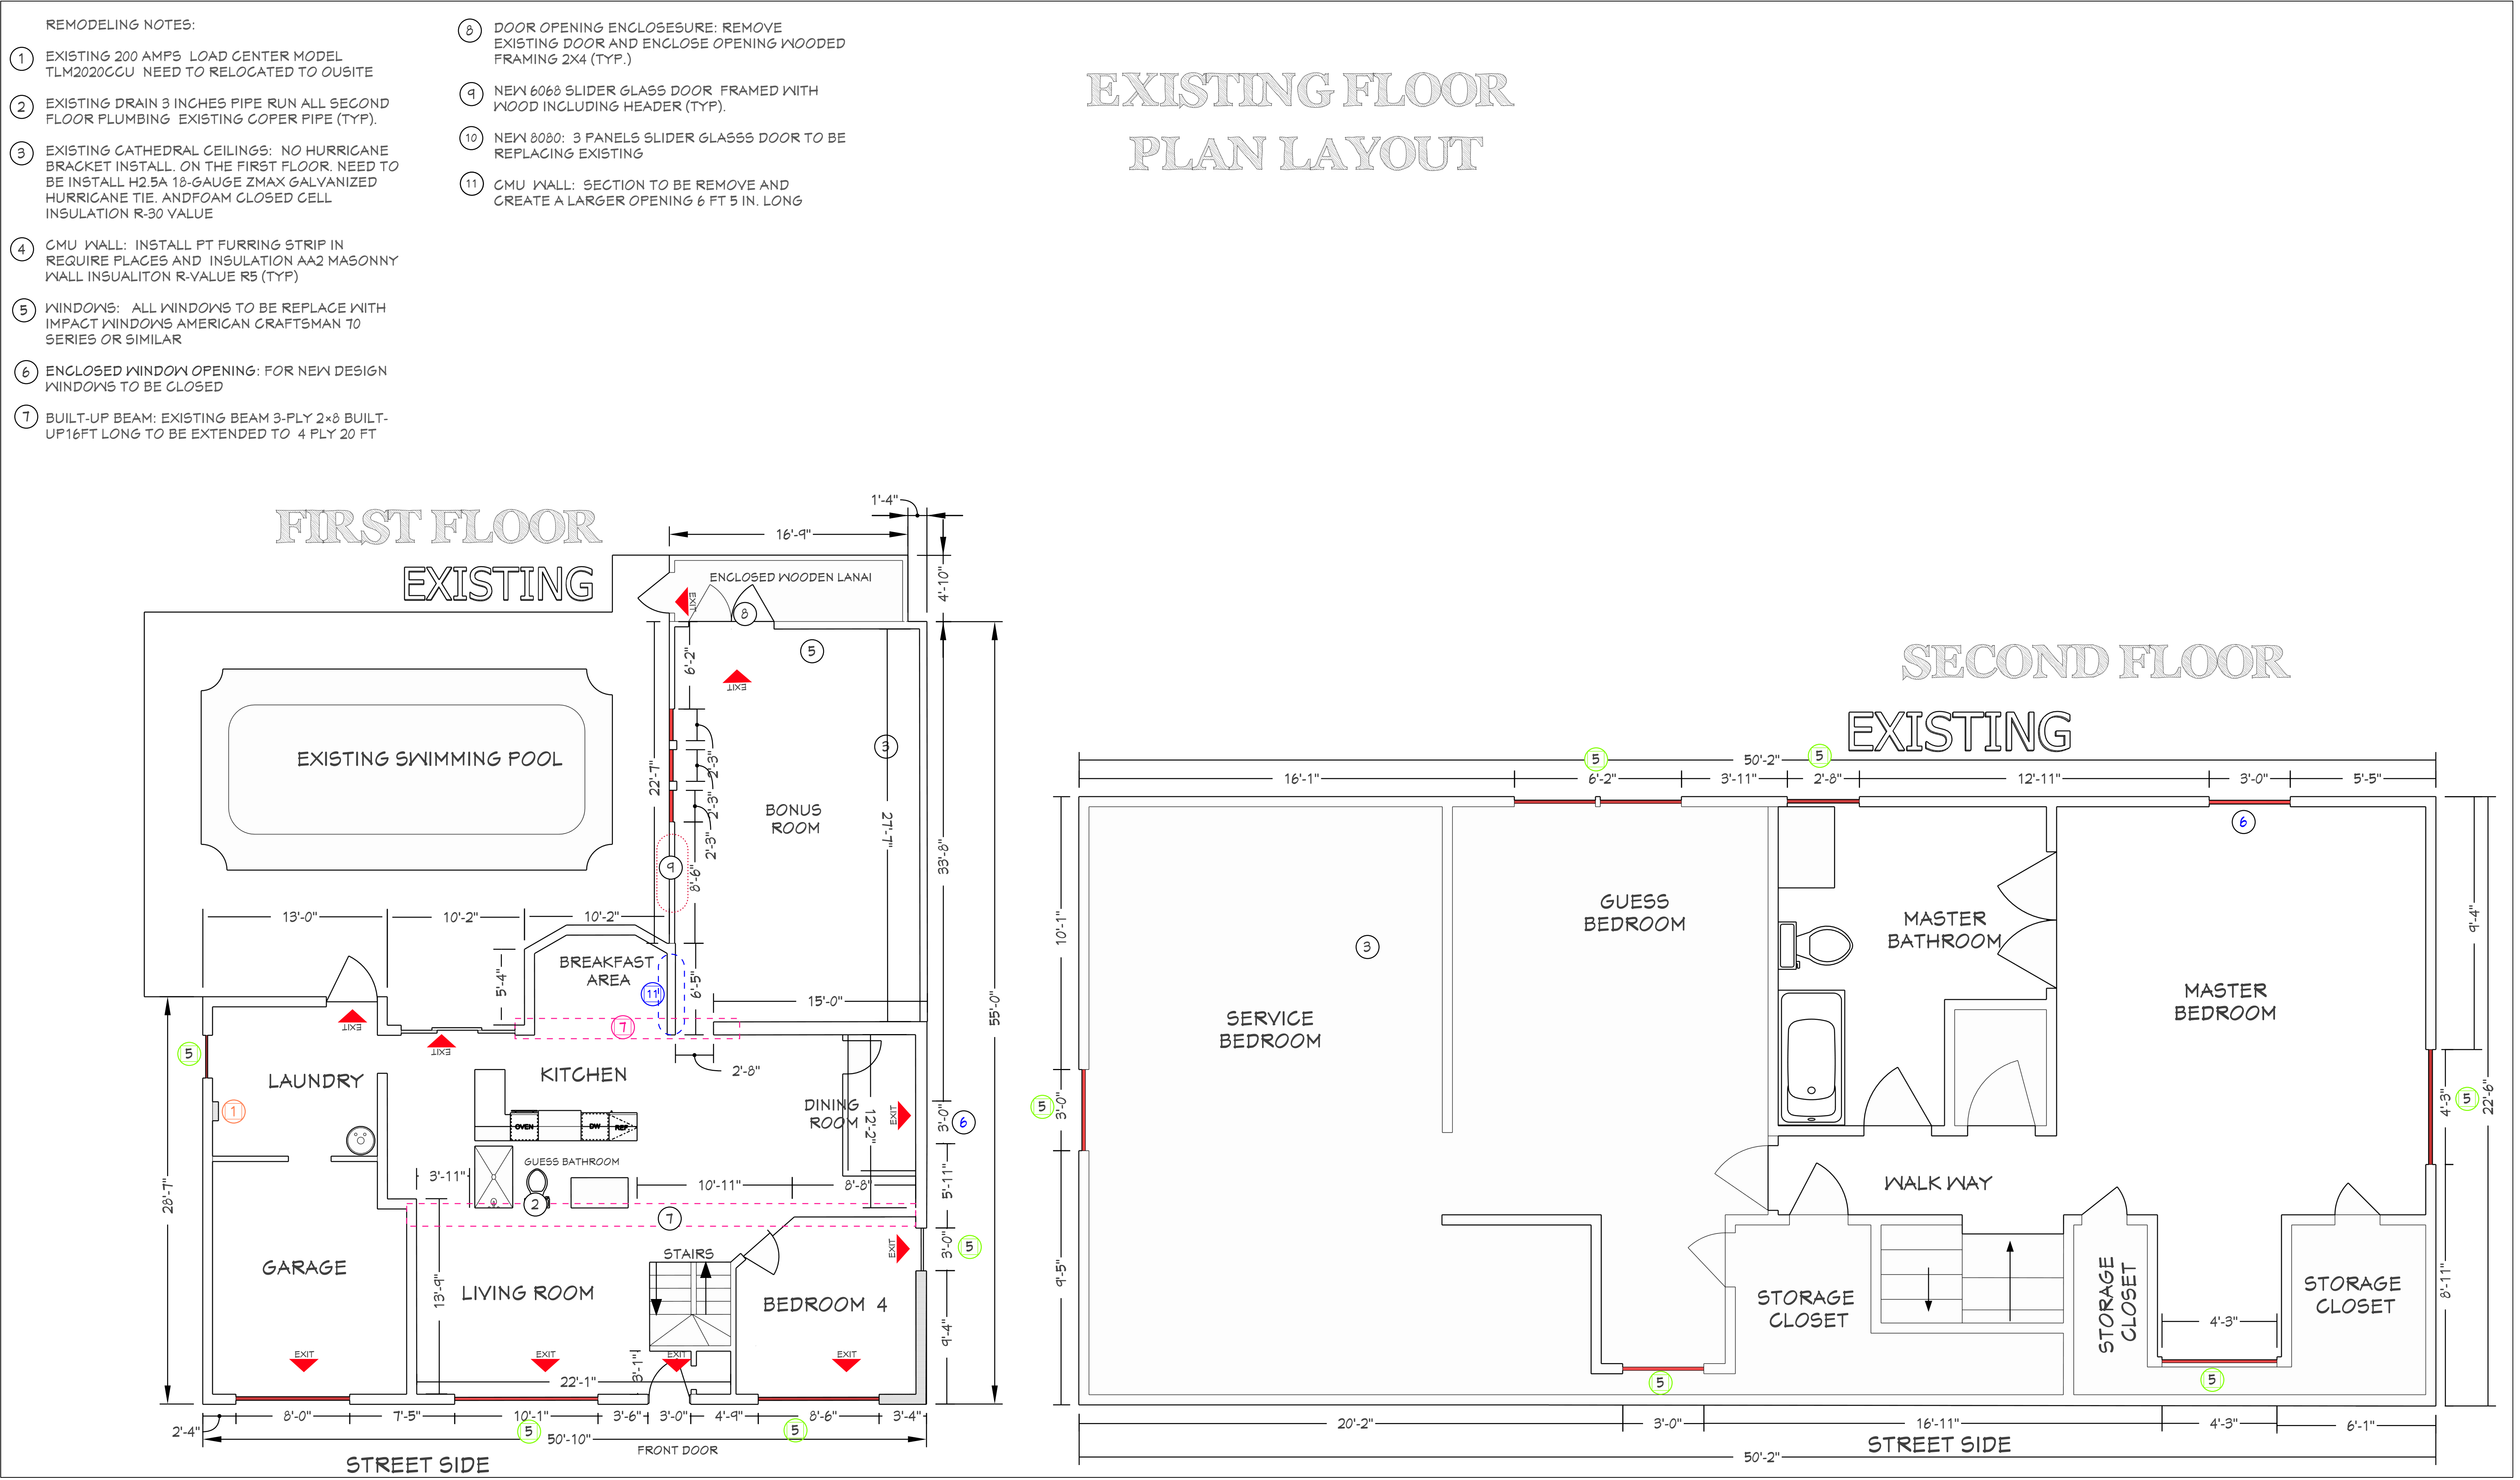


- REMODELING NOTES:
- ① MASTER BEDROOM: REPLACE OLD ORIGINAL WINDOW ARCH STYLE AND RECONFIGURE OPENING TO FIT A PICTURE WINDOW. USING FASTENER RECOMENDE PER MANUFACTURE BUT NOT LESS THAN TAPCON 3/12 X 1/4 IN.
 - ② WINDOWS SILL : INSTALL A WINDOW SILL USING PRE CAST (TYP.)
 - ③ REPAIR OUT SIDE STUCCO : REPAIR TO MATCH EXISTING DESIGN AND PAINT WITH WATER PROOF PAINT.
 - ④ REPAIR INTERIOR DRAYNAL: INSTALL PT FURRING STRIP IN REQUIRE PLACES IS IS NEEDED, DRYWALL WITH 8 IN. A PART DRYWALL SCREWS IN THE REPAIR SECTION. FINISH TO MATCH INTERIOR PAINT COLOR
 - ⑤

PROPOSSSED FLOOR
PLAN LAYOUT


PROPOSED FLOOR PLAN

FIRST FLOOR

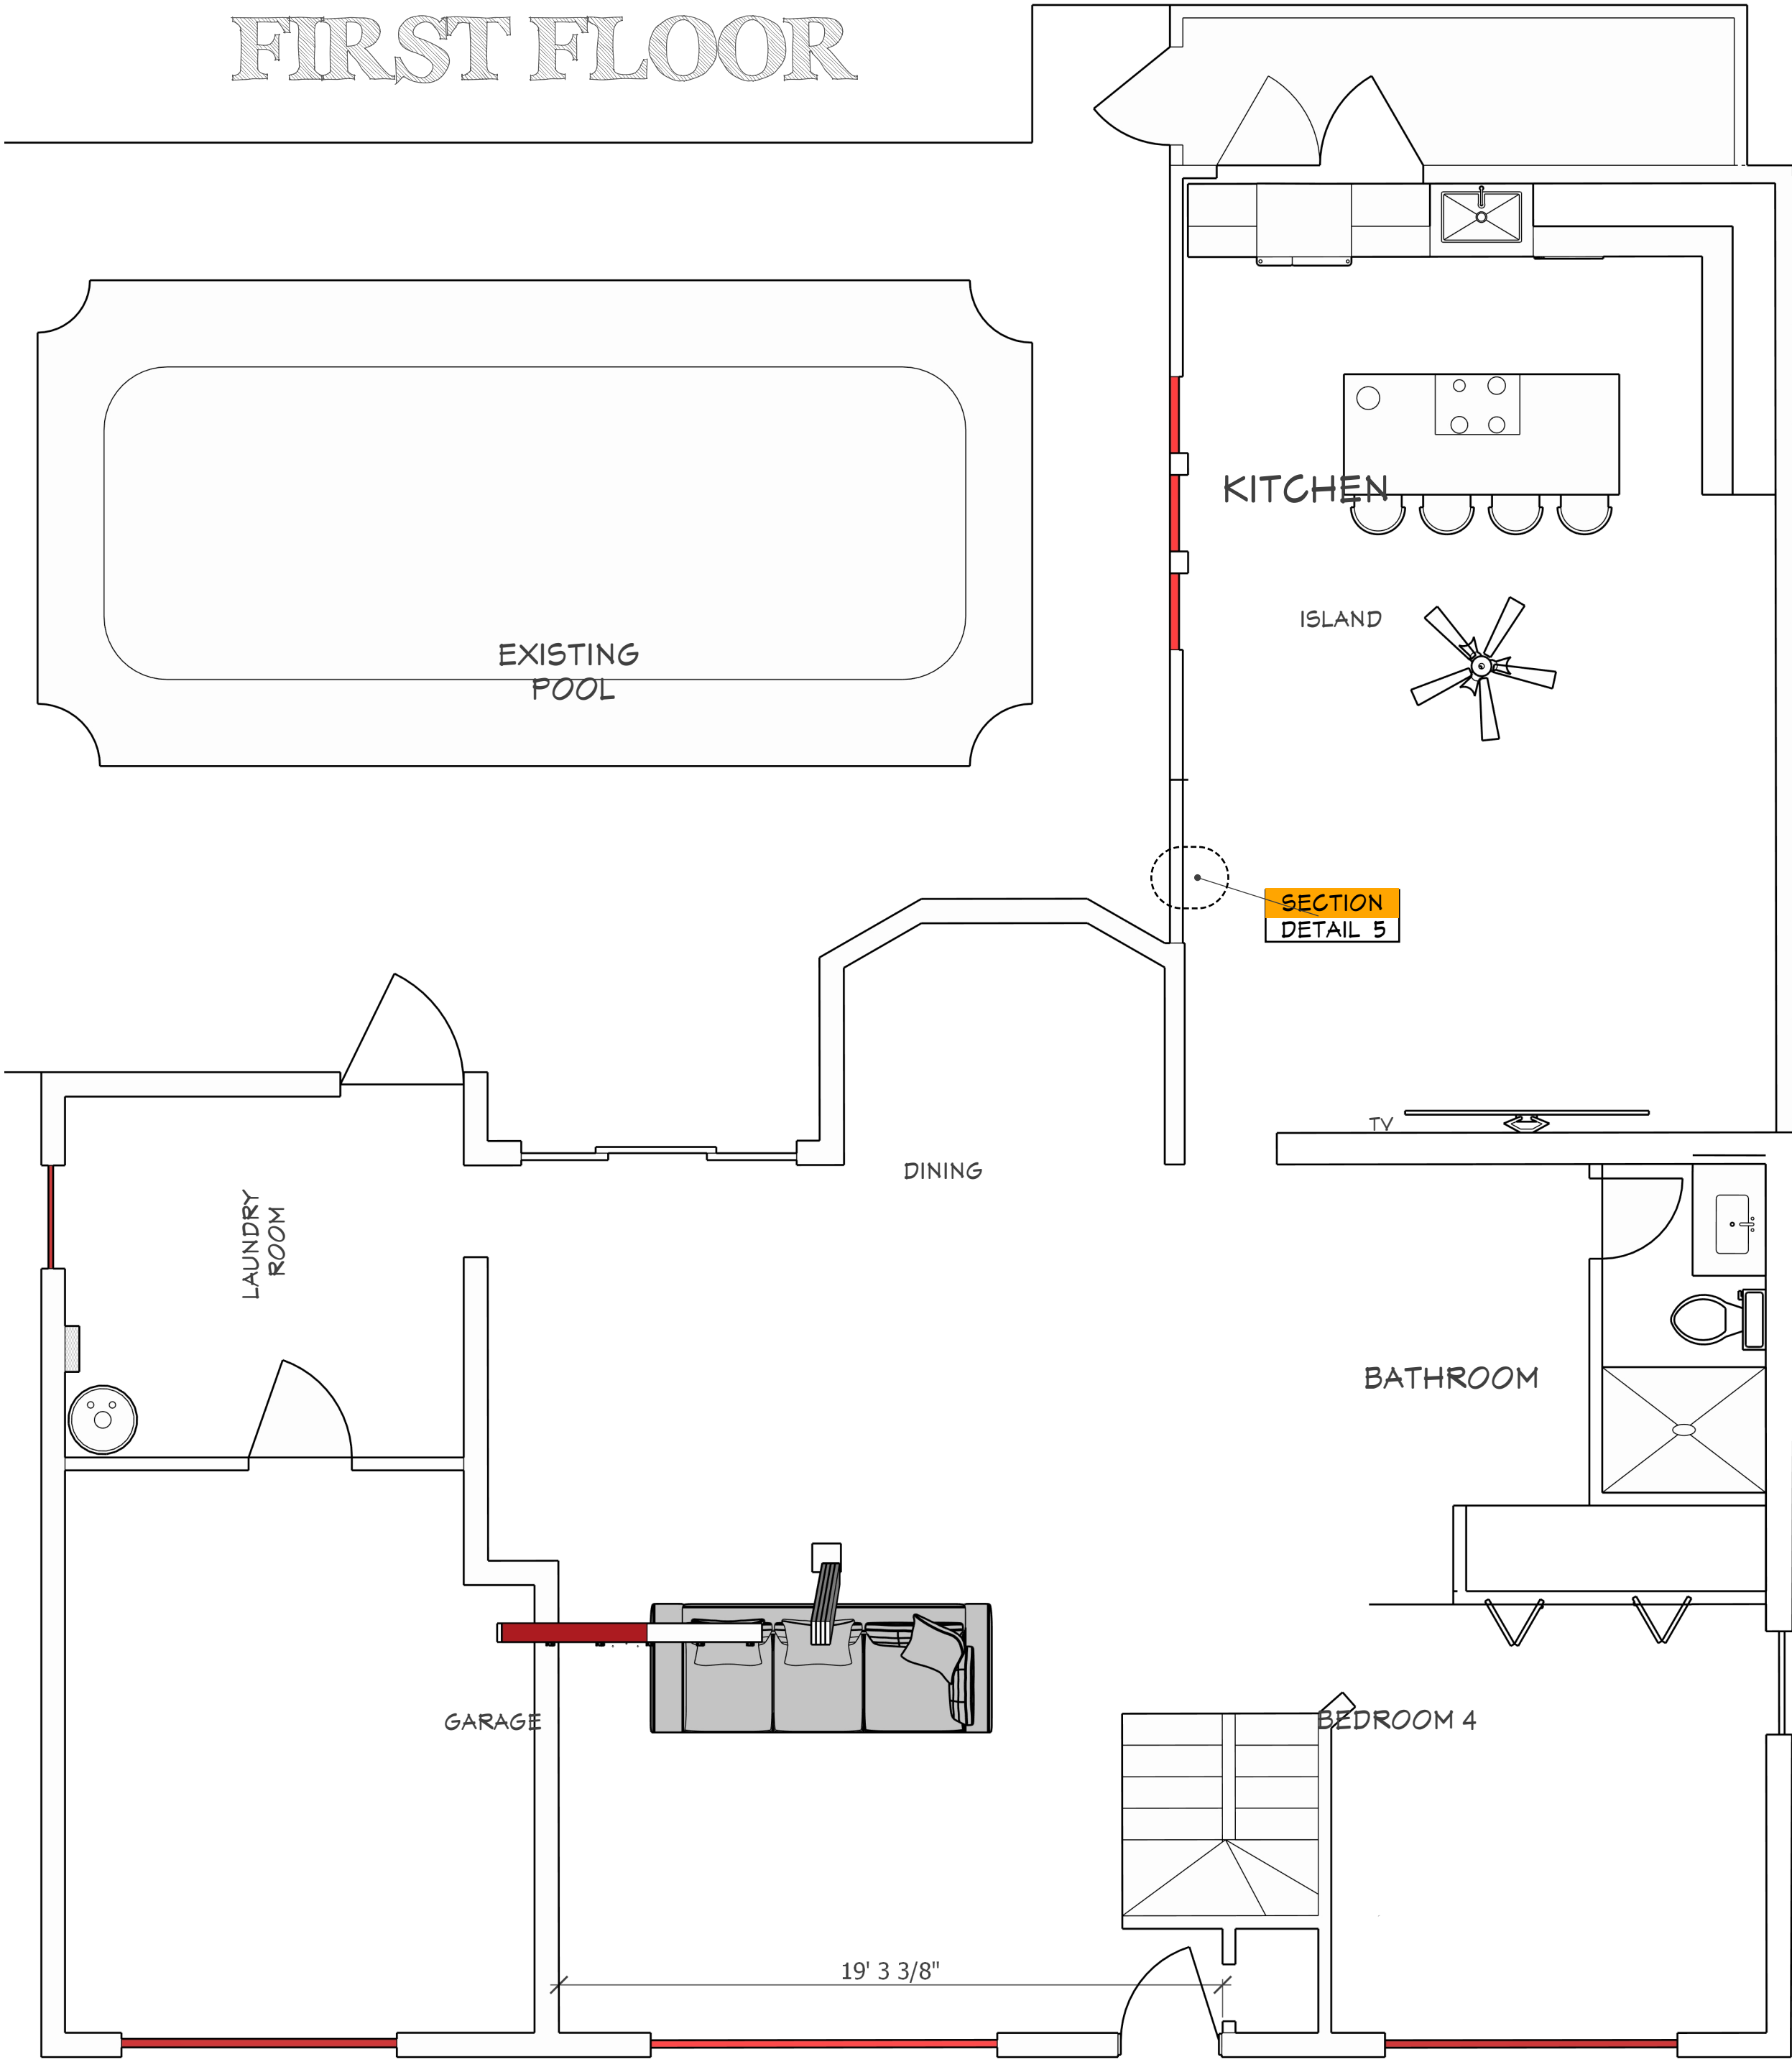

SECOND FLOOR

PROPOSED FLOOR PLAN

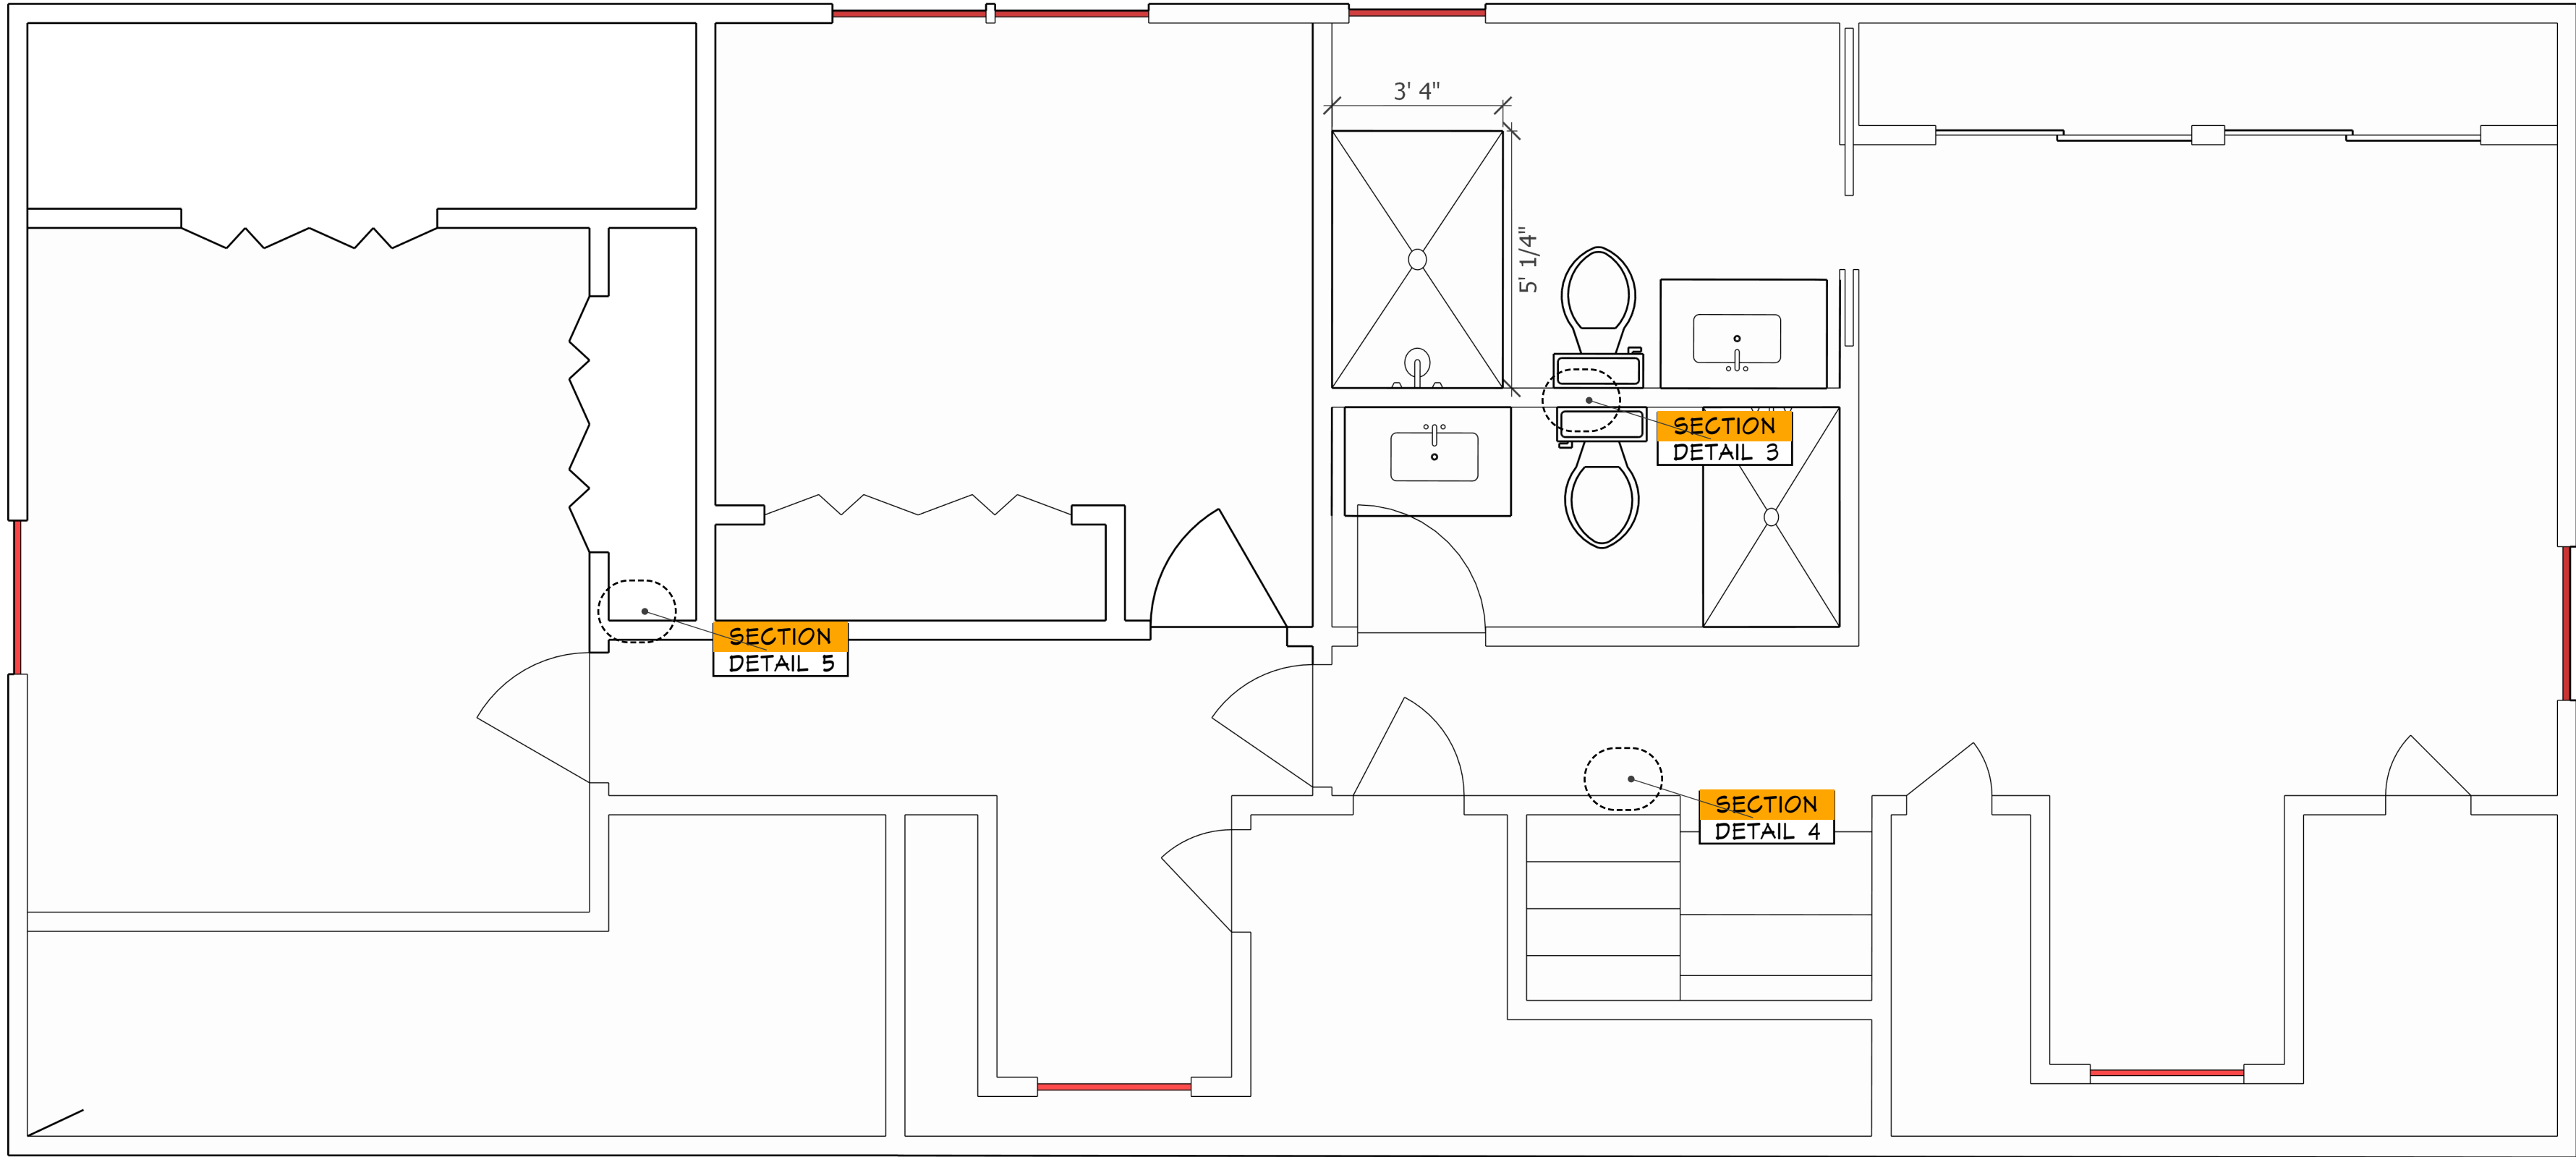

This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright .

SHEET TITLE	CUSTOMER NAME:		CUSTOMER INFORMATION			NICHOLSON ENGINEERING ASSOCIATES, INC. 7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167		REVISIONS	
	MATOSINHO/100 FOLD		Email: Foldreturns1@gmail.com Phone: (781) 420-5726					DRAWINGS REMARKS	
PROPOSED FLOOR PLAN	PROJECT ADDRESS :		PROJECT OPEN DATE :						
	14704 CARNATION AVE, TAMPA FLORIDA 33613		JAN. 05 2026						
			PROJECT REVISED BY : MICHAEL D. JOHNSON						

SIDE VIEW

SCALE: 1"=1'

B
02

This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright .

SHEET TITLE		CUSTOMER NAME: MATOSINHO/100 FOLD		CUSTOMER INFORMATION Email: Foldreturns1@gmail.com Phone: (781) 420-5726			NICHOLSON ENGINEERING ASSOCIATES, INC.			REVISIONS		
ELECTRICAL PLAN	PROJECT ADDRESS : 14704 CARNATION AVE, TAMPA FLORIDA 33613	PROJECT OPEN DATE : JAN. 05 2026	PROJECT REVISED BY : MICHAEL D. JOHNSON	DRAWINGS REMARKS								
				1	01.07.26		FULL HOUSE RENOVATION					
				2								
3				PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26						


SIDE VIEW

SCALE: 1"=1'

B
02

This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright .

SHEET TITLE		CUSTOMER NAME: MATOSINHO/100 FOLD		CUSTOMER INFORMATION Email: Foldreturns1@gmail.com Phone: (781) 420-5726			NICHOLSON ENGINEERING ASSOCIATES, INC.			REVISIONS		
PLUMBING PLAN	PROJECT ADDRESS : 14704 CARNATION AVE, TAMPA FLORIDA 33613	PROJECT OPEN DATE : JAN. 05 2026	PROJECT REVISED BY : MICHAEL D. JOHNSON	7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167			DRAWINGS REMARKS					
				1 01.07.26 FULL HOUSE RENOVATION								
				2								
								PROJECT NUMBER: 0024599		DESIGN DATE: 01.07.26		

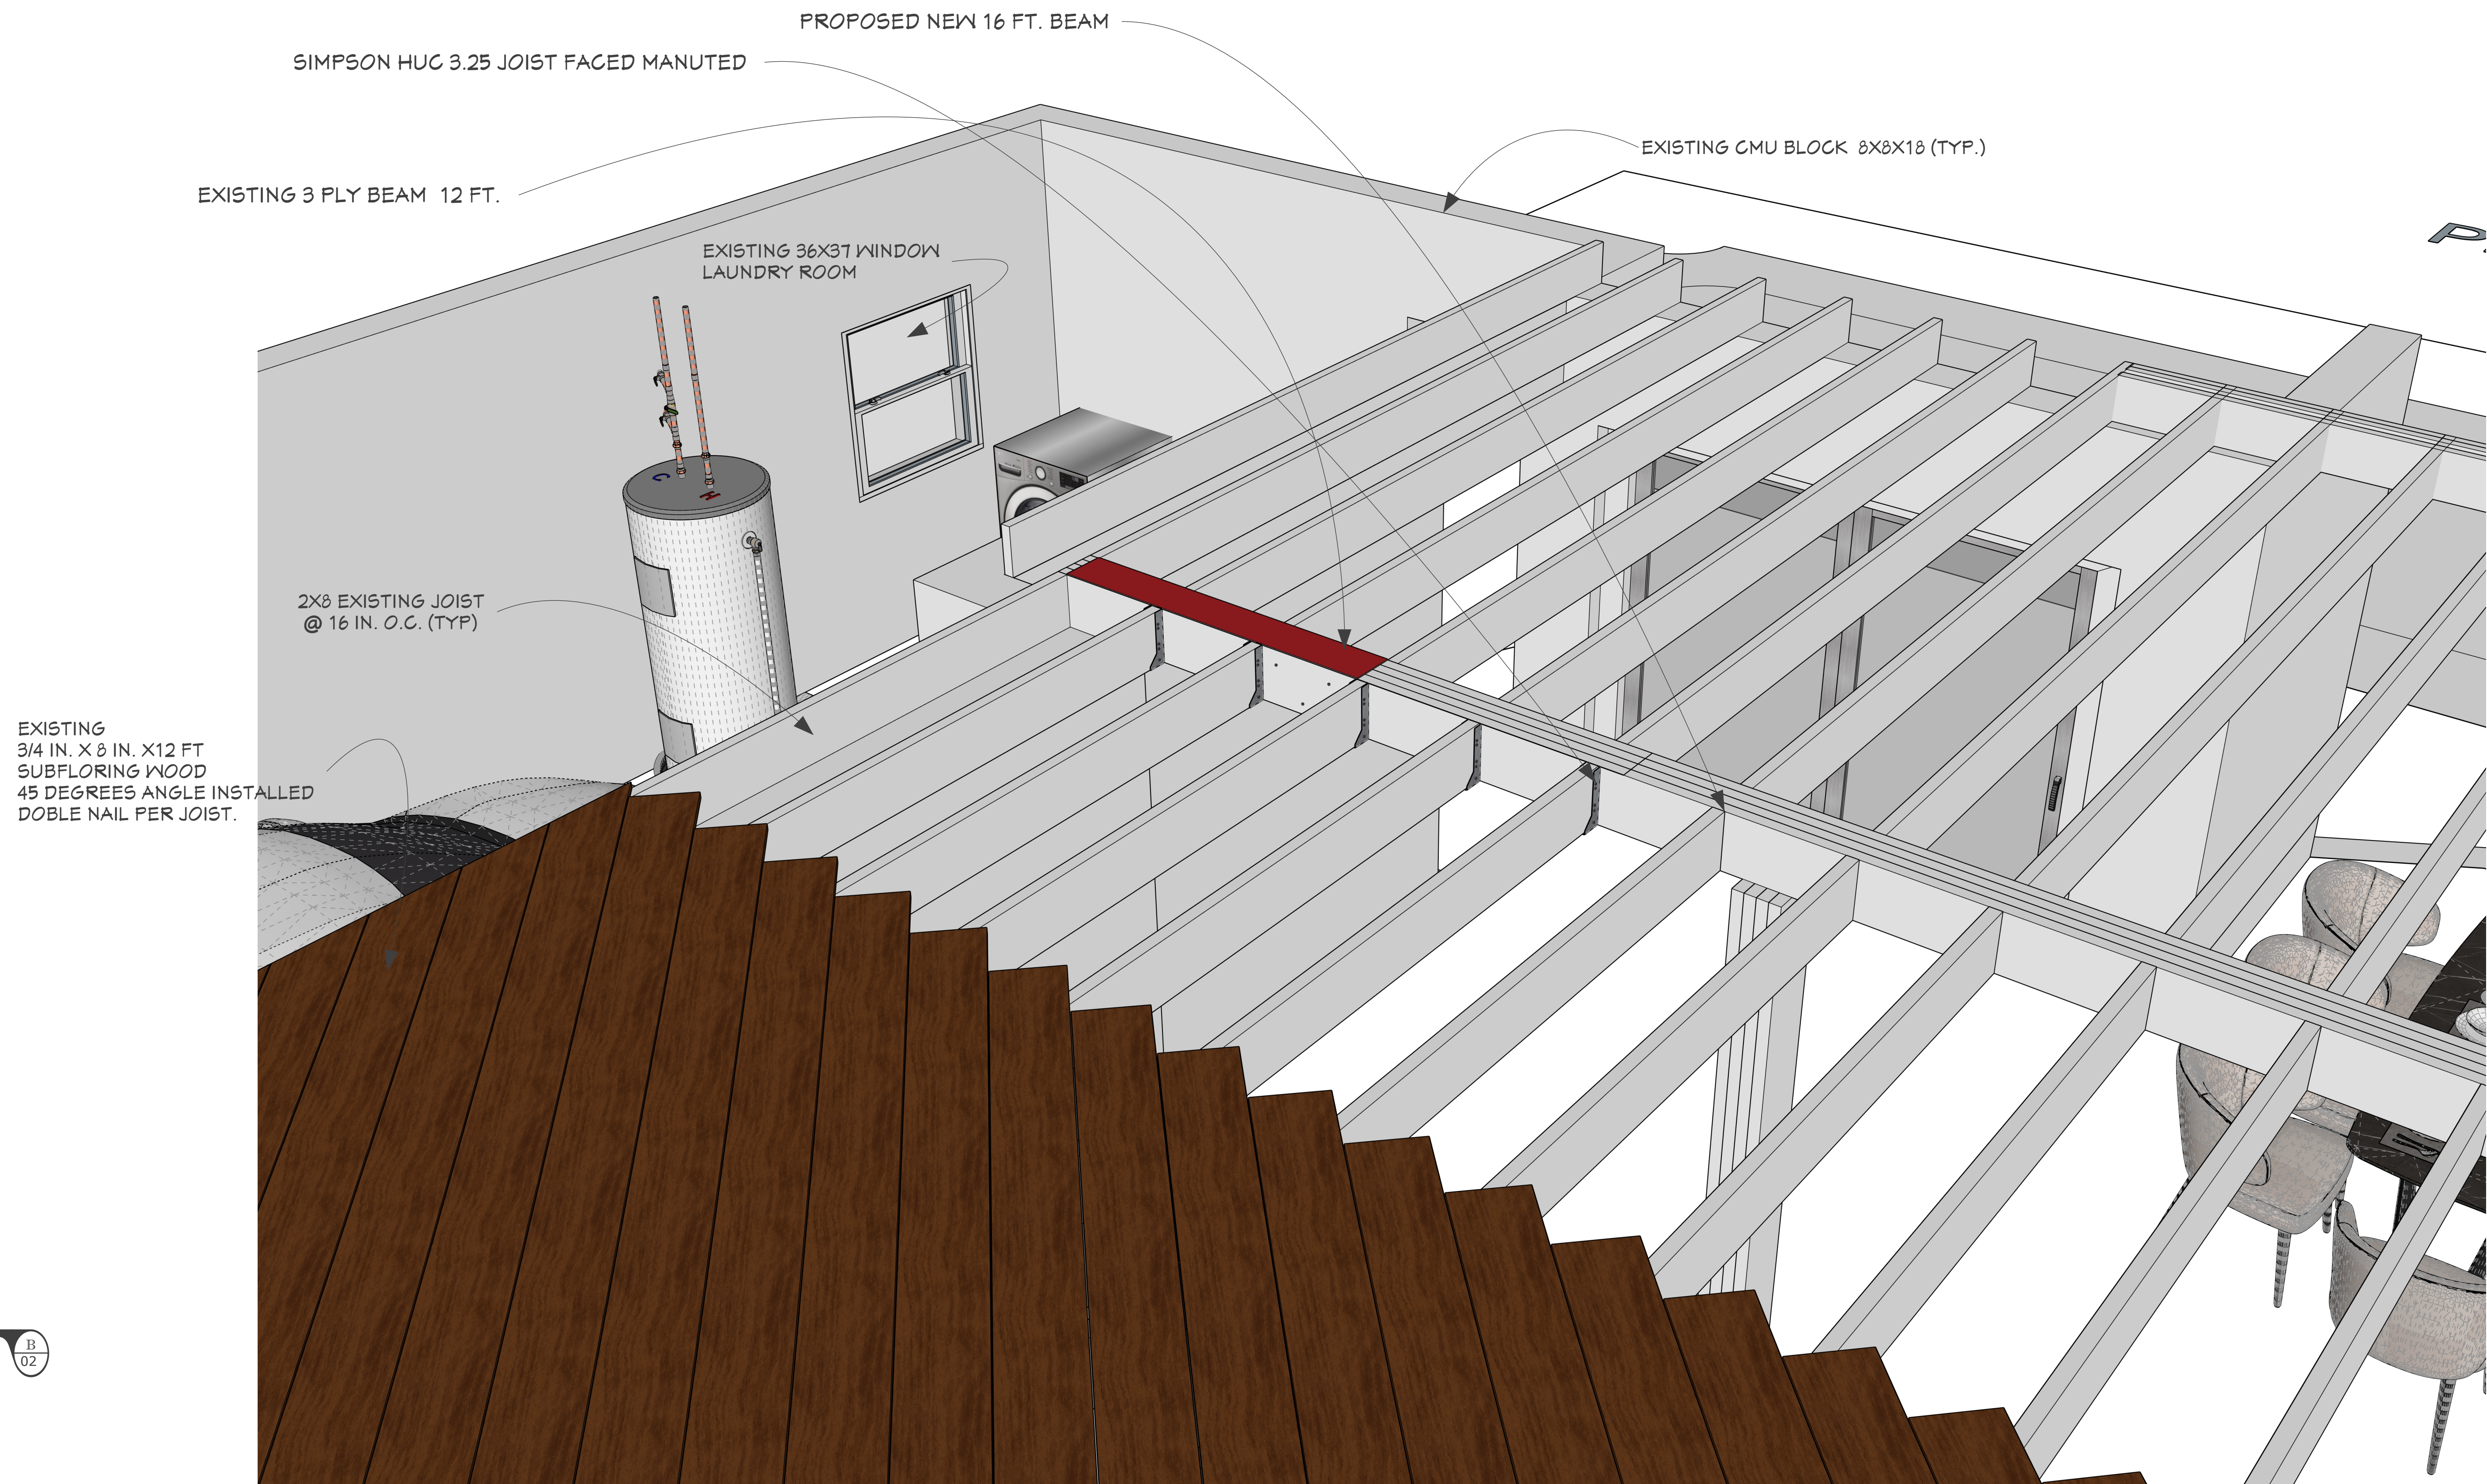


SIDE VIEW
SCALE: 1"=1'

B
02


This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright .

SHEET TITLE		CUSTOMER NAME:		CUSTOMER INFORMATION		NICHOLSON ENGINEERING ASSOCIATES, INC.		Smart Choice CONTRACTORS		REVISIONS	
ISOMETRIC VIEW		MATOSINHO/100 FOLD		Email: Foldreturns1@gmail.com Phone: (781) 420-5726		7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167		DRAWINGS REMARKS			
		PROJECT ADDRESS :		PROJECT OPEN DATE :				1 01.07.26 FULL HOUSE RENOVATION			
		14704 CARNATION AVE, TAMPA FLORIDA 33613		JAN. 05 2026				2			
				PROJECT REVISED BY :				3			
				MICHAEL D. JOHNSON						PROJECT NUMBER: 0024599	
										DESIGN DATE: 01.07.26	

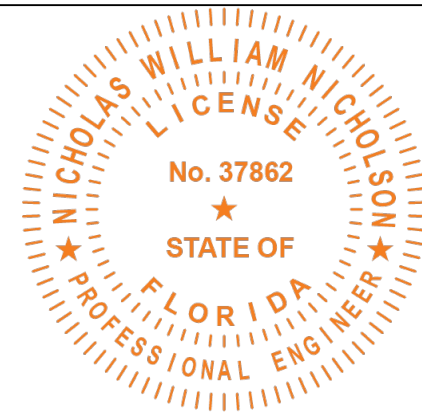

TOP PLATE HURRICANE TIE DETAIL


MUST BE INSTALL IN EVERY TRUSSES IN THE BONUS ROOM IN BOTH SIDES WALLS AND MUST HAVE A QTY. OF (8) NAILS # 8 PER TIE INSTALLED

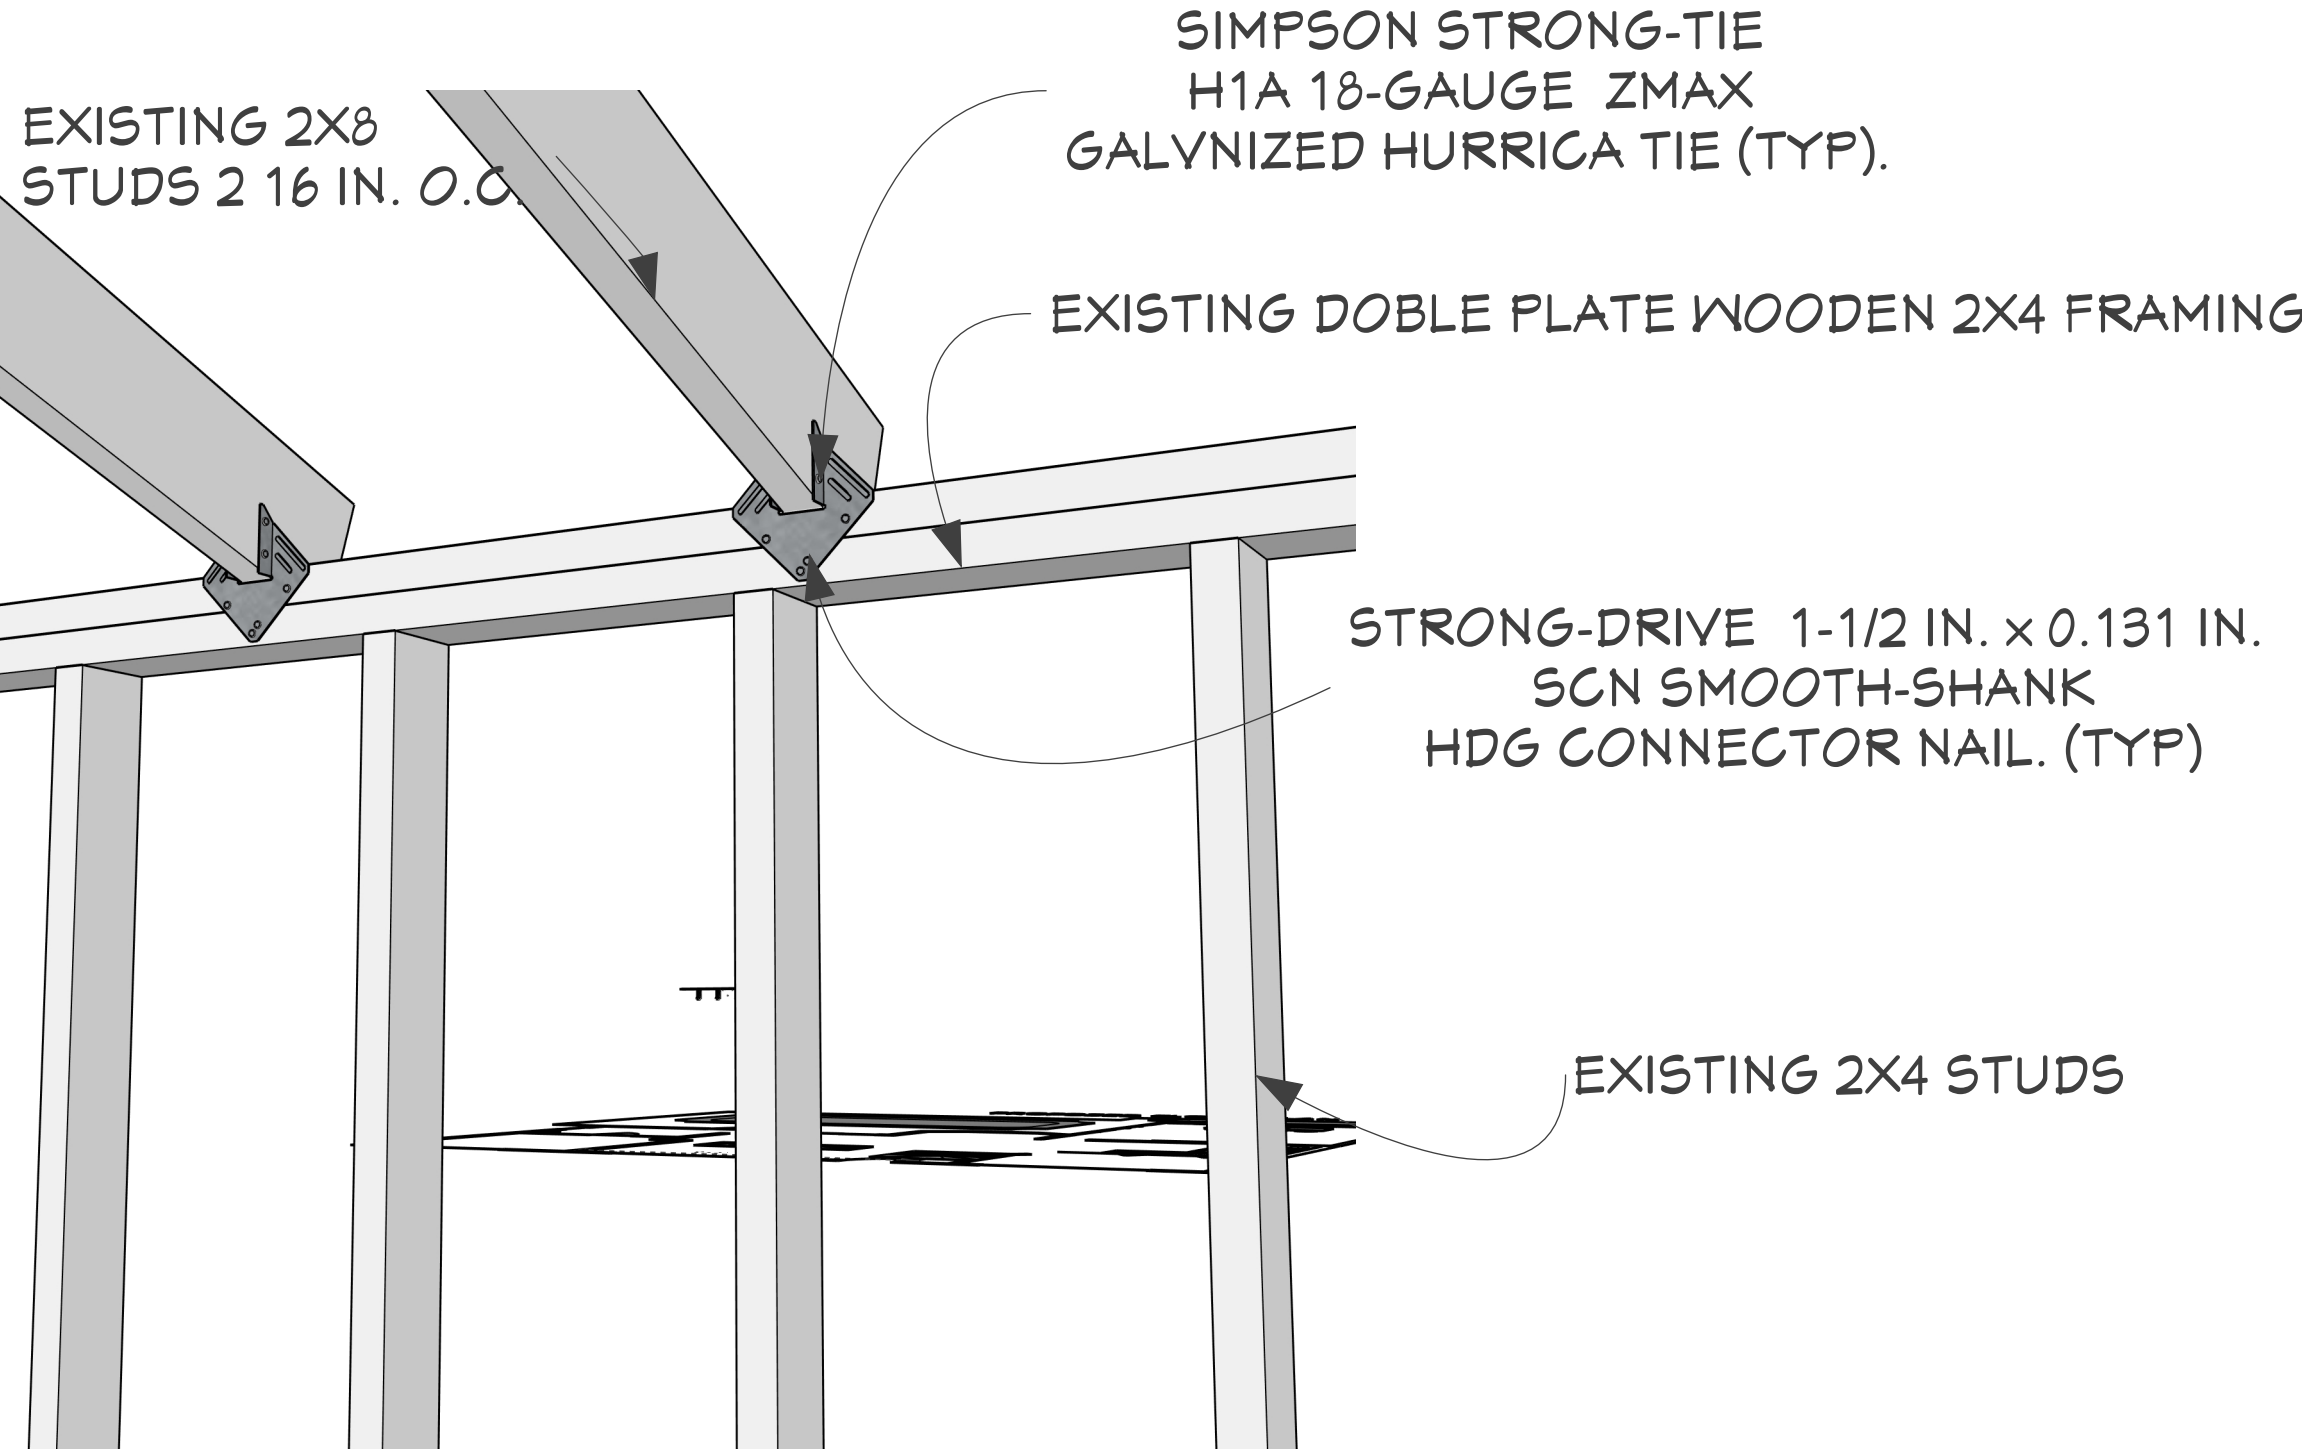

BUILT-UP BEAM


(3) 2x8 SPF #2 BUILT-UP GIRDER, MAX SPAN 10'-0", (TYP)
CONTINUOUSLY NAILED BEAM NAILING PATTERN (FIELD ASSEMBLED)
FASTENERS: 16D COMMON NAILS (0.162" DIA x 3 1/2" LONG)

- NAILING PATTERN
- (2) NAILS AT EACH END OF BEAM, EACH PLY
 - STAGGERED (ZIGZAG) NAILING PATTERN @ 4" O.C.
 - NAILS ALTERNATED TOP AND BOTTOM EDGES
 - MAINTAIN MINIMUM EDGE DISTANCES PER NDS
- NAILING PATTERN REQUIRED TO ENSURE COMPOSITE ACTION OF BUILT-UP MEMBERS.

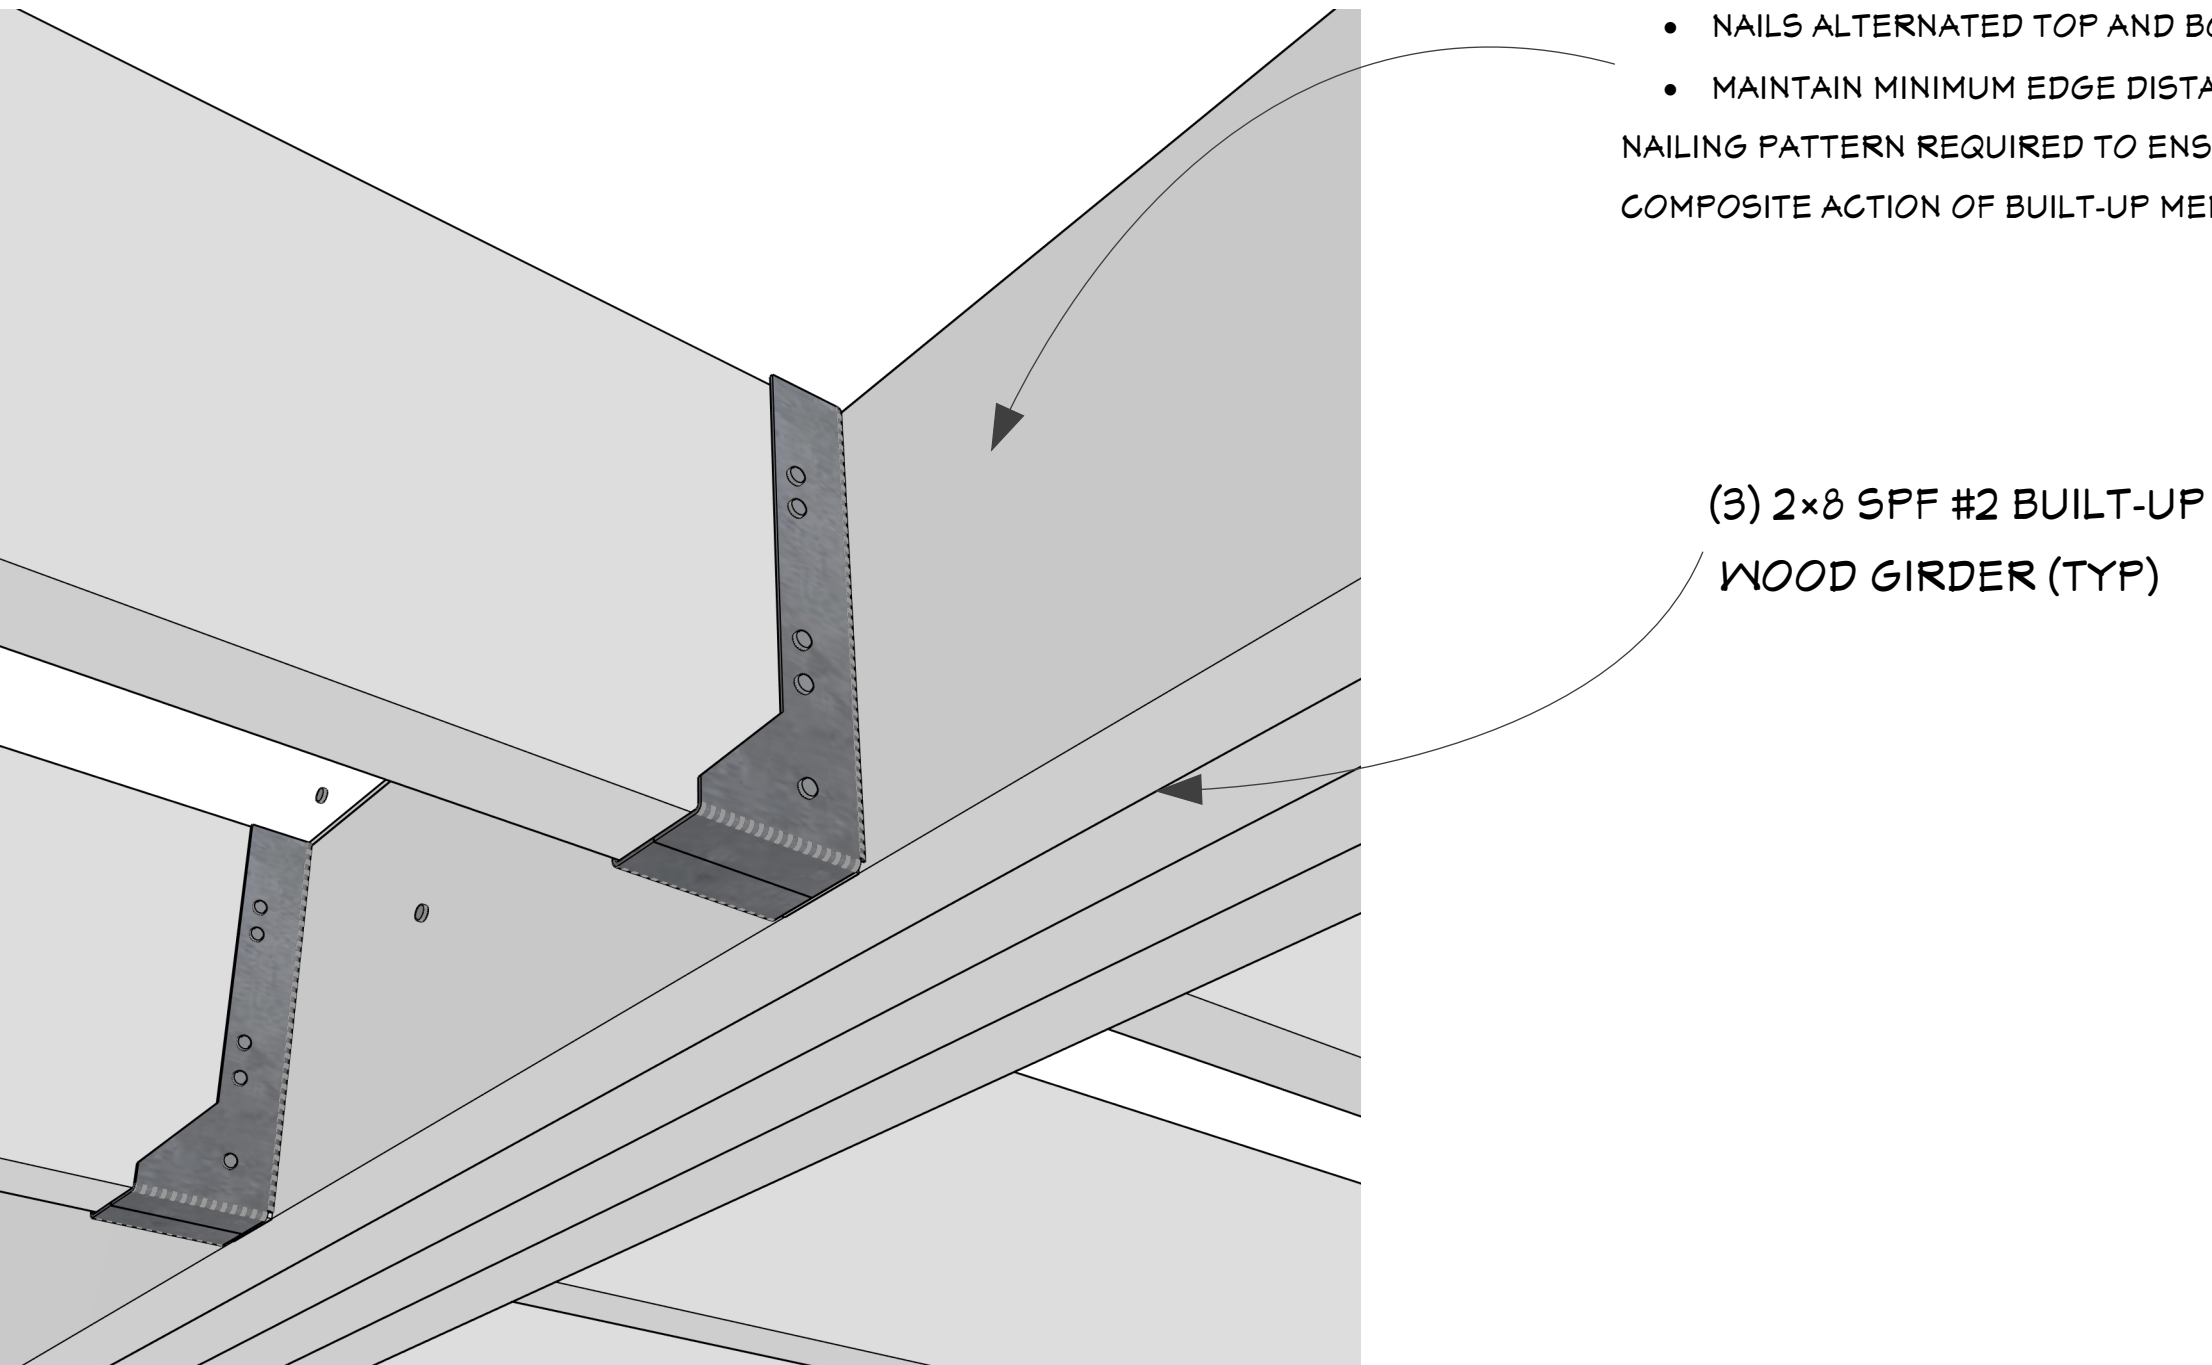

BOTTOM PLATE HURRICANE TIE DETAIL


MUST BE INSTALL IN EVERY 2X4 SPF #2 STUD @ 16 IN. O.C. (TYP) IN THE BONUS ROOM IN BOTH SIDES WALLS AND MUST HAVE A QTY. OF (10) # 8 NAILS PER TIE INSTALLED

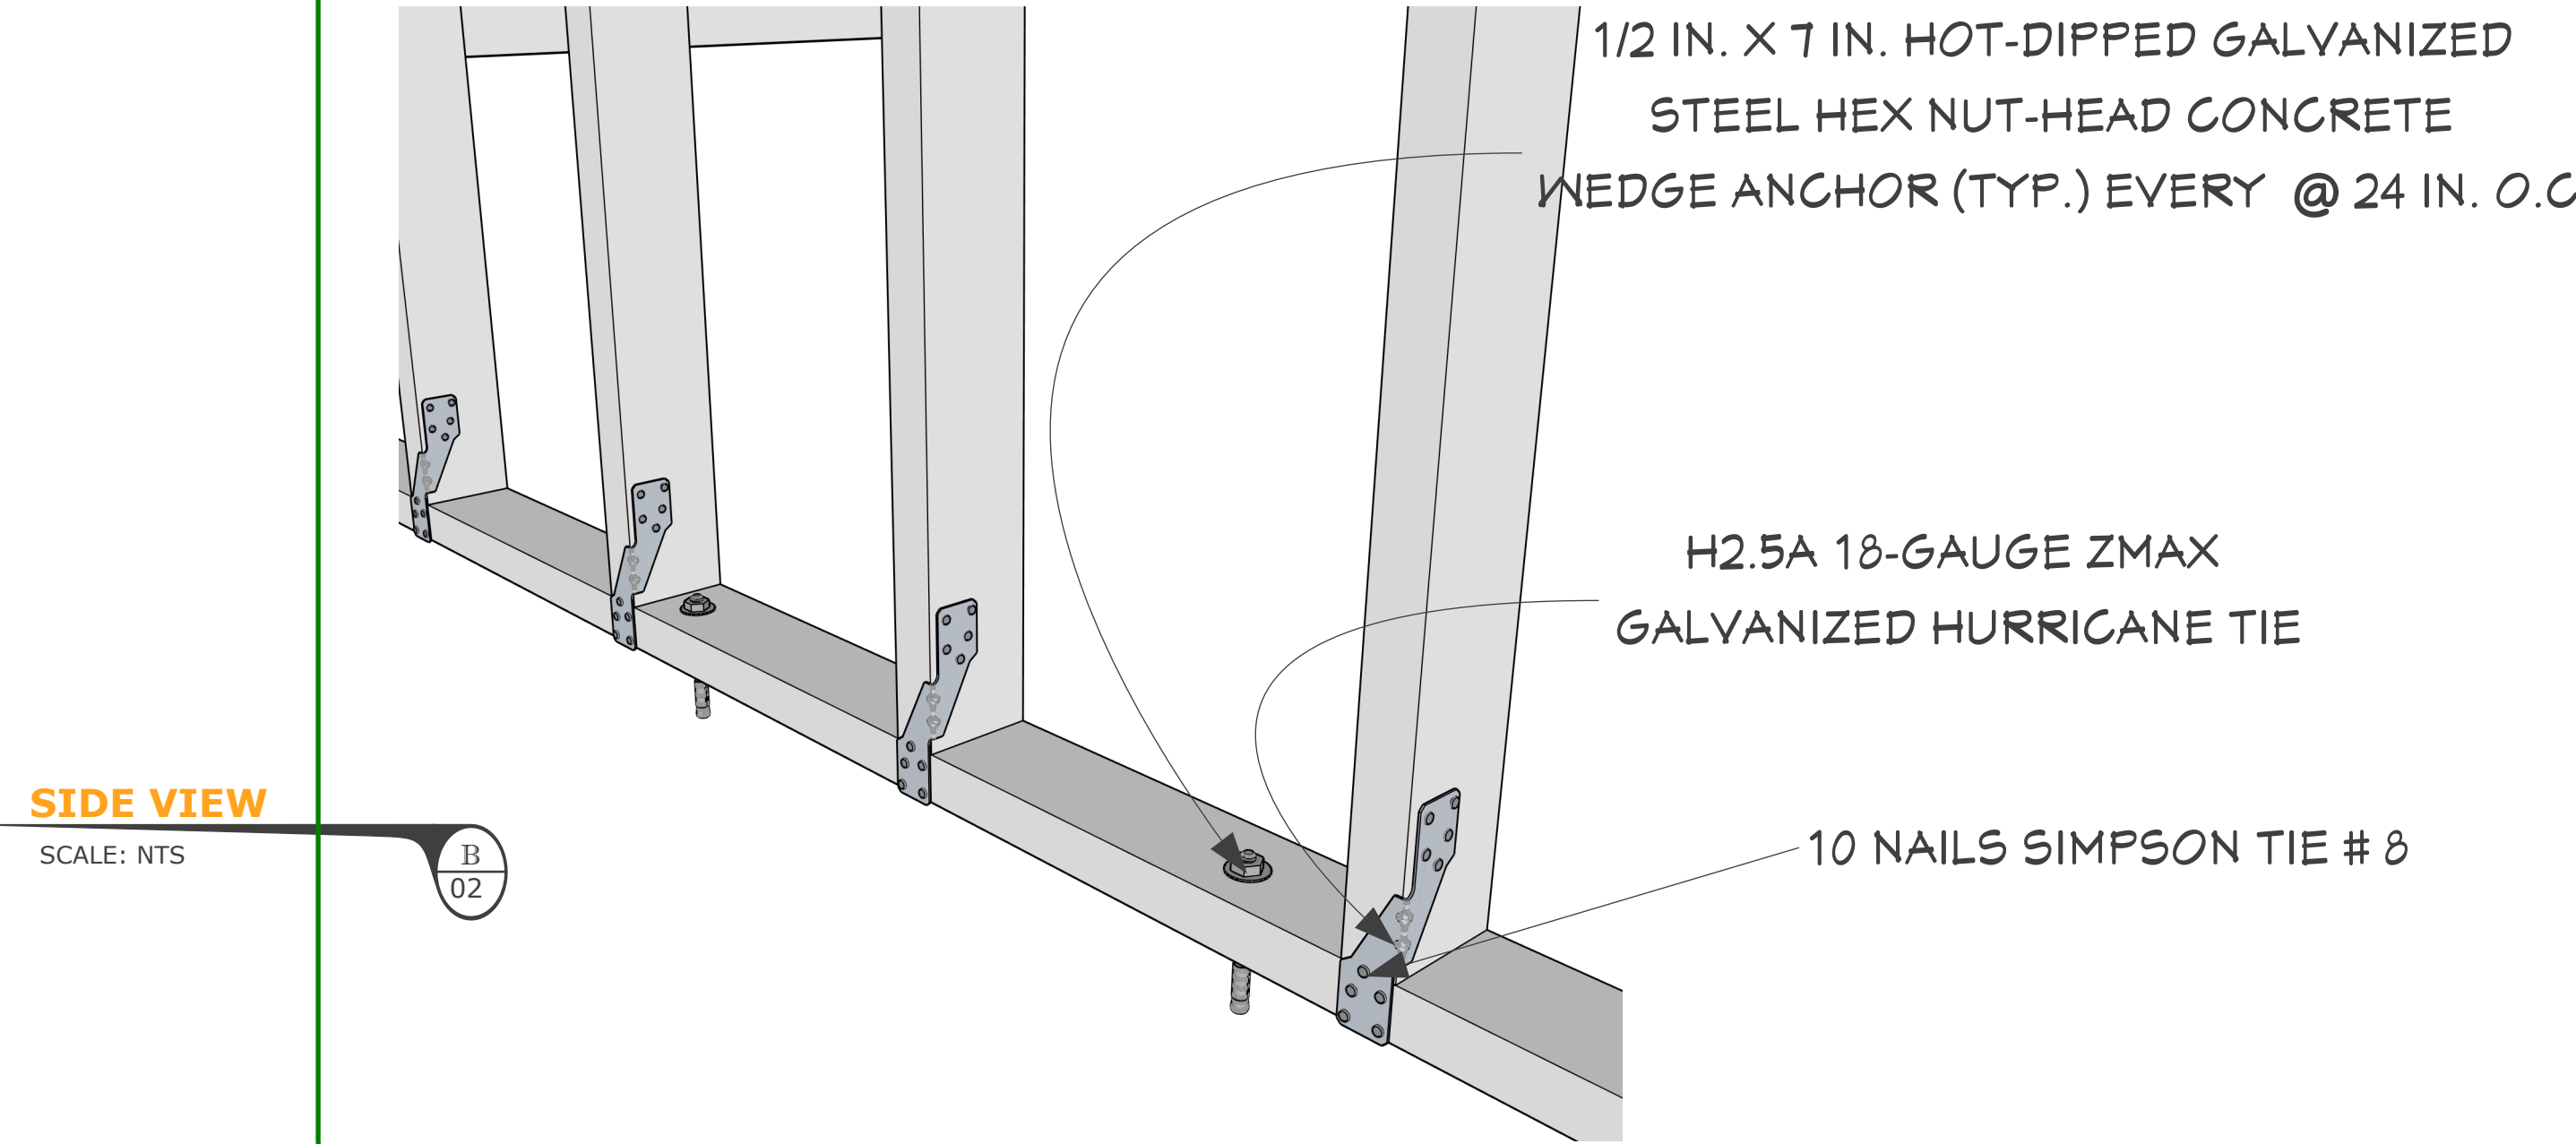

COLUMN / POST SUPPORT
(FOR 2x8 BEAMS)

(4) 2x8 SPF #2 BUILT-UP WOOD COLUMN, PER STRUCTURAL CALCS


FIELD MODIFICATIONS:
No substitutions, additional plies, plywood laminations, or fastener changes shall be made without written approval from the Engineer of Record.

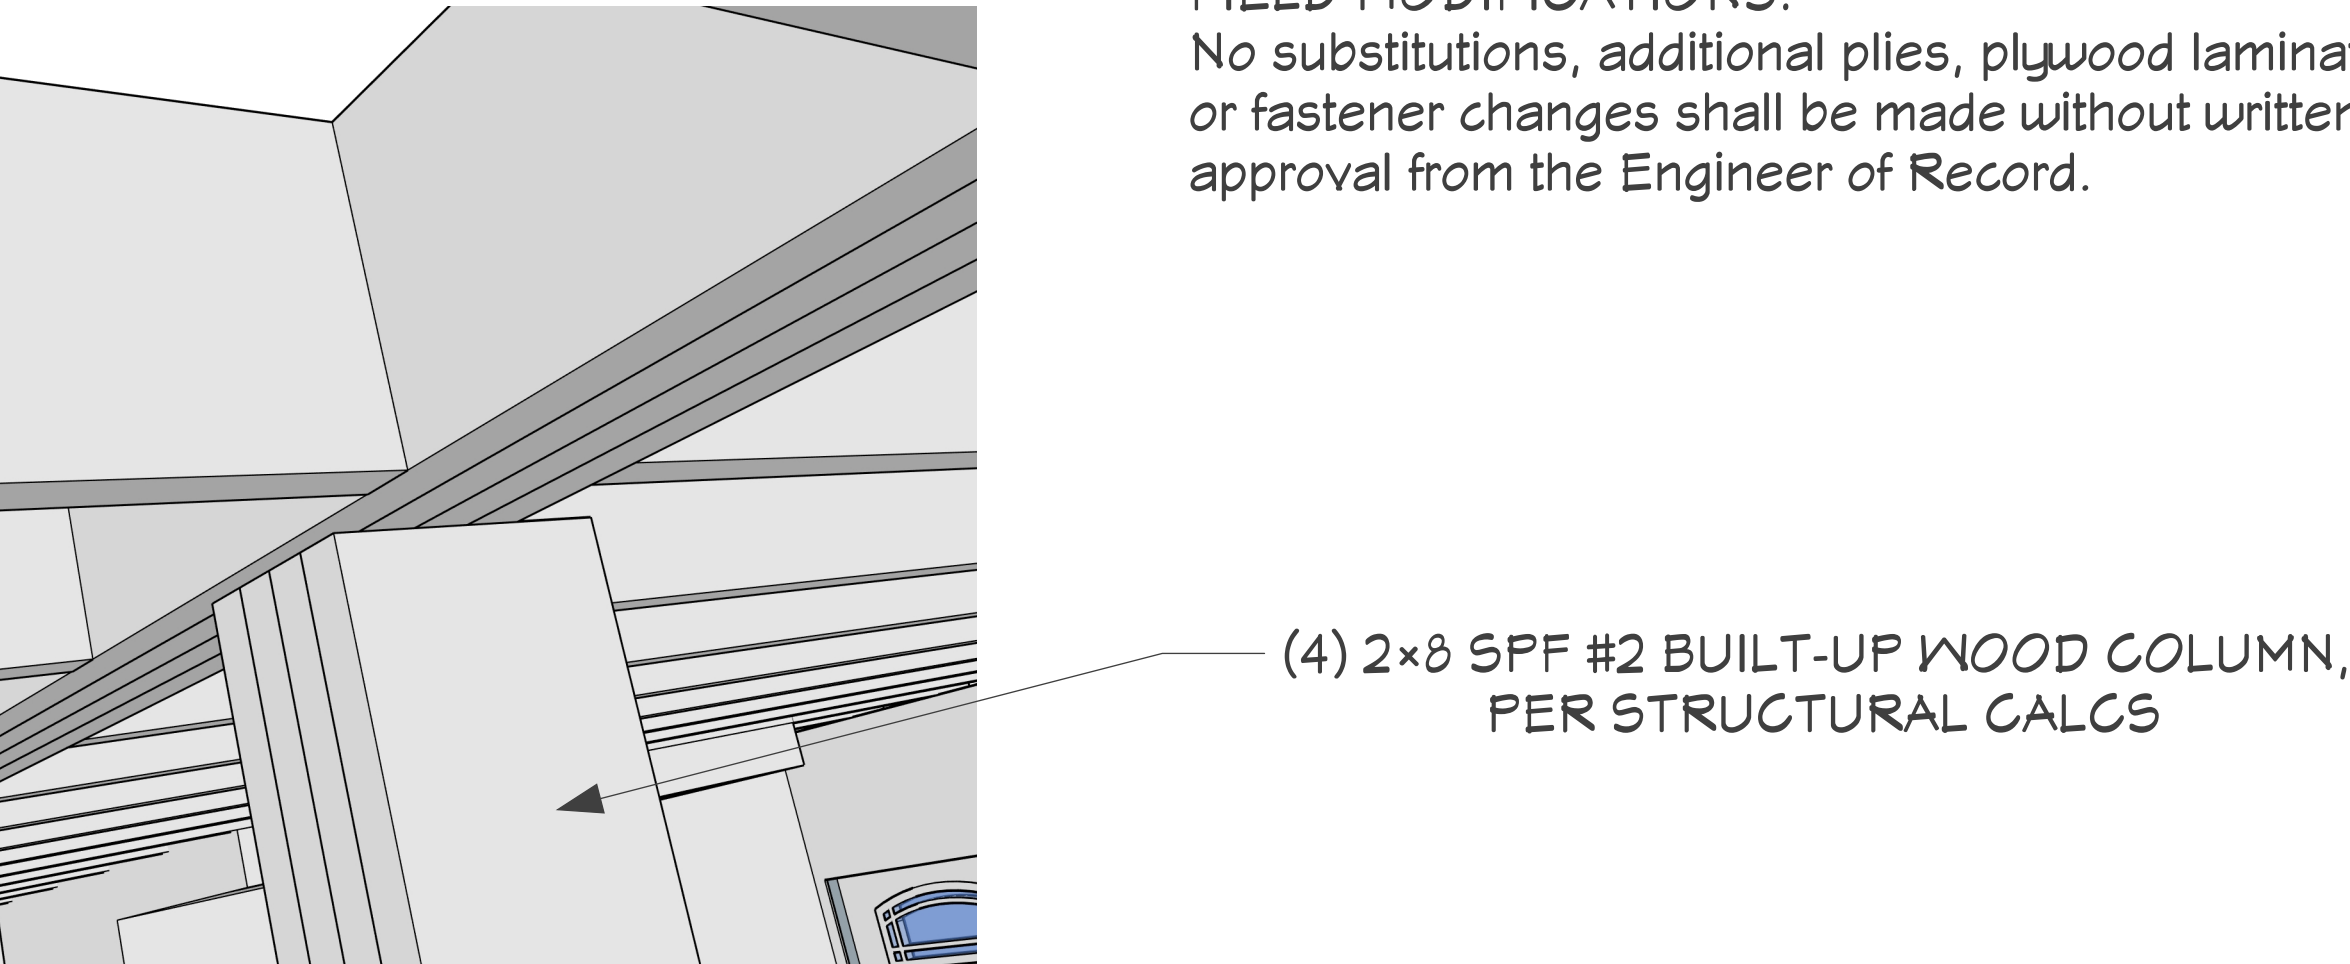


This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright .

SHEET TITLE <
--

TOP PLATE HURRICANE TIE DETAIL

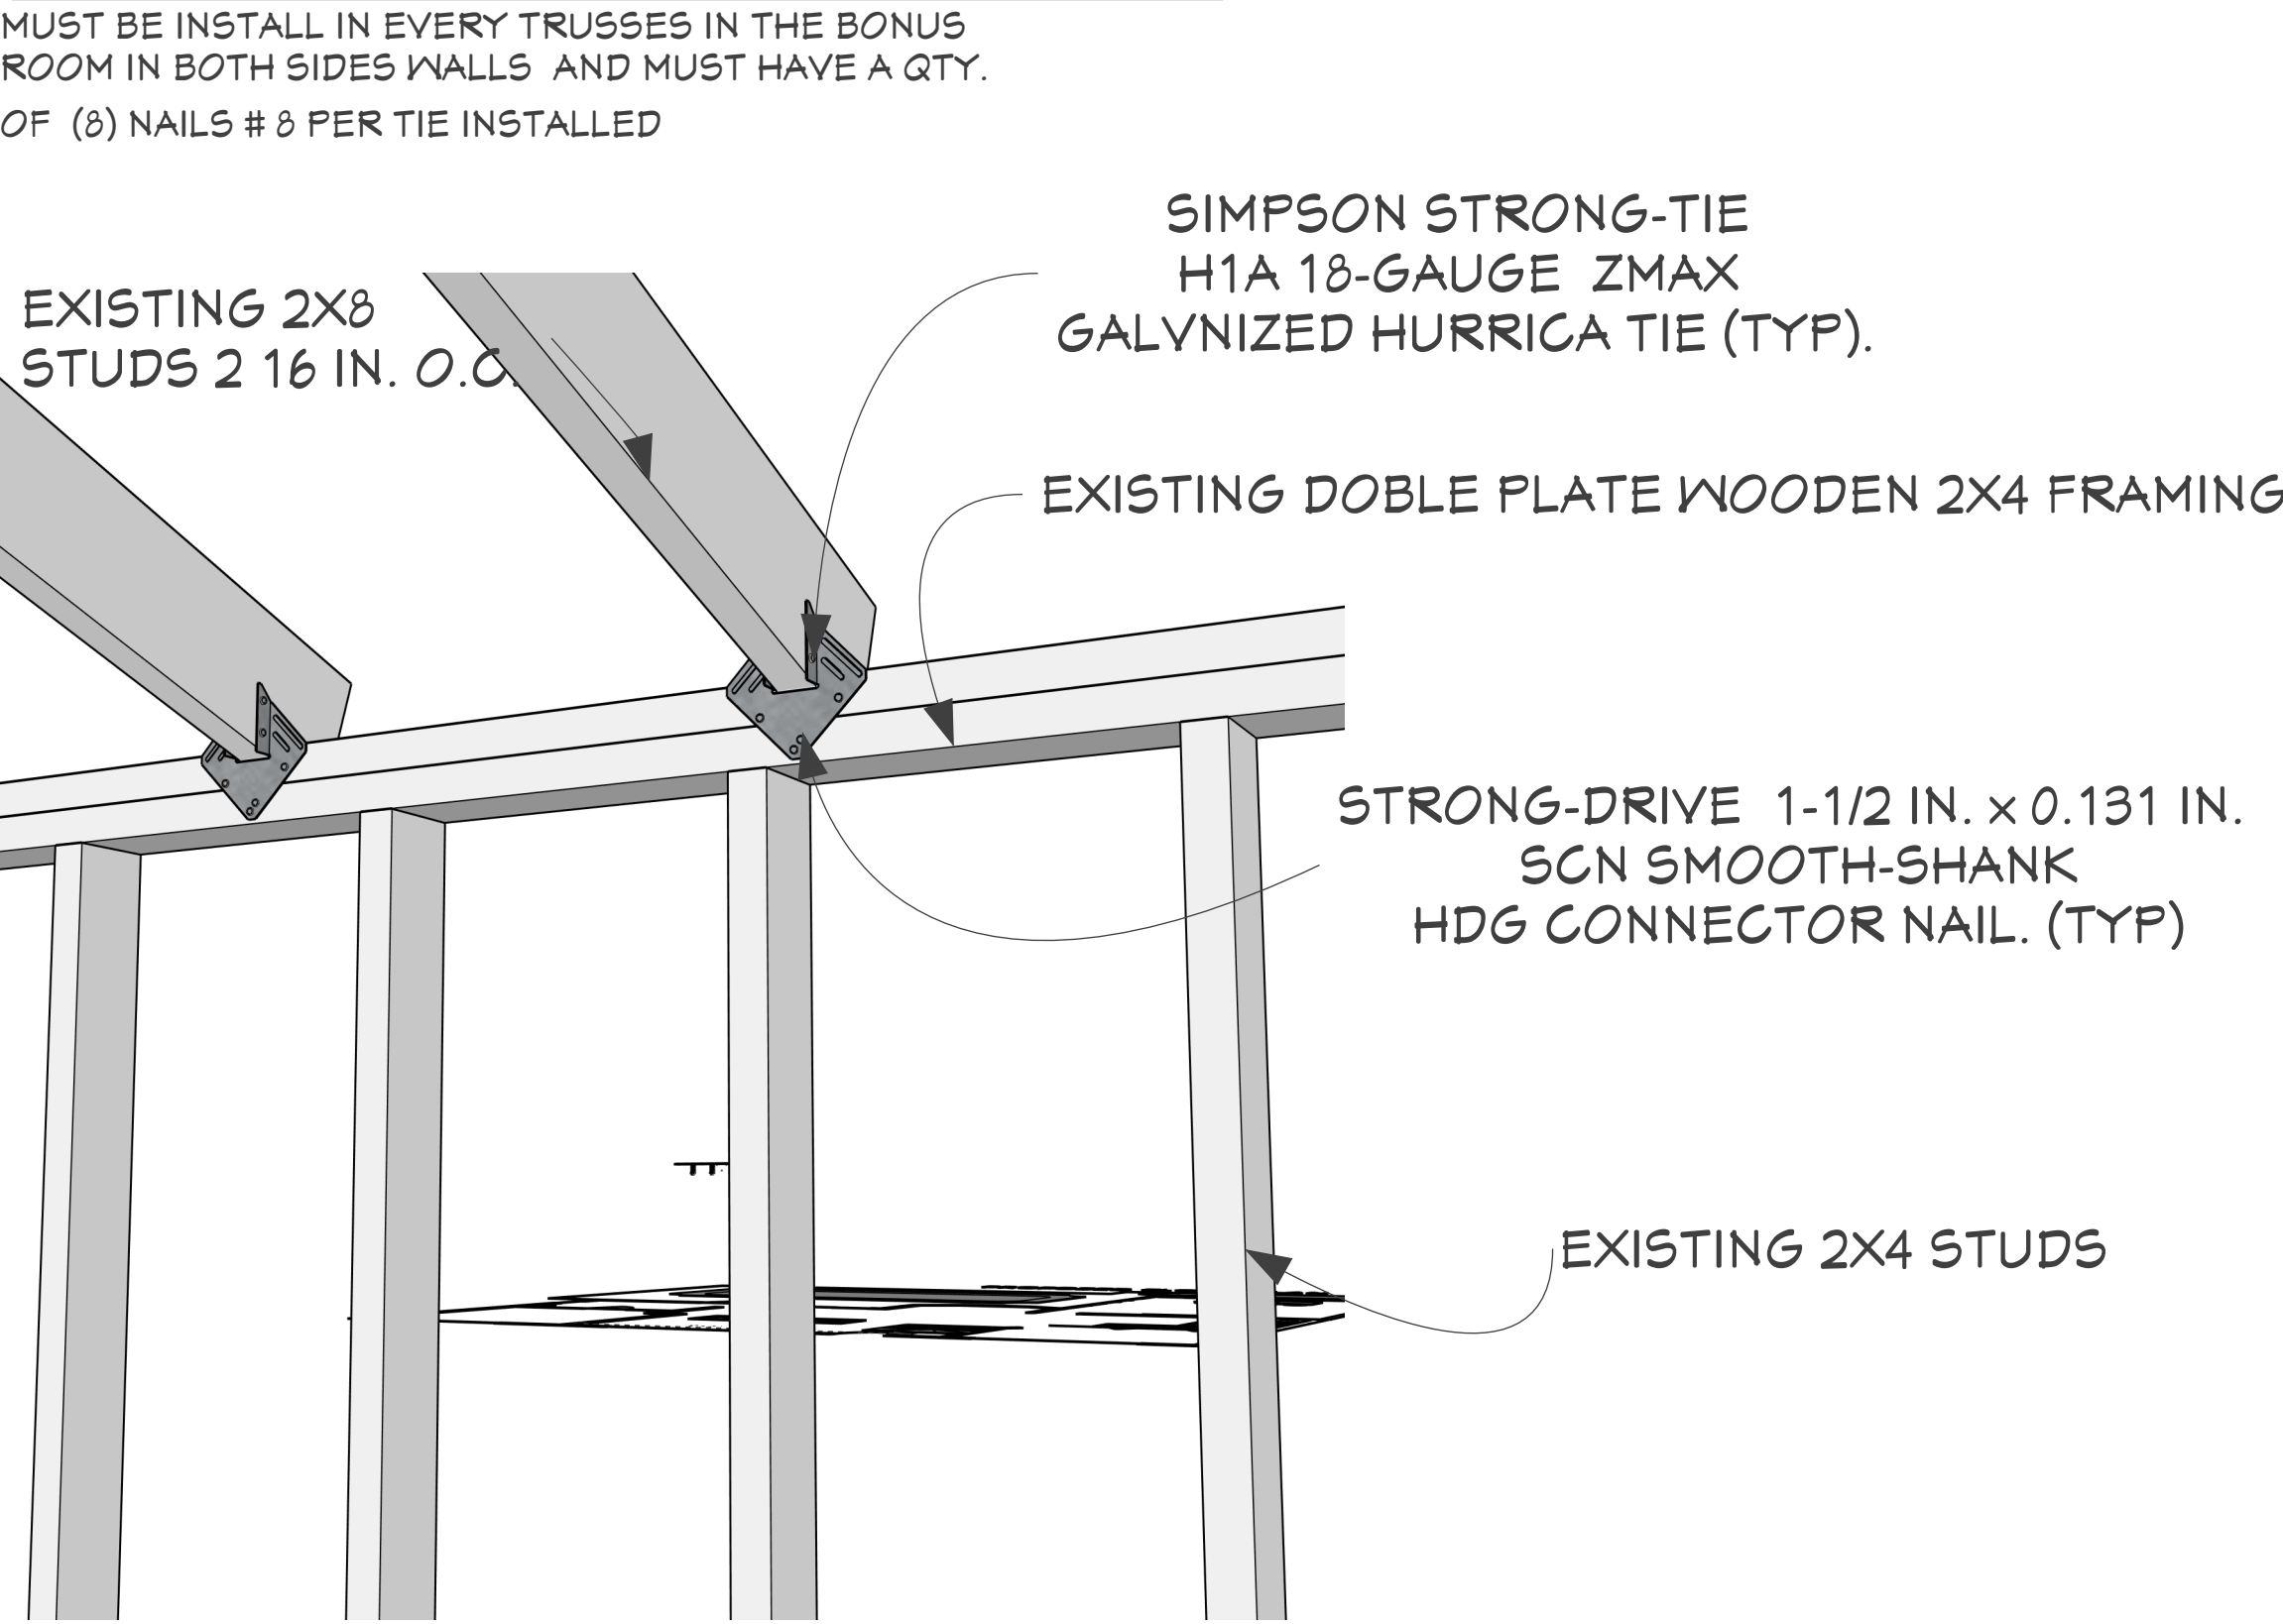


NOTE: HEADERS OVER 6'-0" PROVIDE SOLID BLOCKING AT MAXIMUM 4'-0" INTERVALS; INSULATION SHALL NOT BE CONTINUOUS THROUGH HEADER.

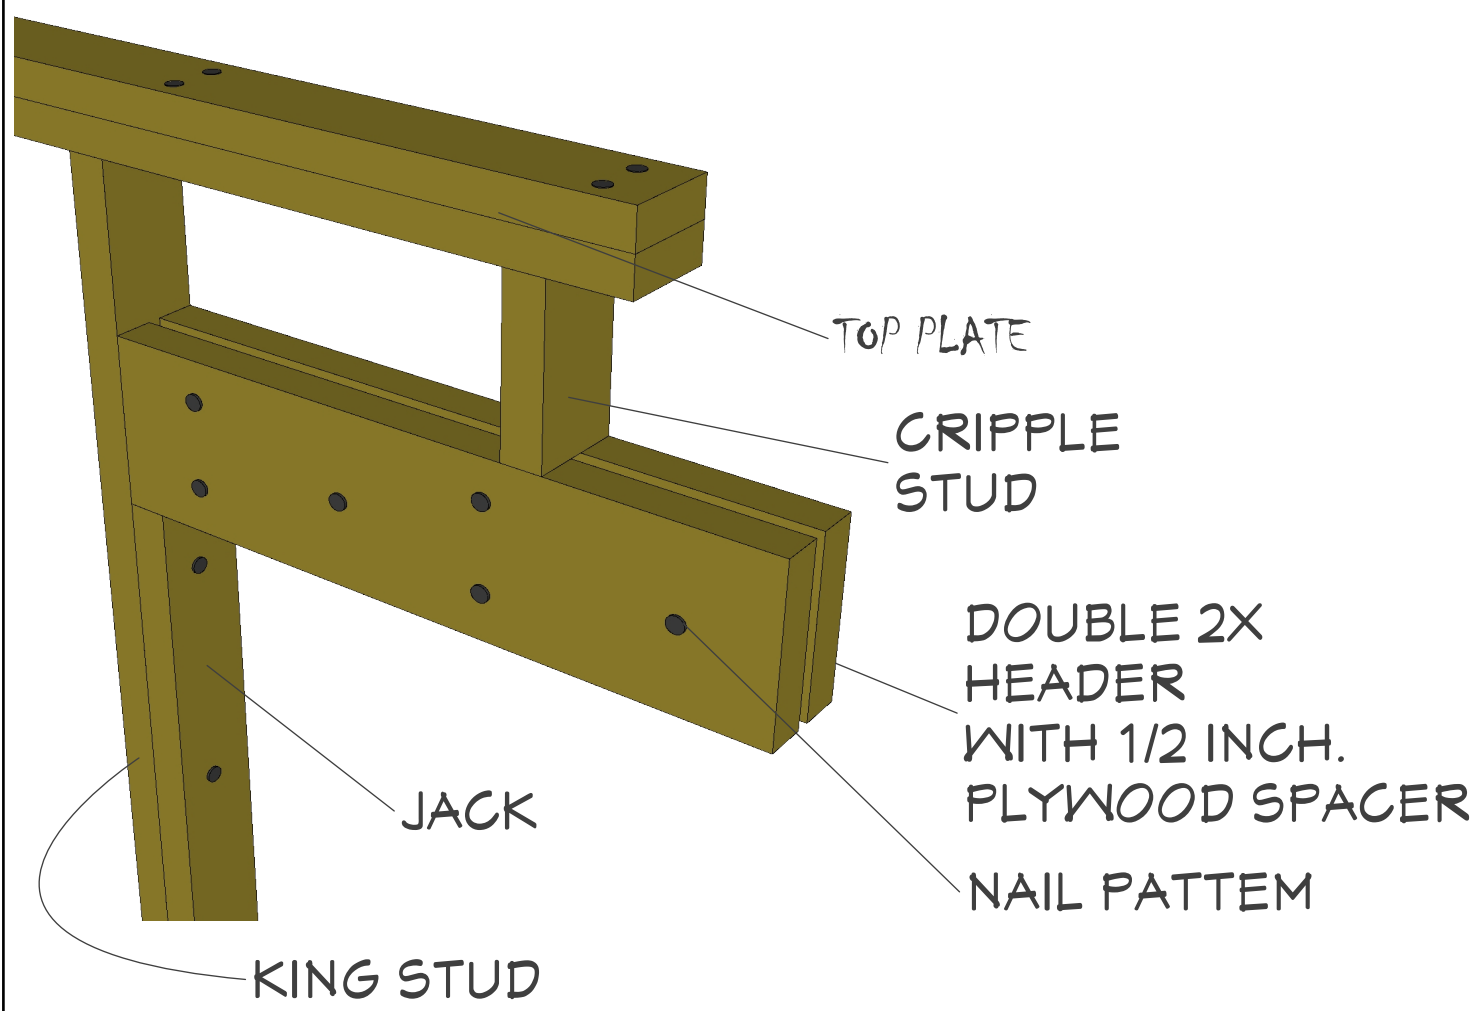


DOOR HEADER DETAIL S-4

BOTTOM PLATE HURRICANE TIE DETAIL

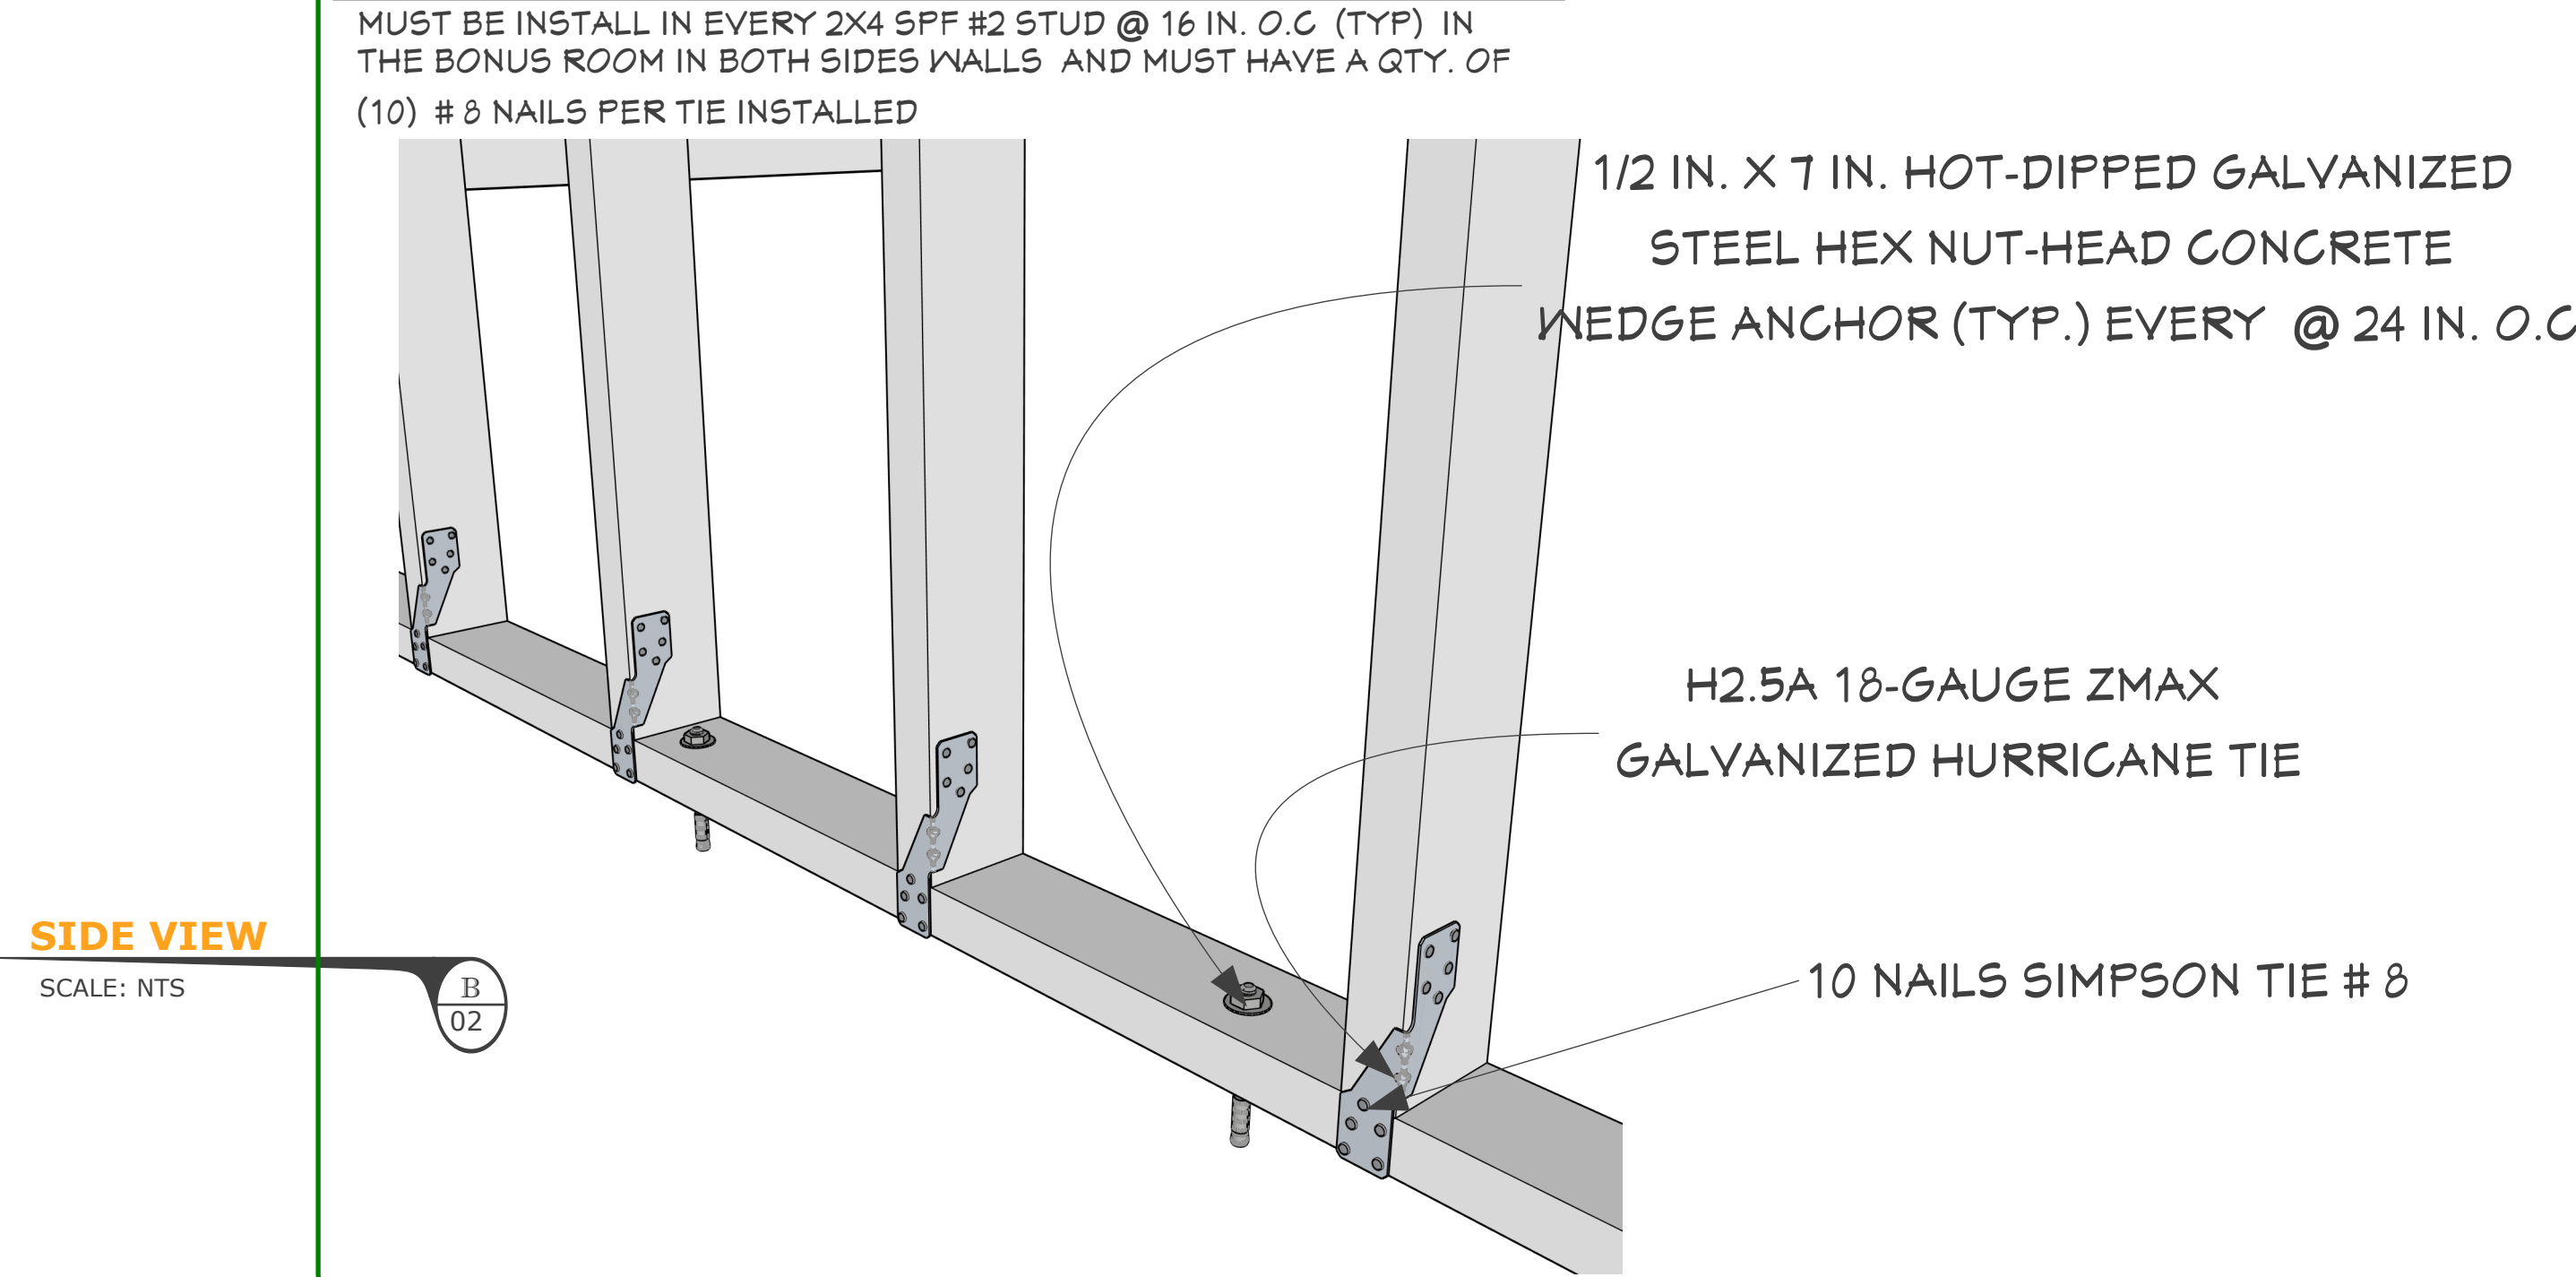

COLUMN / POST SUPPORT (FOR 2x8 BEAMS)

(4) 2x8 SPF #2 BUILT-UP WOOD COLUMN, PER STRUCTURAL CALCS

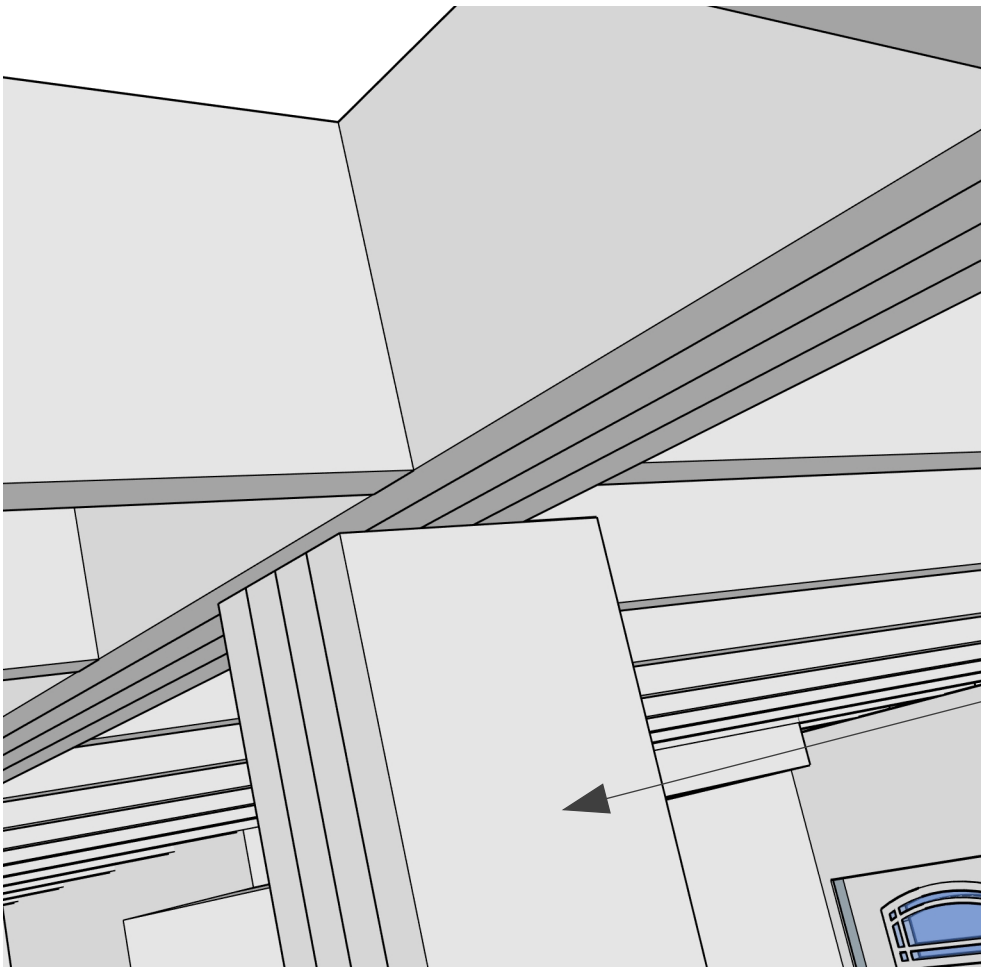

FIELD MODIFICATIONS:
No substitutions, additional plies, plywood laminations, or fastener changes shall be made without written approval from the Engineer of Record.

(4) 2x8 SPF #2 BUILT-UP WOOD COLUMN, PER STRUCTURAL CALCS

This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright .

SHEET TITLE

GENERAL CONSTRUCTION NOTES:

- 1.- BEFORE STARTING THE WORK ON THE PROJECT, THE CONTRACTOR WILL HAVE TO VERIFY THE EXISTING CONDITIONS & DIMENSIONS.
2. ANY DISCREPANCIES SHALL BE REPORTED TO THE ENGINEER.
3. THE CONTRACTOR NEEDS TO COMPLY WITH ALL CONSTRUCTION CODES AND REGULATIONS ESTABLISHEDBY FLORIDA STATE.
- THE CONTRACTOR NEEDS TO APPLY A GROUND TERMITE TREATMENT ACCORDING TO FLORIDA BUILDING CODE.
5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING TO ORIGINAL CONDITIONS, ANY DAMAGES TO BUILDING SURFACES, EQUIPMENT, ETC. CAUSED DURING THE CONSTRUCTION.
6. THE CONTRACTOR SHALL KEEP ALL AREAS WHERE WORK IS BEING PERFORMED FREE FROM DEBRIS AT ALL TIMES. AREA SHALL BE LEFT BROOM CLEAN AT THE END OF EACH WORKING DAY.
7. ALL LUMBER (INTERIOR) SHALL BE COVERED WITH GYPSUM BOARD, 1/2" THICKNESS.
8. THE CONTRACTOR NEEDS TO COORDINATE WTH THE ELECTRICIAN FOR THE ELECTRICAL WORKS.
9. THE CONTRACTOR NEEDS TO COORDINATE WTH THE PLUMBER FOR THE PLUMBING WORKS.
- 10.THE CONTRACTOR NEEDS TO COORDINATE MTH HIS CONSULTANTS FOR THE A/C SYSTEM, ENERGY CALCULATION, ETC.
11. THE CONTRACTOR NEEDS TO COORDINATE WITH THE OWNER THE FINISHED FLOOR PRODUCT OF HOUSE
12. THE CONTRACTOR NEEDS TO COORDINATE WTH THE OWNER FOR THE CABINET DIMENSIONS, LAYOUT, OR OTHER INFORMATION. THE CONTRACTOR HAS TO RELOCATE THE HOT & COLD WATER PIPE, THE DISCHARGE PIPES AND THE ELECTRICAL RECEPTACLES ACCORDING TO THE OWNERS LAYOUT. THE CONTRACTOR WILL HAVE TO VERIFY THE EQUIPMENTS (REFRIGERATOR, SINK, DRYER/WASHER) THAT THE OWNNER WILL PROVIDE TO DETERMINE THE EXACT LOCATION OF WATER SUPPLY, DISCHARGE PIPE OR ENERGY SUPPLY.
13. ALL WINDOWS & GLASS DOORS SHALL HAVE IMPACT RESISTANT GLAZING OR INSTALLED WTH APPROVED HURRICANE SHUTTERS/PANELS OR HIGH WIND BOARD-UP PROTECTION. IF HURRICANE SHUTTERS/PANELS OR HIGH WIND BOARD-UP PROTECTION ARE TO BE USED, ALL INSTALLATION HARDWARE & SHUTTERS/PANELS SHALL BE KEPT ONSITE
14. IF THE ROOTS OR BRANCHES OF THE EXISTING TREE NEED TO TRIMMED IT MUST BE DONE BY A PROFESSIONAL TREE TRIMMING COMPANY.
15. THE CONTRACTOR NEEDS TO INSTALL IN THE EXTERIOR WALL A FIBERGLASS INSULATION R-13
16. THE ROOF CEILING WILL BE 1/2"GYPSUM BOARD AND INSULATED MTH FIBERGLASS INSULATION R-30.
17. ANY LUMBER IN CONTACT MTH CONCRETE SHALL BE PRESSURE TREATED OR SHALL NEED A SILL GASKET TO AVOID MOISTURE INTRUSION

STENGTH OF MATERIALS:

1. CONCRETE FOOTINGS, SLAB OF BEAM	fc = 3,000 psi
2. REINFORCING STEEL	60,000 psi
1. REINFORCED MASONRY	1,500 psi
4. MASONRY GROUT	fc =3,000 psi
5i SOIL BEARING (ASSUMED, TO BE VERIFIED)	2,000 psf
6. BOLTS FOR STEEL & WOOD CONNECTIONS	A307
7. FRAMING LUMBER	#2 SYP
8. SHEATHING DIAPHRAGM (ROOF)	18/32 APA RATED SHEATHING
8.1. UNLOCKED DIAPHRAGM	ALLOWABLE SHEAR=285 POUNDS PER FOOT 10d DEFORMED NAILS 06" O.C. AT ALL ENDS, EDGES, CUTS & TERMINATIONS & 0 12" O.C. AT INTERIOR SUPPORTS.
9. SHEATHING DIAPHRAGM (WALLS)	18/32 APA RATED SHEATHING
9.1. UNBLOCKED DIAPHRAGM	ALLOWABLE SHEAR=310 POUNDS PER FOOT 10d DEFORMED NAILS 06" O.C. AT ALL ENDS, EDGES, CUTS & TERMINATIONS & 0 12" O.C. AT INTERIOR SUPPORTS.
10. DECK DIAPHRACHA (FLOORS)	18/32 APA RATED SHEATHING
10 .1. UNBLOCKED DIAPHRAGH.	ALLOWABLE SHEAR=825 POUNDS PER FOOT CONSTRUCTION ADHESIVE & (2) ROWS OF 10d DEFORMED NAILS @6" O.C. AT ALL ENDS, EDGES, CUTS & TERMINATIONS & 0 12" O.C. AT INTERIOR SUPPORTS.

TERMINE NOTES:

- 1.- A PERMANENT SIGN WHICH IDENTIFIES THE TERMITE TREATMENT PROVIDER AND NEED FOR RE-INSPECTION & TREATMENT CONTRACT RENEWAL SHALL BE PROVDDED. THE SIGN SHALL BEPOSTED NEAR THE WATER HEATER OR ELECTRIC PANEL.
- 2.- TO PROVDE FOR INSPECTION FOR TERMITE INFESTATION THE DISTANCE BETWEEN WALL COVERING & FINAL EARTH GRADE SHALL NOT BE LESS THAN 6". EXCEPTION: PAINT OR DECORATIVE CONTENTIOUS FINISH LESS THAN 5/8" THICK ADHERED DIRECTLY TO THE FOUNDATION WALL.
- 3.- INITIAL TREATMENT SHALL BE DONE AFTER ALL EXCAVATION AND BACKFILL IS COMPLETE. IN ACCORDANCE MTH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 1816.1.1
4. SOIL DISTRIBUTED AFTER THE INITIAL TREATMENT SHALL BE RE-TREATED INCLUDING SPACES BOXED & FORMED. IN ACCORDANCE MTH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 1816.1.2
- 5.- AREAS IN CONCRETE FLOORS FOR SUBSEQUENT INSTALLATIONS OF TRAPS, ETC., SHALL BE MADE MTH PERMANENT METAL OR PLASTIC FORMS. PERMANENT FORMS MUST BE THE SIZE AND DEPTH THAT WILL ELIMINATE THE DISTURBANCE OF SOIL AFTER THE INITIAL TREATMENT. IN ACCORDANCE MTH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11
- 6.- MINIMUM 6 MIL RETARDER MUST BE INSTALLED TO PROTECT AGAINST RAINFALL DILUTION. IF RAINFALL OCCURS BEFORE VAPOR RETARDER PLACEMENT, RETREATMENT IS REQUIRED. IN ACCORDANCE WTH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
- 7.- ONCRETE OVER FOUR AND MORTAR ALONG THE FOUNDATION PERIMETER MUST BE REMOVED BEFORE EXTERIOR SOIL TREATMENT. IN ACCORDANCE WTH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
- 8.- SOIL TREATMENT MUST BE APPLIED UNDER ALL EXTERIOR CONCRETE OR GRADE MTHIN 1'-0" OF THE STRUCTURE SIDEWALLS. IN ACCORDANCE MTH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
12. ALL BUILDING ARE REQUIRED TO HAVE PRE-CONSTRUCTION TREATMENT. IN ACCORDANCE MTHE FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
- 9.- A CERTIFICATE OF COMPLIANCE MUST BE ISSUED TO THE BUILDING DEPARTMENT BY A LICENSED PEST CONTROL COMPANY BEFORE A CERTIFICATE OF OCCUPANCY MILL BE ISSUED. THE CERTIFICATEOF COMPLIANCE SHALL STATE: "THE BUILDING HAS RECEIVED A COMPLETE TREATMENT FOR THE PREVENTION OF SUBTERRANEAN TERMITES THE TREATMENT IS IN ACCORDANCE MTH THE RULES & LAWS OF THE FLORIDA DEPARTMENT OF AGRICULTURE & CONSUMER SERVICES." IN ACCORDANCE MTH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
- 10.- AFTER ALL WORK IS COMPLETED, LOOSE WOOD AND FILL MUST BE REMOVED FROM BELOW AND MTHIN 1'-0" OF THE BUILDING. THIS INCLUDES ALL GRADE STAKES, TUB TRAP BOXES, FORMS, SHORING OR OTHER CELLULOSE CONTAINING MATERIAL.
- 11.- NO WOOD, VEGETATION, STUMPS, CARDBOARD, TRASH, ETC., SHALL BE BURIED MTHIN 15'-0" OF ANY BUILDING OR PROPOSED BUILDING.

PRODUCT APPROVAL LIST & HARDWARE:

ITEM #	PRODUCT MODEL	SUB CATEGORY	MANUFACTURE	FLORIDA APPROVAL #	EPXPERATION DATE:
1	SH.700 SERIES	WINDOWS	AMERICAN CRAFTMAN	FL # 33368.1	
2	6068 SGD	DOOR	AMERICAN CRAFTMAN	FL # 334632	
3	8080 SGD	DOOR	AMERICAN CRAFTMAN	FL # 334631	
4	36X37	WINDOWS	AMERICAN CRAFTMAN	FL # 335631	
5	52X36	WINDOWS	AMERICAN CRAFTMAN		
6	36X49	WINDOWS	AMERICAN CRAFTMAN		
7	52X49	WINDOWS	AMERICAN CRAFTMAN		
8	GARAGE DOOR	DOOR			
9					
10					
11					
12					

PRODUCT APPROVAL LIST WINDOWS & DOORS:

ITEM #	PRODUCT MODEL	SUB CATEGORY	MANUFACTURE	FLORIDA APPROVAL #	EPXPERATION DATE:
1	SH.700 SERIES	WINDOWS	AMERICAN CRAFTMAN	FL # 33368.1	
2	6068 SGD	DOOR	AMERICAN CRAFTMAN	FL # 334632	
3	8080 SGD	DOOR	AMERICAN CRAFTMAN	FL # 334631	
4	36X37	WINDOWS	AMERICAN CRAFTMAN	FL # 335631	
5	52X36	WINDOWS	AMERICAN CRAFTMAN		
6	36X49	WINDOWS	AMERICAN CRAFTMAN		
7	52X49	WINDOWS	AMERICAN CRAFTMAN		
8	GARAGE DOOR	DOOR			
9					
10					

STRUCTURAL NOTES:

1. BEFORE STARTING CONSTRUCTION, THE CONTRACTOR NEEDS TO VERIFY THE EXISTING CONDITION & DIMENSIONS.
2. ALL HORIZONTAL OR MEMBERS SHALL BE CONNECTED USING STRAP CONNECTORS AND NAILS.
3. ALL PLYWOOD USED TO REINFORCING TRUSSES SHALL BE CDX PLYWOOD.
4. THTE REINFORCING STEEL SHALL BE GRADE 60, ASTM A-615.
5. CONSTRUCTION JOINTS SHALL BE SPACED NO GREATER THAN 16' O.C.
6. ALL JOINT REINFORCEMENT, TIES & OTHER ACCESSORIES SHALL BE RESISTANT TO CORROSION.
7. THE CONTRACTOR SHALL USE A HOT-DIPPED ZINC-COATED GALVANIZED STEEL BOLTS FOR PRESSURE TREATED WOOD.
8. THEN FASTEN 1"x2" WOOD FURRING STRIPS TO THE EXTERIOR WALL AT 16" O.C. AND FASTEN SHEET ROCK.

DESIGN CRITERIA:

CODE APPLIED = FLORIDA BUILDING CODE 8 TH EDITION (2023)	
1.- LIVE LOAD	20 PSF
ROOF	40 PSF
FLOOR	
2.- DEAD LOAD	15 PSF
ROOF	175 MPH (ULTIMATE)
3.- WIND LOADS	2
RISK CATEGORY	"B"
EXPOSURE	
CATEGORY	
INTERNAL PRESSURE	* 0.18, ENCLOSEDSTRUCTURE
COEFFICIENTS; GC pi	* 0.55, PARTIALLY ENCLOSED STRUCTURE
	* 0.0 OPEN STRUCTURE
BASIC WIND	q=53.8 PSF
PRESSURE	
4.- SOIL BEARING	Sb= 2000 PSF
(ASSUMED TO BE	ALTERATION LEVEL 2
VERIFIED)	TYPE V-B
5.- CLASSIFICATION OF WORK	
6.- TYPE OF CONSTRUCTION:	
APPLICABLE CODES	
2023 FLORIDA BUILDING CODE 8 TH EDITION.	
2023 FLORIDA BUILDING CODE, PLUMBING	
2023 FLORIDA BUILDING CODE, MECHANICAL	
ROZO FLORIDA BUILDING CODE FOR BUILDING CONSTRUCTION	
2023 FLORIDA BUILDING CODE EXISTING BUILDING	
2023 FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION	
2020 NATIONAL ELECTRICAL CODE	

This drawings are sole property of Seating Constructors USA, Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright .

SHEET TITLE	CUSTOMER NAME:		CUSTOMER INFORMATION			NICHOLSON ENGINEERING ASSOCIATES, INC. 7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167		REVISIONS		
	NOTES		DRAWINGS REMARKS							
PROJECT ADDRESS :		PROJECT OPEN DATE :								
MATOSINHO/100 FOLD		Email: Foldreturns1@gmail.com Phone: (781) 420-5726		7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167						
PROJECT ADDRESS :		PROJECT OPEN DATE :								
14704 CARNATION AVE,		JAN. 05 2026								
TAMPA FLORIDA 33613		PROJECT REVISED BY :								
		MICHAEL D. JOHNSON								