

DRAWINGS INDEX:	
SHEET #	SHEET NAME
Sheet 001	COVER PAGE
Sheet 002	FLOOR PLAN
Sheet 003	PROPOSED FLOOR PLAN
Sheet 004	ELECTRICAL PLAN
Sheet 005	PLUMBING & HVAC PLAN
Sheet 006	ISOMETRIC VIEW
Sheet 007	DETAILS
Sheet 008	OTHER DETAILS
Sheet 009	NOTES

GENERAL NOTES:

- 1.- ALL STRUCTURAL LUMBER AND EXTERIOR FRAMING SHALL BE #2 SOUTHERN YELLOW PINE OR EQUIVALENT, UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
- 2.- ANY WOOD LOCATED BELOW THE REQUIRED BASE FLOOD ELEVATION SHALL BE TREATED WITH 0.40 CCA TREATMENT FOR FLOOD RESISTANCE.
- 3.- ALL WOOD FRAMING MUST ADHERE TO THE REQUIREMENTS OF THE FLORIDA BUILDING CODE, TTH EDITION (2020), INCLUDING BUT NOT LIMITED TO CONNECTIONS, BRACING, BRIDGING, AND NAILING.
- 4.- CONTRACTOR SHALL INSTALL EQUIPMENT IN ACCORDANCE WITH MANUFACTURER INSTRUCTIONS & NOTHING IN THIS DOCUMENT SHALL BE INTERPRETED IN A WAY THAT OVERRIDES THEM.
- 5.- THE BUILDING CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL EXISTING CONDITIONS AS CLOSELY AS POSSIBLE. ANY DISCREPANCIES FOUND PRIOR TO OR DURING CONSTRUCTION SHOULD BE PROMPTLY REPORTED TO THE "ENGINEER."
- 6.- THE BUILDING CONTRACTOR IS RESPONSIBLE FOR REPARING TO ORIGINAL CONDITIONS, ANY AND ALL DAMAGE TO BUILDING SURFACES, EQUIPMENT, ETC. CAUSED DURING THE PERFORMANCE OF THE WORK.

NOTE:

- 1.- THE STRUCTURAL INTEGRITY OF THE BUILDING, AS DEPICTED IN THESE PLANS, IS CONTINGENT UPON COMPLETION ACCORDING TO THE SPECIFIED PLANS AND SPECIFICATIONS. STRUCTURAL MEMBERS ARE NOT SELF-SUPPORTED DURING CONSTRUCTION AND REQUIRE TEMPORARY BRACING UNTIL PERMANENTLY AFFIXED TO THE STRUCTURES AS DIRECTED.
- 2.- THE ENGINEER ASSUMES NO LIABILITY FOR THE STRUCTURE DURING CONSTRUCTION UNLESS THE CONSTRUCTION METHOD AND BRACING ARE EXPLICITLY INCLUDED IN THE PLANS AND SPECIFICATIONS OR SUPERVISED BY THE ENGINEER DURING CONSTRUCTION.
- 3.- THESE DRAWINGS PERTAIN SOLELY TO THE STRUCTURAL ASPECTS AND DO NOT ENCOMPASS ADDITIONAL INFORMATION SUCH AS ELECTRICAL, MECHANICAL, ARCHITECTURAL, OR PROPERTY SURVEY DETAILS. THIS SEAL ON THE DRAWINGS IS VALID FOR 12 MONTHS FROM THE DATE OF SIGNATURE. .
- 4.- INSTALLATION WILL NOT OBSTRUCT ANY PLUMBING, MECHANICAL, OR BUILDING ROOF VENTS.
- 5.- CONTRACTOR SHALL INSTALL EQUIPMENT IN ACCORDANCE WITH MANUFACTURER INSTRUCTIONS & NOTHING IN THIS DOCUMENT SHALL BE INTERPRETED IN A WAY THAT OVERRIDES THEM.
- 6.- CONTRACTOR IS RESPONSIBLE FOR VERIFICATION OF ALL CONDITIONS, DIMENSIONS & DETAILS IN THIS DOCUMENT. ALL DIMENSIONS SHALL BE VERIFIED BY SUBCONTRACTOR BEFORE INSTALLATION.
- 7.- WINDOWS SIZE TO MATCH EXISTING SO TO RETAIN EXISTING EXTERIOR FACADE
- 8.- PER FBC 8TH EDITION R318 TERMITE PROTECTION SHALL BE PROVIDED BY REGISTERED TERMITICIDES, INCLUDING SOIL APPLIED PERTICIDES, BAITING SYSTEMS, AND PESTACIDES APPLIED TO WOOD OR OTHERS METHODS. CONTRACTOR COMPLY WITH CHARTER 1 ALTERATIONS-LEVEL 1.
- 9.- ELECTRICAL REMOVED IN DEMO WALL TO BE REPLACED IN KIND, PER CURRENT BUILDING CODE NEC 2020 BY A LICENSED ELECTRICAL SUB CONTRACTOR.

LIST OF ABBREVIATIONS:

ABV	ANCHOR BOLT	ENG	ELECTRIC WATER COOLER	LAV	LAVATORY
ABV	ABOVE	ELEV	ELEVATION (VERTICAL HEIGHT)	LT	LIGHT
AFF	ABOVE FINISHED FLOOR	EQ	EQUAL	LW	LIGHTWEIGHT
ADJ	ADJACENT	EXH	EXHAUST	LLH	LONG LEG HORIZONTAL
AHU	AIR HANDLER UNIT	EJ	EXPANSION JOINT	LLV	LONG LEG VERTICAL
ALUM	ALUMINUM	EXT	EXTERIOR	MAX	MAXIMUM
BRG	BEARING	FA	FIRE ALARM	MET	METAL
BLK	BLOCK	FE	FIRE EXTINGUISHER	MW	MICROWAVE
BOTT	BOTTOM	FIXT	FIXTURE	MIN	MINIMUM
BLDG	BUILDING	FD	FLOOR DRAIN	MISC	MISCELLANEOUS
B.O	BOTTOM OF	FTG	FOOTING	MO	MASONRY OPENING
CLG	CEILING	FUR	FURRED	N/A	NOT APPLICABLE
CLR	CLEAR / CLEARANCE	FT	FOOT	NOM	NOMINAL
COL	COLUMN	GA	GAGE / GAUGE	NTS	NOT TO SCALE
CONC	CONCRETE	GALV	GALVANIZED	OC	ON CENTER
CMU	CONCRETE MASONRY UNIT	GFI	GROUND FAULT INTERRUPTER	OPNG	OPENING
CU	CONDENSER UNIT	GYP	GYPSPUM WALLBOARD	OD	OUTSIDE DIAMETER
CONST	CONSTRUCTION	HD	HEADER	OHD	OVERHEAD
CONT	CONTINUE / CONTINUOUS	HDR	HEATING / VENTILATIONS / AIR	OPP	OPPOSITE
GJ	CONTROL JOINT	HVAC	CONDITIONING	PLYND	PLYWOOD
DIAG	DIAGONAL	HT	HEIGHT	PT	PRESSURE TREATED
DIA	DIAMETER	HC	HOLLOW CORE	PSF	POUNDS PER SQUARE FOOT
DIM	DIMENSION	HORZ	HORIZONTAL	PSI	POUNDS PER SQUARE INCH
DN	DOWN	HB	HOSE BIBB	PREFAB	PREFABRICATE (ED)
DS	DOWNSPOUT	HM	HOLLOW METAL	PPFN	PREFINISHED
DWG	DRAWING	INCL	INCLUDE (ED) (ING)	QT	QUARRY TILE
DW	DISHWASHER	ID	INSIDE DIAMETER	RAD	RADIUS
EA	EACH	INSUL	INSULATE (ED) (ING)	REC	RECESS (ED)
EAL	EACH WAY	INT	INTERIOR	REF	REFRIGERATOR
ELEC	ELECTRIC	IN	INCH	REINF	REINFORCE (ED) (ING)
		JT	JOINT		


HIILSBOROUGH COUNTY

605 N WOODLYNNE AVE TAMPA, FL 33609-1555

EDUARDO MATOSINHO/100 FOLD RETURNS LLC


RENOVATION DRAWINGS KITCHEN & BATHS

ARIAL VIEW

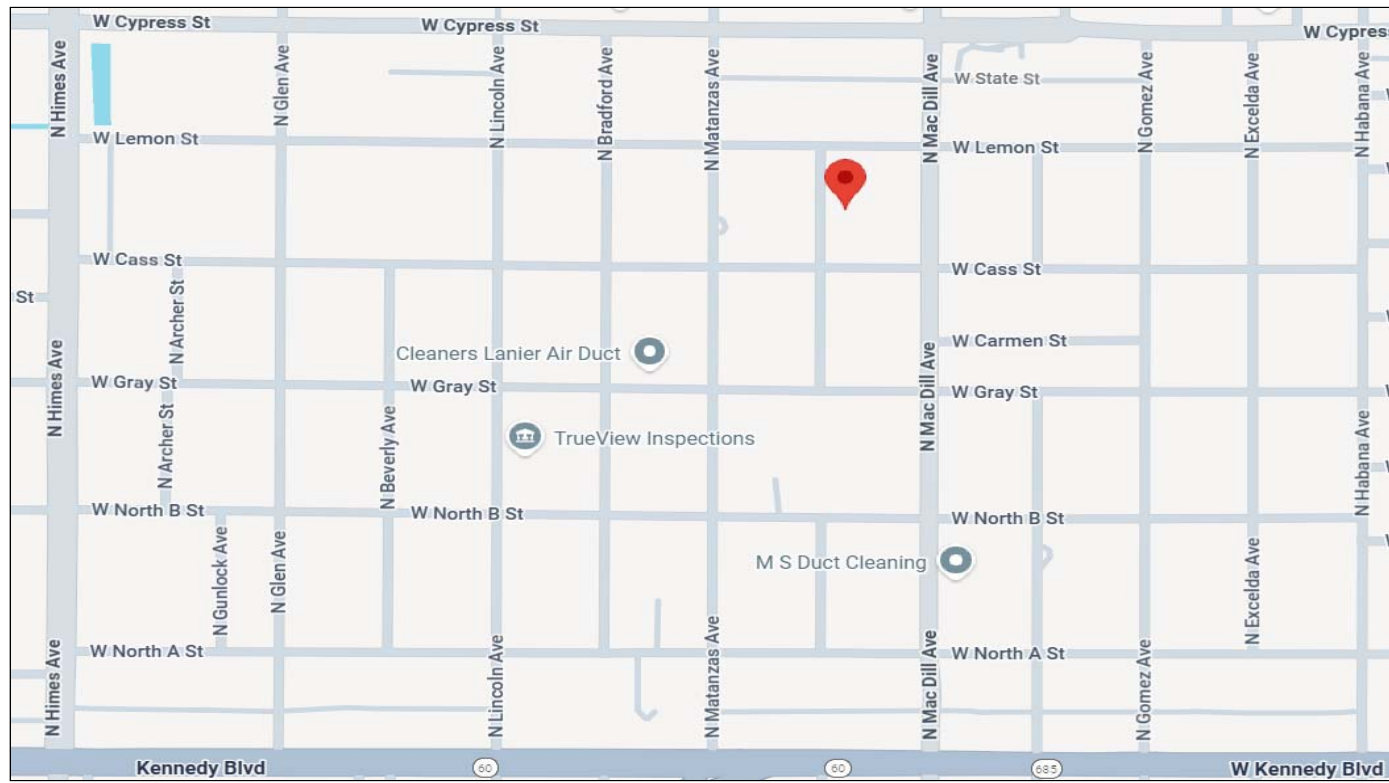

605 N WOODLYNNE AVE
TAMPA, FL 33609-1555

SATALLITE VIEW

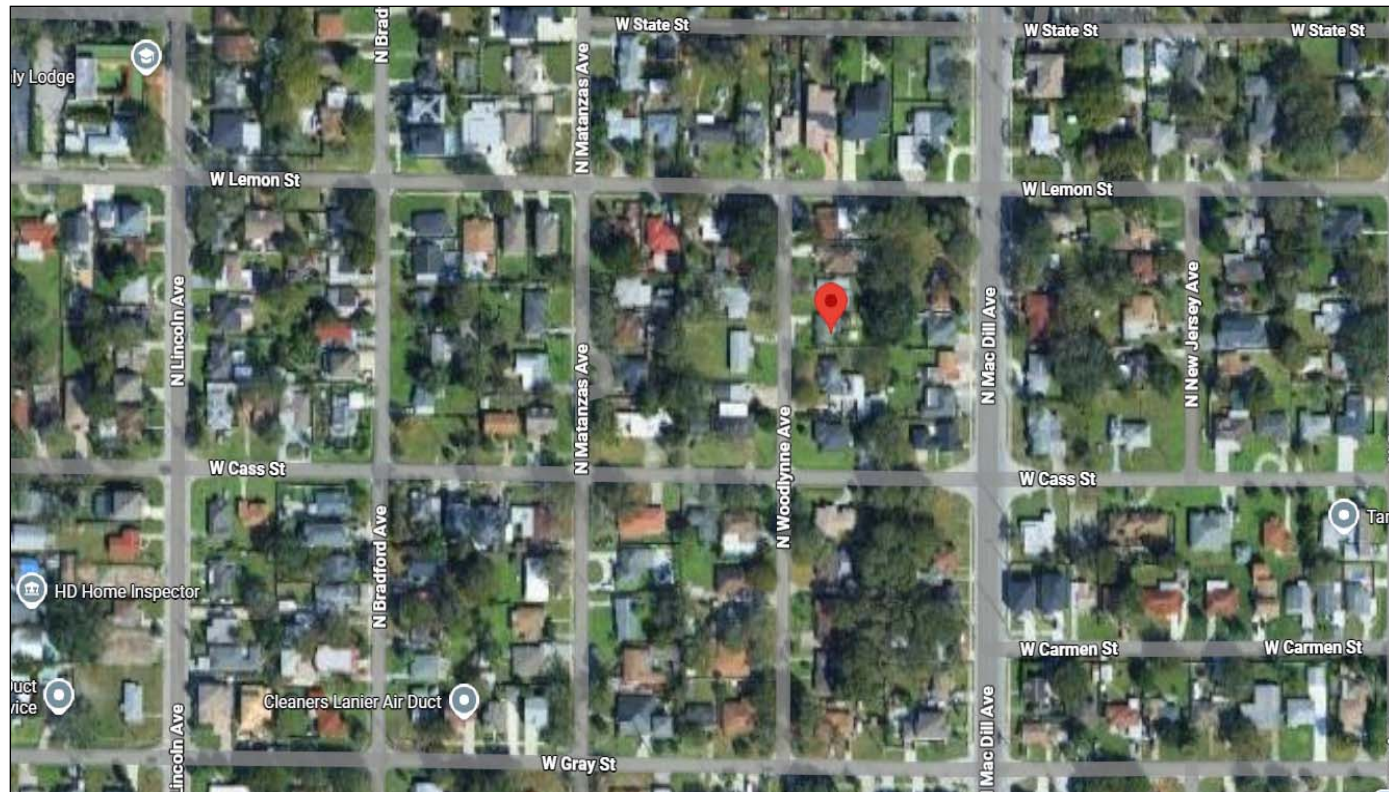

605 N WOODLYNNE AVE
TAMPA, FL 33609-1555

LIMITATION OF DOCUMENTS / PROFESSIONAL DISCLAIMER

- A) THESE DOCUMENTS ARE PREPARED SOLELY TO CONVEY DESIGN INTENT AND FOR THE PURPOSE OF PERMIT APPLICATION, PLAN REVIEW, AND REGULATORY APPROVAL BY THE AUTHORITY HAVING JURISDICTION.
- B) THESE DOCUMENTS ARE NOT INTENDED TO BE USED FOR CONSTRUCTION COST ESTIMATING, BIDDING, PROCUREMENT, SHOP DRAWINGS, FABRICATION, OR INSTALLATION WITHOUT THE PREPARATION OF FINAL CONSTRUCTION DOCUMENTS.
- C) ALL DIMENSIONS, CONDITIONS, MATERIALS, AND INFORMATION SHOWN ARE BASED ON AVAILABLE DATA AND ARE SUBJECT TO CHANGE. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS, DIMENSIONS, AND SITE CONDITIONS IN THE FIELD PRIOR TO COMMENCEMENT OF ANY WORK.
- D) THE DESIGN PROFESSIONAL ASSUMES NO RESPONSIBILITY FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, OR SAFETY PRECAUTIONS, WHICH SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
- E) THESE DOCUMENTS DO NOT RELIEVE THE CONTRACTOR FROM COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE, AND LOCAL CODES, ORDINANCES, REGULATIONS, OR PERMIT CONDITIONS, INCLUDING THOSE NOT EXPRESSLY SHOWN ON THE DRAWINGS.
- F) ANY DISCREPANCIES, CONFLICTS, ERRORS, OR OMISSIONS DISCOVERED IN THE DOCUMENTS OR IN FIELD CONDITIONS SHALL BE REPORTED TO THE DESIGN PROFESSIONAL AND AUTHORITY HAVING JURISDICTION PRIOR TO PROCEEDING WITH THE AFFECTED WORK.
- G) MODIFICATIONS TO THE DESIGN, FIELD CHANGES, OR DEVIATIONS FROM THE APPROVED PERMIT DOCUMENTS SHALL NOT BE MADE WITHOUT PRIOR REVIEW AND WRITTEN APPROVAL FROM THE DESIGN PROFESSIONAL AND THE AUTHORITY HAVING JURISDICTION.
- H) ACCEPTANCE OR USE OF THESE DOCUMENTS FOR ANY PURPOSE OTHER THAN PERMIT REVIEW SHALL BE AT THE SOLE RISK OF THE USER.

SITE INFORMATION:

CUSTOMER NAME:

EDUARDO MATOSINHO/100 FOLD
RETURNS LLC

PROJECT ADDRESS:

605 N WOODLYNNE AVE
TAMPA, FL 33609-1555

CUSTOMER PHONE NUMBER:

(781) 420-5126

CUSTOMER EMAIL:

FOLDRETURNS1@GMAIL.COM


CONTRACTOR INFORMATION:

SEATING CONTRACTORS USA.
DBA: SMART CHOICE CONTRACTORS USA.
14815 STATE ROAD 52
LAND O LAKES Florida 34637
813-505-7560
C/C - 1505749
(813) 505-7650
PHIL@JUSTSMARTCHOICE.COM

OTHER DETAILS:

PROPERTY SEA LEVEL ELEV.: 23 FT.
PROPERTY GEO LOCATION CODENATES:
27.95026° N LATITUDE
-82.444124° W LATITUDE
ATC HAZARD ASCE 7-22
RISK CATEGORY: II
RENOVATION ESTIMATED VALUE:
\$113,635.00.
YEAR BUILT 1955
LOT SIZE: 7,560.00 FT.

FLORIDA ULTIMATE
DESIGN WIND SPEED

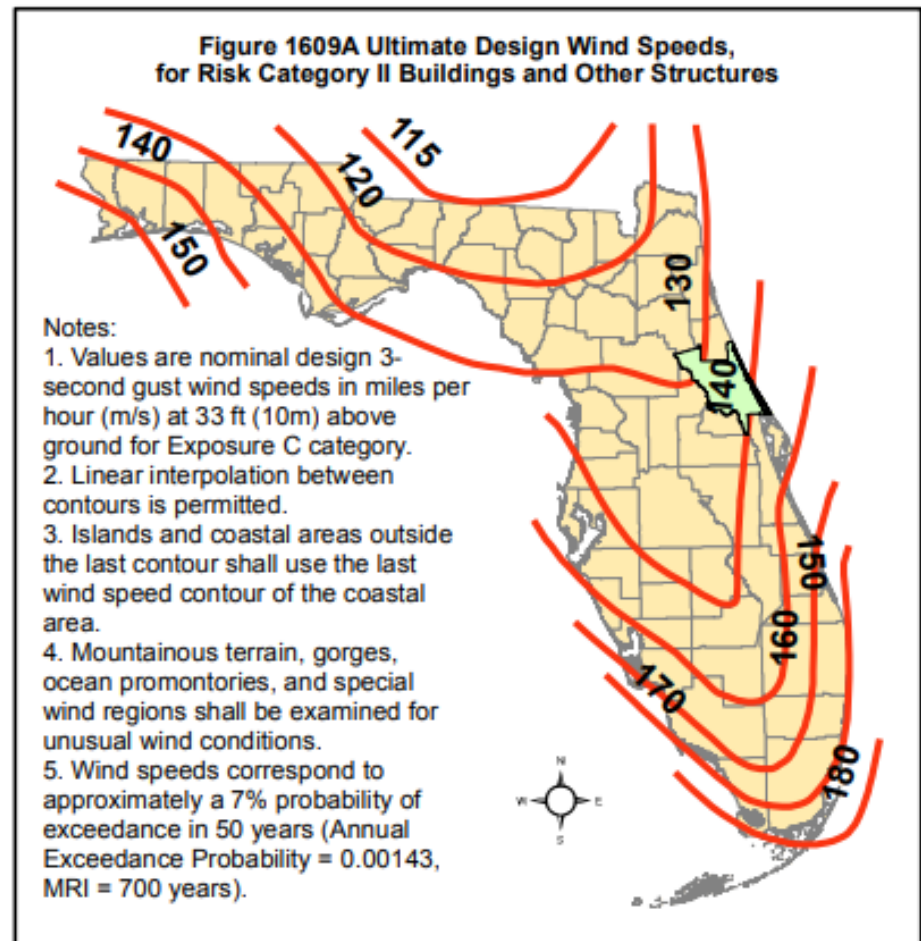

SOURCE: FLORIDA DEPARTMENT OF COMMUNITY AFFAIRS CODE STANDARDS DIVISION; APPLIED RESEARCH ASSOCIATESJUNE 28 2021 FLORIDA RESEARCH DATA

FRONT VIEW



605 N WOODLYNNE AVE
TAMPA, FL 33609-1555

PROJECT OVERVIEW:

THIS RENOVATION PROJECT INCLUDES A COMPLETE INTERIOR RECONFIGURATION AND SYSTEMS UPGRADE DESIGNED TO IMPROVE FUNCTIONALITY EFFICIENCY AND OVERALL PROPERTY VALUE IN FULL COMPLIANCE WITH THE FLORIDA BUILDING CODE 2023 8TH EDITION.

THE SCOPE OF WORK: CONSISTS OF RELOCATING THE ELECTRICAL MAIN SERVICE PANEL, INSTALL NEW IMPACT WINDOWS, RELOCATE THE IAR HANDLER FROM CLOSET TO CENTER OF THE HOUSE ABOVE THE BEDROOM 2 AND 3, CLOSE ONE DOOR OPENING AND TWO WINDOW OPENING. RELOCATING PLUMBING IN MASTER BATHROOM, OPEN A WALL TO ADD CLOSET SPACE TO MASTER BEDROOM, RELOCATING A MASTER BEDROOM, CLOSET AND RECONFIGURING THE MASTER BATHROOM TO A REDUCED FOOTPRINT, RELOCATION OF A NEW FULL KITCHEN LAYOUT IS PROPOSED INCLUDING FULL RELOCATION OF PLUMBING AND ELECTRICAL SYSTEMS TO ACCOMMODATE UPDATED FIXTURES APPLIANCES AND CODE COMPLIANT INSTALLATIONS. THE PROJECT ALSO INCLUDES THE INSTALLATION OF A NEW SLIDING GLASS DOOR ASSOCIATED EXTERIOR OPENING MODIFICATIONS AND ALL REQUIRED INTERIOR FINISHES INCLUDING DRYWALL INSTALLATION SURFACE PREPARATION INTERIOR PAINTING GRANITE COUNTERTOPS AND NEW FLOORING THROUGHOUT DESIGNATED AREAS. ALL WORK SHALL ALSO COMPLY WITH ALL APPLICABLE FLOODPLAIN MANAGEMENT REGULATIONS FEMA REQUIREMENTS AND LOCAL CONSTRUCTION STANDARDS MATERIAL REQUIREMENTS WHERE APPLICABLE.

ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH APPROVED CONSTRUCTION DOCUMENTS REQUIRED ENGINEERING COORDINATION AND ALL APPLICABLE LOCAL AND STATE REGULATIONS TO ENSURE A SAFE DURABLE AND PERMIT READY RENOVATION.

ALL WORK WILL BE COMPLETED IN ACCORDANCE WITH FBC 2023 FOR STRUCTURAL PERFORMANCE, AND LONG-TERM DURABILITY. PLEASE REVIEW THE CODES STANDARD LISTED UNDER.

APPLICABLE GOVERNING
CODES& NOTES:

SYSTEME SHALL BE INSTALL UNDER THE
FOLLOWING CODE STANDARTS:

- 2020 NATIONAL ELECTRIC CODE (N.E.C)
- 2023 FBC BUILDING (8TH EDITION.)
- 2023 FBC RESIDENTIAL (8TH EDITION.)
- 2020 NATIONAL ELECTRICAL CODE (NFFA 70).
- 2023 FFPC FLORIDA PREVENTION CODE 8TH EDITION.

SITE SPECIFICATIONS:

CONSTRUCTION: SINGLE FAMILY DWELLING (SFD)
ZONING: RESIDENTIAL
NO. OF STORY: TWO STORY EXPOSURE
CATEGORY: B,
RISK CATEGORY: II
WIND SPEED (ASCE 7-22) : 140 MPH
GROUND SNOW LOAD (ASCE 7-22) : 0 Lb/Sqft
ASHRAE EXTREME LOW: 1°C
ASHRAE HIGH TEMP (2% AVG.) : 34°C
ASHRAE DISTANCE ABOVE ROOF (7/8") : 56°
PARCEL ID: 168848-0000
PROPERTY HEATED AREA SqFt.: 1,500
PROPERTY FULL AREA SqFt.: 1650

This drawings are sole property of Seating ConstructorsUSA , (DBA Smart Choice ContractorsUSA) Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice ContractorsUSA . 2025 Copyright .

SHEET TITLE		CUSTOMER NAME:		CUSTOMER INFORMATION		NICHOLSON ENGINEERING ASSOCIATES, INC.		Smart Choice CONTRACTORS Done right Guaranteed!		REVISIONS	
COVER PAGE		EDUARDO MATOSINHO/100 FOLD RETURNS LLC		Email: FOLDRETURNS1@GMAIL.C Phone:OM (781) 420-5126		7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167				MM/DD/YY	
										DRAWINGS LATEST REMARKS	
										1 01.07.26 RENOVATION DRAWINGS PERMIT SET.	
		PROJECT ADDRESS:		PROJECT OPEN DATE: JAN. 20 2026		PROJECT REVISED BY : MICHAEL D. JOHNSON					
		605 N WOODLYNNE AVE TAMPA, FL 33609-1555								PROJECT NUMBER: 0024602	
										DESIGN DATE: 01.07.26	

REMODELING GENERAL NOTES – APPLICABLE CODES AND STANDARDS:

ALL WORK SHALL BE PERFORMED IN STRICT ACCORDANCE WITH THE FLORIDA BUILDING CODE (FBC) 2023, INCLUDING BUT NOT LIMITED TO THE FLORIDA BUILDING CODE – BUILDING, FLORIDA PLUMBING CODE, FLORIDA MECHANICAL CODE, FLORIDA ENERGY CONSERVATION CODE, AND THE NATIONAL ELECTRICAL CODE (NEC) 2020, AS ADOPTED BY THE STATE OF FLORIDA AND ENFORCED BY HILLSBOROUGH COUNTY / CITY OF TAMPA. THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO COMMENCEMENT OF CONSTRUCTION AND SHALL COORDINATE ALL WORK WITH THE AUTHORITY HAVING JURISDICTION (AHJ). ANY DISCREPANCIES BETWEEN FIELD CONDITIONS AND THE CONSTRUCTION DOCUMENTS SHALL BE IMMEDIATELY REPORTED TO THE DESIGN PROFESSIONAL AND THE BUILDING OFFICIAL PRIOR TO PROCEEDING WITH THE WORK.

ELECTRICAL

REMOVE THE EXISTING 100-AMP LOAD CENTER (MODEL TLM2020CCU) AND INSTALL A NEW 200-AMP, SERVICE-RATED ELECTRICAL PANEL. ELECTRICAL WORK SHALL COMPLY WITH FBC-B CHAPTER 21 AND NEC ARTICLES 210, 220, 230, 250, 310, AND 408. UPDATED LOAD CALCULATIONS SHALL BE PROVIDED TO ACCOUNT FOR NEW HVAC EQUIPMENT AND FUTURE ELECTRICAL DEMAND PER NEC ARTICLE 220. PROVIDE CODE-COMPLIANT GROUNDING AND BONDING SYSTEMS AND INSTALL ALL REQUIRED AFCI AND GFCI PROTECTION WHERE APPLICABLE PER NEC 210.8 AND 210.12.

MECHANICAL / HVAC

INSTALL A NEW 3-TON AIR CONDITIONING SYSTEM IN COMPLIANCE WITH THE FLORIDA MECHANICAL CODE AND FLORIDA ENERGY CONSERVATION CODE (FBC-M 301; FBC-EC R403). RELOCATE THE AIR HANDLER ABOVE THE GUEST BEDROOM WALKWAY AREA AS SHOWN ON PLANS. PROVIDE STRUCTURAL SUPPORT DESIGNED TO ACCOMMODATE IMPOSED LOADS. PROVIDE A SECONDARY DRAIN PAN, OVERFLOW SAFETY SHUTOFF DEVICE, AND PROPERLY ROUTED CONDENSATE DISPOSAL SYSTEM IN ACCORDANCE WITH FBC-M SECTIONS 304, 306, AND 307. ALL DUCTWORK SHALL BE SEALED AND INSULATED IN COMPLIANCE WITH FBC-M 603 AND FBC-EC REQUIREMENTS.

3 STRUCTURAL

INSTALL SIMPSON STRONG-TIE H2.5T, 18-GAUGE GALVANIZED HURRICANE TIES AT ALL REQUIRED TRUSS-TO-WALL CONNECTIONS WHERE EXISTING CONNECTORS ARE MISSING OR INSUFFICIENT, IN ACCORDANCE WITH FBC-B SECTIONS 1609 AND 2308.6. PROVIDE OPEN-CELL SPRAY FOAM INSULATION WITH A MINIMUM THERMAL RESISTANCE OF R-30, INSTALLED IN ACCORDANCE WITH FBC-EC R402.1.2.

ALL ROOF TRUSSES SHALL BE INSPECTED PRIOR TO CONSTRUCTION. ANY TRUSS EXHIBITING WOOD DECAY, TERMITE DAMAGE, SPLITTING, CRACKING, BROKEN MEMBERS, OR DAMAGED METAL CONNECTOR PLATES SHALL BE REPAIRED OR REINFORCED. TRUSS REPAIRS, SPLICES, SCABS, OR REINFORCEMENTS SHALL BE ENGINEERED AND SEALED BY A FLORIDA-LICENSED PROFESSIONAL ENGINEER IN ACCORDANCE WITH FBC-R R802.10.3 AND FBC-B 2303.4.1. ALL REPAIRS SHALL RESTORE THE TRUSS TO EQUAL OR GREATER STRUCTURAL CAPACITY THAN ORIGINALLY DESIGNED.

4 CMU AND FRAMING

INSTALL PRESSURE-TREATED WOOD FURRING STRIPS AT CMU WALLS WHERE REQUIRED, IN ACCORDANCE WITH FBC-B SECTIONS 2104 AND 2304.12. PROVIDE AA2 MASONRY WALL INSULATION WITH A MINIMUM R-5 THERMAL VALUE (TYPICAL) IN COMPLIANCE WITH FBC-EC R402.1.2.

REMOVE DESIGNATED NON-STRUCTURAL PORTIONS OF CMU WALLS TO CREATE NEW OPENINGS AS SHOWN ON PLANS. CONTRACTOR SHALL VERIFY WALLS ARE NON-LOAD-BEARING PRIOR TO DEMOLITION. PROVIDE REQUIRED LINTELS, HEADERS, AND REINFORCEMENT DESIGNED TO RESIST APPLICABLE LOADS PER FBC-B SECTIONS 1604 AND 2104.

5 WINDOWS AND DOORS

REMOVE ALL EXISTING WINDOWS AND INSTALL NEW IMPACT-RESISTANT WINDOWS, AMERICAN CRAFTSMAN TO SERIES OR APPROVED EQUIVALENT, COMPLYING WITH WIND LOAD, WIND-BORNE DEBRIS, AND DESIGN PRESSURE REQUIREMENTS PER FBC-B SECTIONS 1609, 1709, AND 2406, AND FAC 61G20-3. WINDOWS SHALL BE INSTALLED STRICTLY IN ACCORDANCE WITH MANUFACTURER INSTALLATION INSTRUCTIONS AND APPLICABLE FLORIDA PRODUCT APPROVALS.

WHERE WINDOWS ARE REMOVED PER THE NEW DESIGN, INFILL OPENINGS USING PRESSURE-TREATED WOOD FRAMING, EXTERIOR-GRADE PLYWOOD SHEATHING, AND AN APPROVED WEATHER-RESISTIVE BARRIER IN COMPLIANCE WITH FBC-B SECTIONS 1402.2, 2304, AND 2510.

INSTALL NEW 6068 SLIDING GLASS DOOR. PROVIDE FULL WOOD FRAMING AND PROPERLY SIZED STRUCTURAL HEADERS DESIGNED FOR OPENING WIDTH, WIND LOADS, AND APPLICABLE DESIGN CRITERIA PER FBC-B SECTIONS 1609, 2308.4, AND 2406.

6 FLOOR FRAMING

BUILD UP EXISTING LOW FLOOR AREAS APPROXIMATELY 8 INCHES TO MATCH FINISHED FLOOR ELEVATIONS USING 2X6 PRESSURE-TREATED WOOD FRAMING (TYPICAL). PROVIDE ADEQUATE ANCHORAGE, MOISTURE PROTECTION, AND STRUCTURAL SUPPORT IN COMPLIANCE WITH FBC-B SECTIONS 1604, 1805, AND 2304.

7 MECHANICAL LOCATIONS

EXISTING AIR HANDLER LOCATIONS ARE SHOWN FOR REFERENCE ONLY. NEW AIR HANDLER LOCATIONS SHALL BE AS INDICATED ON THE CONSTRUCTION DOCUMENTS. SEAL AND REPAIR ALL ABANDONED OPENINGS AND PENETRATIONS IN ACCORDANCE WITH FBC-M SECTIONS 304 AND 306 AND FBC-B SECTION 1203.

8 CONSTRUCTION OPERATIONS


PROVIDE AND MAINTAIN A CONSTRUCTION DEBRIS CONTAINER (DUMPSTER) ON SITE IN ACCORDANCE WITH LOCAL ORDINANCES, SAFETY REGULATIONS, AND FBC-B SECTIONS 3301 AND 3307.

9 PERMITS AND INSPECTIONS

ALL REQUIRED PERMITS SHALL BE OBTAINED PRIOR TO COMMENCEMENT OF WORK. ALL CONSTRUCTION SHALL BE SUBJECT TO INSPECTION AND APPROVAL BY THE HILLSBOROUGH COUNTY / CITY OF TAMPA BUILDING DEPARTMENT. NO WORK SHALL PROCEED BEYOND ANY REQUIRED INSPECTION POINT WITHOUT WRITTEN APPROVAL FROM THE AHJ.



EXISTING FLOOR PLAN LAYOUT

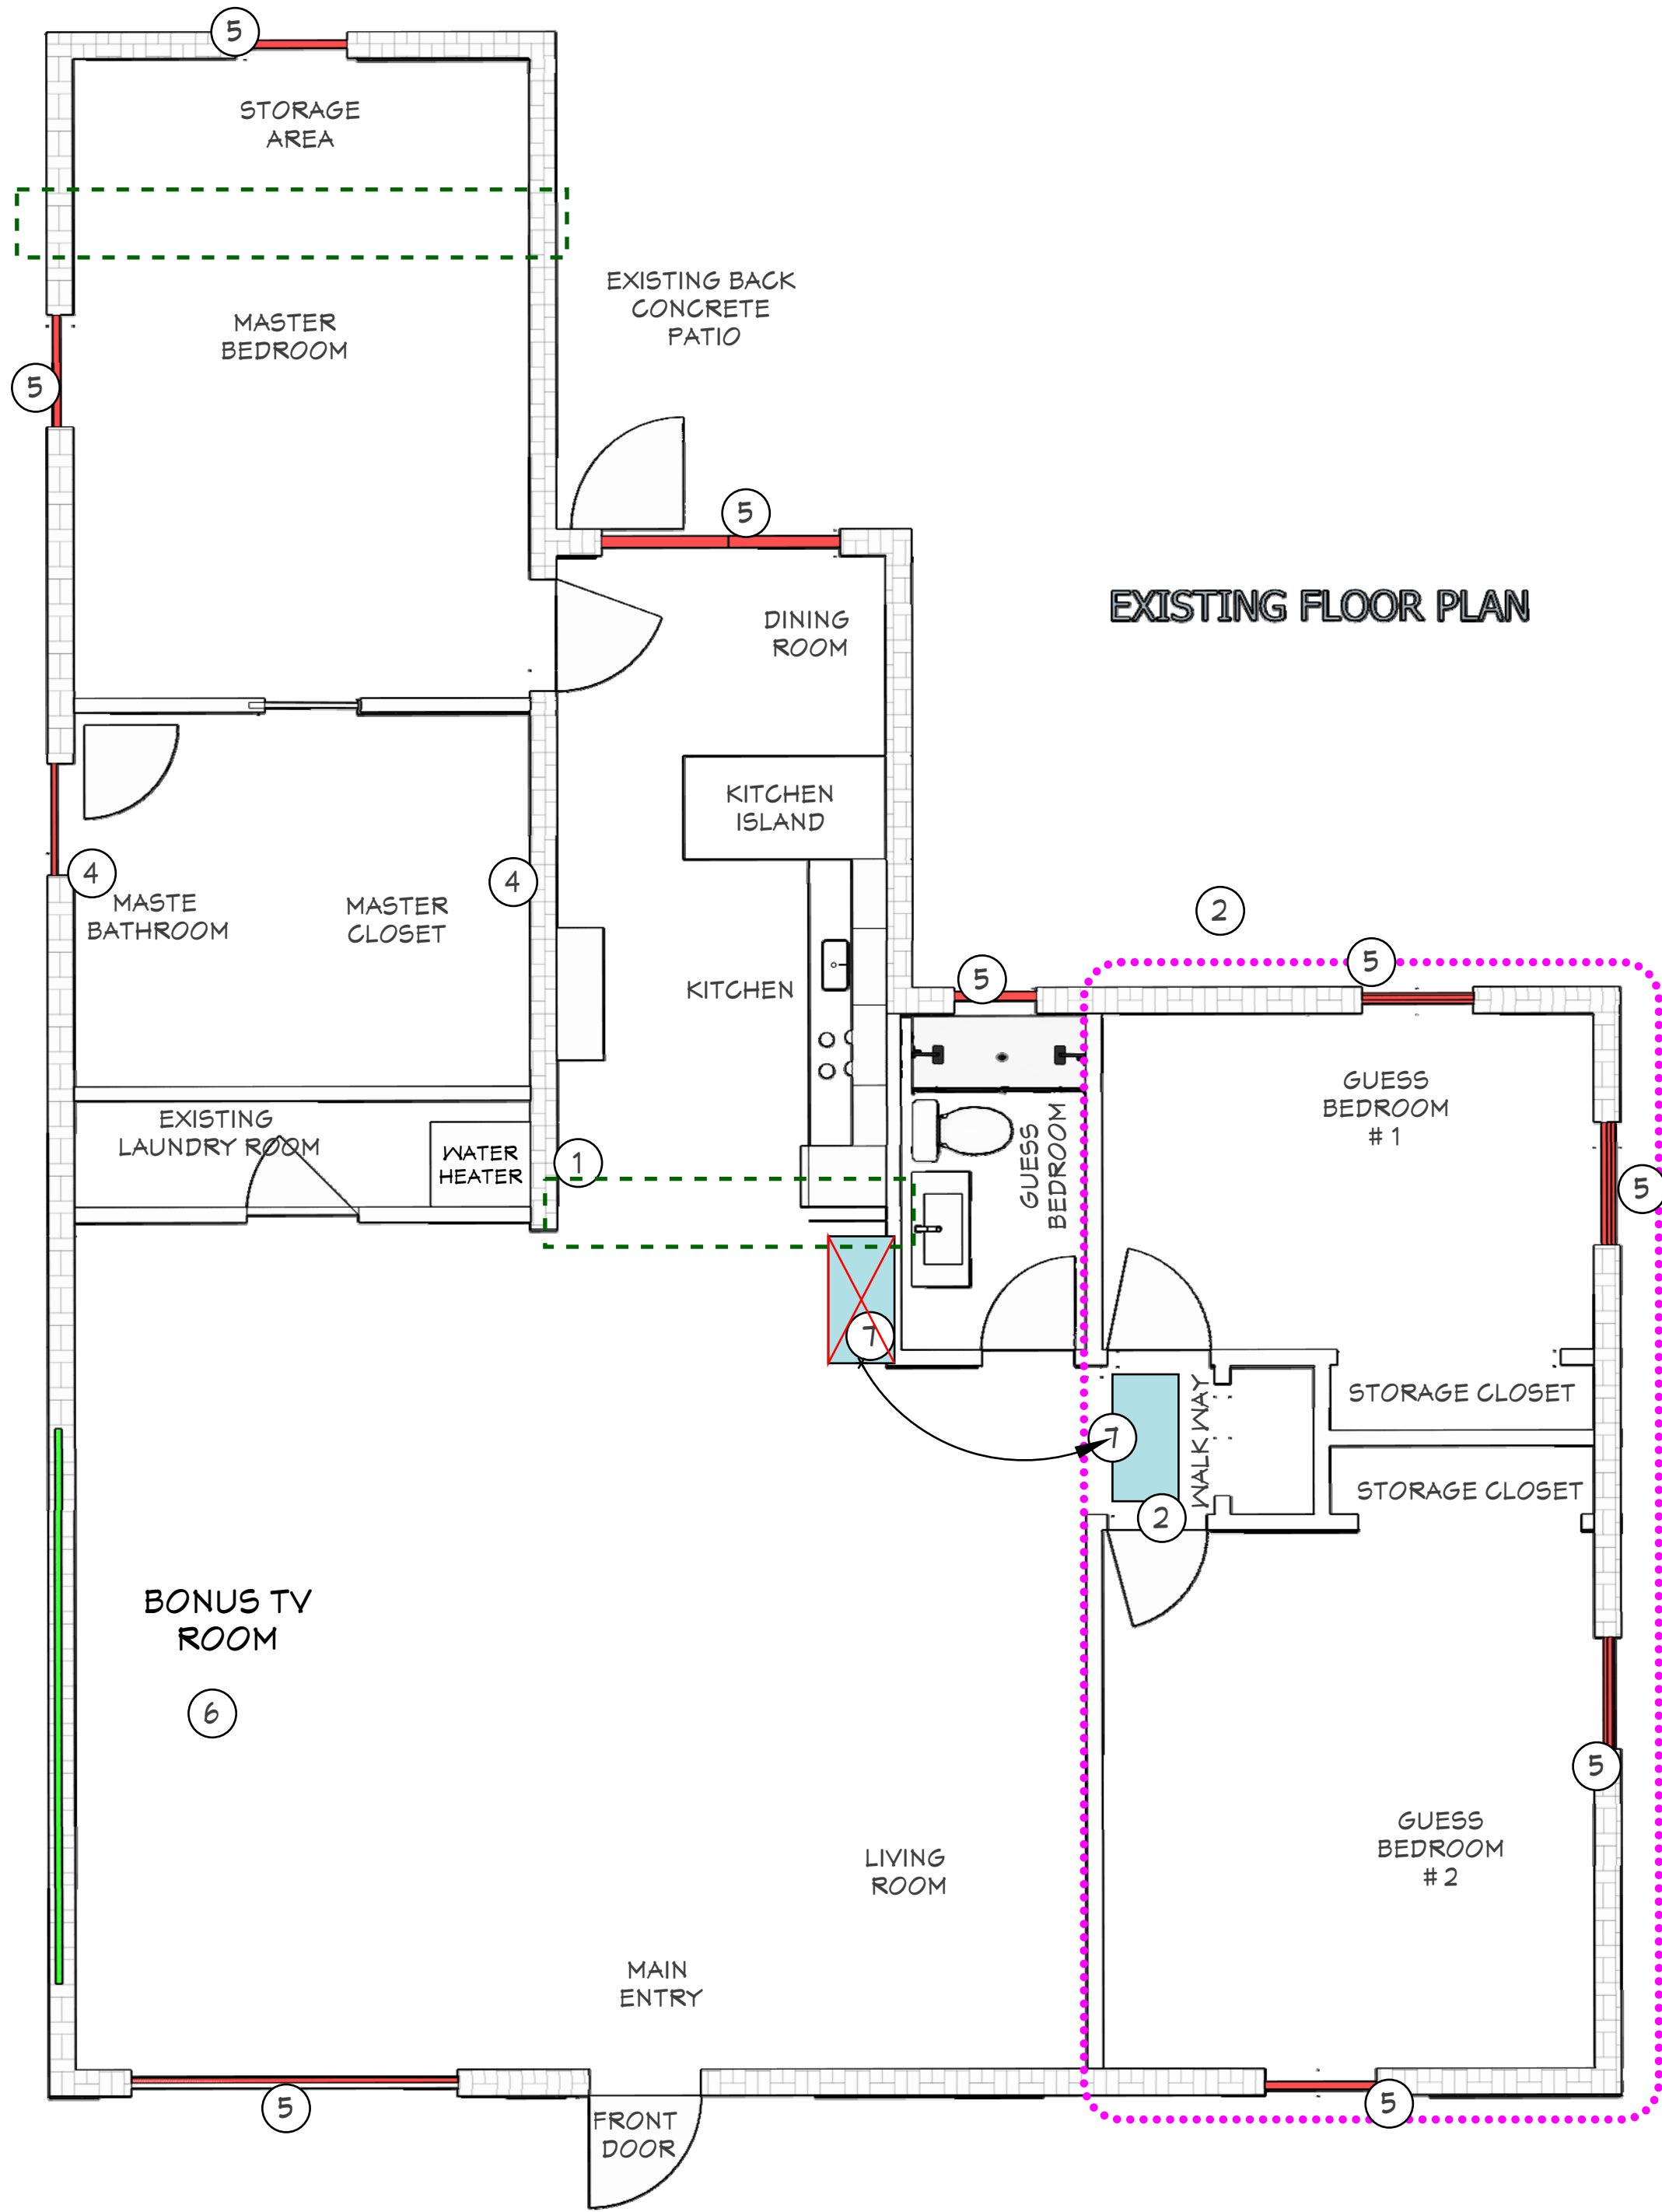

LEGEND:

- EXISTING WALL CMU BLOCK
- EXISTING WALL UMBER NON EXTRUCTURAL TO BE REMOVED
- EXISTING WINDOWS TO BE REPLACE WITH PLYGEM WINDOWS IMPACT SERIES 400 OR EQUIVELANT
- EXISTING PART OF THE HOUSE NOT BEEN UDTADED OR CHANGES MAKES
- NEW LOCATION FOR THE INSTALLATION OF THE AIR COND. HANDLER ABOVE THE GEALING

PROJECT INFORMATION:

PROJECT TYPE: REMODELING / ALTERATION
RELOCATED KITCHEN AND BATHS, REPLACE WINDOWS AND DOOR, UPDATE ELECTRICAL AS MAIN PORPUSE OF RENOVATION.
EXISTING BUILDING: YES
CHANGE OF OCCUPANCY: NO

OCCUPANCY CLASSIFICATION (FBC CHAPTER 3)

PRIMARY OCCUPANCY GROUP: R-3
DESCRIPTION: SINGLE-FAMILY DWELLING
APPLICABLE CODE SECTION: FBC-B 310.1

CONSTRUCTION TYPE:

CONSTRUCTION TYPE: TYPE V-B
APPLICABLE CODE SECTION: FBC-B 602.5

NUMBER OF STORIES:

STORIES ABOVE GRADE: 1
APPLICABLE CODE SECTION: FBC-B 503

BUILDING HEIGHT:

HEIGHT: ONE STORY 8FT HIGH WALLS AND 12.6 TOTAL HIGH
COMPLIES WITH ALLOWABLE HEIGHT
APPLICABLE CODE SECTION: FBC-B 504

BUILDING AREA:

AREA: EXISTING SINGLE-FAMILY RESIDENCE WITH 1560 SQFT GROSS ARE AND 1146 HEATED AREA
ALLOWABLE AREA: UNLIMITED FOR R-3
APPLICABLE CODE SECTION: FBC-B 503.1

SPRINKLER SYSTEM:

FIRE SPRINKLER SYSTEM: NOT REQUIRED
APPLICABLE CODE SECTION: FBC-B 903.2.8

FIRE ALARM / DETECTION:

SMOKE ALARMS: REQUIRED
CARBON MONOXIDE ALARMS: REQUIRED WHERE APPLICABLE
APPLICABLE CODE SECTIONS: FBC-B 907.2.11, FBC-R 314, FBC-R 315

MEANS OF EGRESS:

NUMBER OF EXITS: 2 EXIT DOOR
EGRESS COMPLIANCE: COMPLIES
APPLICABLE CODE SECTIONS: FBC-B 1006.2.1, FBC-B 1010

INTERIOR FINISH REQUIREMENTS:

INTERIOR WALL AND CEILING FINISH: PLASTER AND NEW WALL WITH DRYWALL 1/2 4X8 FT. SHETTS
COMPLIES
APPLICABLE CODE SECTION: FBC-B 803

STRUCTURAL DESIGN CRITERIA

WIND DESIGN REQUIRED: 140 MPH. REQUIRED TO MEET CODE
WIND LOADS: PER ASCE 7
APPLICABLE CODE SECTION: FBC-B 1609

ENERGY CODE COMPLIANCE:

ENERGY CODE: FLORIDA ENERGY CONSERVATION CODE 2023
COMPLIANCE METHOD: PRESCRIPTIVE
APPLICABLE CODE SECTION: FBC-EC R401

JOB SITE SAFETY NOTES

FBC CHAPTER 33 – SAFEGUARDS DURING CONSTRUCTION

- PROVIDE AND MAINTAIN ALL REQUIRED SAFEGUARDS DURING CONSTRUCTION IN ACCORDANCE WITH FBC-B CHAPTER 33.
- CONTRACTOR SHALL ENSURE THE JOB SITE IS KEPT IN A SAFE CONDITION AT ALL TIMES FOR WORKERS, OCCUPANTS, AND THE PUBLIC (FBC-B 3301).
- PROVIDE REQUIRED SITE BARRICADES, TEMPORARY FENCING, WARNING SIGNS, AND PROTECTION AS NECESSARY TO PREVENT UNAUTHORIZED ACCESS (FBC-B 3306).
- MAINTAIN CLEAR AND SAFE MEANS OF EGRESS AT ALL TIMES DURING CONSTRUCTION ACTIVITIES (FBC-B 3307).
- STORE MATERIALS, EQUIPMENT, AND DEBRIS IN A MANNER THAT DOES NOT CREATE HAZARDS OR OBSTRUCT EGRESS OR ADJACENT PROPERTIES (FBC-B 3304).
- PROVIDE TEMPORARY LIGHTING AS REQUIRED FOR SAFE CONSTRUCTION OPERATIONS AND EGRESS (FBC-B 3308).
- IMPLEMENT DUST CONTROL MEASURES AND MAINTAIN SITE CLEANLINESS THROUGHOUT CONSTRUCTION DURATION (FBC-B 3301).
- PROTECT ADJACENT STRUCTURES, UTILITIES, AND PUBLIC RIGHTS-OF-WAY FROM DAMAGE DURING CONSTRUCTION (FBC-B 3303).
- ALL DEMOLITION ACTIVITIES SHALL BE CONDUCTED IN A CONTROLLED AND SAFE MANNER. VERIFY STRUCTURAL STABILITY PRIOR TO REMOVAL OF ANY COMPONENTS (FBC-B 3303; FBC-B 3309).
- REMOVE CONSTRUCTION DEBRIS AND WASTE MATERIALS ON A REGULAR BASIS. DUMPSTERS SHALL BE PROPERLY LOCATED AND MAINTAINED (FBC-B 3301; FBC-B 3307).
- CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE OSHA REQUIREMENTS IN ADDITION TO FLORIDA BUILDING CODE REQUIREMENTS.
- JOB SITE SHALL BE SUBJECT TO INSPECTION BY HILLSBOROUGH COUNTY BUILDING OFFICIALS AT ANY TIME DURING CONSTRUCTION.

This drawing is the sole property of Seating ConstructorsUSA , (DBA Smart Choice ContractorsUSA) Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice ContractorsUSA . 2025 Copyright .

SHEET TITLE		CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC		CUSTOMER INFORMATION Email: FOLDRETURNS1@GMAIL.C Phone:OM (781) 420-5126			NICHOLSON ENGINEERING ASSOCIATES, INC.			REVISIONS			A 02
FLOOR PLAN		PROJECT ADDRESS: 605 N WOODLYNNE AVE TAMPA, FL 33609-1555		PROJECT OPEN DATE: JAN. 20 2026			7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167			DRAWINGS LATEST REMARKS			
		PROJECT REVISED BY : MICHAEL D. JOHNSON		1 01.07.26 RENOVATION DRAWINGS PERMIT SET.									
				2									
								3					
								PROJECT NUMBER: 0024602		DESIGN DATE: 01.07.26			

MASTER BEDROOM WALL MODIFICATION:
IN THE MASTER BEDROOM, THE EXISTING NON-STRUCTURAL WALL PREVIOUSLY USED AS A STORAGE SEPARATION BETWEEN THE MASTER BEDROOM AND THE EXTERIOR STORAGE AREA SHALL BE REMOVED AS INDICATED ON THE PROPOSED FLOOR PLAN. THE PURPOSE OF THIS MODIFICATION IS TO INCREASE THE USABLE FLOOR AREA OF THE MASTER BEDROOM.
WALL REMOVAL SHALL BE LIMITED STRICTLY TO THE IDENTIFIED PARTITION ONLY AND SHALL NOT IMPACT LOAD-BEARING ELEMENTS, STRUCTURAL COMPONENTS, OR BUILDING ENVELOPE INTEGRITY. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE APPROVED PLANS, APPLICABLE PROVISIONS OF THE FLORIDA BUILDING CODE 2023, AND SUBJECT TO FIELD VERIFICATION BY THE CONTRACTOR AND ENGINEER OF RECORD AS REQUIRED.

ALL EXISTING WINDOWS INDICATED ON THE PROPOSED FLOOR LAYOUT SHALL BE REMOVED AND REPLACED WITH 400 SERIES SINGLE-FAMILY IMPACT-RATED WINDOWS COMPLIANT WITH THE FLORIDA BUILDING CODE, 2023 (FBC 2023). WINDOW SIZES, LOCATIONS, AND PERFORMANCE VALUES USED FOR THE PROJECT ARE INCLUDED IN AND FORM THE BASIS OF THE DESIGN CALCULATIONS.

IN THE MASTER BATHROOM, THE EXISTING CLOSET AREA SHALL BE CONVERTED INTO A NEW SHOWER AREA AS INDICATED ON THE PROPOSED FLOOR PLAN. THE NEW SHOWER INSTALLATION SHALL BE DESIGNED AND CONSTRUCTED IN FULL COMPLIANCE WITH THE FLORIDA BUILDING CODE 2023 AND FLORIDA PLUMBING CODE REQUIREMENTS, INCLUDING CLEARANCES, DRAINAGE, WATERPROOFING, AND VENTING.

THE EXISTING SHOWER LOCATION SHALL BE REMOVED, AND THE POSITIONS OF THE REMAINING PLUMBING FIXTURES SHALL BE RECONFIGURED AND RELOCATED AS SHOWN ON THE PLANS. ALL ASSOCIATED PLUMBING COMPONENTS, INCLUDING WATER SUPPLY LINES, DRAINS, TRAPS, AND VENTS, SHALL BE MODIFIED OR RELOCATED AS REQUIRED TO ACCOMMODATE THE NEW LAYOUT. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE APPROVED PLANS, APPLICABLE CODE PROVISIONS, AND SUBJECT TO INSPECTION AND APPROVAL BY THE AUTHORITY HAVING JURISDICTION.

REPLACEMENT WINDOWS SHALL BE APPROVED FOR THE REQUIRED DESIGN PRESSURES AND EXPOSURE CATEGORY FOR THE SITE. INSTALLATION SHALL BE PERFORMED STRICTLY IN ACCORDANCE WITH THE MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS, APPROVED PRODUCT APPROVALS, AND ALL APPLICABLE PROVISIONS OF FBC 2023. ALL ANCHORAGE, FLASHING, SEALING, AND PERIMETER PROTECTION SHALL BE INSTALLED TO ENSURE STRUCTURAL INTEGRITY, WATER INTRUSION RESISTANCE, AND FULL CODE COMPLIANCE. (TYP.)

IN THE KITCHEN AREA, APPROXIMATELY 19 FEET BY 8 FEET, THE EXISTING ORIGINAL CONCRETE SLAB OF THE HOUSE IS AT A HIGHER ELEVATION THAN THE CURRENT KITCHEN FLOOR. TO ACHIEVE A LEVEL AND CONTINUOUS FINISHED FLOOR, THE KITCHEN FLOOR SHALL BE RAISED USING A NEW SUBFLOOR SYSTEM AS INDICATED ON THE PROPOSED FLOOR PLAN.

THE SUBFLOOR SHALL BE CONSTRUCTED USING 2X6 FRAMING MEMBERS WITH STRUCTURAL PLYWOOD SHEATHING. THE PLYWOOD SHALL BE GLUED AND NAILED TO THE FRAMING MEMBERS IN ACCORDANCE WITH ENGINEERED FASTENING REQUIREMENTS AND MANUFACTURER SPECIFICATIONS. ALL FRAMING MEMBERS SHALL BE PROPERLY ANCHORED AND SECURED WITH APPROVED HURRICANE TIES (WOOD OR METAL CONNECTORS AS APPLICABLE) TO PROVIDE STRUCTURAL CONTINUITY AND RESIST UPLIFT AND LATERAL LOADS.

THE FRAMING MEMBERS AND SUBFLOOR SYSTEM SHALL NOT BE IN DIRECT CONTACT WITH THE EXISTING CONCRETE SLAB. AN APPROVED ISOLATION BARRIER, MOISTURE BARRIER, OR SEPARATION MEMBRANE SHALL BE INSTALLED BETWEEN THE CONCRETE AND ALL WOOD COMPONENTS TO PREVENT MOISTURE TRANSFER AND MATERIAL DEGRADATION. THIS REQUIREMENT IS BASED ON BUILDING SCIENCE AND ENGINEERED DESIGN PRACTICE, AND SHALL GOVERN IN ADDITION TO, AND NOT SOLELY RELY UPON, CODE SECTIONS ADDRESSING CONTACT BETWEEN CONCRETE AND PRESSURE-TREATED WOOD.

ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE FLORIDA BUILDING CODE 2023, APPROVED PLANS, AND SUBJECT TO FIELD VERIFICATION AND INSPECTION BY THE AUTHORITY HAVING JURISDICTION.

THE EXISTING AIR-CONDITIONING/AIR HANDLER UNIT SHALL BE REMOVED AND RELOCATED APPROXIMATELY EIGHT (8) FEET FROM ITS ORIGINAL LOCATION AND REPLACED WITH A NEW AIR HANDLER UNIT AS INDICATED ON THE PROPOSED FLOOR PLAN. THE NEW UNIT SHALL BE SIZED AND INSTALLED IN ACCORDANCE WITH FLORIDA BUILDING CODE 2023 – MECHANICAL, MANUFACTURER REQUIREMENTS, AND THE ENGINEER OF RECORD'S DESIGN CRITERIA FOR THE SERVED SPACE, INCLUDING AIRFLOW, CLEARANCES, SERVICEABILITY, AND CONDENSATE MANAGEMENT.

THE AIR HANDLER SHALL BE INSTALLED ON A FLOATING SUPPORT PLATFORM SYSTEM. THE PLATFORM SHALL CONSIST OF MINIMUM 1/2-INCH THICK MOISTURE-RESISTANT STRUCTURAL PLYWOOD INSTALLED OVER CEILING TRUSSES SPACED AT 24 INCHES ON CENTER. THE PLYWOOD SHALL BE ADEQUATELY FASTENED TO PROVIDE A STABLE, CONTINUOUS LOAD-DISTRIBUTING SURFACE AND SHALL BE DESIGNED TO SUPPORT THE FULL OPERATING WEIGHT OF THE HVAC EQUIPMENT. ALL WOOD COMPONENTS SHALL BE PROTECTED AGAINST MOISTURE AND CONDENSATION IN ACCORDANCE WITH CODE AND MANUFACTURER REQUIREMENTS.

THE PLATFORM AND EQUIPMENT SHALL BE INSTALLED TO MAINTAIN REQUIRED CLEARANCES FROM STRUCTURAL MEMBERS AND SHALL NOT IMPOSE UNDERSIGNED LOADS ON THE TRUSS SYSTEM. VIBRATION ISOLATION AND CONDENSATE DRAINAGE SHALL BE PROVIDED AS REQUIRED.

AN ACCESS OPENING NOT LESS THAN 22 INCHES BY 30 INCHES SHALL BE PROVIDED FOR SERVICE AND MAINTENANCE. THE ACCESS PANEL SHALL BE LOCATED ON THE INTERIOR SIDEWALL OF THE LIVING ROOM (MOUNTING SIDEWALL) AS SHOWN ON THE PLANS. THE ACCESS DOOR SHALL BE PERMANENT, READILY ACCESSIBLE, AND INSTALLED IN ACCORDANCE WITH FBC MECHANICAL REQUIREMENTS.

ALL HVAC WORK SHALL COMPLY WITH THE FLORIDA BUILDING CODE 2023, APPROVED PLANS, MANUFACTURER INSTALLATION INSTRUCTIONS, AND SHALL BE SUBJECT TO INSPECTION AND APPROVAL BY THE AUTHORITY HAVING JURISDICTION.

ALL WORK SHALL BE PERFORMED UNDER A VALID PERMIT ISSUED BY HILLSBOROUGH COUNTY AND SHALL BE SUBJECT TO INSPECTION BY THE AUTHORITY HAVING JURISDICTION. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING, SCHEDULING, AND PASSING ALL REQUIRED INSPECTIONS IN THE PROPER SEQUENCE.

FOR PROJECTS LOCATED IN HILLSBOROUGH COUNTY, A SEPARATE DRYWALL NAILING INSPECTION IS NOT REQUIRED. DRYWALL FASTENING SHALL BE VERIFIED AS PART OF THE APPLICABLE FRAMING AND FINAL INSPECTIONS, UNLESS OTHERWISE DIRECTED BY THE BUILDING OFFICIAL.

BASED ON THE PROPOSED SCOPE OF WORK, THE TYPICAL INSPECTION SEQUENCE SHALL INCLUDE, BUT NOT BE LIMITED TO, THE FOLLOWING, IN ORDER:

ROUGH FRAMING INSPECTION - INCLUDING ALL STRUCTURAL MODIFICATIONS, WALL REMOVALS, SUBFLOOR FRAMING, PLATFORM CONSTRUCTION AND HURRICANE TIES OR CONNECTORS.

ROUGH MECHANICAL (HVAC) INSPECTION - INCLUDING AIR HANDLER RELOCATION, PLATFORM INSTALLATION, CLEARANCES, CONDENSATE DRAINAGE, AND ACCESS REQUIREMENTS.

ROUGH PLUMBING INSPECTION – INCLUDING RELOCATED SUPPLY LINES, DRAINS, VENTS, AND NEW SHOWER INSTALLATION IN THE MASTER BATHROOM.

ROUGH ELECTRICAL INSPECTION – IF APPLICABLE BASED ON RELOCATED OR MODIFIED ELECTRICAL COMPONENTS


INSULATION INSPECTION – IF REQUIRED BY SCOPE OR ENERGY CODE COMPLIANCE.

FINAL BUILDING INSPECTION – TO VERIFY OVERALL CODE COMPLIANCE, COMPLETION OF ALL WORK, AND APPROVAL FOR FINAL CLOSE-OUT.

NO ADDITIONAL INSPECTIONS SHALL BE REQUIRED UNLESS TRIGGERED BY FIELD CONDITIONS, SCOPE CHANGES, OR SPECIFIC REQUEST BY THE BUILDING OFFICIAL. THE CONTRACTOR SHALL VERIFY FINAL INSPECTION REQUIREMENTS WITH HILLSBOROUGH COUNTY PRIOR TO PROJECT CLOSEOUT.

ALL WORK SHALL COMPLY WITH THE FLORIDA BUILDING CODE 2023, LOCAL AMENDMENTS, APPROVED PLANS, AND APPLICABLE COUNTY PROCEDURES.

- EXISTING WALL CMU BLOCK
- EXISTING WALL UMBER NON EXSTRUCTURAL TO BE REMOVED
- EXISTING WINDOWS TO BE REPLACE WITH PLYGEM WINDOWS
IMPACT SERIES 400 OR EQUIVELANT
- EXISTING PART OF THE HOUSE NOT BEEN UTDATED
OR CHANGES MAKES
- NEW LOCATION FOR THE INSTALLATION
OF THE AIR COND. HANDLER ABOVE THE CEALING

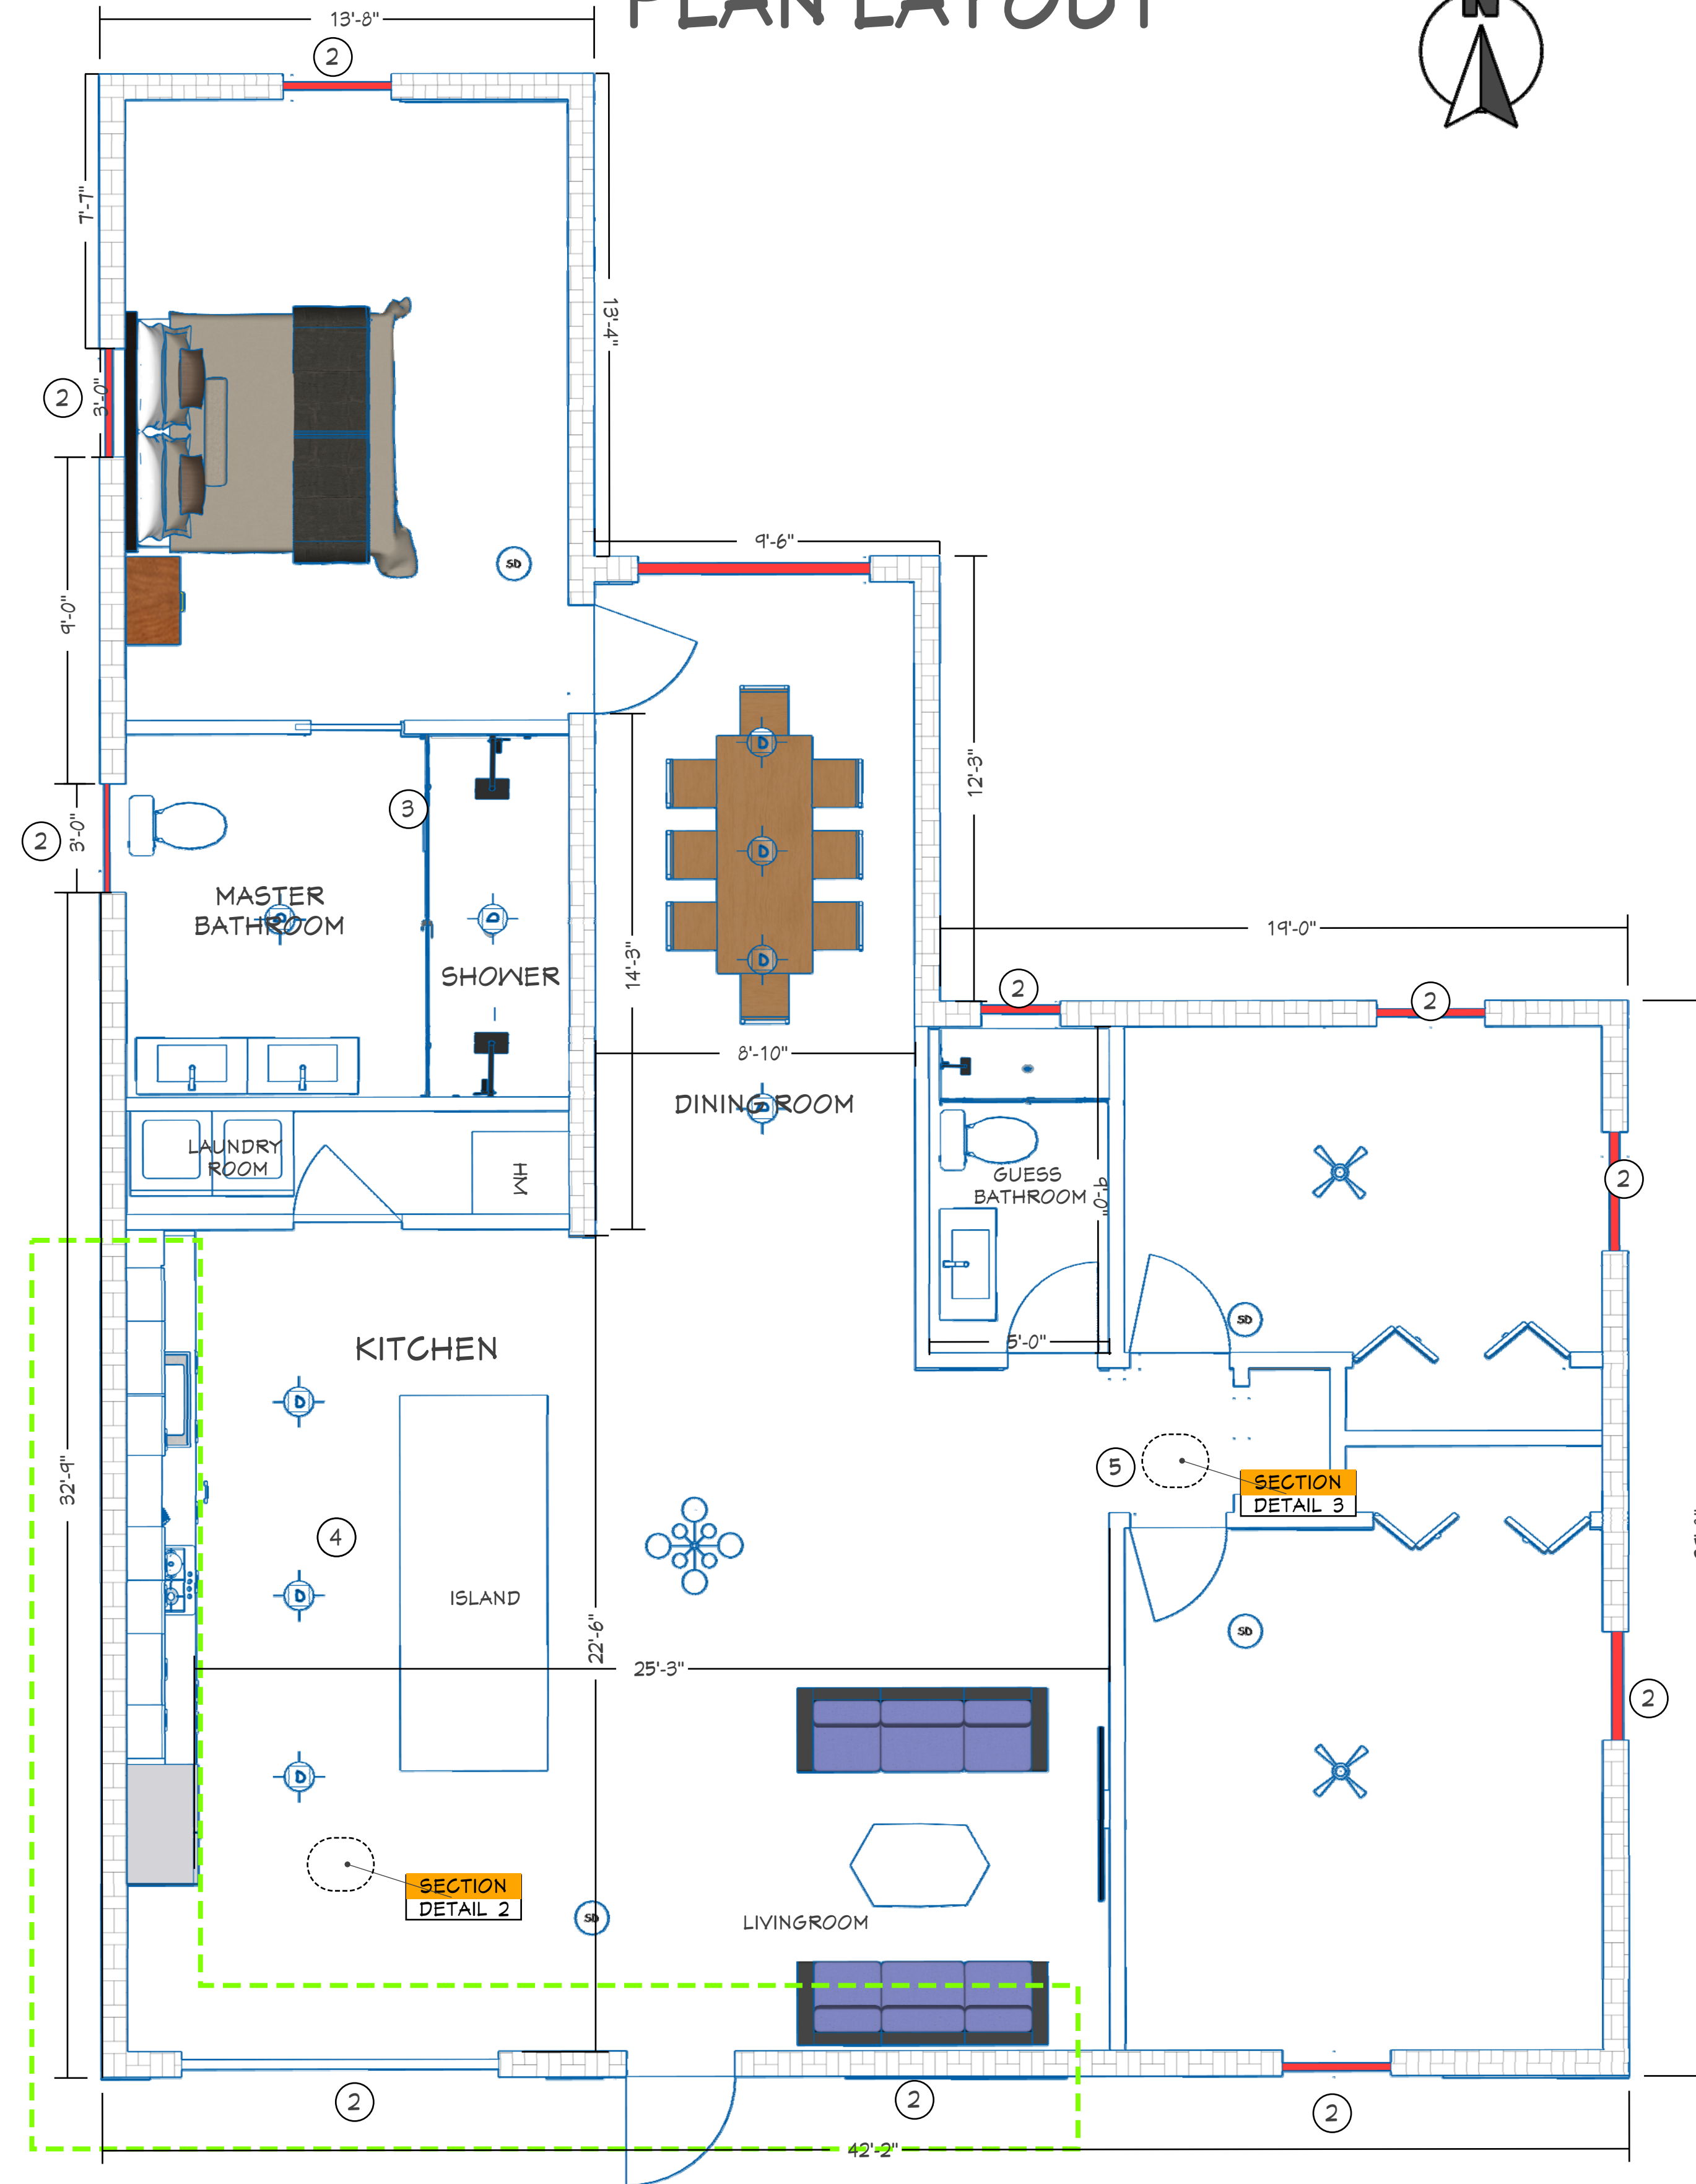

This drawing is the sole property of Seating Constructors USA, (DBA Smart Choice Contractors USA). Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. 2025 Copyright.

SHEET TITLE PROPOSED FLOOR PLAN	CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC	CUSTOMER INFORMATION Email: FOLDRETURNS1@GMAIL.C Phone:OM (781) 420-5726		NICHOLSON ENGINEERING ASSOCIATES, INC. 7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.749.0170 Fax: 352.754.9167		REVISIONS		A 03
	PROJECT ADDRESS: 605 N WOODLYNNE AVE TAMPA, FL 33609-1555	PROJECT OPEN DATE: JAN. 20 2026				DRAWINGS LATEST REMARKS		
						MM/DD/YY		
						1 2 3	01.07.26 RENOVATION DRAWINGS PERMIT SET. 	
PROJECT REVISED BY : MICHAEL D. JOHNSON		PROJECT NUMBER: 0024602		DESIGN DATE: 01.07.26				

GENERAL ELECTRICAL NOTES:

- 1

THE ENTIRE INSTALLATION SHALL BE DONE IN ACCORDANCE WITH THE LATEST EDITION OF THE FBC 2023, NEC 2020 AND OF ALL LOCAL CODES, RULES AND ORDINANCES HAVING JURISDICTION.
- 2

AS A MINIMUM, ALL EQUIPMENT SHALL MEET APPLICABLE STANDARDS, FOR TYPE OF EQUIPMENT AND INTENDED USE, OF THE FOLLOWING:
- a

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)
- b

ILLUMINATING ENGINEERS SOCIETY (IES).
- c

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)
- d

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA). NOTE: THESE STANDARDS ARE SUBORDINATE TO CODES AND STANDARDS SET BY U.L.
- 1

IT SHALL BE UNDERSTOOD THAT ALL WORK PERFORMED SHALL BE BY A LICENSED ELECTRICAL CONTRACTOR IN A FIRST-CLASS WORKMANLIKE MANNER. SAID CONTRACTOR SHALL MEET ALL REQUIREMENTS SET FORTH BY ANY LOCAL ORDINANCE AND GOVERNING AUTHORITIES.
- 2

THE CONTRACTOR SHALL PROVIDE ALL REQUIRED INSURANCE FOR PROTECTION AGAINST PUBLIC LIABILITY AND PROPERTY DAMAGE FOR THE DURATION OF THE WORK.
- 3

THE CONTRACTOR SHALL GUARANTEE ALL MATERIALS AND WORKMANSHIP FREE FROM DEFECTS FOR A PERIOD OF NOT LESS THAN (1) YEAR FROM DATE OF ACCEPTANCE U.O.N.
- 4

IT SHALL NOT BE THE INTENT OF THESE PLANS AND/OR SPECIFICATIONS TO SHOW EVERY MINOR DETAIL OF CONSTRUCTION. THE CONTRACTOR SHALL BE EXPECTED TO FURNISH AND INSTALL ALL ITEMS FOR A COMPLETE ELECTRICAL SYSTEM AND PROVIDE ALL REQUIREMENTS NECESSARY FOR EQUIPMENT TO BE PLACED IN PROPER WORKING ORDER.
- 5

THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING TO ORIGINAL CONDITIONS ANY AND ALL DAMAGES TO BUILDING SURFACES, EQUIPMENT, ETC. CAUSED DURING THE PERFORMANCE OF WORK.
- 6

CORRECTION OF ANY DEFECTS SHALL BE COMPLETED WITHOUT ADDITIONAL CHARGE OR DELAYS AND SHALL INCLUDE REPLACEMENT OR REPAIR OF ANY OTHER PHASE OF THE INSTALLATION WHICH MAY HAVE BEEN DAMAGED THEREBY.
- 7

THE CONTRACTOR SHALL VISIT THE JOB SITE AND VERIFY ALL CONDITIONS, LOCATIONS DIMENSIONS AND COUNTS AS SHOWN OR NOTED ON THE DRAWINGS, PRIOR TO SUBMITTING BID.
- 8

THE CONTRACTOR SHALL NOT SCALE THE ELECTRICAL DRAWINGS, REFER TO ARCHITECTURAL PLANS AND ELEVATIONS FOR EXACT LOCATIONS OF ALL EQUIPMENT UNLESS NOTED OTHERWISE.
- 9

IT SHALL BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR TO PROVIDE ALL LABOR, MATERIALS AND SUPERVISION NECESSARY TO ACCOMPLISH THE WORK AS SHOWN AND/OR NOTED ON THE PLANS.
- 10

IT SHALL BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR FOR THE ADVANCE ORDERING OF LONG LEAD ITEMS, AS TO NOT INTERFERE WITH THE PRODUCTION OF OTHER TRADES RESULTING IN ANY DOWN OR LAG TIME. THE CONTRACTOR SHALL NOT ORDER ANY ITEMS UNTIL APPROVED SHOP DRAWINGS ARE RETURNED TO HIM.
- 11

THE CONTRACTOR SHALL KEEP ALL AREAS WHERE WORK IS BEING PERFORMED FREE FROM DEBRIS AT ALL TIMES AND SAID AREAS SHALL BE LEFT BROOM CLEAN AT THE END OF EACH WORKING DAY.
- 12

ALL CONDUCTORS SHALL BE COPPER, TYPE THHN/THWN EXCEPT WHERE OTHERWISE BY U.L OR CODES. MINIMUM WIRE SIZE SHALL BE #12 AWG. EXCLUDING CONTROL WIRE.
- 13

ALUMINUM CONDUCTORS ARE NOT PERMITTED ANYWHERE.
- 14

ALL CONDUCTORS SHALL BE IN 1/2 IN. MINIMUM CONDUITS (U.O.N.) ALL CONDUITS SHALL BE GALVANIZED RIDGED STEEL (GRS) EXCEPT THAT:
- a

PVC CONDUITS MAY BE USED UNDERGROUND PROVIDED ELBOWS AND RISERS ARE GRS, WHERE SUBJECT TO PHYSICAL DAMAGE
- b

ELECTRICAL METALLIC TUBING (EMT) MAY BE USED IN OR ON WALLS OR CEILINGS WHERE NOT SUBJECT TO MECHANICAL DAMAGE, DAMP OR CORROSIVE CONDITIONS.
- c

LIQUID TIGHT FLEXIBLE CONDUIT WHERE REQUIRED.
- d

FLEXIBLE METALLIC CONDUIT WHERE REQUIRED IN DRY LOCATIONS ONLY ALL CONDUITS IN HAZARDOUS AREAS (PER NEC) SHALL MEET THE REQUIREMENTS OF NEC CH. 5.
- 15

ALL CONDUIT RUNS ARE SHOWN DIAGRAMATICALLY. THE EXACT ROUTING SHALL BE DETERMINED IN THE FIELD, UNLESS NOTED OTHERWISE.
- 16

WHERE CORE DRILLING OF FLOORS/WALLS IS REQUIRED, THE CONTRACTOR SHALL SEAL OPENINGS WATERTIGHT AFTER UTILITIES HAVE BEEN INSTALLED. LOCATION OF CORED HOLES SHALL COORDINATE WITH LOCATION OF EQUIPMENT IN A MANNER THAT IS CLEAN AND FUNCTIONAL. THE CONTRACTOR SHALL INSTALL ONLY ONE CONDUIT PER HOLE AND SEAL THE OPENING AROUND THE CONDUIT.
- 17

PROVIDE FIRE RETARDANT U.L. APPROVED SEALANT ON ALL PENETRATIONS, WALLS AND STRUCTURAL SLABS. IT SHALL BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR TO VERIFY PRIOR TO SUBMITTING BID, THE LOCATIONS OF ALL SUCH FIRE RATED PARTITIONS, WALLS, AND STRUCTURAL SLABS.
- 18

UNLESS NOTED AS EXISTING, ALL EQUIPMENT, WIRING, DEVICES, ETC. SHALL BE NEW.
- 19

ALL DISCONNECT SWITCHES SHALL BE SIZED BY NEC REQUIREMENTS TO ACCOMMODATE EQUIPMENT SERVED, INCLUDING REQUIRED FUSES U.O.N. SWITCHES SHALL BE HORSEPOWER RATED FOR MAX. HORSEPOWER, HEAVY DUTY TYPE.
- 20

THE CONTRACTOR SHALL VERIFY CIRCUIT PROTECTIVE DEVICE RATINGS FOR EQUIPMENT PRIOR TO INSTALLATION.
- 21

ALL FUSES SHALL BE CURRENT LIMITING, PER U.L., RATED 600V. OR 250V. AS REQUIRED, WITH: (a) NON TIME DELAY FUSES IN MAIN SWITCHES AND SWITCHES FEEDING PANELS. (b) TIME DELAY FUSES FOR MOTOR AND HVAC CIRCUITS.
- 22

WIREWAYS SHALL BE SIZED AS REQUIRED, PER NEC, U.O.N.
- 23

ALL CIRCUIT BREAKERS SHALL BE INVERSE TIME TYPE (THERMAL-MAGNETIC). TWO AND THREE POLE CIRCUIT BREAKERS SHALL BE COMMON TRIP. TIE HANDLES ARE NOT PERMITTED.
- 24

ALL ELECTRICAL EQUIPMENT SHALL BE RAIN-TIGHT (NEMA 3R) WHERE EXPOSED TO THE WEATHER. ALL FLEX CONDUITS CONNECTED TO SUCH EQUIPMENT SHALL BE LIQUID-TIGHT.
- 25

OUTLET BOXES SHALL BE PRESSED STEEL IN DRY LOCATIONS, CAST ALLOY WITH THREADED HUBS IN WET OR DAMP LOCATIONS AND SPECIAL ENCLOSURES AS REQUIRED FOR OTHER CLASSIFIED AREAS. U.O.N.
- 26

ALL CONNECTIONS TO GROUND RODS SHALL BE MADE WITH U.L. APPROVED WELDED CONNECTIONS, UNLESS NOTED OTHERWISE. THE CONTRACTOR SHALL FORM A GROUNDING ELECTRODE SYSTEM AS PER NEC 250-50.
- 27

THE CONTRACTOR SHALL SUBMIT 6 COPIES OF EQUIPMENT SHOP DRAWINGS FOR ELECTRICAL EQUIPMENT TO THE ENGINEER FOR REVIEW, PRIOR TO ORDERING SUCH EQUIPMENT.
- 28





PROPER PLASTER RINGS SHALL BE USED WITH OUTLET BOXES. PLASTER RINGS SHALL BE A MAXIMUM OF 1/8" FROM THE FINISHED SURFACE OF THE DRYWALL AFTER THE DRYWALL IS INSTALLED. PROPER COORDINATION BETWEEN THE ELECTRICAL CONTRACTOR AND THE GENERAL CONTRACTOR FOR RING INSTALLATION IS REQUIRED NO "GOOF" RINGS WILL BE ALLOWED. ALL OUTLET BOXES SHALL BE SECURELY FASTENED, ANY AND ALL IMPROPERLY INSTALLED PLASTER RINGS OR OUTLET BOXES SHALL BE REMOVED AND A NEW RING OR OUTLET INSTALLED AT THE CONTRACTOR'S EXPENSE.
- 29

FOR EMERGENCY EXIT SIGNS AND EMERGENCY BATTERY PACKS MAKE CONNECTION AHEAD OF ALL SWITCHES

PROPOSED FLOOR

ELECTRICAL PLAN LAYOUT

ELECTRICAL PLAN LEGEND:

	PRE - WIRE CLG. CEILING FAN WITH LIGHT (SPLIT SWITCH -OFF)
	EXHAUST FAN
	CEILING LIGHT FIXTURE
	110 VOLTS. DUPLEX RECEPTABLE
	110 VOLTS. GFCI OUTLET
	SMOKE DETECTOR WITH (ELECTRIC POWERED WITH BATTERIES BACK-UP)
	LIGHT SWITCH
	110 VOLTS TV OUTLET
	CHANDALIER LAMP

ELECTRICAL LOAD CALCULATION – DWELLING UNIT
(NEC 2020 / FBC 2023)

PROJECT ADDRESS: 605 WOODLYNNE AVE, TAMPA, FL 33609
HEATED/CONDITIONED FLOOR AREA (A/C): 1,445 SF
CALCULATION METHOD: NEC 2020 ARTICLE 220 – OPTIONAL METHOD (220.82)

GENERAL LIGHTING & GENERAL-USE RECEPTACLES (220.82(B)(1))
3 VA/SF x 2,105 SF = 6,315 VA (A1) 6,315 VA

SMALL APPLIANCE & LAUNDRY CIRCUITS (220.82(B)(2))
SMALL APPLIANCE CIRCUITS (2) @ 1,500 VA = 3,000 VA
LAUNDRY CIRCUIT (1) @ 1,500 VA = 1,500 VA
SUBTOTAL (A2) 4,500 VA

FASTENED-IN-PLACE APPLIANCES (220.82(B)(3)) (VERIFY NAMEPLATES)
RANGE/OVEN 8,000 VA
MICROWAVE/HOOD 1,000 VA
ELECTRIC WATER HEATER 4,500 VA
REFRIGERATOR 1,250 VA
CLOTHES WASHER 1,500 VA
CLOTHES DRYER 5,000 VA
DISHWASHER 1,500 VA
FOOD WASTE DISPOSER 600 VA
BATH FANS (2) @ 100 VA 200 VA
APPLIANCE SUBTOTAL (A3) 23,550 VA

TOTAL GENERAL + CIRCUITS + APPLIANCES
(A1) 6,315 + (A2) 4,500 + (A3) 23,550 = 34,365 VA (A) 34,365 VA.

DEMAND FACTOR (220.82(B))
FIRST 10,000 VA @ 100% 10,000 VA

REMAINDER: (34,365 – 10,000) = 24,365 VA @ 40% = 9,746 VA

DEMANDED GENERAL/APPLIANCE LOAD (DGA) 19,746 VA

HVAC / HEATING LOAD (220.82(C)) – LARGEST AT 100%
AIR HANDLER: GOODMAN MODEL ARUF48D14AC, 208/230V, 1PH
NAMEPLATE (ASSUMED HEAT KIT HKSC10XF): MCA = 48A, MOP = 60A
HVAC LOAD = MCA x 240V = 48A x 240V = 11,520 VA (HVAC) 11,520 VA
(ROUND UP FOR SERVICE CALC) (HVAC) 12,000 VA

TOTAL SERVICE LOAD (OPTIONAL METHOD)
(DGA) 19,746 VA + (HVAC) 12,000 VA = 31,746 VA (TSL) 31,746 VA

SERVICE AMPERES
31,746 VA + 240V = 132.3 AMPS (SA) 132.3 A

SERVICE / PANEL SELECTION (DESIGN)
PROVIDE 200A, 120/240V, 1PH, 3W MAIN SERVICE AND PANELBOARD.
LOAD CALC INDICATES MINIMUM 150A SERVICE; 200A PROVIDED FOR
REMODEL CAPACITY AND FUTURE LOADS (EV, ADDITIONAL APPLIANCES).

- NOTES:
- 1

ALL APPLIANCE VA VALUES SHALL BE VERIFIED AGAINST FINAL MANUFACTURER NAMEPLATES PRIOR TO ROUGH-IN INSPECTION.
- 2

HVAC LOAD BASED ON MANUFACTURER NAMEPLATE MCA. ELECTRIC HEAT IS THE GOVERNING LOAD WHEN INSTALLED (LARGEST OF HEAT OR COOL).
- 3

CALCULATION PREPARED PER NEC 2020 ARTICLE 220 (OPTIONAL METHOD

ELECTRICAL GENERAL NOTES:

- 1

POP UP OUTLET ELECTRICAL POWER SOCKET FOR KITCHEN COUNTERTOP, RETRACTABLE RECESSED POWER STRIP. ELECTRICAL CONDUIT AND WIRE TO KITCHEN ISLAND ARE EXISTING FROM PREVIOUS KITCHEN
- 2

2 (TWO) EXISTING MAIN PANELS EATON 200 AMPS. 225 BUSBAR
- 3

RECESSED LIGHT MUST BE L.E.D TYPE, NO LIGHT CAN BE REQUIRED TO INSTALL OR MUST BE INSIDE J.B. PROVIDED FOR MANUFACTURE WITH FIXTURE OR PROVIDE ONE FOR CONNECTIONS.
- ADDITIONAL NOTES:

FOR EXISTING WIRES RETROFIT OR RELOCATION ALL ELECTRIC SPLICES NEED TO BE INSIDE A JUNCTION BOX. THE JUNCTION BOX WILL PROVIDE PROTECTION FROM ANY ACCIDENTAL ELECTRICAL SHOCK AS WELL AS PHYSICAL PROTECTION FOR THE CABLE SPLICES.

This drawing is the sole property of Seating ConstructorsUSA , (DBA Smart Choice ContractorsUSA) Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice ContractorsUSA . 2025 Copyright .

SHEET TITLE		CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC		CUSTOMER INFORMATION Email: FOLDRETURNS1@GMAIL.C Phone:OM (781) 420-5126			NICHOLSON ENGINEERING ASSOCIATES, INC.			REVISIONS				A 04
ELECTRICAL PLAN		PROJECT ADDRESS: 605 N WOODLYNNE AVE TAMPA, FL 33609-1555		PROJECT OPEN DATE: JAN. 20 2026			7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167			DRAWINGS LATEST REMARKS				
										1 01.07.26 RENOVATION DRAWINGS PERMIT SET.				
										2				
								3						
				PROJECT REVISED BY : MICHAEL D. JOHNSON						PROJECT NUMBER: 0024602		DESIGN DATE: 01.07.26		

AIR CONTONER GENERAL NOTES:

ATTIC-MOUNTED AIR HANDLER INSTALLATION SHALL COMPLY WITH FLORIDA BUILDING CODE 2023 (8TH ED.), FLORIDA MECHANICAL CODE, AND FLORIDA ENERGY CONSERVATION CODE.

AIR HANDLER IS LOCATED WITHIN THE ATTIC SPACE ABOVE CONDITIONED AREAS AS SHOWN.

STRUCTURAL SUPPORT & PLATFORM NOTE (REQUIRED):

- HAIR HANDLER SHALL BE SUPPORTED ON A PERMANENT STRUCTURAL PLATFORM DESIGNED TO SUPPORT THE EQUIPMENT LOAD.
- PLATFORM SHALL BE FRAMED WITH MINIMUM 2X MEMBERS, SHEATHED WITH MIN. 3/4" PLYWOOD OR OSB, AND ANCHORED TO STRUCTURAL FRAMING.
- PLATFORM SHALL NOT BE SUPPORTED BY CEILING DRYWALL OR NON-STRUCTURAL COMPONENTS.

SECONDARY DRAIN PAN & OVERFLOW PROTECTION (CRITICAL):

PROVIDE SECONDARY DRAIN PAN UNDER ATTIC AIR HANDLER CONSTRUCTED OF CORROSION-RESISTANT MATERIAL.

SECONDARY PAN SHALL DRAIN TO A ATTIC WALKWAY / WORKING PLATFORM NOTE VISIBLE LOCATION OUTSIDE THE BUILDING.

PROVIDE FLOAT SWITCH OR OTHER APPROVED OVERFLOW SHUTOFF DEVICE INSTALLED IN SECONDARY PAN AND WIRED TO SHUT DOWN SYSTEM UPON WATER DETECTION.

CONDENSATE DRAIN NOTE:

PROVIDE MINIMUM 22" X 30" ATTIC ACCESS OPENING FOR AIR HANDLER SERVICE.

PROVIDE MINIMUM 30" CLEAR WORKING SPACE IN FRONT OF AIR HANDLER SERVICE ACCESS PANEL.

ACCESS PATH TO UNIT SHALL BE PROVIDED WITH SOLID WALKWAY MIN. 24" WIDE FROM ATTIC ACCESS TO EQUIPMENT.

ATTIC ACCESS & SERVICE CLEARANCE (MANDATORY):

PROVIDE MINIMUM 22" X 30" ATTIC ACCESS OPENING FOR AIR HANDLER SERVICE.

PROVIDE MINIMUM 30" CLEAR WORKING SPACE IN FRONT OF AIR HANDLER SERVICE ACCESS PANEL.

ACCESS PATH TO UNIT SHALL BE PROVIDED WITH SOLID WALKWAY MIN. 24" WIDE FROM ATTIC ACCESS TO EQUIPMENT.

ATTIC WALKWAY / WORKING PLATFORM NOTE:

PROVIDE PERMANENT ATTIC WALKWAY FROM ACCESS OPENING TO AIR HANDLER.

WALKWAY SHALL BE CONSTRUCTED OF MIN. 3/4" SOLID SHEATHING AND SHALL NOT COMPRESS INSULATION.

DUCTWORK LOCATION & AIRFLOW DIRECTION:

SUPPLY AND RETURN DUCTWORK SHALL BE ROUTED WITHIN THE INSULATED ATTIC SPACE AS SHOWN.

DUCTS SHALL BE SUSPENDED ABOVE INSULATION AND SHALL NOT REST DIRECTLY ON CEILING DRYWALL.

AIRFLOW DIRECTION IS INDICATED BY ARROWS ON PLANS.

ELECTRICAL SAFETY NOTE:


PROVIDE DISCONNECT WITHIN SIGHT OF AIR HANDLER OR LOCKABLE BREAKER IN ACCORDANCE WITH CODE.

PROVIDE LIGHT AND SWITCH AT AIR HANDLER LOCATION.

WIND & ATTIC PENETRATION NOTE:

ALL ROOF AND CEILING PENETRATIONS FOR MECHANICAL SYSTEMS SHALL BE SEALED AIR-TIGHT AND WEATHER-TIGHT TO MAINTAIN BUILDING ENVELOPE INTEGRITY.

PLUMBING AND HVAC
PLAN LAYOUT

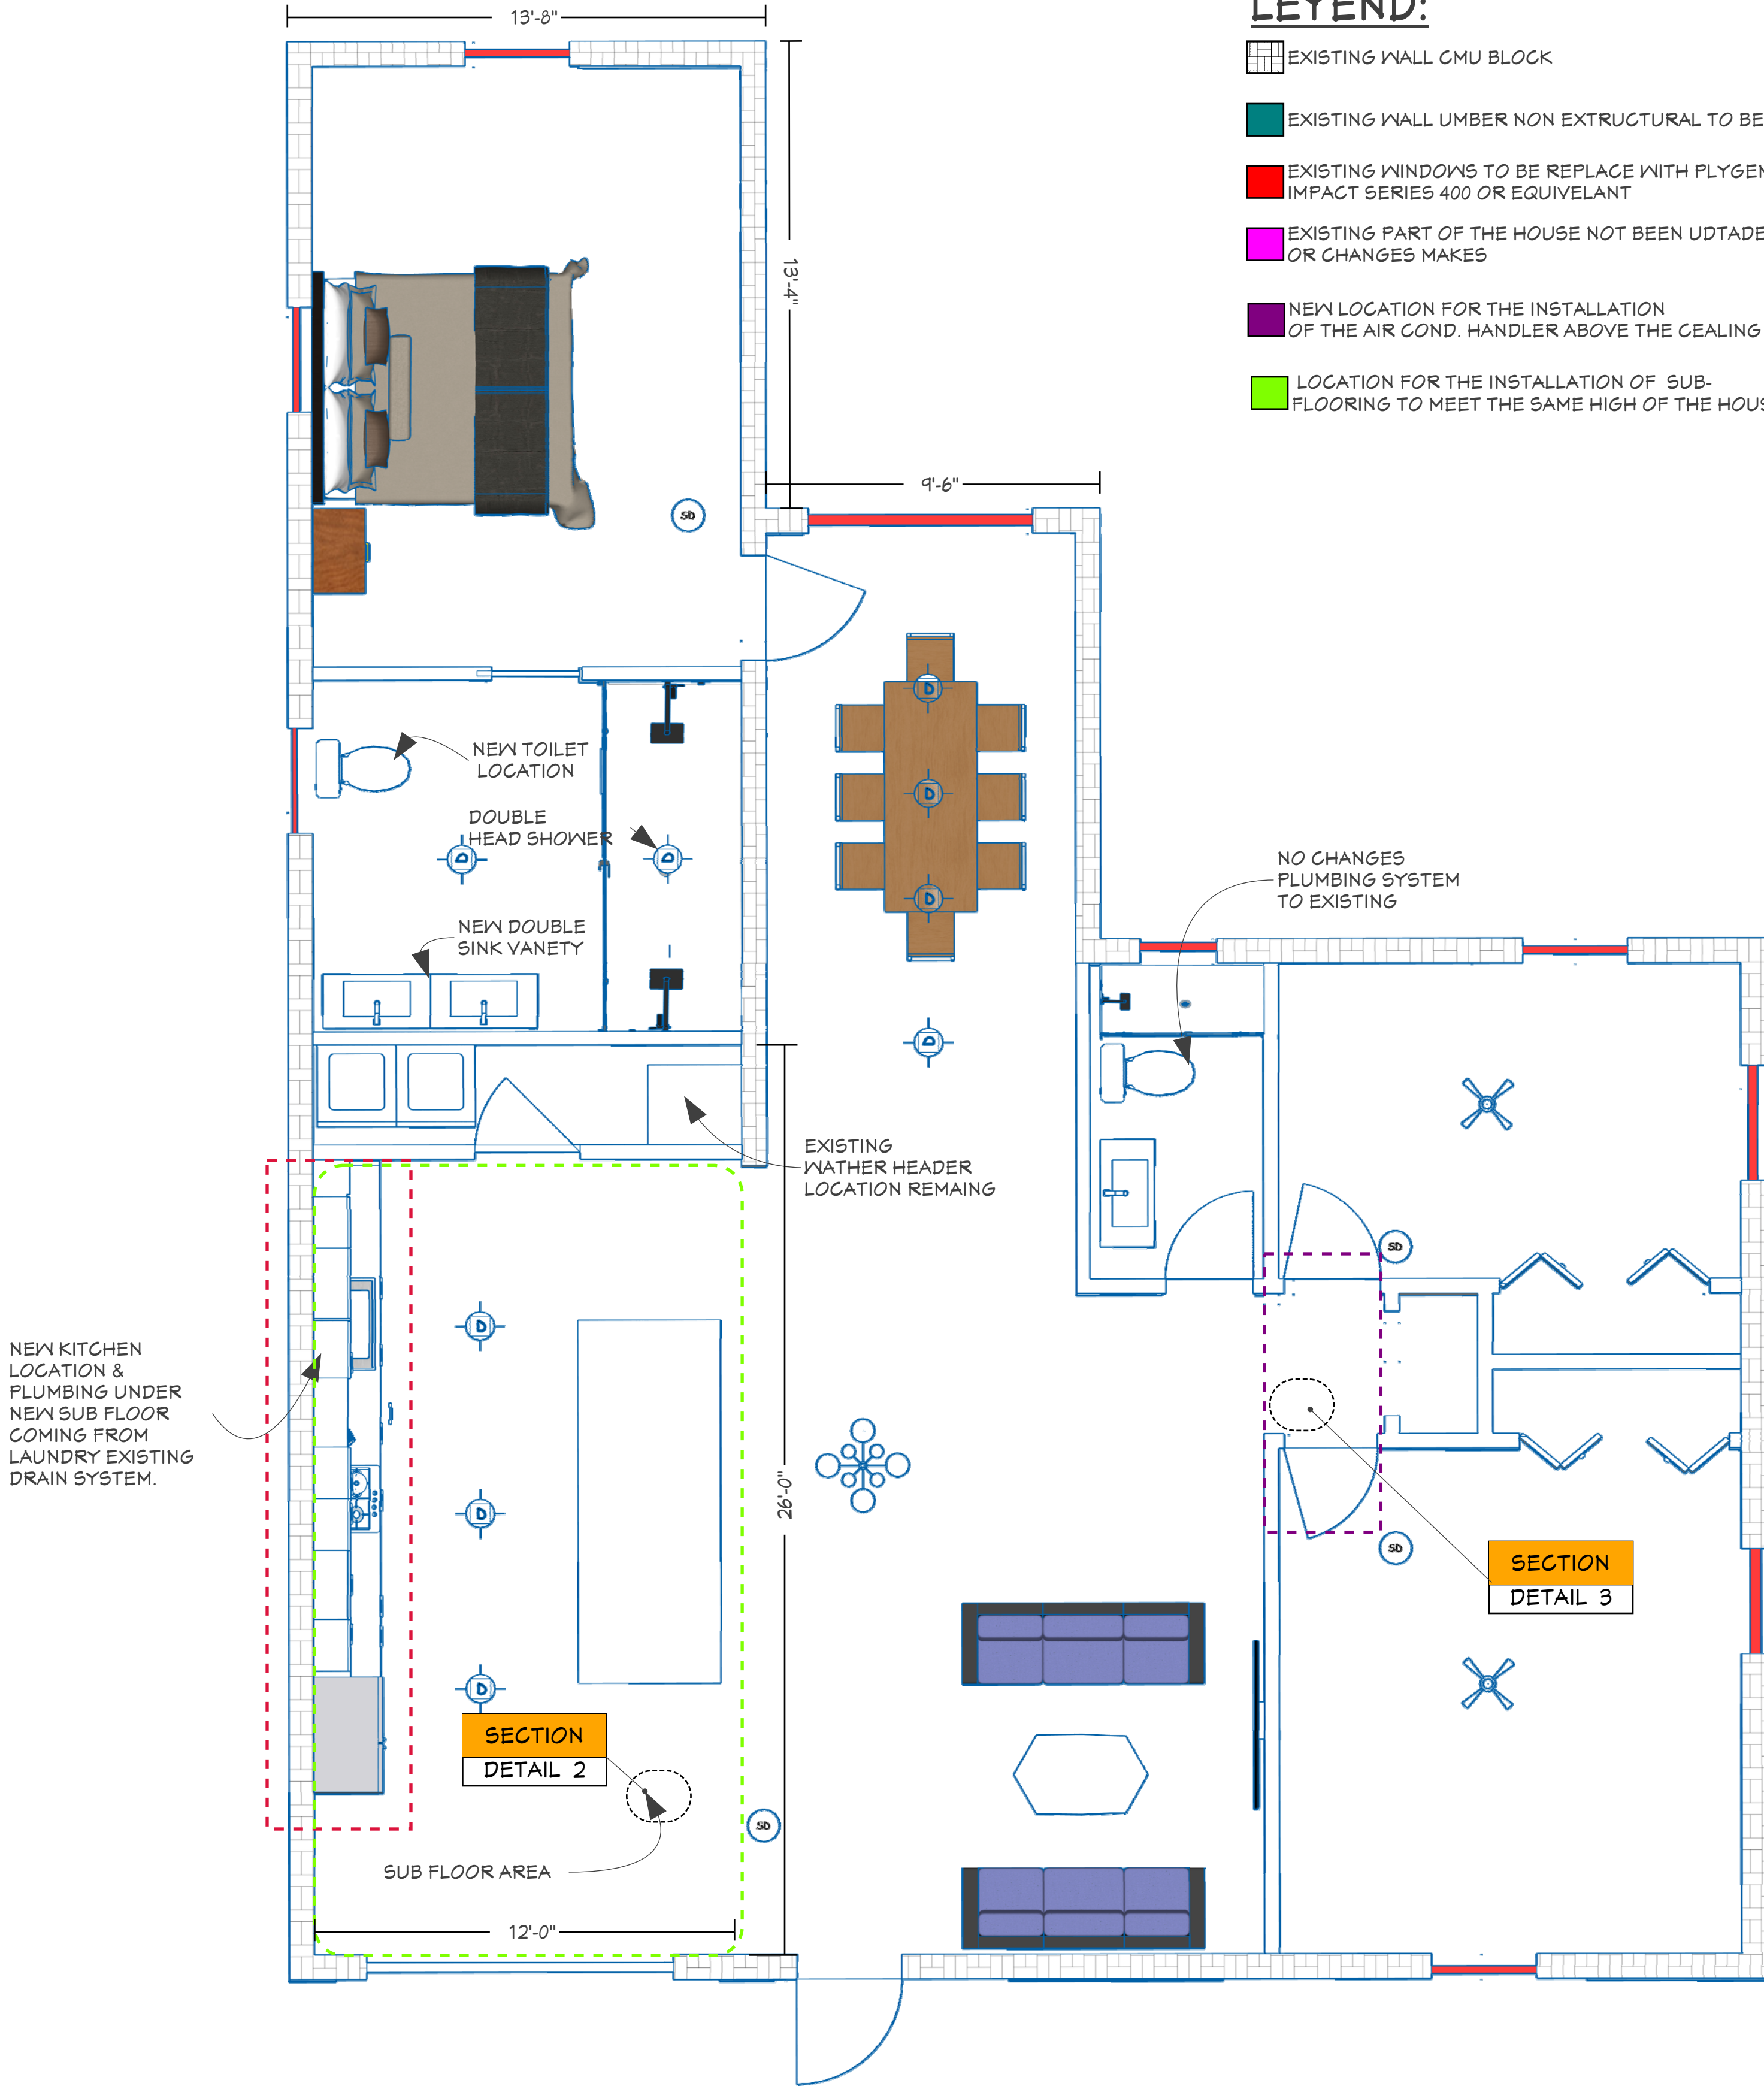

LEGEND:

- EXISTING WALL CMU BLOCK
- EXISTING WALL UMBER NON EXSTRUCTURAL TO BE REMOVED
- EXISTING WINDOWS TO BE REPLACE WITH PLYGEM WINDOWS IMPACT SERIES 400 OR EQUIVELANT
- EXISTING PART OF THE HOUSE NOT BEEN UDTADED OR CHANGES MAKES
- NEW LOCATION FOR THE INSTALLATION OF THE AIR COND. HANDLER ABOVE THE CEALING
- LOCATION FOR THE INSTALLATION OF SUB-FLOORING TO MEET THE SAME HIGH OF THE HOUSE.

PLUMBING GENERAL NOTES:
(ONE FLOOR PLAN- TWO BATHROOMS):

- ALL PLUMBING WORK SHALL COMPLY WITH THE FLORIDA BUILDING CODE - PLUMBING (FBC-P 2013), FLORIDA BUILDING CODE - RESIDENTIAL, AND ALL APPLICABLE CITY OF TAMPA / HILLSBOROUGH COUNTY REQUIREMENTS.
- A PLUMBING PERMIT IS REQUIRED FOR ALL RELOCATED AND NEW PLUMBING FIXTURES AND ASSOCIATED PIPING.
- CONTRACTOR SHALL VERIFY ALL EXISTING PIPE SIZES, VENT LOCATIONS, ELEVATIONS, AND CONNECTION POINTS PRIOR TO ROUGH-IN. ANY CONFLICTS SHALL BE REPORTED TO THE DESIGNER AND AHJ BEFORE CONTINUING WORK.
- ALL PLUMBING MATERIALS, FITTINGS, VALVES, AND FIXTURES SHALL BE LISTED, LABELED, AND APPROVED AND INSTALLED PER MANUFACTURER'S INSTRUCTIONS.
- PROVIDE ACCESSIBLE SHUTOFF VALVES FOR EACH FIXTURE AND EACH BATHROOM GROUP.
- ALL NEW OR MODIFIED DRAIN, WASTE, VENT (DWV) AND WATER PIPING SHALL BE TESTED IN ACCORDANCE WITH CODE PRIOR TO CONCEALMENT.
- NO PLUMBING INSTALLATION SHALL COMPROMISE STRUCTURAL MEMBERS. ALL DRILLING AND NOTCHING SHALL COMPLY WITH STRUCTURAL AND MANUFACTURER LIMITATIONS.
- PROVIDE FIREBLOCKING AND SEALING AT ALL FLOOR AND WALL PENETRATIONS PER FBC REQUIREMENTS.
- ALL PLUMBING FIXTURES SHALL BE INSTALLED TO MAINTAIN REQUIRED CLEARANCES AND ACCESSIBILITY.
- ALL WORK SHALL BE SUBJECT TO ROUGH-IN, PAN, AND FINAL INSPECTIONS BY THE CITY OF TAMPA.

FIXTURE SCOPE (PER PLAN):

- RELOCATE (1) TOILET
- RELOCATE (1) SHOWER
- INSTALL (1) DOUBLE LAVATORY VANITY - MASTER BATHROOM.
- INSTALL (1) SINGLE LAVATORY VANITY - GUEST BATHROOM.
- RUN A PLUMBING PIPING FOR THE NEW KITCHEN POCATION FROM THE LAUNDRY.
- REPLACE PLUMBING FOR THE GUES BATHROM AND MASTER BATHROOM
- RELOCATED I EXAUTH VENT A RE INSTALL NEW ONE ON GUESS BATHROOM.

NO INCREASE IN TOTAL FIXTURE COUNT.

BATHROOMS (TOILET) NOTES - (2 TOTAL):

- TOILETS SHALL DISCHARGE INTO A MINIMUM 3-INCH SANITARY DRAIN, UNLESS EXISTING CONDITIONS ARE VERIFIED AND APPROVED BY THE AHJ.
- EACH TOILET SHALL BE INDIVIDUALLY TRAPPED AND PROPERLY VENTED PER FBC-P.
- PROVIDE AN ACCESSIBLE X-TURN ANGLE STOP AT EACH TOILET SUPPLY.
- MAINTAIN MINIMUM CLEARANCES:

*15 INCHES MINIMUM FROM TOILET CENTERLINE TO SIDE WALL OR FIXTURE.
*21 INCHES MINIMUM CLEAR SPACE IN FRONT OF TOILET.

- TOILET FLANGE SHALL BE INSTALLED FLUSH WITH FINISHED FLOOR AND SECURELY ANCHORED.

SHOWER NOTES - (2 TOTAL):

- SHOWERS SHALL BE PROVIDED WITH LISTED PRESSURE-BALANCED OR THERMOSTATIC MIXING VALVES (ANTI-SCALD).
- SHOWER DRAINS SHALL BE MINIMUM 2 INCHES IN DIAMETER.
- EACH SHOWER SHALL BE INDIVIDUALLY TRAPPED AND VENTED.
- PROVIDE A CODE-APPROVED SHOWER PAN OR WATERPROOFING SYSTEM.
- SHOWER PAN SHALL BE WATER-TESTED PRIOR TO CONCEALMENT AND INSPECTED BY AHJ.
- ALL PENETRATIONS THROUGH WATERPROOFING SHALL BE PROPERLY SEALED.

LAVATORY NOTES - MASTER BATHROOM (DOUBLE SINK):

- TWO LAVATORIES SHALL BE INSTALLED AS SHOWN ON PLANS.
- EACH LAVATORY SHALL BE INDIVIDUALLY TRAPPED.
- COMMON VENTING IS PERMITTED ONLY IF CODE-COMPLIANT AND PROPERLY SIZED.
- PROVIDE HOT AND COLD WATER SUPPLIES WITH INDIVIDUAL ANGLE STOPS AT EACH LAVATORY.
- DRAIN AND VENT PIPING SHALL BE SIZED BASED ON FIXTURE UNIT REQUIREMENTS.
- COORDINATE WITH ELECTRICAL PLANS FOR REQUIRED GFCI RECEPTACLES AT VANITY.

LAVATORY NOTES - GUEST BATHROOM (SINGLE SINK):

- LAVATORY SHALL BE INDIVIDUALLY TRAPPED AND VENTED.
- PROVIDE HOT AND COLD WATER SUPPLIES WITH ACCESSIBLE SHUTOFF VALVES.
- DRAIN PIPING SHALL CONNECT TO SANITARY SYSTEM USING APPROVED FITTINGS ONLY.
- MAINTAIN REQUIRED CLEARANCES AND SERVICE ACCESS.

VENTING NOTES:

- ALL FIXTURES SHALL BE VENTED TO PREVENT SIPHONAGE AND BACKPRESSURE.
- VENT PIPING SHALL TERMINATE TO THE EXTERIOR IN ACCORDANCE WITH CODE.
- NO S-TRAPS OR FLAT VENTS PERMITTED.
- HORIZONTAL VENT RUNS SHALL MAINTAIN REQUIRED SLOPE.
- WATER SUPPLY NOTES.

WATER SUPPLY NOTES:

- WATER DISTRIBUTION PIPING SHALL BE SIZED TO MAINTAIN ADEQUATE PRESSURE AT THE MOST REMOTE FIXTURE.
- WATER HAMMER ARRESTORS SHALL BE INSTALLED WHERE QUICK-CLOSING VALVES ARE USED.
- HOT WATER PIPING SHALL COORDINATE WITH FBC ENERGY REQUIREMENTS.
- ALL PIPING SHALL BE PROPERLY SUPPORTED AND PROTECTED.

CLEANOUT NOTES:

PROVIDE CLEANOUTS AT:
BASE OF EACH STACK.
CHANGES OF DIRECTION GREATER THAN 45 DEGREES.
LOCATIONS REQUIRED FOR MAINTENANCE ACCESS.
CLEANOUTS SHALL REMAIN ACCESSIBLE AFTER CONSTRUCTION.

PERMIT REVIEWER NOTE:

THIS PROJECT CONSISTS OF RELOCATING PLUMBING FIXTURES WITHIN EXISTING SECOND-FLOOR BATHROOMS. NO INCREASE IN FIXTURE COUNT. WORK INCLUDES NEW SANITARY, VENT, AND WATER CONNECTIONS TIED INTO EXISTING APPROVED SYSTEMS. ALL WORK SHALL COMPLY WITH FLORIDA BUILDING CODE - PLUMBING AND CITY OF TAMPA REQUIREMENTS

This drawing is the sole property of Seating ConstructorsUSA , (DBA Smart Choice ContractorsUSA) Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice ContractorsUSA . 2025 Copyright .

SHEET TITLE		CUSTOMER NAME:		CUSTOMER INFORMATION		NICHOLSON ENGINEERING ASSOCIATES, INC.		Smart Choice CONTRACTORS Done right Guaranteed!		REVISIONS	
PLUMBING & HVAC PLAN		EDUARDO MATOSINHO/100 FOLD RETURNS LLC		Email: FOLDRETURNS1@GMAIL.C Phone:OM (781) 420-5126		7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167				DRAWINGS LATEST REMARKS	
		PROJECT ADDRESS:		PROJECT OPEN DATE:							
		605 N WOODLYNNE AVE TAMPA, FL 33609-1555		JAN. 20 2026							
				PROJECT REVISED BY :						PROJECT NUMBER: 0024602	
				MICHAEL D. JOHNSON						DESIGN DATE: 01.07.26	

SUB-FLOOR DETAIL SECTION (TYP.)

8" TOTAL BUILD UP TO MEET FLOOR PLAN HIGH
2x8 SPF No 2 OR BETTER (ACTUAL 1 1/4")
3/4" T&G PLYWOOD, EXPOSURE 1, APA-RATED
PER R317.1 & R317.1.2, WOOD IN CONTACT WITH
CONCRETE MUST BE PROTECTED

SECTION
DETAIL 1

YELLOW PINE 2X8 TRUSS SYSTEM - INSPECTED AND FOUND
TO BE IN GOOD CONDITION, SPACED AT 24" O.C., TO BE
INSULATED WITH OPEN CELL SPRAY FOAM, MINIMUM
INSULATION R-VALUE R-30.

ANY EXISTING DAMAGE TO STRUCTURAL
MEMBERS SHALL BE REPAIRED IN
ACCORDANCE WITH FLORIDA BUILDING
CODE 2023. WOOD MEMBERS (2X6 OR 2X8)
SHALL BE SANDBWICHED OR SPLICED AS
REQUIRED BY CODE, WITH MINIMUM OVERLAP
LENGTH OF 24-28 INCHES OR AS SPECIFIED BY
CODE. ALL REPAIRS SHALL USE LUMBER TYPES
TYPICALLY UTILIZED IN RESIDENTIAL
CONSTRUCTION OF THE 1970S, INSTALLED AND
FASTENED PER STANDARD PRACTICES TO
RESTORE STRUCTURAL INTEGRITY.

ROOF AND TRUSS SYSTEM NOTE (FBC 2023 COMPLIANT)

EXISTING TRUSS SYSTEM TO REMAIN AND IS VERIFIED AS PREVIOUSLY INSTALLED IN ACCORDANCE
WITH APPLICABLE FLORIDA BUILDING CODE REQUIREMENTS AT TIME OF CONSTRUCTION; NO
MODIFICATIONS TO PRIMARY ROOF FRAMING ARE PROPOSED UNDER THIS SCOPE. ALL TRUSSES
SHALL CONTINUE TO COMPLY WITH FBC CHAPTER 8 AND R802 AS APPLICABLE, INCLUDING
CONNECTIONS AND LOAD PATH. CATHEDRAL CEILING SECTION SHALL REMAIN AT ITS CURRENT
CONFIGURATION; LIMITS OF CATHEDRAL AREA ARE EXACTLY AS EXISTING AND TERMINATE AT
THE SAME POINT WHERE THE ORIGINAL CATHEDRAL SECTION ENDS. NO EXTENSION OR ALTERATION
OF THE CATHEDRAL FRAMING IS INCLUDED. EXISTING FLAT ROOF SECTION WITH TPO MEMBRANE HAS
BEEN VISUALLY INSPECTED AND IS CONFIRMED TO BE IN SERVICEABLE AND GOOD CONDITION; NO
STRUCTURAL OR MEMBRANE REPLACEMENT IS REQUIRED AT THIS TIME. ANY WORK PERFORMED
ADJACENT TO ROOF SYSTEM SHALL MAINTAIN EXISTING STRUCTURAL INTEGRITY, WEATHERPROOFING,
AND CODE COMPLIANCE.

LAUNDRY AREA INCLUDED WITHIN
THIS MODIFICATION AND CONSIDERED
PART OF THE ORIGINAL HOUSE
LAYOUT; NO CHANGE TO ORIGINAL
FUNCTIONAL DESIGN.

6' X 80" OPENING TO BE ENCLOSED USING 2X6 OR 2X8 STUD
FRAMING (MATCHING WALL THICKNESS), WITH CMU INFILL AS
REQUIRED; INSTALL MOISTURE BARRIER PAPER, EXTERIOR
METAL MESH AND STUCCO FINISH TO MATCH EXISTING FACADE
(PER ENGINEER LETTER); INTERIOR TO RECEIVE DRYWALL FINISH
AND INSULATION WITH MINIMUM R-18 VALUE. (TYP.)

KITCHEN FLOOR AREA TO BE RAISED 8 IN.
USING PRESSURE-TREATED 2X8
FRAMING; INSTALL PLYWOOD SUBFLOOR
ON TOP, SECURED WITH NAILS AND SCREWS;
PROVIDE PROPER SEPARATION SO WOOD DOES
NOT CONTACT CONCRETE.

NOTICE: EXISTING EXTERIOR WALLS ARE
CONSTRUCTED OF CMU (CINDER BLOCK)
WITH PAINTED, SMOOTH FINISH; NO
STUCCO AND NO TEXTURE. EXISTING
WALL THICKNESS, DIMENSIONS, AND
ALIGNMENTS SHALL REMAIN UNCHANGED.
NO MODIFICATIONS, ALTERATIONS,
OR ADDITIONS TO THE EXISTING
EXTERIOR WALLS ARE PROPOSED.

WINDOW INSTALLATION: TO FOLLOW MANUFACTURER SPECIFICATIONS,
INCLUDING FASTENING WITH SCREWS 3 INCHES FROM BOTTOM AND
SPACED ACCORDING TO SCREEN THICKNESS REQUIREMENTS. WHERE
MULTIPLE WINDOWS ARE MOUNTED ADJACENTLY AND MOLDED TOGETHER,
STAINLESS STEEL SCREWS SHALL BE USED TO SECURE THE MOLDS
BETWEEN WINDOWS, ENSURING PROPER ALIGNMENT,
STRUCTURAL INTEGRITY, AND COMPLIANCE WITH
FLORIDA BUILDING CODE 2023.

DOOR REMOVAL AND WALL INFILL NOTE:
(FBC 2023 COMPLIANT)

EXISTING EXTERIOR DOOR, FRAME, JAMB AND
THRESHOLD TO BE FULLY REMOVED.
OPENING TO BE INFILLED WITH WOOD
FRAMING TO MATCH EXISTING WALL THICKNESS
AND STRUCTURAL CONFIGURATION IN
ACCORDANCE WITH 2023 FLORIDA BUILDING
CODE (FBC RESIDENTIAL/BUILDING AS APPLICABLE).
PROVIDE PRESSURE-TREATED SILL PLATE IN CONTACT
WITH CONCRETE PER FBC R317, ANCHORED WITH 1/2" BOLTS
AT MAX 6'-0" O.C. INSTALL STUDS AT 16" O.C., DOUBLE
TOP PLATE TIED INTO EXISTING FRAMING, AND HEADER SIZED
TO MATCH EXISTING OR AS REQUIRED BY FBC R602.7. I
NSTALL 1/16" OSB EXPOSURE 1 OR 1/2" EXTERIOR-GRADE
PLYWOOD SHEATHING FASTENED PER FBC TABLE R602.3(1).
PROVIDE CONTINUOUS WATER-RESISTIVE BARRIER PER
FBC R703.2; APPROVED PRODUCT: DUPONT™ TYVEK® HOMEWRAF®
INSTALLED SHINGLE-FASHION WITH TAPED SEAMS AND FULL
INTEGRATION INTO EXISTING WRB TO MAINTAIN CONTINUOUS
DRAINAGE PLANE. EXTERIOR FINISH TO MATCH EXISTING FACADE
IN MATERIAL, PROFILE, TEXTURE AND COLOR; IF STUCCO,
INSTALL LATH AS REQUIRED AND APPLY THREE-COAT SYSTEM
TO MATCH ADJACENT SURFACE; IF SIDING, INSTALL MATCHING
PROFILE AND PROVIDE PROPER FLASHING AT TRANSITIONS. P
ROVIDE CAVITY INSULATION TO MATCH EXISTING R-VALUE PER
FLORIDA ENERGY CODE; INSTALL 1/2" GYPSUM BOARD, FINISH,
TEXTURE AND PAINT TO MATCH ADJACENT INTERIOR. ALL
WORK SHALL COMPLY WITH FBC CHAPTERS 6 AND 7, MANUFACTURER
INSTALLATION REQUIREMENTS, AND LOCAL JURISDICTIONAL
AMENDMENTS; REQUIRED INSPECTIONS TO INCLUDE FRAMING
(IF APPLICABLE) AND FINAL.

TRUSS CONNECTION / HURRICANE TIE NOTE
(FBC 2023 COMPLIANT)

PROVIDE TRUSS-TO-WALL UPLIFT CONNECTION AT THIS SECTION. INSTALL
SIMPSON STRONG-TIE H8 18-GAUGE GALVANIZED HURRICANE TIE AT EACH
TRUSS LOCATION. H8 18-GAUGE GALVANIZED HURRICANE TIE SHALL BE
INSTALLED PER MANUFACTURER'S CURRENT ICC-ES REPORT AND PUBLISHED
LOAD TABLES, USING APPROVED FASTENERS AND FULL NAIL PATTERN AS
SPECIFIED. FASTENERS SHALL BE CORROSION-RESISTANT AND COMPATIBLE
WITH PRESERVATIVE-TREATED LUMBER WHERE APPLICABLE. INSTALLATION
SHALL COMPLY WITH FBC R802.11 AND FBC CHAPTER 16 WIND LOAD
REQUIREMENTS TO PROVIDE CONTINUOUS LOAD PATH AND REQUIRED
UPLIFT RESISTANCE BASED ON PROJECT DESIGN WIND SPEED.
CONNECTIONS SUBJECT TO FRAMING INSPECTION PRIOR TO CONCEALMENT.

WINDOW REMOVAL AND WALL INFILL NOTE (FBC 2023 COMPLIANT)

REMOVE THREE (3) EXISTING WINDOWS ADJACENT TO FORMER DOOR LOCATION AT KITCHEN AREA,
INCLUDING FRAMES, GLAZING, TRIM AND ASSOCIATED COMPONENTS. OPENINGS TO BE INFILLED
WITH WOOD FRAMING TO MATCH EXISTING WALL THICKNESS AND STRUCTURAL SYSTEM IN
ACCORDANCE WITH 2023 FLORIDA BUILDING CODE (FBC RESIDENTIAL/BUILDING AS APPLICABLE).
PROVIDE PRESSURE-TREATED SILL PLATE WHERE IN CONTACT WITH CONCRETE PER FBC R317,
STUDS AT 16" O.C., DOUBLE TOP PLATE TIED INTO EXISTING FRAMING, AND HEADER SIZED PER
ENGINEER CALCULATIONS AND FBC R602.7. INSTALL 1/16" OSB EXPOSURE 1 OR 1/2" EXTERIOR-
GRADE PLYWOOD SHEATHING FASTENED PER FBC TABLE R602.3(1). PROVIDE CONTINUOUS
WATER-RESISTIVE BARRIER PER FBC R703.2, FULLY INTEGRATED WITH EXISTING WRB TO
MAINTAIN CONTINUOUS DRAINAGE PLANE. EXTERIOR FINISH TO MATCH EXISTING FACADE IN
MATERIAL, TEXTURE, PROFILE AND COLOR; STUCCO OR SIDING TO BE INSTALLED TO BLEND
WITH ADJACENT SURFACES AND MAINTAIN WEATHERPROOF ENVELOPE. INTERIOR TO RECEIVE
INSULATION TO MATCH EXISTING R-VALUE PER FLORIDA ENERGY CODE, 1/2" GYPSUM BOARD,
FINISH, TEXTURE AND PAINT TO MATCH ADJACENT AREAS. PER ENGINEER STRUCTURAL
CALCULATIONS, REMOVAL OF WINDOWS AND INFILL CONFIGURATION MAINTAINS REQUIRED
STRUCTURAL CAPACITY AND COMPLIES WITH EGRESS REQUIREMENTS OF FBC R310; EXISTING
DWELLING SHALL CONTINUE TO MEET MINIMUM EMERGENCY ESCAPE AND RESCUE OPENING
PROVISIONS. ALL WORK SHALL COMPLY WITH FBC CHAPTERS 6, 7 AND 31 AS APPLICABLE,
MANUFACTURER INSTALLATION REQUIREMENTS, AND LOCAL JURISDICTIONAL AMENDMENTS;
REQUIRED INSPECTIONS TO INCLUDE FRAMING (IF APPLICABLE) AND FINAL.

SIDE VIEW


SCALE: 1"=1'

B
02

This drawing is the sole property of Seating ConstructorsUSA, (DBA Smart Choice ContractorsUSA). Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice ContractorsUSA. 2025 Copyright.

SHEET TITLE		CUSTOMER NAME:		CUSTOMER INFORMATION		NICHOLSON ENGINEERING ASSOCIATES, INC.		Smart Choice CONTRACTORS Done right Guaranteed!		REVISIONS	
ISOMETRIC VIEW		EDUARDO MATOSINHO/100 FOLD RETURNS LLC		Email: FOLDRETURNS1@GMAIL.COM Phone: OM (781) 420-5126		7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167				DRAWINGS LATEST REMARKS	
		PROJECT ADDRESS:		PROJECT OPEN DATE:							
		605 N WOODLYNNE AVE TAMPA, FL 33609-1555		JAN. 20 2026							
				PROJECT REVISED BY :						PROJECT NUMBER: 0024602	
				MICHAEL D. JOHNSON						DESIGN DATE: 01.07.26	



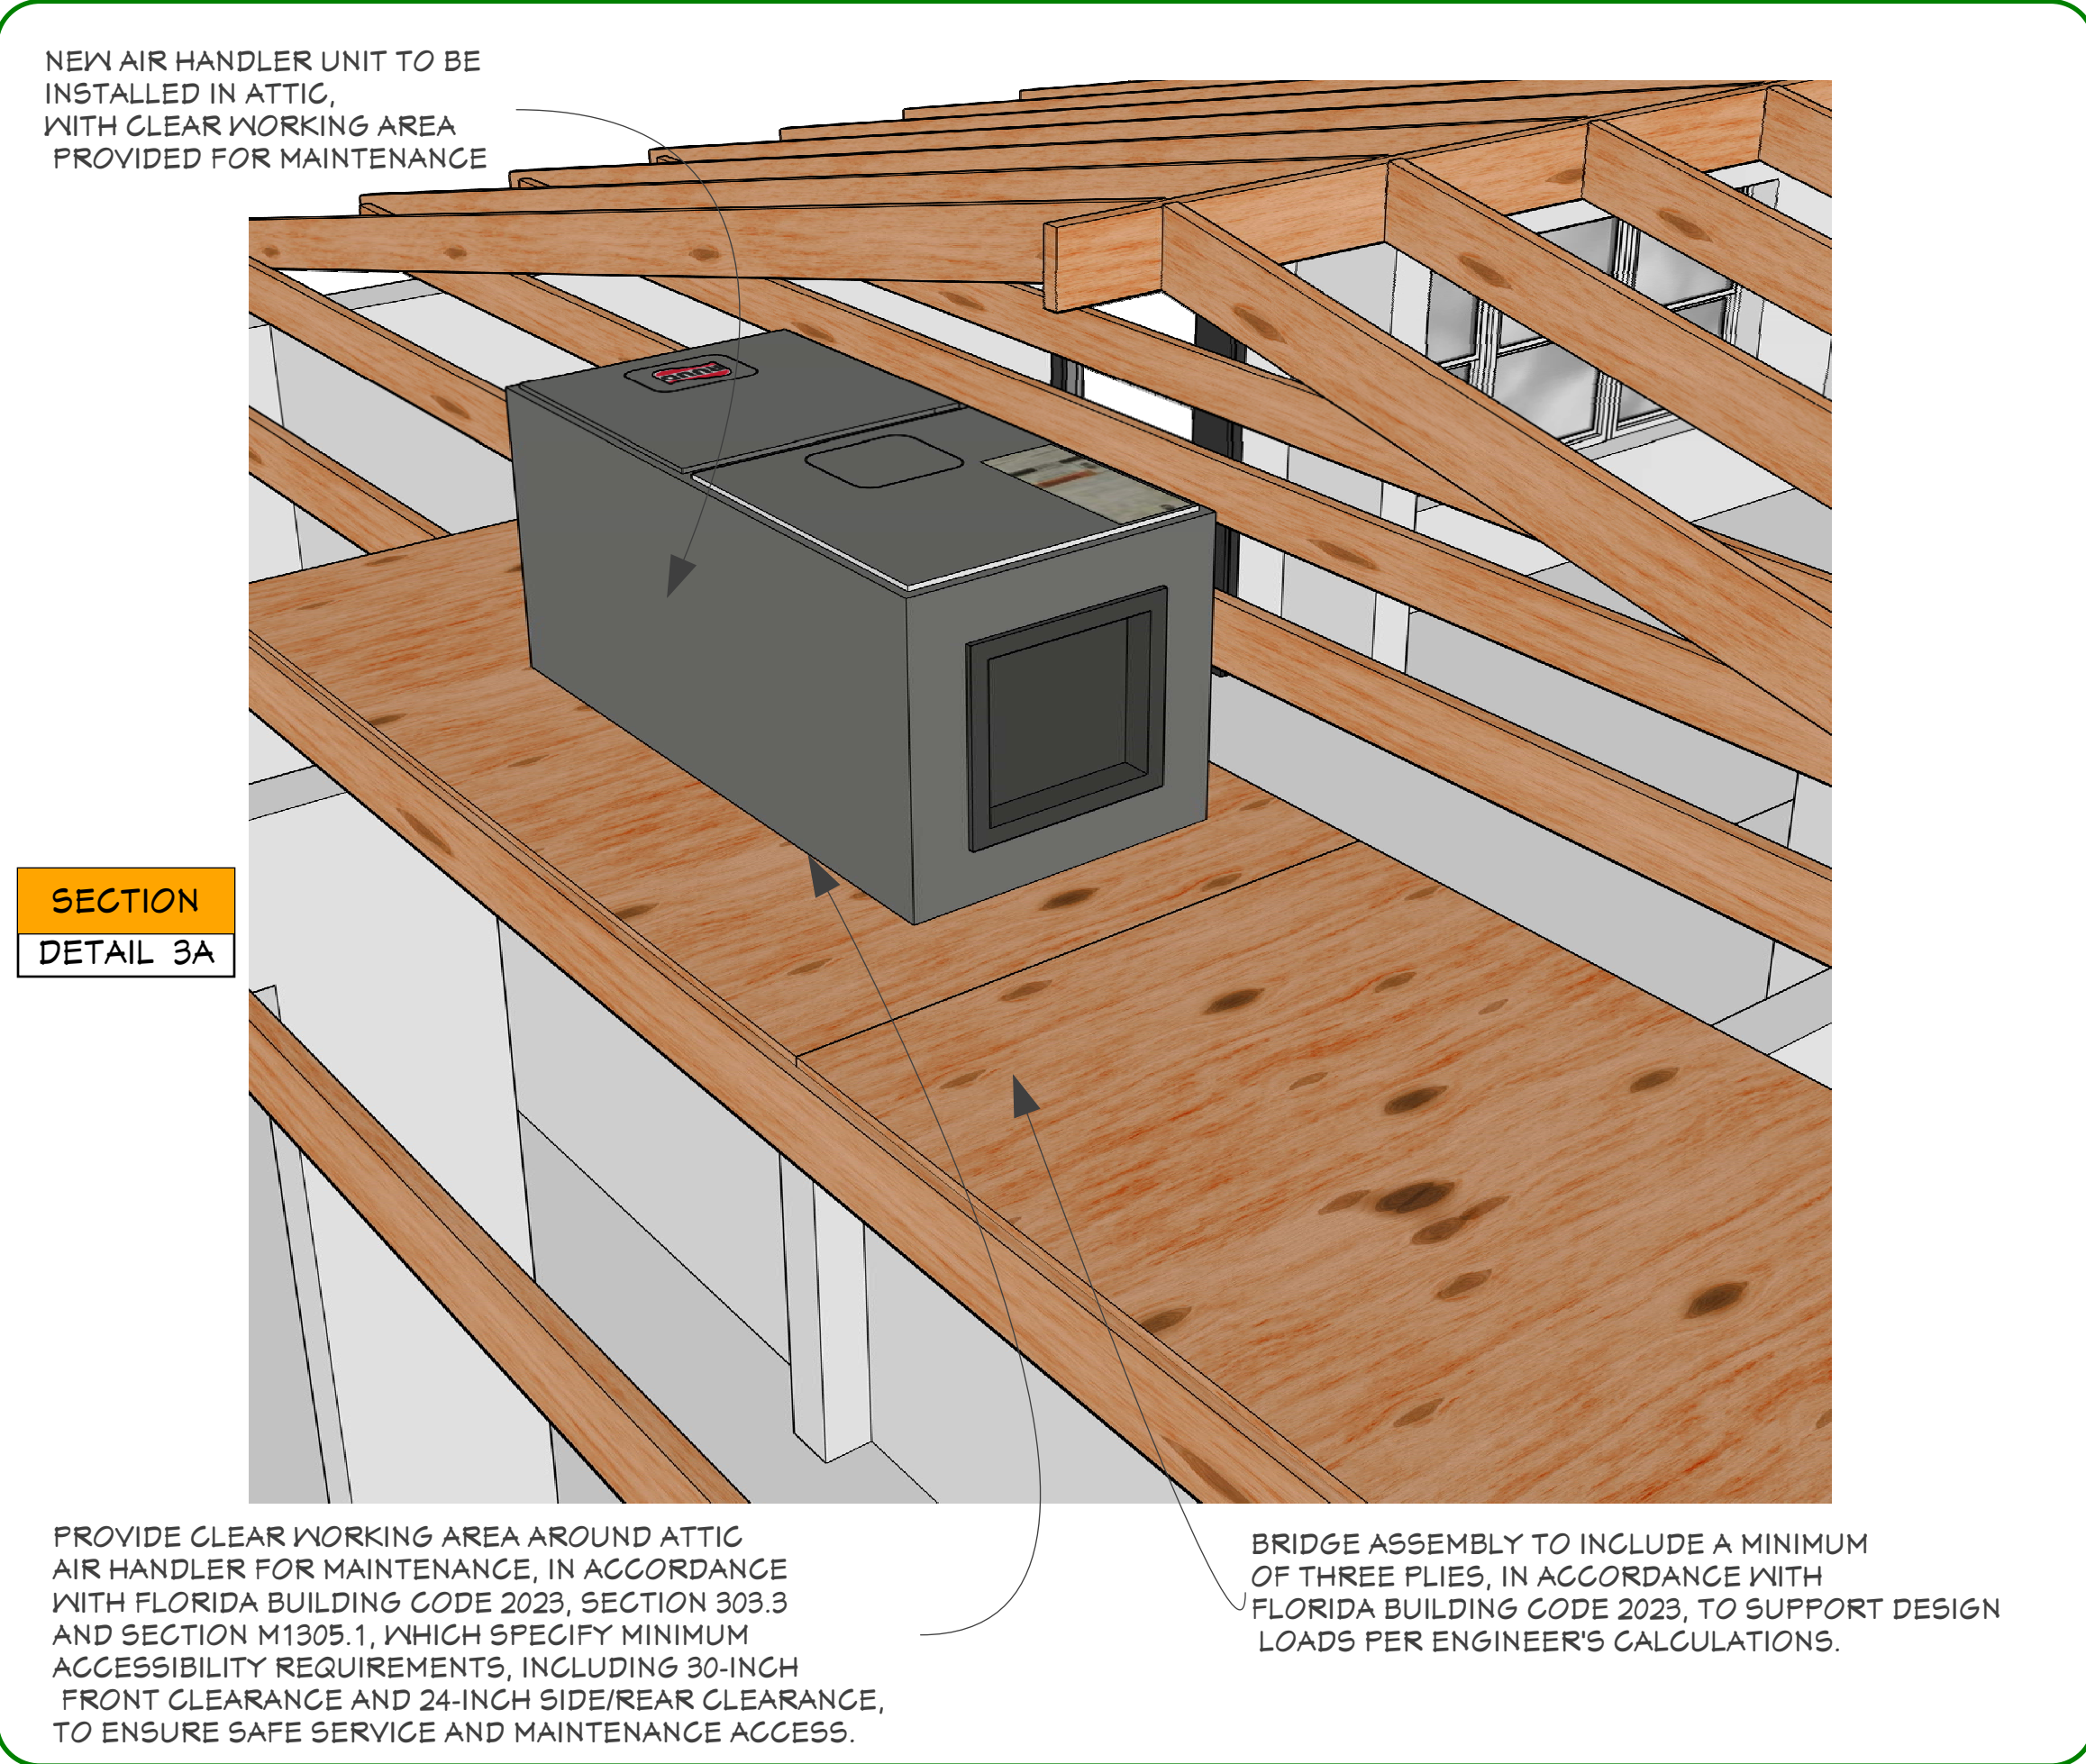

PLUMBING PENETRATIONS & FIREBLOCKING NOTE – RAISED SUBFLOOR OVER CONCRETE SLAB

PLUMBING MAY BE ROUTED BETWEEN PT 2X8 SLEEPERS INSTALLED ON EDGE. ALL BORING, NOTCHING, FIREBLOCKING, AND PROTECTION SHALL COMPLY WITH FLORIDA BUILDING CODE RESIDENTIAL 2023 (8TH EDITION).

BORING / HOLES IN SLEEPERS (FBC R502.8 – APPLIED BY ANALOGY)

HOLES SHALL BE BORED ONLY (NO NOTCHING PERMITTED).

MAXIMUM HOLE DIAMETER: NOT TO EXCEED 1/3 OF SLEEPER DEPTH

FOR 2X8 (T-1/4"): MAX HOLE = 2-3/8" DIA.

HOLES SHALL BE LOCATED:

MIN. 2" FROM TOP AND BOTTOM EDGES

MIN. 2" FROM ENDS

MULTIPLE HOLES SHALL BE SPACED TO MAINTAIN STRUCTURAL INTEGRITY.

PIPE PROTECTION (FBC R602.6)

WHERE PLUMBING PIPES PASS THROUGH OR WITHIN 1-1/4" OF THE EDGE OF ANY WOOD MEMBER, PROVIDE STEEL PROTECTIVE PLATES (MIN. 16 GAUGE).

FIREBLOCKING REQUIREMENTS (FBC R302.11)

PROVIDE FIREBLOCKING AT:

PERIMETER EDGES OF THE RAISED SUBFLOOR

PENETRATIONS AT WALL LINES

TRANSITIONS WHERE THE SUBFLOOR CAVITY CONNECTS TO WALL OR FLOOR CAVITIES

FIREBLOCKING MATERIALS SHALL BE ONE OF THE FOLLOWING:

SOLID WOOD BLOCKING (MIN. 2" THICK)

3/4" PLYWOOD OR OSB

APPROVED FIREBLOCKING FOAM (LISTED FOR FIREBLOCK USE)

FORMING / CAVITY CLOSURE

ALL OPEN ENDS OF THE SLEEPER CAVITY SHALL BE FULLY CLOSED AND SEALED TO PREVENT:

AIR MOVEMENT, FIRE SPREAD, PEST INTRUSION

FORMING SHALL BE TIGHT-FITTING AND MECHANICALLY FASTENED.


GENERAL NOTE

COORDINATE PLUMBING LAYOUT WITH SLEEPER AND BLOCKING LOCATIONS PRIOR TO INSTALLATION.

NO CUTTING, NOTCHING, OR BORING BEYOND CODE LIMITS SHALL BE PERMITTED WITHOUT ENGINEER APPROVAL.

**SECTION
DETAIL 2**

SUB-FLOOR DETAIL SECTION (TYP.)

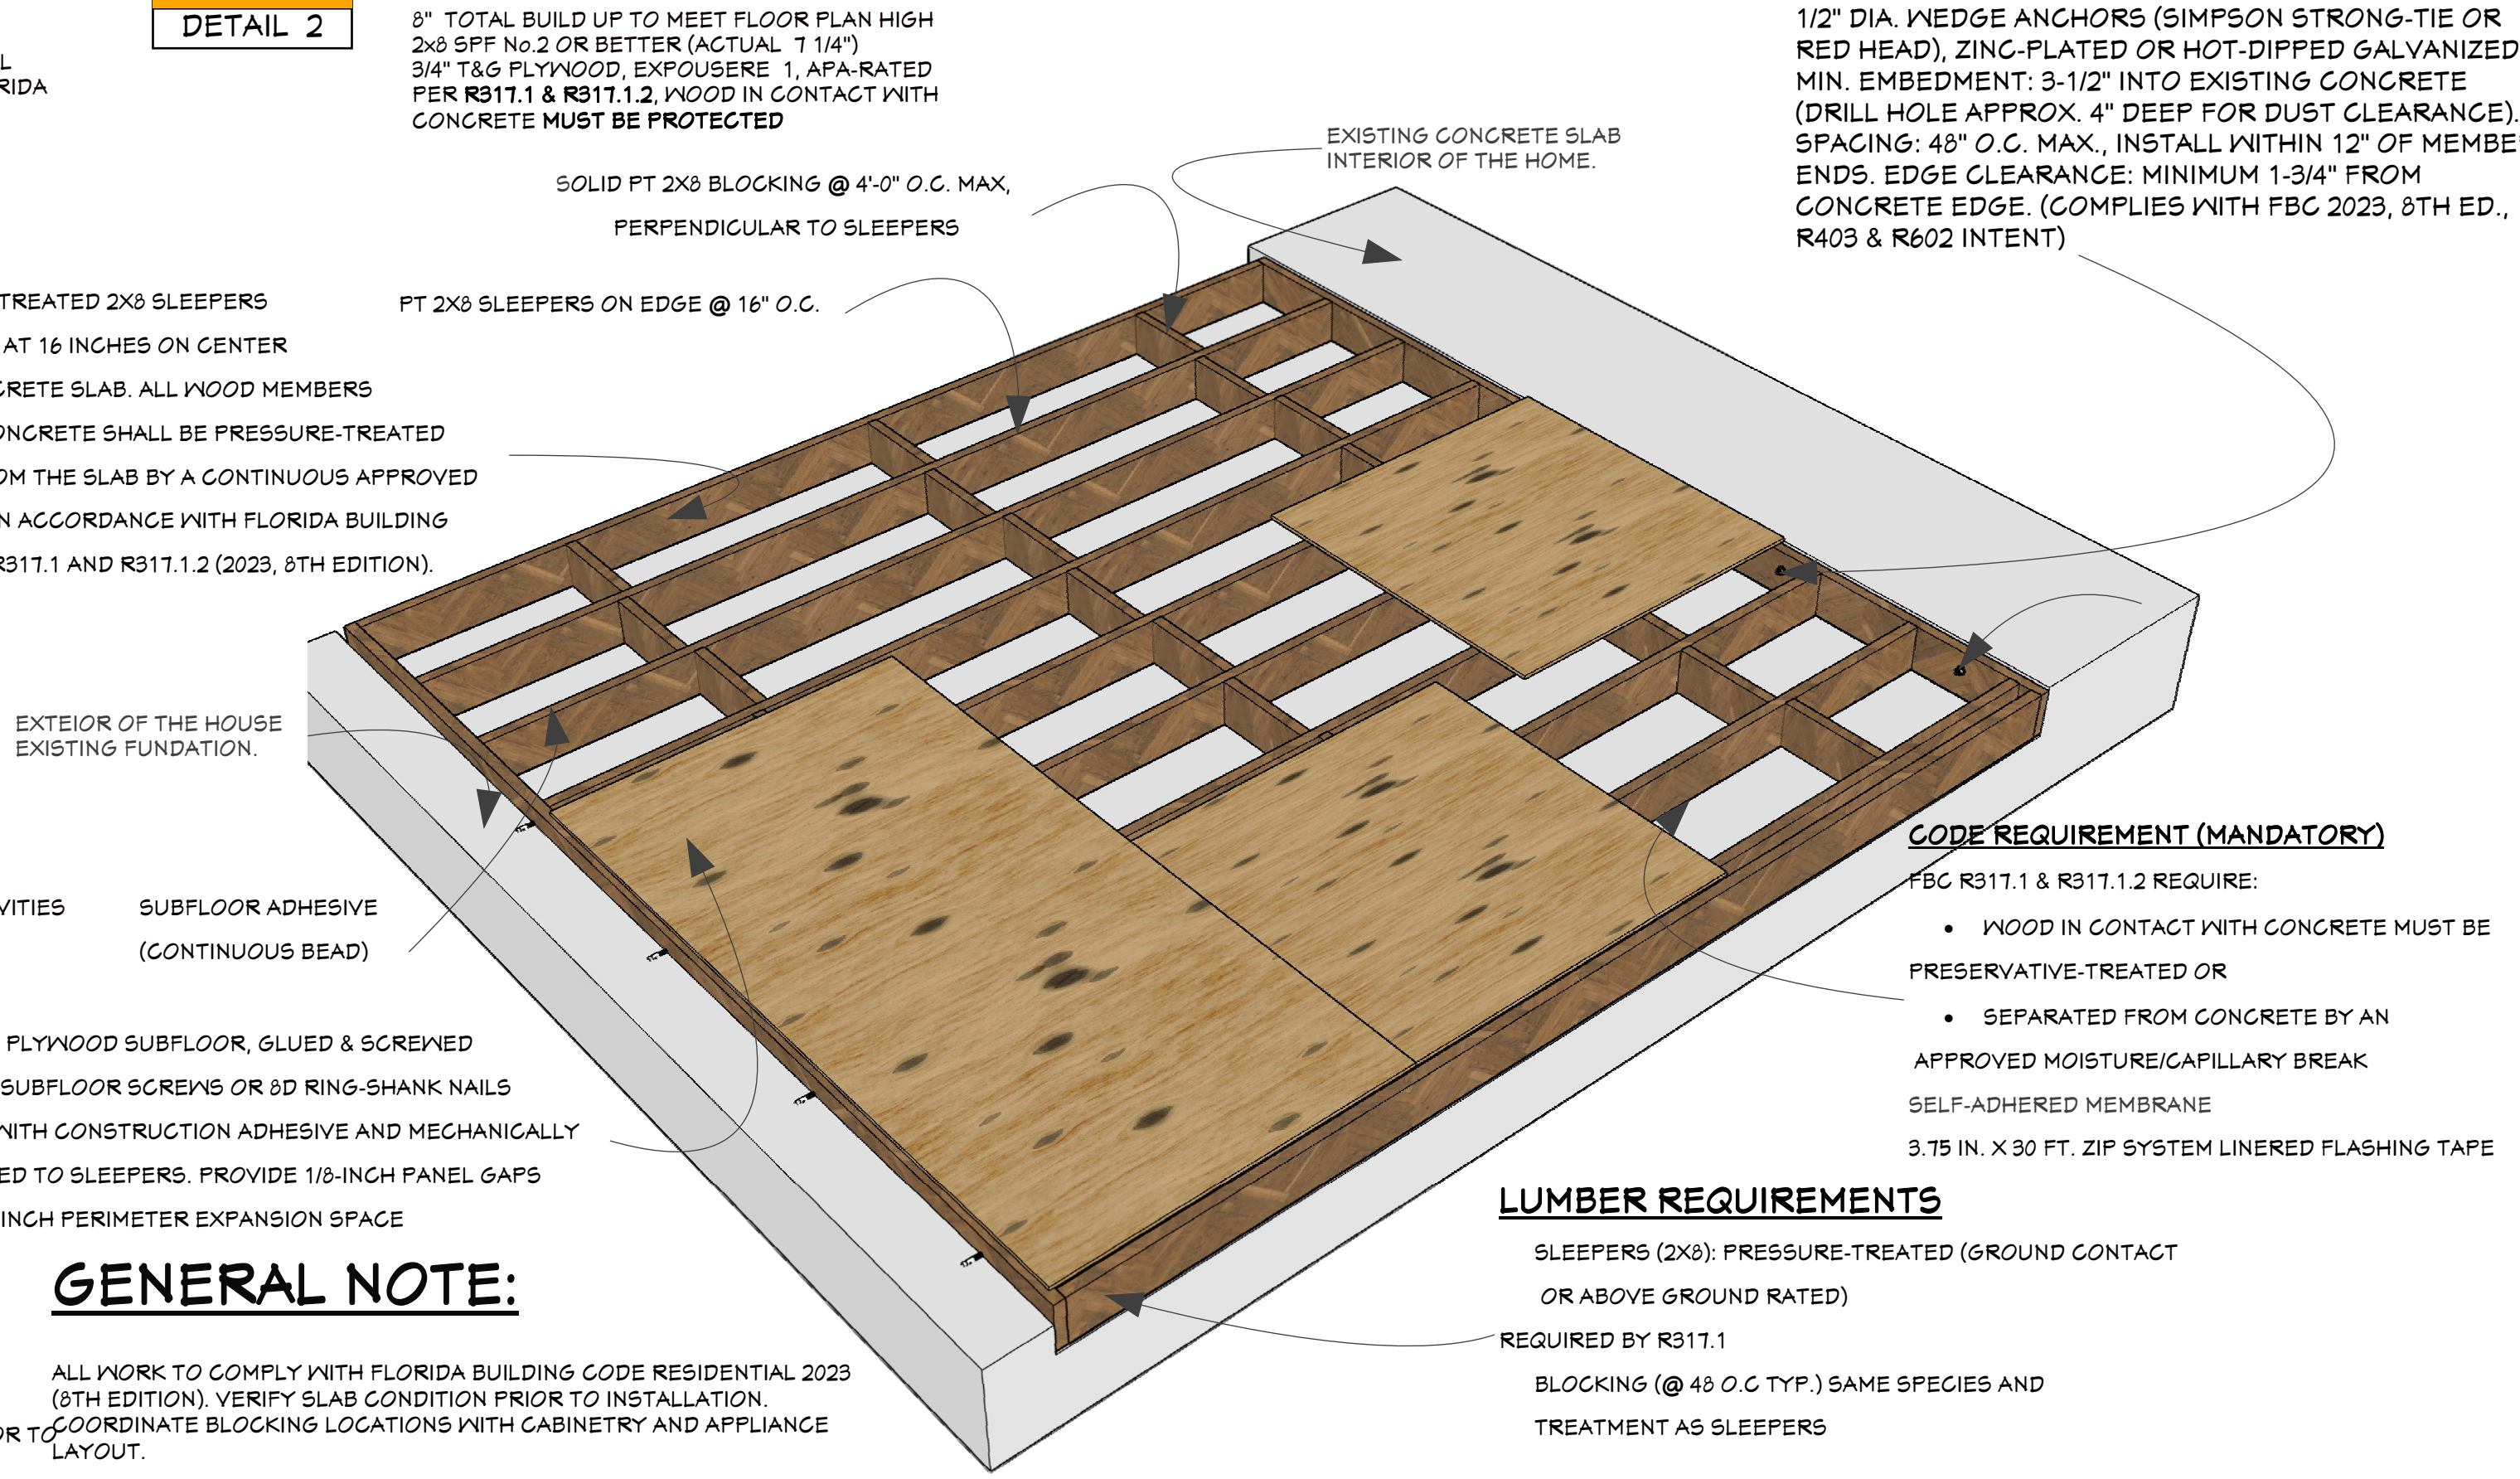

GENERAL NOTE:

ALL WORK TO COMPLY WITH FLORIDA BUILDING CODE RESIDENTIAL 2023 (8TH EDITION). VERIFY SLAB CONDITION PRIOR TO INSTALLATION. COORDINATE BLOCKING LOCATIONS WITH CABINETS AND APPLIANCE LAYOUT.

AIR HANDLER INSTALLATION IN ATTIC:


SUBFLOOR: TO BE CONSTRUCTED PER FLORIDA BUILDING CODE 2023 REQUIREMENTS FOR ATTIC ACCESS AND EQUIPMENT SUPPORT; STRUCTURALLY ADEQUATE TO SUPPORT AIR HANDLER WEIGHT AND MAINTENANCE LOADS.

ACCESSIBILITY SPACE: PROVIDE CLEAR WORKING SPACE AROUND UNIT AS REQUIRED BY CODE, MINIMUM OF 30 INCHES FRONT CLEARANCE AND 24 INCHES SIDE/REAR CLEARANCE, OR AS SPECIFIED IN FBC 2023 MECHANICAL AND ENERGY CODES.

ACCESS DOOR: INSTALL MAINTENANCE/ACCESS DOOR IN ATTIC FRONT WALL OR CEILING WITH MINIMUM DIMENSIONS OF 22" X 30" (OR PER CODE REQUIREMENTS), LOCATED FOR SAFE AND EASY ENTRY TO AIR HANDLER.

NOTE: ALL INSTALLATION, FRAMING, AND OPENINGS SHALL COMPLY WITH FLORIDA BUILDING CODE 2023, INCLUDING STRUCTURAL, MECHANICAL, AND ENERGY PROVISIONS.

EXISTING CASIROS CEILINGS WITH 12 FT. 6 IN. HIGH NEED TO BE INSULATED R-VALUE (R-30) TYPICAL.

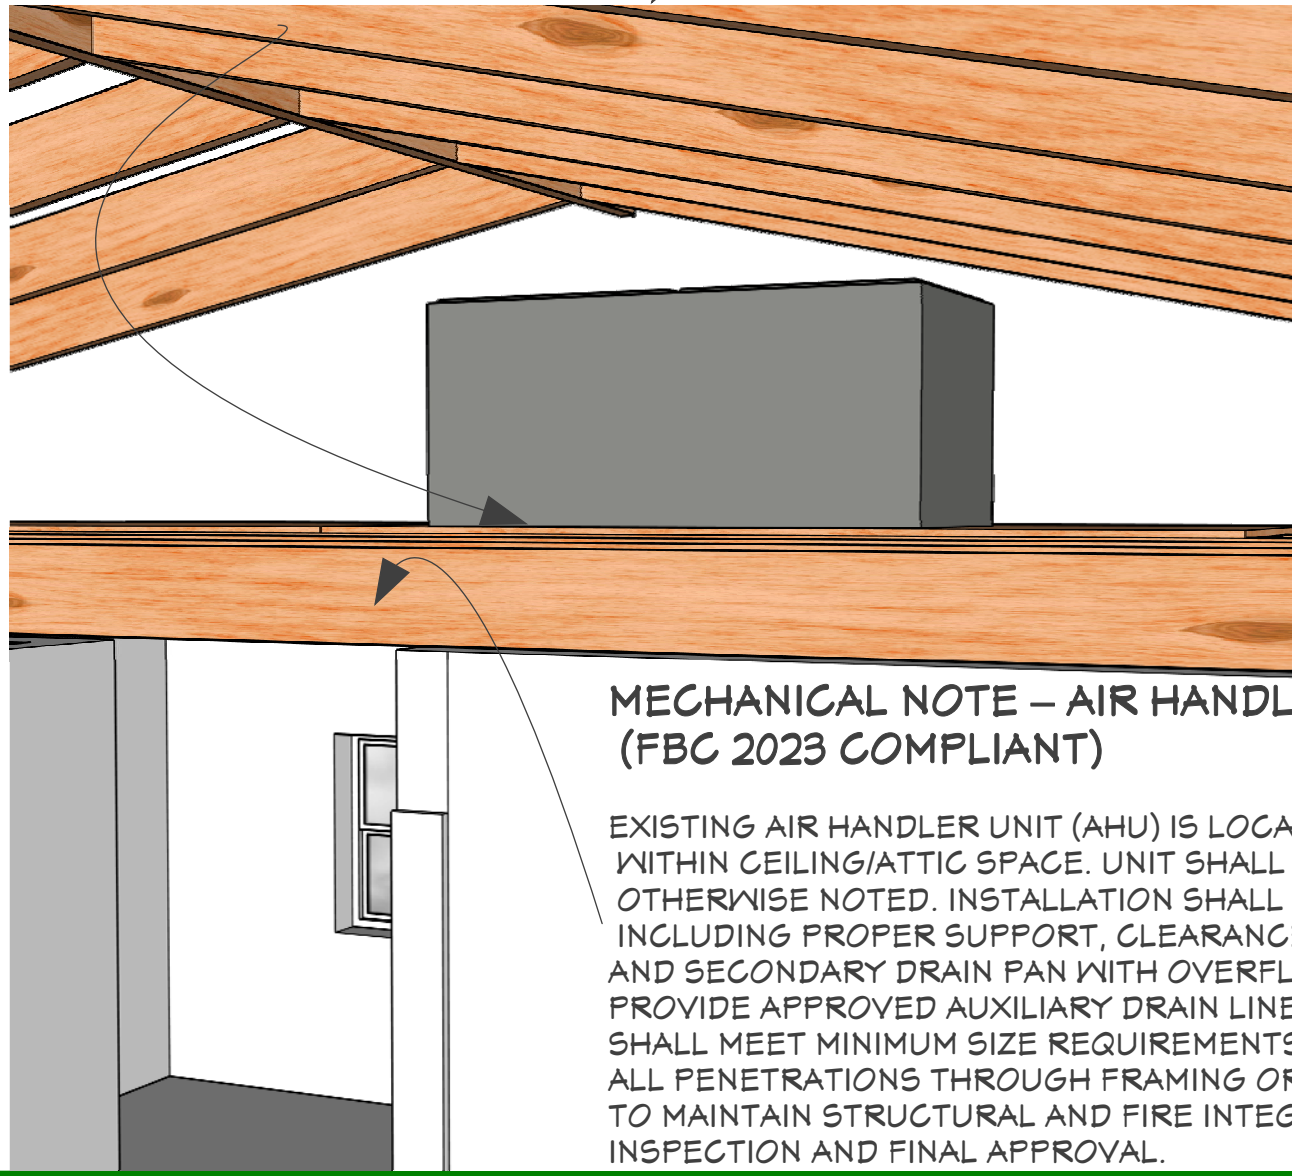

MECHANICAL NOTE – AIR HANDLER LOCATION (FBC 2023 COMPLIANT)

EXISTING AIR HANDLER UNIT (AHU) IS LOCATED ABOVE THE LIVING ROOM AREA WITHIN CEILING/ATTIC SPACE. UNIT SHALL REMAIN IN CURRENT POSITION UNLESS OTHERWISE NOTED. INSTALLATION SHALL COMPLY WITH FBC MECHANICAL 2023, INCLUDING PROPER SUPPORT, CLEARANCES FOR SERVICE ACCESS PER FBC M1305.1, AND SECONDARY DRAIN PAN WITH OVERFLOW PROTECTION PER FBC M1411.3.1 WHERE REQUIRED. PROVIDE APPROVED AUXILIARY DRAIN LINE OR FLOAT SWITCH AS APPLICABLE. ACCESS OPENING SHALL MEET MINIMUM SIZE REQUIREMENTS AND BE READILY ACCESSIBLE FROM CONDITIONED SPACE. ALL PENETRATIONS THROUGH FRAMING OR CEILING ASSEMBLIES SHALL BE PROPERLY SEALED TO MAINTAIN STRUCTURAL AND FIRE INTEGRITY. ALL WORK SUBJECT TO MECHANICAL INSPECTION AND FINAL APPROVAL.

SIDE VIEW

SCALE: NTS

**SECTION
DETAIL 3**

**SECTION
DETAIL 2-B**

NAILING:
PROVIDE SOLID BLOCKING BETWEEN JOISTS AT 16 INCHES O.C. BLOCKING SHALL BE INSTALLED IN A STAGGERED / ZIGZAG LAYOUT TO ALLOW FULL FACE NAILING FROM BOTH SIDES OF ADJACENT JOISTS

PROVIDE 2X8 PRESSURE-TREATED (PT) WOOD MEMBER

WEDGE ANCHOR

1/2 IN. WEDGE ANCHOR EMBEDMENT 3-1/2 IN. INTO CONCRETE. INSTALL PER MANUFACTURER'S SPECIFICATIONS. ANCHORS SHALL BE LOCATED A MINIMUM OF 1-3/4 INCHES FROM THE EDGE OF CONCRETE, MEASURED FROM THE CENTERLINE OF THE ANCHOR TO THE NEAREST FREE EDGE.

ADHESIVE:

CONTINUOUS BEAD OF CONSTRUCTION ADHESIVE BETWEEN WOOD AND CONCRETE PRIOR TO FASTENING. ADHESIVE SHALL BE A STANDARD CONSTRUCTION-GRADE ADHESIVE. (TYP.)


ADHESIVE:

CONTINUOUS BEAD OF CONSTRUCTION ADHESIVE BETWEEN SUB FLOOR WOOD AND JOIST PRIOR TO FASTENING. ADHESIVE SHALL BE A STANDARD CONSTRUCTION-GRADE ADHESIVE. (TYP.)


**SECTION
DETAIL 2-A**

This drawing is the sole property of Seating ConstructorsUSA, (DBA Smart Choice ContractorsUSA). Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice ContractorsUSA. 2025 Copyright.


SHEET TITLE		CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC		CUSTOMER INFORMATION Email: FOLDRETURNS1@GMAIL.C Phone:OM (781) 420-5126			NICHOLSON ENGINEERING ASSOCIATES, INC.			REVISIONS				A 07
DETAILS		PROJECT ADDRESS: 605 N WOODLYNNE AVE TAMPA, FL 33609-1555		PROJECT OPEN DATE: JAN. 20 2026			7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167			MM/DD/YY		DRAWINGS LATEST REMARKS		
										1 01.07.26		RENOVATION DRAWINGS PERMIT SET.		
						2								
						3								
				PROJECT REVISED BY : MICHAEL D. JOHNSON				PROJECT NUMBER: 0024602		DESIGN DATE: 01.07.26				

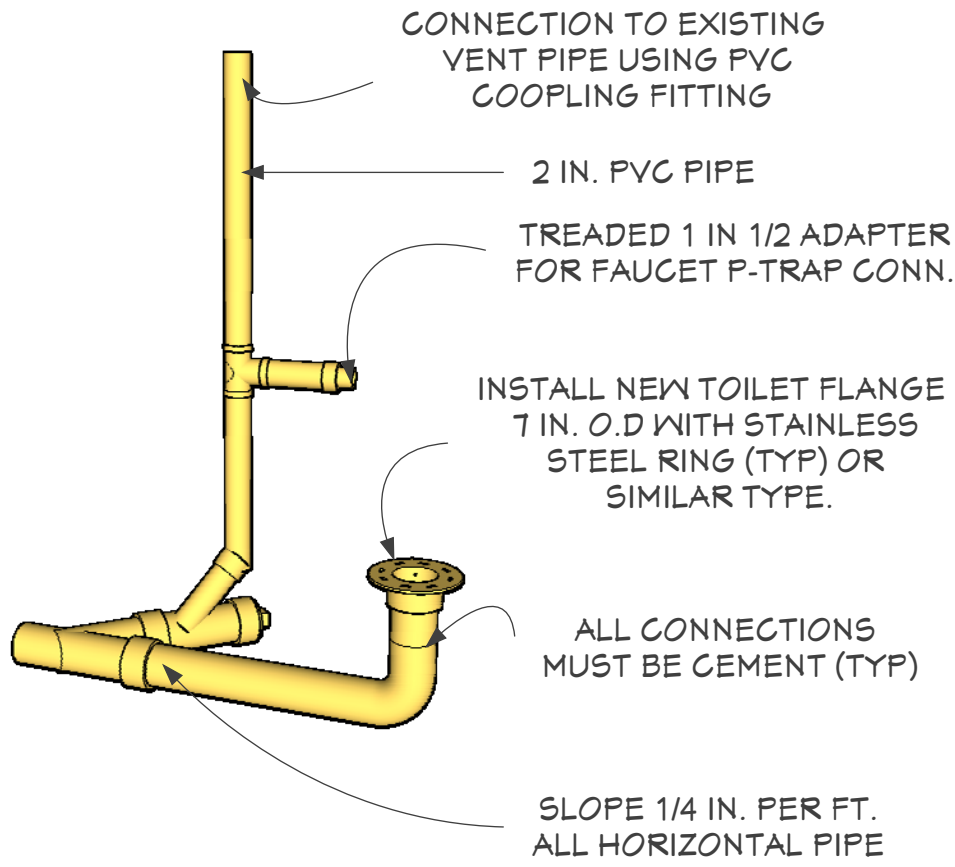




PLUMBING DRAIN PIPE DETAIL

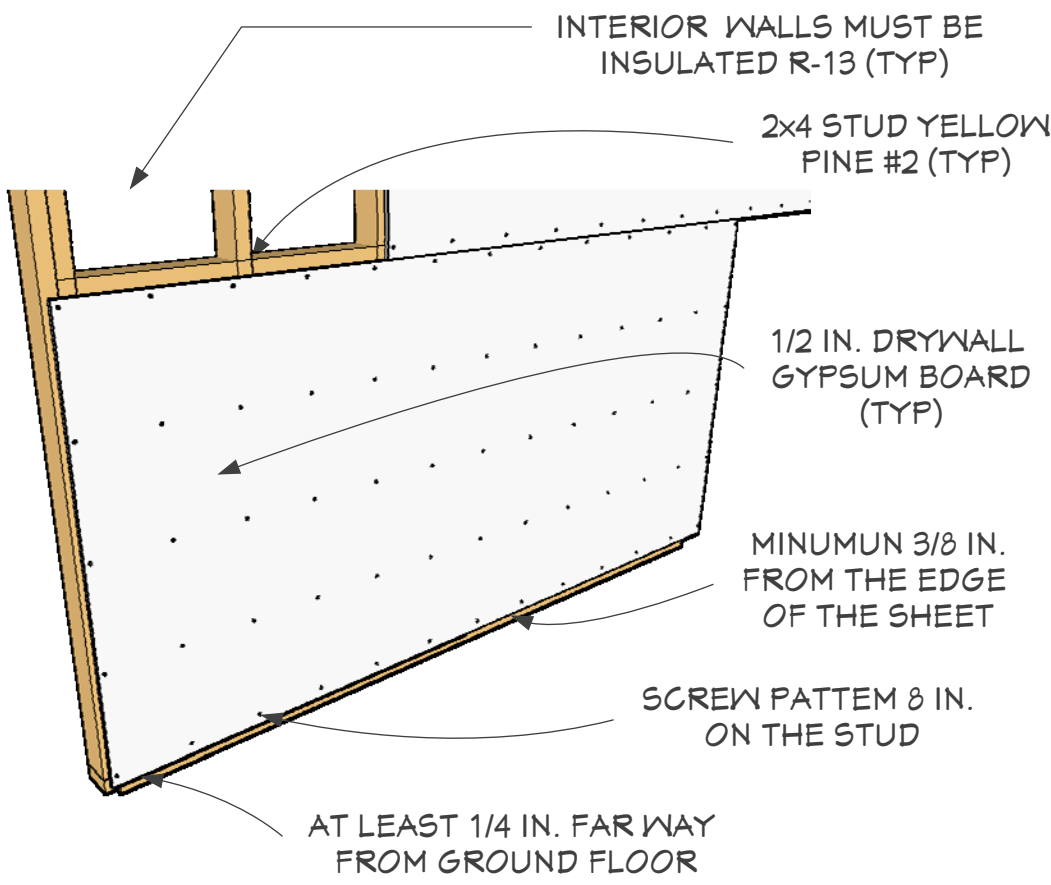

INTERIOR WALL DETAIL (TYP.)

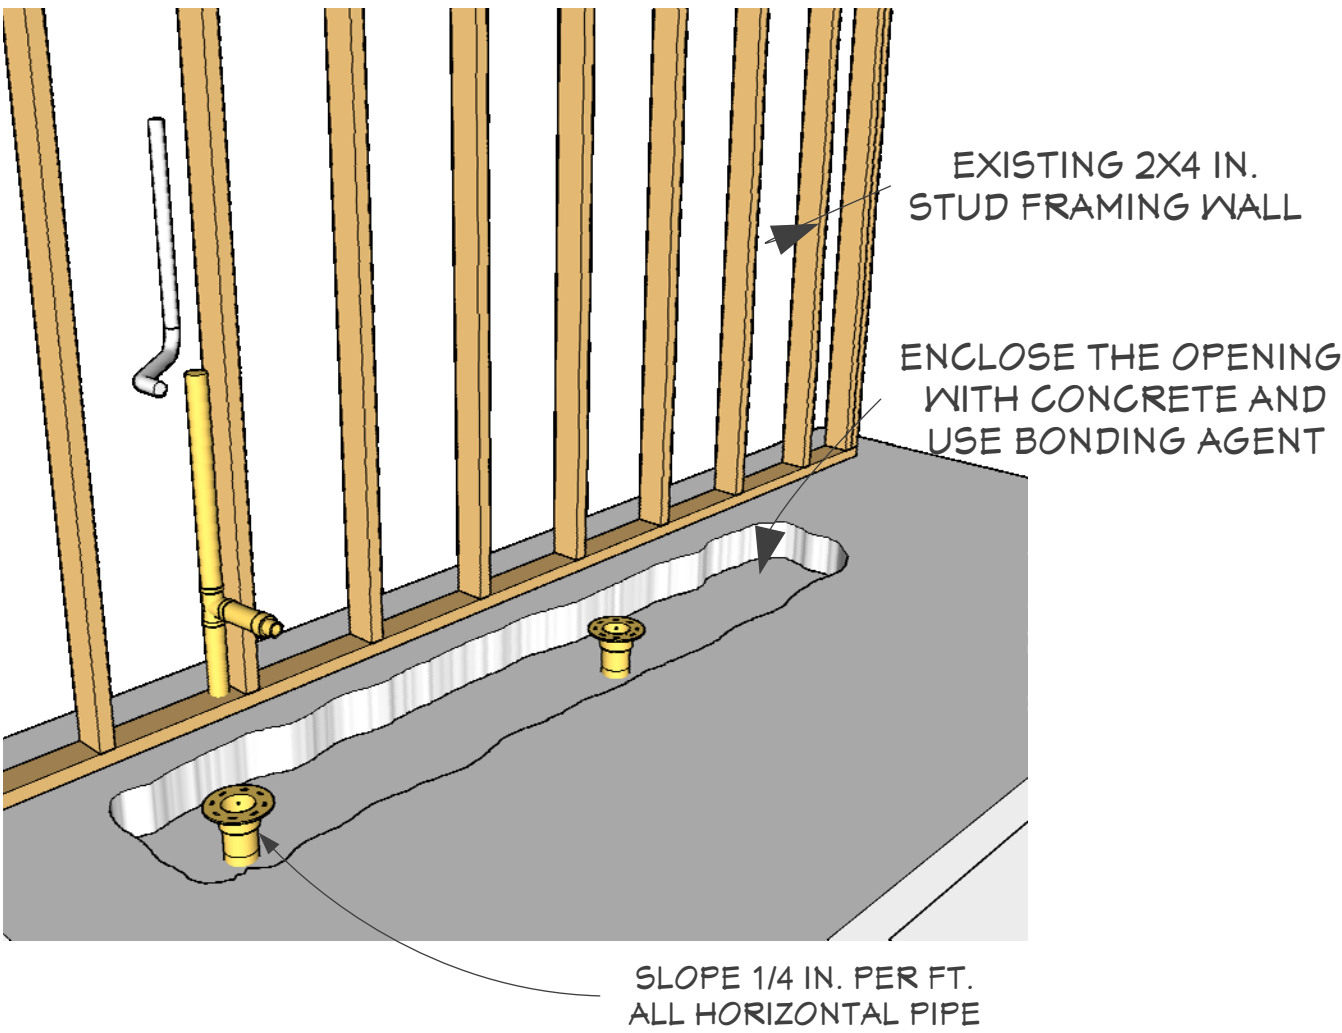


PLUMBING UNDERGROUND PIPE DETAIL (TYP.)

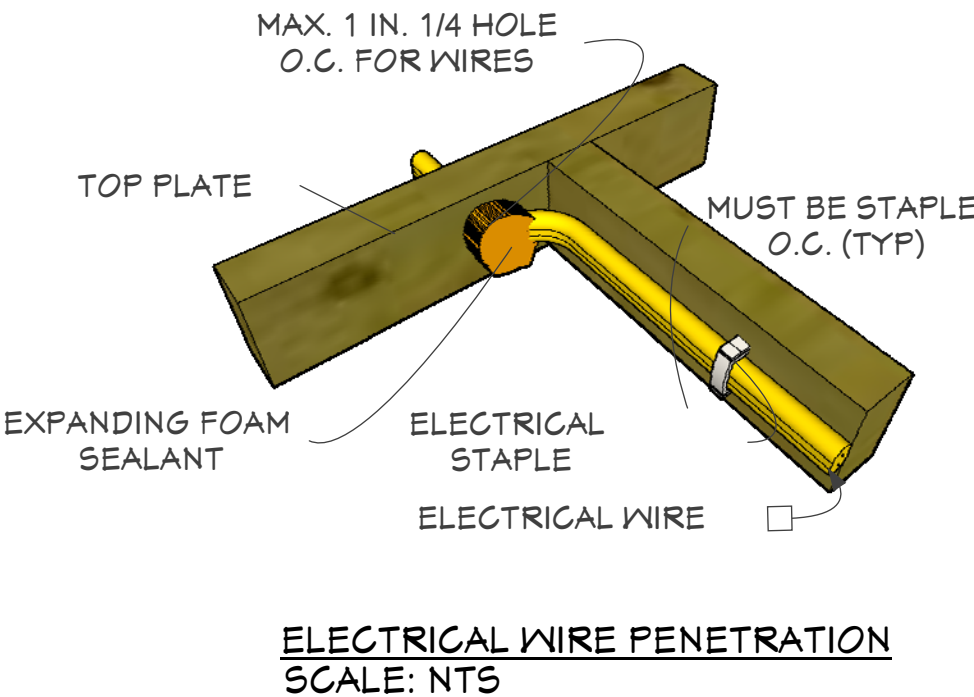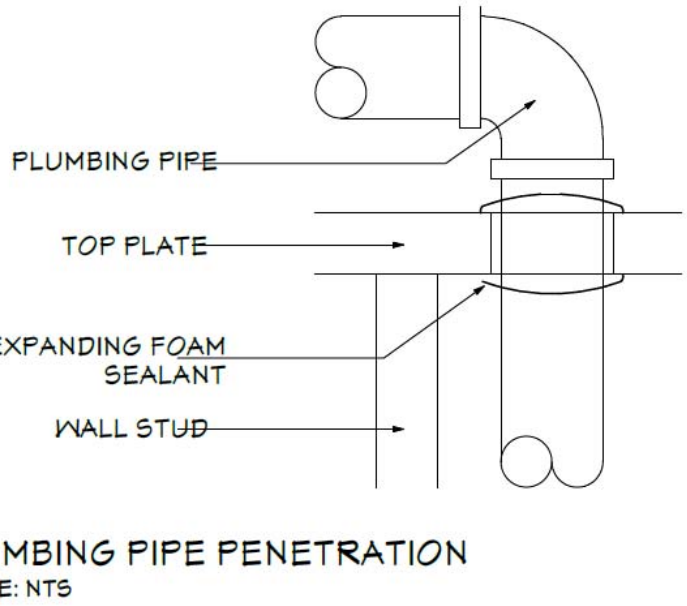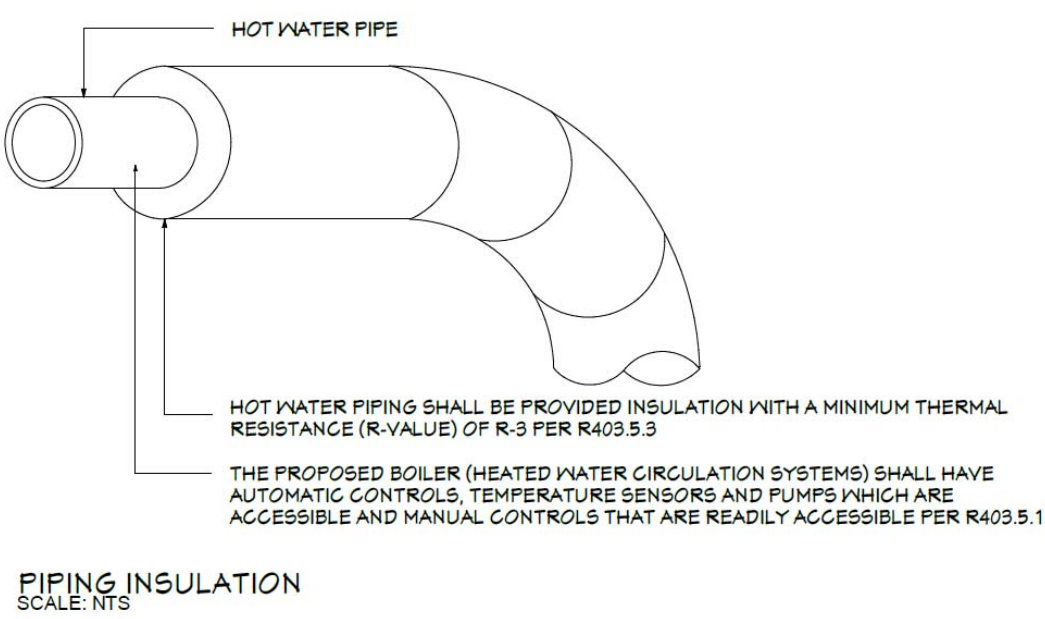


DOOR HEADER DETAIL (TYP.)

NOTE: HEADERS OVER 6'-0" PROVIDE SOLID BLOCKING AT MAXIMUM 4'-0" INTERVALS; INSULATION SHALL NOT BE CONTINUOUS THROUGH HEADER.

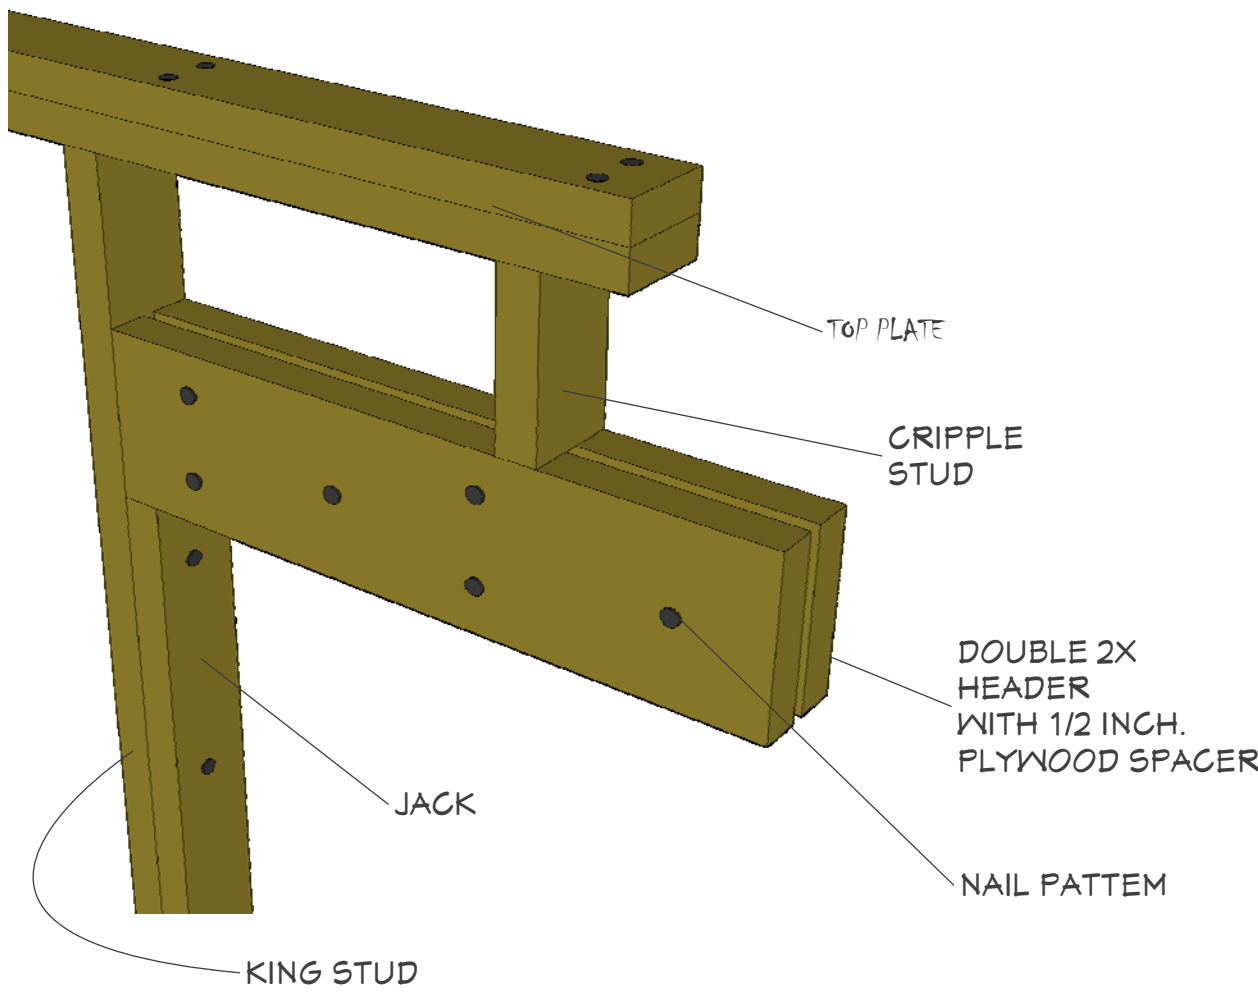

BOTTOM PLATE HURRICANE TIE DETAIL

MUST BE INSTALL IN EVERY 2X4 SPF #2 STUD @ 16 IN. O.C (TYP) IN THE OPEN SPACES OR WALL BEEN UPDATE, AND MUST HAVE A QTY. OF (10) # 8 NAILS PER TIE INSTALLED

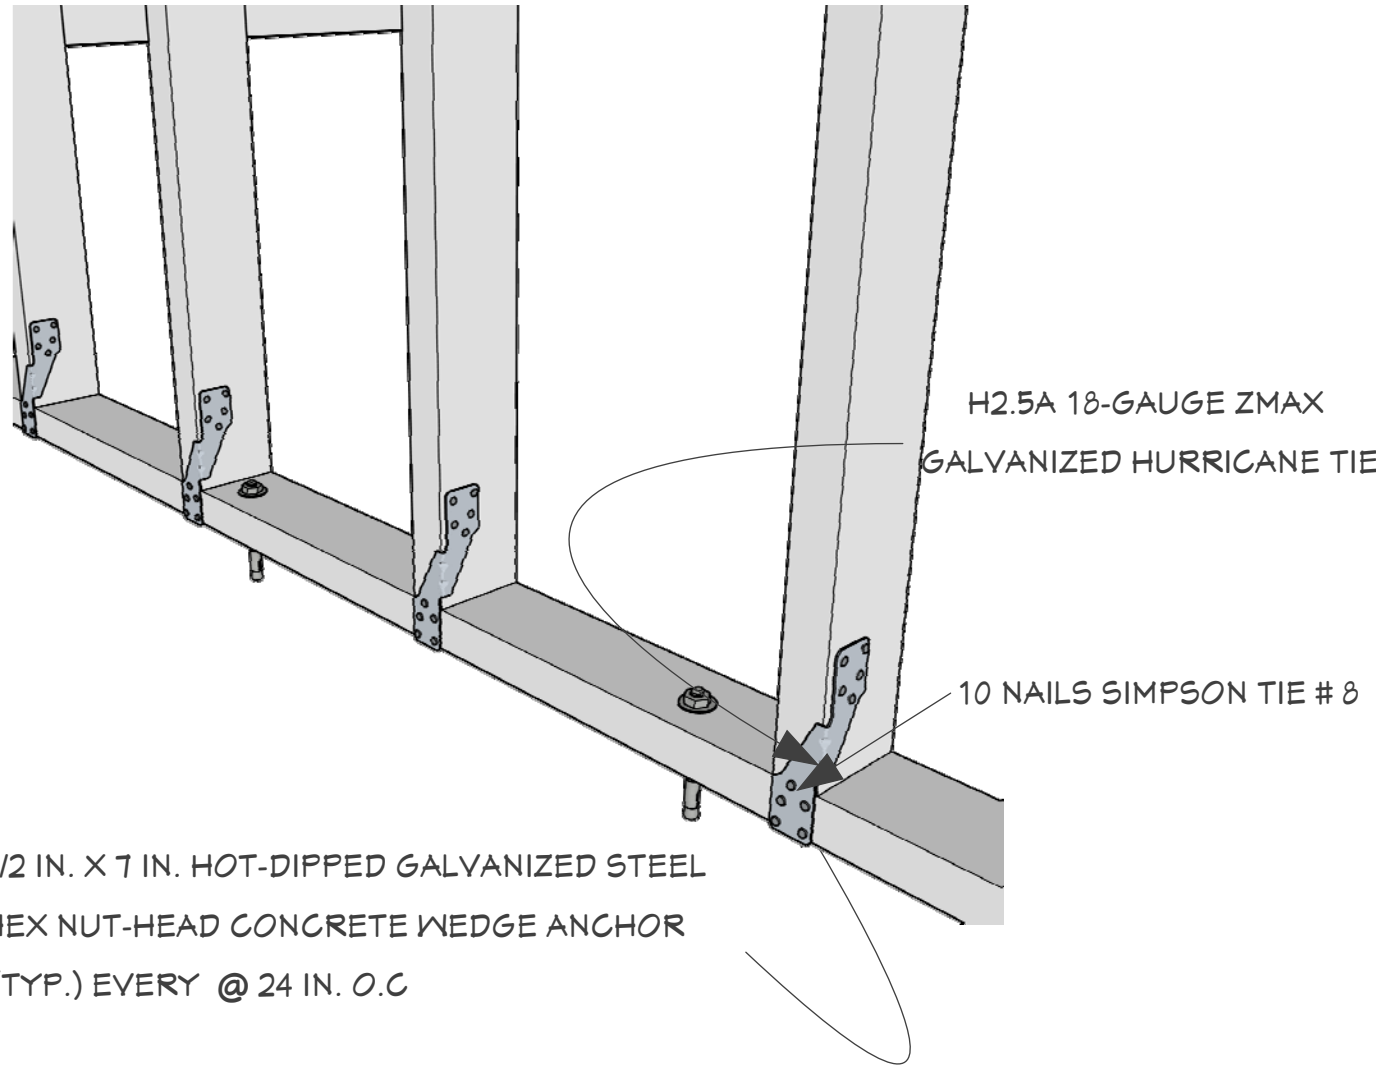

This drawings are sole property of Seating ConstructorsUSA , (DBA Smart Choice ContractorsUSA) Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice ContractorsUSA . 2025 Copyright .

SHEET TITLE		CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC		CUSTOMER INFORMATION Email: FOLDRETURNS1@GMAIL.C Phone:OM (781) 420-5126			NICHOLSON ENGINEERING ASSOCIATES, INC.			REVISIONS				A 08
OTHER DETAILS		PROJECT ADDRESS: 605 N WOODLYNNE AVE TAMPA, FL 33609-1555		PROJECT OPEN DATE: JAN. 20 2026			7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167			MM/DD/YY		DRAWINGS LATEST REMARKS		
										1 01.07.26		RENOVATION DRAWINGS PERMIT SET.		
										2				
								3						
				PROJECT REVISED BY : MICHAEL D. JOHNSON						PROJECT NUMBER: 0024602		DESIGN DATE: 01.07.26		

GENERAL CONSTRUCTION NOTES:

- 1.- BEFORE STARTING THE WORK ON THE PROJECT, THE CONTRACTOR WILL HAVE TO VERIFY THE EXISTING CONDITIONS & DIMENSIONS.
2. ANY DISCREPANCIES SHALL BE REPORTED TO THE ENGINEER.
3. THE CONTRACTOR NEEDS TO COMPLY WITH ALL CONSTRUCTION CODES AND REGULATIONS ESTABLISHED BY FLORIDA STATE.
THE CONTRACTOR NEEDS TO APPLY A GROUND TERMITE TREATMENT ACCORDING TO FLORIDA BUILDING CODE.
5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING TO ORIGINAL CONDITIONS, ANY DAMAGES TO BUILDING SURFACES, EQUIPMENT, ETC. CAUSED DURING THE CONSTRUCTION.
6. THE CONTRACTOR SHALL KEEP ALL AREAS WHERE WORK IS BEING PERFORMED FREE FROM DEBRIS AT ALL TIMES. AREA SHALL BE LEFT BROOM CLEAN AT THE END OF EACH WORKING DAY.
7. ALL LUMBER (INTERIOR) SHALL BE COVERED WITH GYPSUM BOARD, 1/2" THICKNESS.
8. THE CONTRACTOR NEEDS TO COORDINATE WITH THE ELECTRICIAN FOR THE ELECTRICAL WORKS.
9. THE CONTRACTOR NEEDS TO COORDINATE WITH THE PLUMBER FOR THE PLUMBING WORKS.
10. THE CONTRACTOR NEEDS TO COORDINATE WITH HIS CONSULTANTS FOR THE A/C SYSTEM, ENERGY CALCULATION, ETC.
11. THE CONTRACTOR NEEDS TO COORDINATE WITH THE OWNER THE FINISHED FLOOR PRODUCT OF HOUSE
12. THE CONTRACTOR NEEDS TO COORDINATE WITH THE OWNER FOR THE CABINET DIMENSIONS, LAYOUT, OR OTHER INFORMATION. THE CONTRACTOR HAS TO RELOCATE THE HOT & COLD WATER PIPE, THE DISCHARGE PIPES AND THE ELECTRICAL RECEPTACLES ACCORDING TO THE OWNERS LAYOUT. THE CONTRACTOR WILL HAVE TO VERIFY THE EQUIPMENTS (REFRIGERATOR, SINK, DRYER/WASHER) THAT THE OWNER WILL PROVIDE TO DETERMINE THE EXACT LOCATION OF WATER SUPPLY, DISCHARGE PIPE OR ENERGY SUPPLY.
13. ALL WINDOWS & GLASS DOORS SHALL HAVE IMPACT RESISTANT GLAZING OR INSTALLED WITH APPROVED HURRICANE SHUTTERS/PANELS OR HIGH WIND BOARD-UP PROTECTION. IF HURRICANE SHUTTERS/PANELS OR HIGH WIND BOARD-UP PROTECTION ARE TO BE USED, ALL INSTALLATION HARDWARE & SHUTTERS/PANELS SHALL BE KEPT ONSITE
14. IF THE ROOTS OR BRANCHES OF THE EXISTING TREE NEED TO TRIMMED IT MUST BE DONE BY A PROFESSIONAL TREE TRIMMING COMPANY.
15. THE CONTRACTOR NEEDS TO INSTALL IN THE EXTERIOR WALL A FIBERGLASS INSULATION R-13
16. THE ROOF CEILING WILL BE 1/2" GYPSUM BOARD AND INSULATED WITH FIBERGLASS INSULATION R-30.
17. ANY LUMBER IN CONTACT WITH CONCRETE SHALL BE PRESSURE TREATED OR SHALL NEED A SILL GASKET TO AVOID MOISTURE INTRUSION

TERMINE NOTES:

- 1.- A PERMANENT SIGN WHICH IDENTIFIES THE TERMITE TREATMENT PROVIDER AND NEED FOR RE-INSPECTION & TREATMENT CONTRACT RENEWAL SHALL BE PROVIDED. THE SIGN SHALL BE POSTED NEAR THE WATER HEATER OR ELECTRIC PANEL.
2.- TO PROVIDE FOR INSPECTION FOR TERMITE INFESTATION THE DISTANCE BETWEEN WALL COVERING & FINAL EARTH GRADE SHALL NOT BE LESS THAN 6". EXCEPTION: PAINT OR DECORATIVE CONTENTIOUS FINISH LESS THAN 5/8" THICK ADHERED DIRECTLY TO THE FOUNDATION WALL.
3.- INITIAL TREATMENT SHALL BE DONE AFTER ALL EXCAVATION AND BACKFILL IS COMPLETE. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 1816.1.1
4. SOIL DISTRIBUTED AFTER THE INITIAL TREATMENT SHALL BE RE-TREATED INCLUDING SPACES BOXED & FORMED. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 1816.1.2
5.- AREAS IN CONCRETE FLOORS FOR SUBSEQUENT INSTALLATIONS OF TRAPS, ETC., SHALL BE MADE WITH PERMANENT METAL OR PLASTIC FORMS. PERMANENT FORMS MUST BE THE SIZE AND DEPTH THAT WILL ELIMINATE THE DISTURBANCE OF SOIL AFTER THE INITIAL TREATMENT. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11
6.- MINIMUM 6 MIL RETARDER MUST BE INSTALLED TO PROTECT AGAINST RAINFALL DILUTION. IF RAINFALL OCCURS BEFORE VAPOR RETARDER PLACEMENT, RETREATMENT IS REQUIRED. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
7.- CONCRETE OVER FOUR INCH MORTAR ALONG THE FOUNDATION PERIMETER MUST BE REMOVED BEFORE EXTERIOR SOIL TREATMENT. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
8.- SOIL TREATMENT MUST BE APPLIED UNDER ALL EXTERIOR CONCRETE OR GRADE WITHIN 1'-0" OF THE STRUCTURE SIDEWALLS. IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
12. ALL BUILDING ARE REQUIRED TO HAVE PRE-CONSTRUCTION TREATMENT. IN ACCORDANCE WITH THE FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
9.- A CERTIFICATE OF COMPLIANCE MUST BE ISSUED TO THE BUILDING DEPARTMENT BY A LICENSED PEST CONTROL COMPANY BEFORE A CERTIFICATE OF OCCUPANCY WILL BE ISSUED. THE CERTIFICATE OF COMPLIANCE SHALL STATE: "THE BUILDING HAS RECEIVED A COMPLETE TREATMENT FOR THE PREVENTION OF SUBTERRANEAN TERMITES THE TREATMENT IS IN ACCORDANCE WITH THE RULES & LAWS OF THE FLORIDA DEPARTMENT OF AGRICULTURE & CONSUMER SERVICES." IN ACCORDANCE WITH FLORIDA BUILDING CODE 7th EDITION 2020 SECTION 2304.11.
10.- AFTER ALL WORK IS COMPLETED, LOOSE WOOD AND FILL MUST BE REMOVED FROM BELOW AND WITHIN 1'-0" OF THE BUILDING. THIS INCLUDES ALL GRADE STAKES, TUB TRAP BOXES, FORMS, SHORING OR OTHER CELLULOSE CONTAINING MATERIAL.
11.- NO WOOD, VEGETATION, STUMPS, CARDBOARD, TRASH, ETC., SHALL BE BURIED WITHIN 15'-0" OF ANY BUILDING OR PROPOSED BUILDING.

STRUCTURAL REPAIR NOTE – ROOF TRUSSES (FBC 2023):

NOTE:
ALL ROOF TRUSSES ARE ENGINEERED STRUCTURAL MEMBERS REQUIRED TO BE FREE OF DAMAGE, DECAY, INSECT ATTACK, BREAKS, OR DEFECTIVE MEMBERS. ANY TRUSS SHOWING EVIDENCE OF WOOD DAMAGE, DECAY, TERMITE DAMAGE, SPLITTING, CRACKING, OR DAMAGE TO METAL CONNECTOR PLATES SHALL BE CORRECTED PRIOR TO CONTINUATION OF WORK AND PERMITTED AS FOLLOWS:

TRUSS REPAIR APPROVAL:
A REGISTERED PROFESSIONAL ENGINEER (RPE) LICENSED IN THE STATE OF FLORIDA SHALL DESIGN AND CERTIFY ALL TRUSS REPAIRS, INCLUDING, BUT NOT LIMITED TO, SPLICING, SCABBING, DOUBLING OR OTHER REINFORCEMENT METHODS, AND SHALL SUBMIT SEALED SHOP DRAWINGS FOR REVIEW AND PERMIT APPROVAL.
REFERENCE: FLORIDA BUILDING CODE 2023 – R502.1.3.3 / R802.10.3 – ALTERATIONS TO TRUSSES (NO TRUSS SHALL BE CUT, NOTCHED, DRILLED, SPLICED OR OTHERWISE ALTERED WITHOUT ENGINEER APPROVAL).

REPAIR METHOD:
TRUSS REPAIR SHALL INVOLVE SPARING OR DOUBLING (SCABBING) OF MEMBERS USING SIZED LUMBER EQUAL TO THE ORIGINAL TRUSS MEMBER (MINIMUM #2 GRADE). THE REPAIR SHALL EXTEND A MINIMUM OF 48" (FOUR FEET) BEYOND EACH SIDE OF THE DAMAGE POINT, OR AS REQUIRED BY THE ENGINEER OF RECORD TO DEVELOP FULL STRENGTH BASED ON TRUSS DESIGN CAPACITY. THIS EXTENSION IS A MINIMUM PRACTICAL ENGINEERING GUIDE.

ENGINEERING PRACTICE:
TRUSS REPAIR BY SPLICING MUST PROVIDE ADEQUATE LAP BEYOND THE DAMAGED AREA TO DEVELOP NECESSARY LOAD TRANSFER AND MINIMIZE STRESS CONCENTRATION (ANSI/TPI ENGINEERING PRACTICE).

METAL PLATE CONNECTOR REPAIR:
METAL CONNECTOR PLATES DAMAGED OR MISSING SHALL BE REPLACED OR REINFORCED WITH APPROVED PRODUCT-APPROVED CONNECTOR PLATES OR ENGINEER DESIGNED FASTENERS. CONNECTORS MUST HAVE CURRENT FLORIDA PRODUCT APPROVAL WHEN APPLICABLE.

ADDITIONAL REQUIREMENTS:
A. ALL REPAIR MATERIALS MUST BE GRADE STAMPED AND INSTALLED PER ENGINEER DETAIL.
B. CONNECTIONS MUST BE FASTENED USING CODE-COMPLIANT FASTENERS, STRAPS, PLATES, AND NAILS WITH PRODUCT APPROVAL WHERE REQUIRED.
C. ALL REPAIRS SHALL BE DOCUMENTED ON SEALED SHOP DRAWINGS SUBMITTED WITH THE PERMIT PACKAGE.

PERMITTED CONDITION:
ANY TRUSS MEMBER REPLACED OR STRENGTHENED SHALL BE RESTORED TO AN EQUIVALENT OR HIGHER LOAD-CARRYING CAPACITY

STRUCTURAL NOTES:

1. BEFORE STARTING CONSTRUCTION, THE CONTRACTOR NEEDS TO VERIFY THE EXISTING CONDITION & DIMENSIONS.
2. ALL HORIZONTAL OR MEMBERS SHALL BE CONNECTED USING STRAP CONNECTORS AND NAILS.
3. ALL PLYWOOD USED TO REINFORCING TRUSSES SHALL BE CDX PLYWOOD.
4. THE REINFORCING STEEL SHALL BE GRADE 60, ASTM A-615.
5. CONSTRUCTION JOINTS SHALL BE SPACED NO GREATER THAN 16" O.C.
6. ALL JOINT REINFORCEMENT, TIES & OTHER ACCESSORIES SHALL BE RESISTANT TO CORROSION.
7. THE CONTRACTOR SHALL USE A HOT-DIPPED ZINC-COATED GALVANIZED STEEL BOLTS FOR PRESSURE TREATED WOOD.
8. THEN FASTEN 1"x2" WOOD FURRING STRIPS TO THE EXTERIOR WALL AT 16" O.C. AND FASTEN SHEET ROCK.

DESIGN CRITERIA:

CODE APPLIED = FLORIDA BUILDING CODE 8TH EDITION (2023)	
1.- LIVE LOAD ROOF FLOOR	20 PSF 40 PSF
2.- DEAD LOAD ROOF	15 PSF 175 MPH (ULTIMATE)
3.- WIND LOADS RISK CATEGORY EXPOSURE CATEGORY INTERNAL PRESSURE COEFFICIENTS; GC pi	2 "B" * 0.18, ENCLOSED STRUCTURE * 0.55, PARTIALLY ENCLOSED STRUCTURE * 0.0 OPEN STRUCTURE q=53.8 PSF
4.- BASIC WIND PRESSURE	
5.- SOIL BEARING (ASSUMED TO BE VERIFIED)	Sb= 2000 PSF
6.- CLASSIFICATION OF WORK TYPE OF CONSTRUCTION:	ALTERATION LEVEL 2 TYPE V-B

APPLICABLE CODES

2023 FLORIDA BUILDING CODE 8TH EDITION.
2023 FLORIDA BUILDING CODE, PLUMBING
2023 FLORIDA BUILDING CODE, MECHANICAL
ROZO FLORIDA BUILDING CODE FOR BUILDING CONSTRUCTION
2023 FLORIDA BUILDING CODE EXISTING BUILDING
2023 FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION
2020 NATIONAL ELECTRICAL CODE

LIST OF ALL HARDWARE & FLORIDA APPROVALS NUMBERS:

ITEM #	PRODUCT MODEL	SUB CATEGORY	DIMENSIONS (INCHES)	MANUFACTURERS	FLORIDA APPROVAL #	EXPIRATION DATE:
1	7 IN. 16-GAUGE ZMAX GALVANIZED REINFORCING L ANGLE	REINFORCING ANGLE	7 IN.	SIMPSON STRONG-TIE	FL10446-R7	ACTIVE
2	H8 18-GAUGE GALVANIZED HURRICANE TIE	HURRICANE TIE CONNECTOR	H8	SIMPSON STRONG-TIE	FL10446-R7	ACTIVE
3	1/4 IN. X 1-3/4 IN. WHITE ULTRASHIELD HEX-WASHER-HEAD CONCRETE ANCHORS	CONCRETE ANCHOR	1/4 IN. X 1-3/4 IN	SIMPSON STRONG-TIE	FL16230-R9	ACTIVE
4	STRONG-DRIVE 3 IN. X 0.148 IN. SCN SMOOTH-SHANK HDG CONNECTOR NAIL	CONNECTOR NAIL	3 IN. X 0.148 IN.	SIMPSON STRONG-TIE	FL10446-R7	ACTIVE

LIST OF WINDOWS - DOORS & FLORIDA PRODUCT APPROVALS NUMBERS:

ITEM #	PRODUCT MODEL	SUB CATEGORY	DIMENSIONS (INCHES)	MANUFACTURERS	FLORIDA APPROVAL #	EXPIRATION DATE:
1	4700 IMPACT SERIES DOUBLE SLIDING DOOR	SLIDING EXTERIOR DOOR ASSEMBLY	59.75 X 79.75	PLYGEM WINDOWS	FL15443.2-R9	ACTIVE
2	400 IMPACT SERIES SINGLE HUNG WINDOW	IMPACT SINGLE HUNG WINDOW	44.25 X 73.5625	PLYGEM WINDOWS	FL15317-R13	ACTIVE
3	400 IMPACT SERIES SINGLE HUNG WINDOW	IMPACT SINGLE HUNG WINDOW	27.25 X 37.25	PLYGEM WINDOWS	FL15317-R13	ACTIVE
4	400 IMPACT SERIES SINGLE HUNG WINDOW	IMPACT SINGLE HUNG WINDOW	37.25 X 52.25	PLYGEM WINDOWS	FL15317-R13	ACTIVE
5	400 IMPACT SERIES SINGLE HUNG WINDOW	IMPACT SINGLE HUNG WINDOW	36.25 X 49.25	PLYGEM WINDOWS	FL15317-R13	ACTIVE
6	400 IMPACT SERIES SINGLE HUNG WINDOW	IMPACT SINGLE HUNG WINDOW	36.25 X 49.25	PLYGEM WINDOWS	FL15317-R13	ACTIVE
7	400 IMPACT SERIES SINGLE HUNG WINDOW	IMPACT SINGLE HUNG WINDOW	44.25 X 71.5625	PLYGEM WINDOWS	FL15317-R13	ACTIVE
8	400 IMPACT SERIES SINGLE HUNG WINDOW	IMPACT SINGLE HUNG WINDOW	59.00 X 107.125	PLYGEM WINDOWS	FL15317-R13	ACTIVE

This drawing is the sole property of Seating Constructors USA, (DBA Smart Choice Contractors USA). Unless otherwise provided for by contract, or the writing means, the contents of this drawing are confidential & shall be not transmitted to any other party accepted and agreed by Smart Choice Contractors USA. © 2025 Copyright.

SHEET TITLE	CUSTOMER NAME: EDUARDO MATOSINHO/100 FOLD RETURNS LLC		CUSTOMER INFORMATION Email: FOLDRETURNS1@GMAIL.C Phone:OM (781) 420-5726			NICHOLSON ENGINEERING ASSOCIATES, INC. 7468 Horse Lake Rd, Brooksville, FL 34601 Phone: 352.799.0170 Fax: 352.754.9167		REVISIONS		A 09	
	NOTES	PROJECT ADDRESS: 605 N WOODLYNNE AVE TAMPA, FL 33609-1555	PROJECT OPEN DATE: JAN. 20 2026	PROJECT REVISED BY : MICHAEL D. JOHNSON				DRAWINGS LATEST REMARKS			
								MM/DD/YY			
								1	01.07.26		RENOVATION DRAWINGS PERMIT SET.
								2			
3											
PROJECT NUMBER: 0024602		DESIGN DATE: 01.07.26									

