


NEW SINGLE FAMILY RESIDENCE PLANS FOR 9135 ORCHARD WAY, SPRING HILL, FL 34608

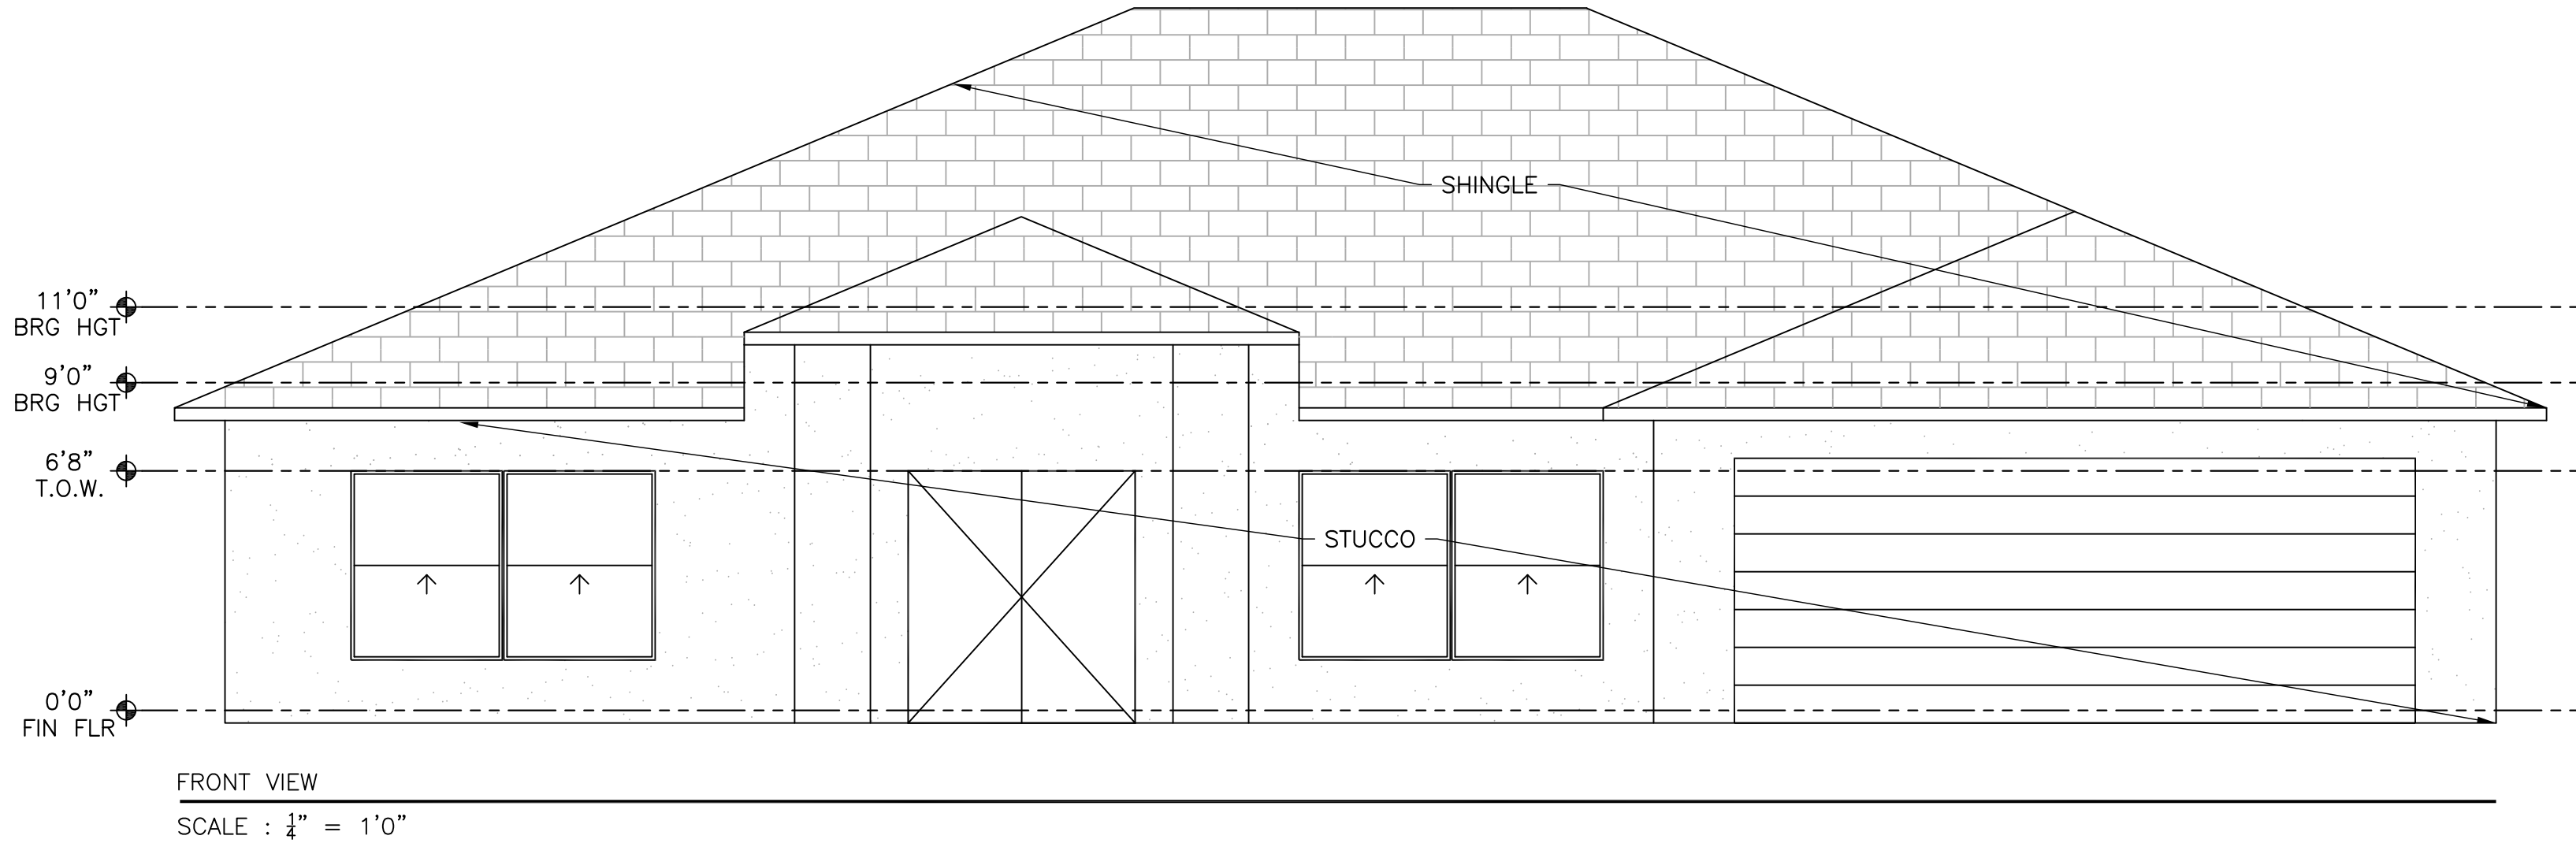

GENERAL NOTES:

- G1 ALL DETAILS, SECTIONS, AND NOTES SHOWN ON DRAWINGS ARE INTENDED TO BE TYPICAL AND SHALL APPLY TO SIMILAR SITUATIONS ELSEWHERE UNLESS NOTED OR SHOWN OTHERWISE.
- G2 THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND CONDITIONS AT SITE BEFORE START OF WORK.
- G3 THE DETAILS ON THESE DRAWINGS SHALL BE USED WHEREVER APPLICABLE UNLESS NOTED OR SHOWN OTHERWISE ON THE DRAWINGS. NOTES AND DETAILS ON DRAWINGS SHALL TAKE PRECEDENCE OVER GENERAL NOTES AND TYPICAL DETAILS.
- G4 ALL CONSTRUCTION, WORKMANSHIP AND MATERIALS SHALL CONFORM TO THE REQUIREMENTS OF THE FLORIDA BUILDING CODE 2020 SEVENTH EDITION.
- G5 ALL ASTM DESIGNATIONS SHALL BE AS AMENDED TO DATE UNLESS NOTED OTHERWISE.
- G6 ALL OMISSIONS OR CONFLICTS BETWEEN THE VARIOUS ELEMENTS OF THE WORKING DRAWINGS AND/OR SPECIFICATIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER BEFORE PROCEEDING WITH ANY WORK INVOLVED.
- G7 CONTRACTOR SHALL BE RESPONSIBLE FOR SAFETY AND PROTECTION IN AND AROUND JOB SITE AND/OR ADJACENT PROPERTIES.
- G8 OBSERVATION VISITS TO THE SITE BY A AN ENGINEERING FIELD REPRESENTATIVE SHALL NEITHER BE CONSTRUED AS INSPECTION NOR APPROVAL OF CONSTRUCTION UNLESS WRITTEN CONFIRMATION IS PROVIDED.
- G9 DURING AND AFTER CONSTRUCTION, BUILDER AND/OR OWNER SHALL KEEP LOADS ON STRUCTURE WITHIN THE LIMITS OF DESIGN LOADS.
- G10 U.N.O.S. MEANS UNLESS NOTED OR SHOWN OTHERWISE.
- G11 DURING THE CONSTRUCTION PERIOD THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE SAFETY OF THE BUILDING. THE CONTRACTOR SHALL PROVIDE ADEQUATE SHORING, BRACING AND GUYS IN ACCORDANCE WITH ALL NATIONAL, STATE, AND LOCAL SAFETY ORDINANCES. ANY DEVIATION MUST BE APPROVED PRIOR TO ERECTION.
- G12 ALL ERECTION PROCEDURES SHALL CONFORM TO OSHA STANDARDS. ANY DEVIATION MUST BE APPROVED BY OSHA PRIOR TO ERECTION.
- G13 THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL EXCAVATION PROCEDURES INCLUDING LAGGING, SHORING AND PROTECTION OF ADJACENT PROPERTY, STRUCTURES, STREETS AND UTILITIES IN ACCORDANCE WITH ALL NATIONAL, STATE AND LOCAL SAFETY ORDINANCES.
- G14 PROVIDE OPENINGS AND SUPPORTS, AS REQUIRED FOR HEATERS, MECHANICAL EQUIPMENT, VENTS, DUCTS, PIPING, ETC. STRUCTURAL MEMBERS SHALL NOT BE MODIFIED WITHOUT THE EXPRESSED APPROVAL OF THE ENGINEER. ALL SUSPENDED MECHANICAL EQUIPMENT SHALL BE SWAY OR LATERALLY BRACED.
- G15 ALL INFORMATION SHOWN ON THE DRAWINGS RELATIVE TO EXISTING CONDITIONS IS GIVEN AS THE BEST PRESENT KNOWLEDGE, BUT WITHOUT GUARANTEE OF ACCURACY. WHERE ACTUAL CONDITIONS CONFLICT WITH THE DRAWINGS, THEY SHALL BE REPORTED TO THE ENGINEER SO THAT THE PROPER REVISIONS MAY BE MADE. MODIFICATION OF DETAILS OF CONSTRUCTION SHALL NOT BE MADE WITHOUT WRITTEN APPROVAL OF THE ENGINEER.
- G16 CONTRACTOR TO BE SOLELY RESPONSIBLE FOR SHORING DURING CONSTRUCTION. ALL SHORING DESIGN'S SHALL BE APPROVED BY THE ENGINEER PRIOR TO PLACEMENT.
- G17 FASTENER OR SIMPSON CONNECTORS SUBSTITUTION SHALL EQUAL OR EXCEED CAPACITY OF SPECIFIED FASTENER OR SIMPSON CONNECTORS.
- G18 ALL COMPONENTS AND CLADDING AS DEPICTED ON THIS PLAN SHALL BE DESIGNED, TESTED AND APPROVED FOR USE AS REQUIRED BY THE FLORIDA BUILDING CODE 2020 SEVENTH EDITION, INCLUDING ALL ASSEMBLY AND CONNECTION DEVICES AND PROCEDURES. ALL MANUFACTURER'S OF ANY EXTERIOR COMPONENT OR CLADDING MUST HAVE THEIR PRODUCTS APPROVED, CERTIFIED AND ON FILE WITH THE RESPECTIVE PERMITTING AGENCY. THE ENGINEER OF RECORD FOR THIS PLAN TAKES NO RESPONSIBILITY FOR THE ATTACHMENT OF SAID MANUFACTURED DEVICES TO THE STRUCTURE.
- G19 ALL ELECTRICAL DESIGN AND CONSTRUCTION SHALL BE THE RESPONSIBILITY OF A LICENSED ELECTRICAL CONTRACTOR.
- G20 ALL PLUMBING DESIGN AND CONSTRUCTION SHALL BE THE RESPONSIBILITY OF A LICENSED PLUMBING CONTRACTOR.
- G21 ALL MECHANICAL DESIGN AND CONSTRUCTION SHALL BE THE RESPONSIBILITY OF A LICENSED MECHANICAL CONTRACTOR.
- G22 CODES: THESE PLANS COMPLY WITH THE LATEST FBC 2020 SEVENTH EDITION.

- G23 BUILDING DESIGNED FOR ULTIMATE DESIGN WIND SPEED 140 MPH, NOMINAL WIND DESIGN SPEED 108 MPH. RISK CATEGORY II, EXPOSURE B. INTERNAL PRESSURE COEFFICIENT ±0.18.
- G24 BUILDING LOADS: WIND, COMPONENTS & CLADDING.
- DEAD LOAD: ROOF 7 PSF
ATTIC 10 PSF
DECK 7 PSF(IF APPLICABLE)
LIVE LOAD: ROOF 20 PSF
2ND FLOOR 40 PSF(IF APPLICABLE)
DECK 40 PSF(IF APPLICABLE)
- C&C ASD LOADS: 140 150
ZONES: 1: 15.8 PSF, -39.1 PSF | 18.1 PSF, -44.9 PSF
2E: 15.8 PSF, -39.1 PSF | 18.1 PSF, -44.9 PSF
2N: 15.8 PSF, -57.0 PSF | 18.1 PSF, -65.4 PSF
2R: 15.8 PSF, -57.0 PSF | 18.1 PSF, -65.4 PSF
3E: 15.8 PSF, -57.0 PSF | 18.1 PSF, -65.4 PSF
3R: 15.8 PSF, -67.8 PSF | 18.1 PSF, -77.8 PSF
4: 21.2 PSF, -22.9 PSF | 24.3 PSF, -26.3 PSF
5: 21.2 PSF, -28.3 PSF | 24.3 PSF, -32.5 PSF
- MULTIPLY VALUES ABOVE BY 1.4 FOR EXPOSURE C.
MULTIPLY VALUES ABOVE BY 1.6 FOR EXPOSURE D.

G25 FREESTANDING WALLS WIND LOAD = 24 PSF

G26 BUILDING OCCUPANCY: R3

CONCRETE NOTES:

- C1 CONCRETE AND GROUT SHALL HAVE A MINIMUM COMPRESSION STRENGTH OF 3000 PSI AT 28 DAYS.
- C2 BILLET STEEL BARS FOR REINFORCING SHALL CONFORM TO THE REQUIREMENTS OF ASTM A-615, GRADE 40.
- C3 ALL REINFORCING SHOWN CONTINUOUS SHALL BE LAP SPLICED AS SHOWN BELOW:
#3, 15"
#4, 20"
#5, 25"
#6, 31"
- C4 COVER OVER REINFORCEMENT SHALL BE:
3" - CONCRETE CAST AGAINST EARTH
1-1/2" - CONCRETE EXPOSED TO WEATHER
1-1/2" - BOND BEAM
- C5 ALL REINFORCING BARS SHALL EXTEND CONTINUOUSLY (LAPPED W/ CORNER BARS OR DOWELS.) INTO FRAMING MEMBERS.
- C6 ALL CONCRETE CONSTRUCTION SHALL CONFORM TO ACI 318, LATEST EDITION.

FOUNDATION NOTES:

- F1 ALL CONCRETE TO BE 3000 P.S.I. AT 28 DAY STRENGTH.
- F2 BILLET STEEL BARS FOR REINFORCING SHALL CONFORM TO THE REQUIREMENTS OF ASTM A-615, GRADE 40.
- F3 CONCRETE FOOTINGS AND SLAB ON GRADE: SUB-GRADE SHALL BE COMPACTED TO .95% OF THE MAXIMUM DRY DENSITY OF THE MODIFIED PROCTOR, FOR A DEPTH OF 24 INCHES BELOW FOOTINGS AND 12 INCHES BELOW SLABS ON GRADE.
- F4 SOIL SHALL BE TREATED FOR TERMITES BY A LICENSED EXTERMINATOR.
- F5 A 6 MIL VAPOR BARRIER SHALL BE PLACED UNDER ALL SLABS ON GRADE.
- F6 FOUNDATION IS DESIGNED FOR A MINIMUM ASSUMED BEARING VALUE OF 2000 P.S.F.
- F7 IF UNSUITABLE SOIL (MORE THAN 10% PASSING A # 200 SIEVE) IS ENCOUNTERED, UNSUITABLE MATERIAL SHALL BE REMOVED NO LESS THAN 2 FEET BELOW THE BOTTOM OF THE FOOTER AND REPLACED WITH CLEAN FILL.
- F8 SAW CUT SLAB MAX. 10'x10' 1/3 DEPTH OF SLAB.
- F9 PROVIDE RAILING IF FINISH FLOOR ELEVATION IS 30" OR MORE ABOVE FINISH LOT GRADE. RAILING IS TO BE CONSTRUCTED IN ACCORDANCE TO FLORIDA BUILDING CODE 2020 SEVENTH EDITION.
- F10 CONSULTATION WITH GEOTECHNICAL ENGINEER SHALL BE CONDUCTED TO VERIFY THE 2000 PSF BEARING ASSUMPTION

WOOD CONSTRUCTION NOTES:

- W1 ALTHOUGH A SPECIFIC SPECIES AND GRADE IS GIVEN, A SPECIES AND GRADE WITH EQUIVALENT OR GREATER DESIGN VALUES SHALL BE PERMITTED. THE DESIGN VALUES CONTAINED IN DESIGN VALUES FOR WOOD CONSTRUCTION, ATC, SHALL BE USED TO DETERMINE EQUIVALENCY OF SUBSTITUTED MATERIAL. STUD GRADE OF A SPECIES CAN BE SUBSTITUTED FOR #3 GRADE OF SAME SPECIES.
- W2 ALL WOOD EXPOSED OR IN CONTACT WITH EARTH OR WEATHER SHALL BE PRESSURE TREATED.
- W3 DIRECT WOOD TERMITE TREATMENT IS REQUIRED IF SOIL TERMITE TREATMENT HAS NOT BEEN PROVIDED.
- W4 METAL PLATES, CONNECTORS, SCREWS, BOLTS AND NAILS EXPOSED DIRECTLY TO THE WEATHER OR SUBJECT TO SALT CORROSION IN COASTAL AREAS SHALL BE STAINLESS STEEL OR HOT DIPPED GALVANIZED, AFTER THE FASTENER OR CONNECTOR IS FABRICATED, TO FORM A ZINC COATING NOT LESS THAN 1 OZ. PER SQ. FT..
- W5 FRAMING LUMBER SHALL BE GRADE-MARKED SOUTHERN PINE PER ATTIC SPECIFICATIONS AS GRADE NO. 1 MINIMUM EXCEPT AS NOTED BELOW.
A. BEAM, HEADERS, PURLINS NO. 2
B. LEDGERS NO. 2
C. STUDS, PLATES AND SILLS STUD OR NO. 3
D. BLOCKING STUD OR NO. 3
- W6 NAILING SHALL CONFORM TO TABLE R602.3(1) OF THE FLORIDA BUILDING CODE RESIDENTIAL UNLESS NOTED OTHERWISE. COMMON NAILS SHALL BE USED.
- W7 NO STRUCTURAL MEMBER SHALL BE CUT OR NOTCHED UNLESS SPECIFICALLY SHOWN, NOTED OR APPROVED BY THE STRUCTURAL ENGINEER.
- W8 MAXIMUM MOISTURE CONTENT SHALL NOT EXCEED 19% FOR ALL STRUCTURAL MEMBERS.
- W9 SILLS OR PLATES BEARING ON CONCRETE OR MASONRY WHICH IS WITHIN 48" OF EARTH SHALL BE PRESSURE TREATED WOOD, OR EQUAL, UNLESS NOTED OTHERWISE.
- W10 ALL BOLT HEADS AND NUTS BEARING ON WOOD SHALL HAVE STANDARD CUT WASHERS. ALL BOLT HOLES IN WOOD SHALL BE DRILLED 1/32" TO 1/16" DIA. LARGER THAN THE NOMINAL BOLT DIAMETER.
- W11 LAG BOLTS AND SCREWS SHALL BE PRE DRILLED TO SHANK DIAMETER AND FULL DEPTH AND SCREWED INTO PLACE.
- W12 TOP PLATES OF ALL WOOD STUD WALLS TO BE DOUBLE 2x's WITH SAME WIDTH AS STUDS UNLESS NOTED OTHERWISE. LAP 48" MINIMUM WITH NOT LESS THAN 8-16d NAILS AT EACH LAP AND NOT MORE THAN 12" BETWEEN NAILS.
- W13 ALL UNSUPPORTED EDGE OF ROOF SHEETING SHALL HAVE CLIPS.
- W14 TRUSS MANUFACTURE SHALL SPECIFY TRUSS BRACING.
- W15 ALL TRUSS TO TRUSS CONNECTORS ARE THE RESPONSIBILITY OF THE TRUSS MANUFACTURER IN ADDITION, THE CONNECTORS SHALL BE PROVIDED BY THE TRUSS MANUFACTURER.

TRUSS CONSTRUCTION NOTES:

- T1 TRUSS LOADING DESIGN
LL: 20 psf
DL: TOP CHORD 7 psf
BOTTOM CHORD 10 psf
SPACING 2'-0" O.C.
- T2 TRUSSES SHALL BE DESIGNED IN ACCORDANCE WITH THE TPI DESIGN SPECIFICATIONS FOR METAL PLATE CONNECTED WOOD TRUSSES.
- T3 CONTRACTOR TO SUPPLY ROOF TRUSS SHOP DRAWINGS SIGNED AND SEALED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF FLORIDA. DRAWINGS TO BE SENT TO ENGINEERS OFFICE FOR REVIEW AND APPROVAL BEFORE CONSTRUCTION OF TRUSSES IS STARTED.
- T4 TRUSSES TO BE HANDLED WITH REASONABLE CARE DURING FABRICATION, SHIPPING AND ERECTION TO PREVENT EXCESSIVE DAMAGE. DAMAGED TRUSSES WILL BE REJECTED.
- T5 ALL METAL CONNECTORS TO BE STANDARD GALVANIZED.
- T6 TRUSSES SHALL BE BRACED IN ACCORDANCE WITH THE TRUSS PLATE INSTITUTE'S "BRACING WOOD TRUSSES, BWT-76".
- T7 TRUSS MEMBERS SHALL NOT BE CUT, NOTCHED, DRILLED, SPLICED OR OTHERWISE ALTERED UNLESS ENGINEER APPROVED. NO ADDITIONAL LOADING OF ANY MEMBER SHALL BE PERMITTED WITHOUT ADDITIONAL LOAD BEARING INCORPORATED INTO THE ENGINEERING DESIGN


MASONRY NOTES:



- M1 CONCRETE MASONRY UNITS SHALL BE HOLLOW OR SOLID UNIT MASONRY IN ACCORDANCE WITH ASTM C 90 OR C 145 AND SHALL HAVE A MINIMUM NET A. AREA COMPRESSIVE STRENGTH OF 1900 psi.
- M2 MORTAR SHALL BE EITHER TYPE M OR S IN ACCORDANCE WITH ASTM C 270. MORTAR SHALL BE NON AIR-ENTRAINED PORTLAND CEMENT/LIME MORTAR. GROUT SHALL BE READY-MIXED CONCRETE WITH A MAXIMUM COARSE AGGREGATE SIZE OF 3/8 INCH PLACED AT AN 8 TO 10 INCH SLUMP AND HAVE A MINIMUM SPECIFIED COMPRESSIVE STRENGTH OF 3000 PSI AT 28 DAYS WHEN TESTED IN ACCORDANCE WITH ASTM C 1019 OR SHALL BE IN ACCORDANCE WITH ASTM C476.
- M3 CLEANOUT OPENINGS SHALL BE PROVIDED FOR CELLS CONTAINING SPLICED REINFORCEMENT WHEN THE GROUT POUR EXCEEDS 5 FEET IN HEIGHT, WHERE CLEANOUT OPENINGS ARE REQUIRED, AN OPENING SHALL BE PROVIDED IN THE BOTTOM COURSE OF THE MASONRY CELL TO BE FILLED.
- M4 CLEANOUT OPENINGS SHALL HAVE MINIMUM AREA OF 12 SQUARE INCHES AND A MINIMUM OPENING DIMENSION OF 3 INCHES. ALL HEAD AND BED JOINTS FOR HOLLOW CONCRETE MASONRY CONSTRUCTION SHALL BE THE FULL WIDTH OF THE FACE SHELL THICKNESS. MORTAR JOINTS FOR SOLID CONCRETE, CLAY AND BRICK MASONRY SHALL BE FULL HEAD AND BED JOINTS.
- M5 MASONRY PROTRUSIONS EXTENDING 1/2 INCH OR MORE INTO CELLS OR CAVITIES TO BE GROUTED SHALL BE REMOVED FOR GROUT POURS OVER 5 FT.
- M6 SPACES TO BE GROUTED SHALL BE FREE OF MORTAR DROPPINGS, DEBRIS, LOOSE AGGREGATES, AND ANY MATERIAL DELETERIOUS TO MASONRY GROUT.
- M7 ALL CMU WALLS TO BE CONSTRUCTED UTILIZING COMMON RUNNING BOND UNLESS NOTED OTHERWISE IN PLANS.
- M8 BED JOINTS SHALL BE 3/8 INCH (+/- 1/8 INCH) THICK. HEAD JOINTS SHALL BE 3/8 INCH (+ 3/8 INCH/- 1/4 INCH) THICK.
- M9 THE BED JOINT OF THE STARTING COURSE PLACED OVER THE FOUNDATIONS SHALL BE PERMITTED TO VARY IN THICKNESS FROM A MINIMUM OF 1/4 INCH TO A MAXIMUM OF 3/4 INCH.
- M10 HORIZONTAL JOINT REINFORCEMENT, IN ADDITION TO REQUIRED VERTICAL REINFORCEMENT, SHALL BE PLACED IN BED JOINTS AT NOT MORE THAN 16 INCHES ON CENTER.
- M11 LONGITUDINAL WIRES OF JOINT REINFORCEMENT SHALL BE FULLY EMBEDDED IN MORTAR OR GROUT WITH A MINIMUM COVER OF 5/8 INCH WHEN EXPOSED TO EARTH OR WEATHER AND 1/2 INCH WHEN NOT EXPOSED TO EARTH OR WEATHER. ALL REINFORCING SHALL BE NEW STOCK DEFORMED BARS CONFORMING TO ASTM A-615, GRADE 40
- M12 SPACING REQUIREMENTS BETWEEN BARS OR ANY FACE OF CMU:
1/4" - FINE GROUT
1/2" - COARSE GROUT



STRUCTURE SQ.FT. AREAS	
SPACE	SQ. FT.
CONDITIONED	2171
GARAGE	464
ENTRY	64
LANAI	673
TOTAL	3372

SHEET INDEX	
01	COVER PAGE
02	FOUNDATION PLAN
03	FLOOR PLAN
04	ELEVATIONS
05	TRUSS PLAN
06	UTILITY PLAN
07	DETAILS

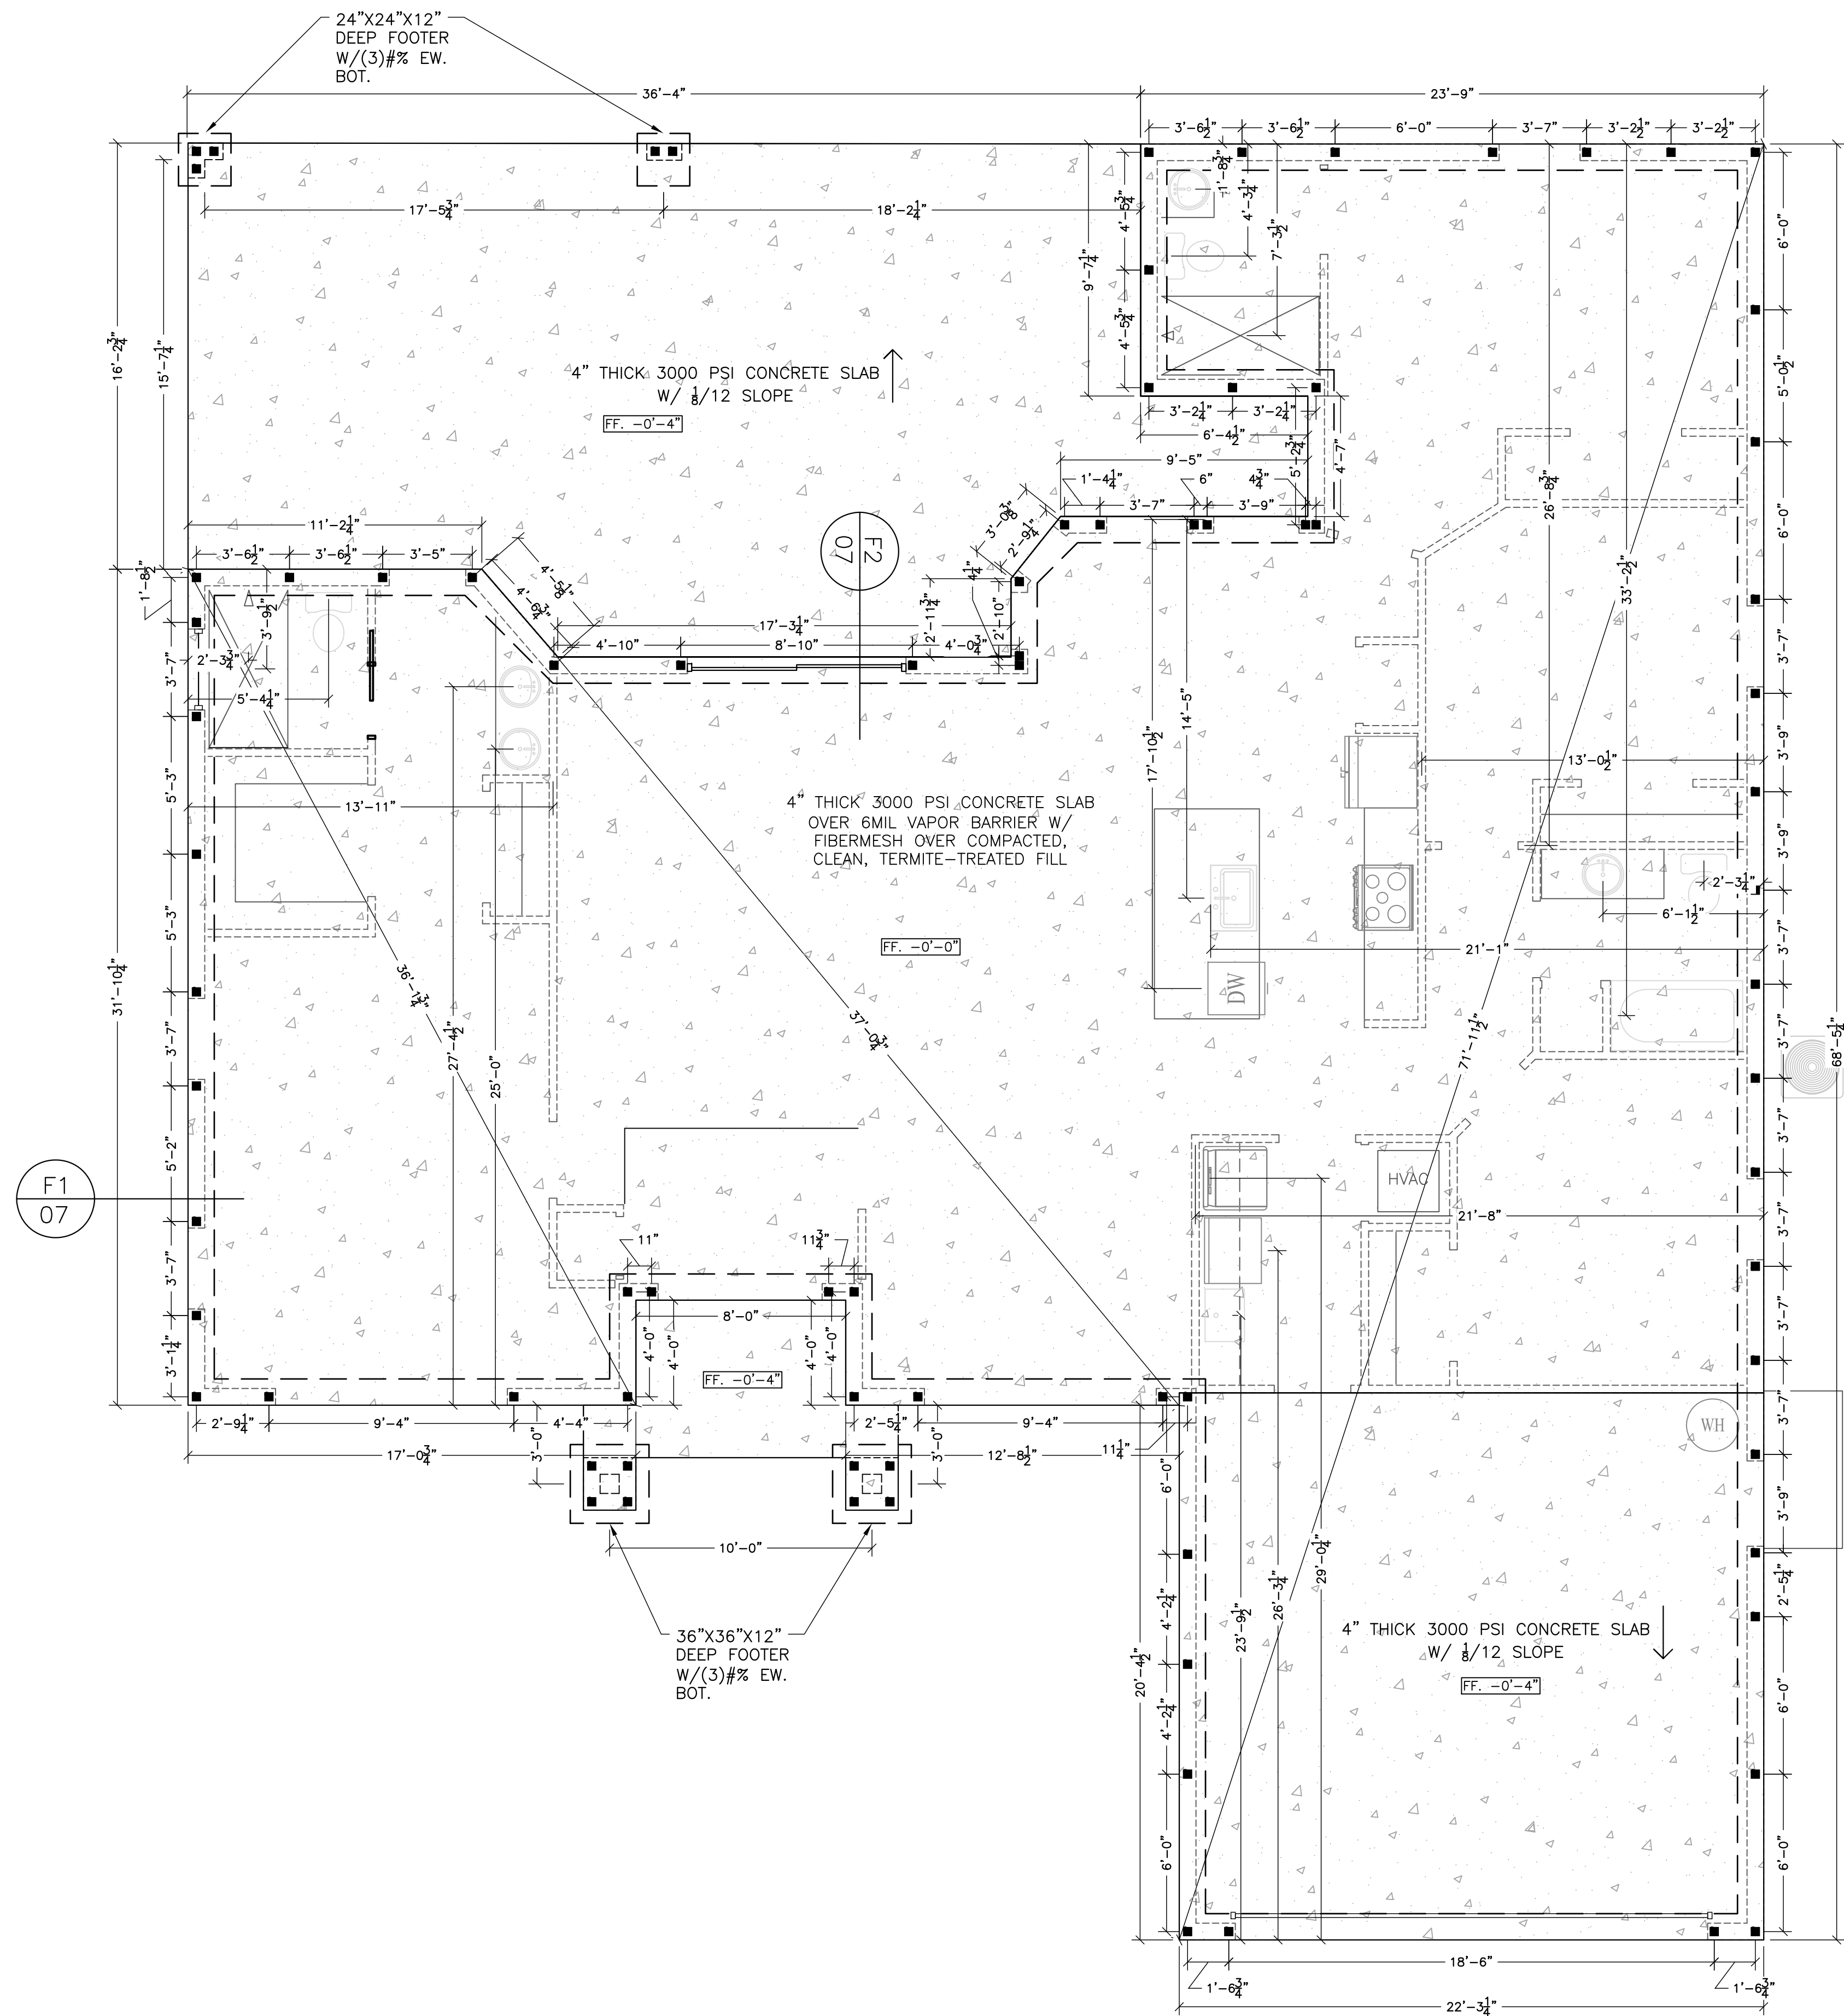

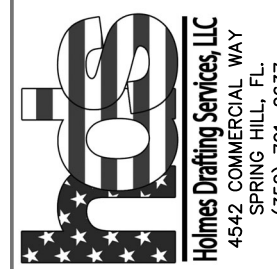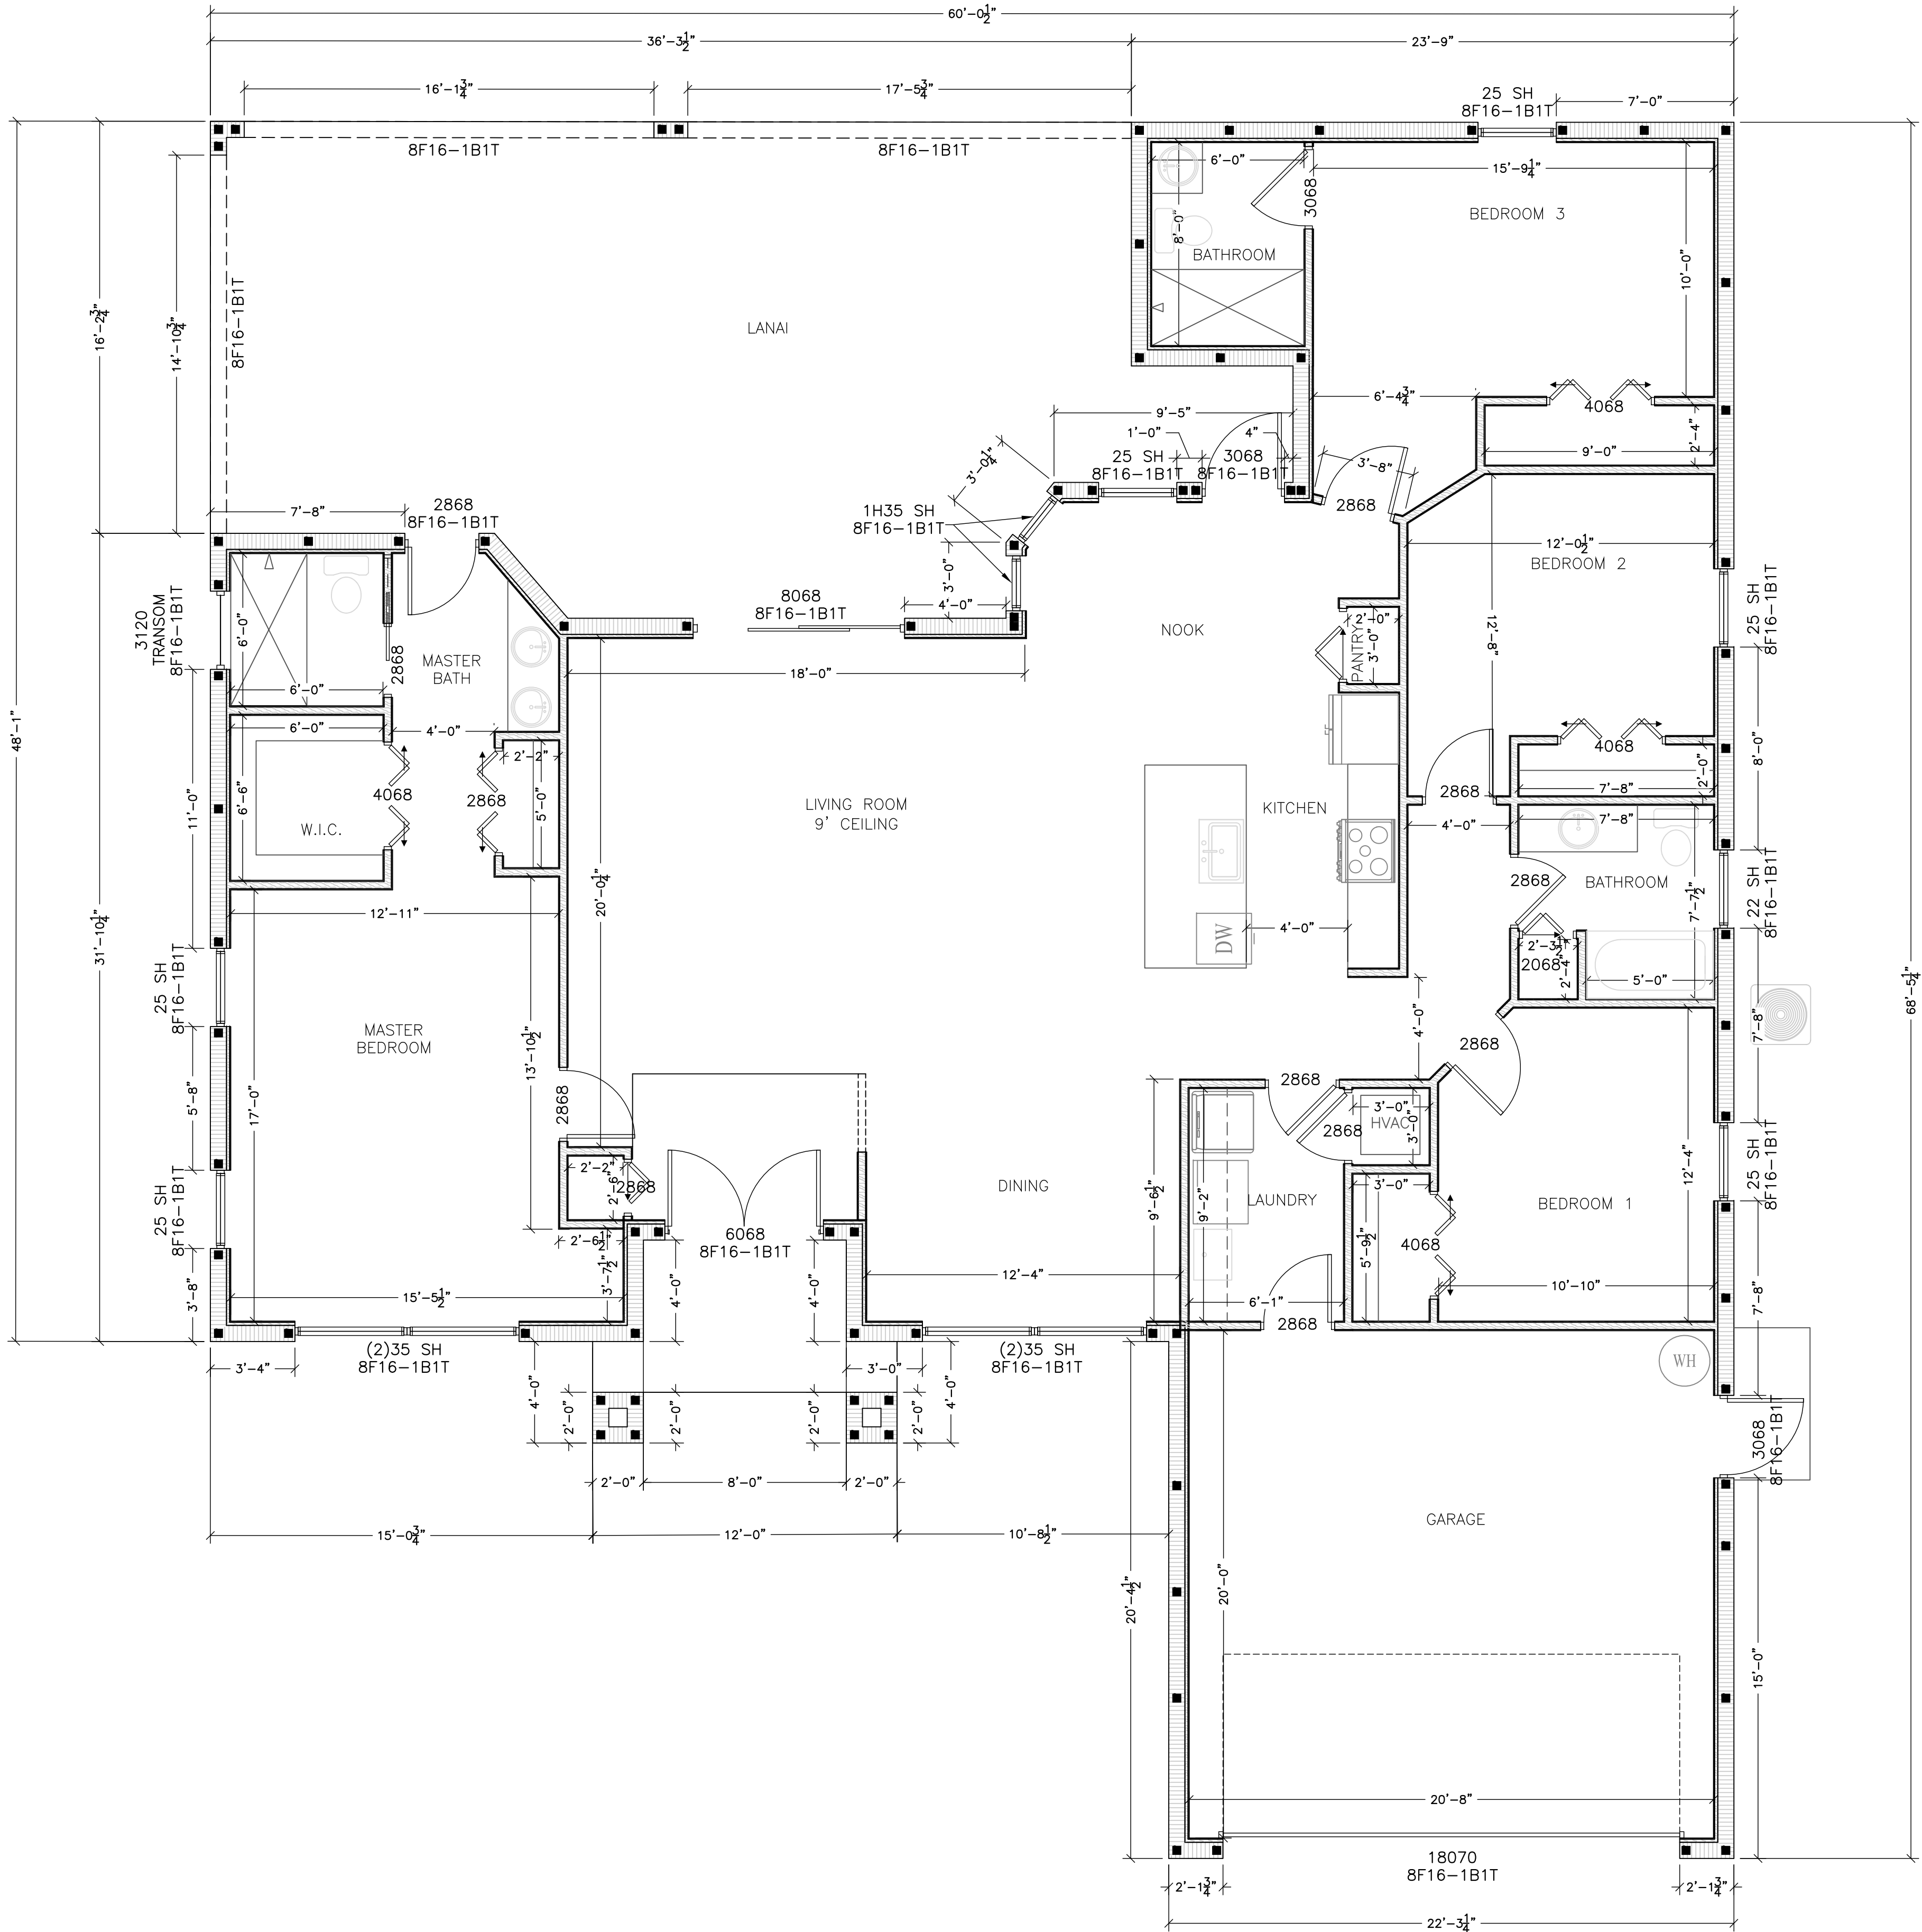

CUSTOMER: MONTEJO
PARCEL: R3622317170000000118
ADDRESS: 9134 ORCHARD WAY
SPRING HILL 34608

FLOOR PLAN

PAGE 03 OF 07

DRAWN BY: ATH SCALE: 1/4" = 1'-0"
CHECKED BY: NRB
SAVED DATE: 11/30/2022 02:10


INITIAL

REVISION DESCRIPTION

FLORIDA ENGINEERING, LLC
CA# 30782
CRAG E. GUNDERSON, P.E.
NO. 6002, STATE OF FLORIDA
4456 TAMAMI TRAIL, SUITE B14
PORT JEFFERSON, FL 33686
(941) 391-5960

ENGINEER SEAL
THIS DOCUMENT HAS BEEN DIGITALLY SIGNED & SEALED IN ACCORDANCE WITH 61G15-23.004(e) F.A.C. WHEN THE ENGINEER'S SEAL IS VISIBLE ON THE FIRST PAGE.

THESE PLANS HAVE BEEN DESIGNED FOR OWNER-BUILDER USE.

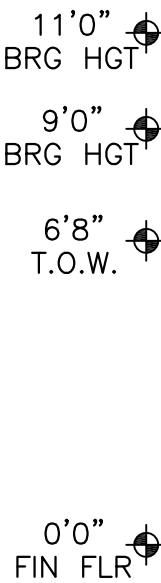


FRONT VIEW

SCALE : $\frac{1}{4}" = 1'0"$




REAR VIEW

SCALE : $\frac{1}{4}" = 1'0"$

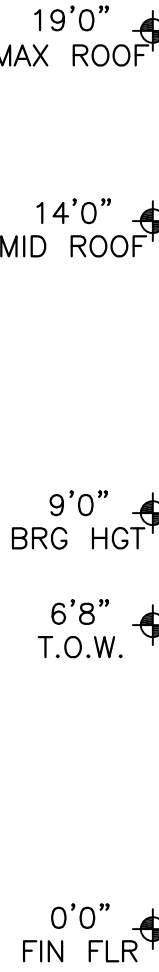

LEFT VIEW

SCALE : $\frac{1}{4}" = 1'0"$

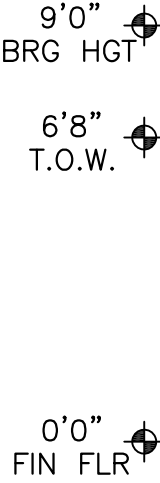

RIGHT VIEW

SCALE : $\frac{1}{4}" = 1'0"$


—HOLMES DRAFTING SERVICES, LLC EXPRESSLY RESERVES THE EXCLUSIVE COMMON LAW COPYRIGHT AND PROPERTY RIGHTS TO THESE DRAWINGS WHICH MAY NOT BE REPRODUCED, CHANGED OR COPIED IN ANY FORM OR MANNER, NOR ARE THEY TO BE ASSIGNED TO ANY PARTY WITHOUT WRITTEN CONSENT.

CA# 30782

CRAIG E. GUNDERSON, P.E.
NO. 60102, STATE OF FLORIDA

4456 TAMiami TRAIL, SUITE B14
PORT CHARLOTTE, FL. 33980
(941) 391-5980

ENGINEER SEAL
THIS DOCUMENT HAS
BEEN DIGITALLY
SIGNED & SEALED IN
ACCORDANCE WITH
61G15-23.004(e) F.A.C.
WHEN THE ENGINEER'S
SEAL IS VISIBLE ON THE
FIRST PAGE.

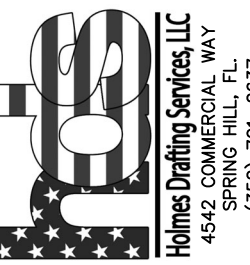
[illegible]

CUSTOMER:
MONTEJO
PARCEL #:
R362231717000000011B
ADDRESS:
9134 ORCHARD WAY
SPRING HILL 34608

ELEVATIONS

PAGE
04 / 07

DRAWN BY: ATH	SCALE: AS SHOWN
CHECKED BY: NRH	SAVED DATE: 11/30/2022 02:

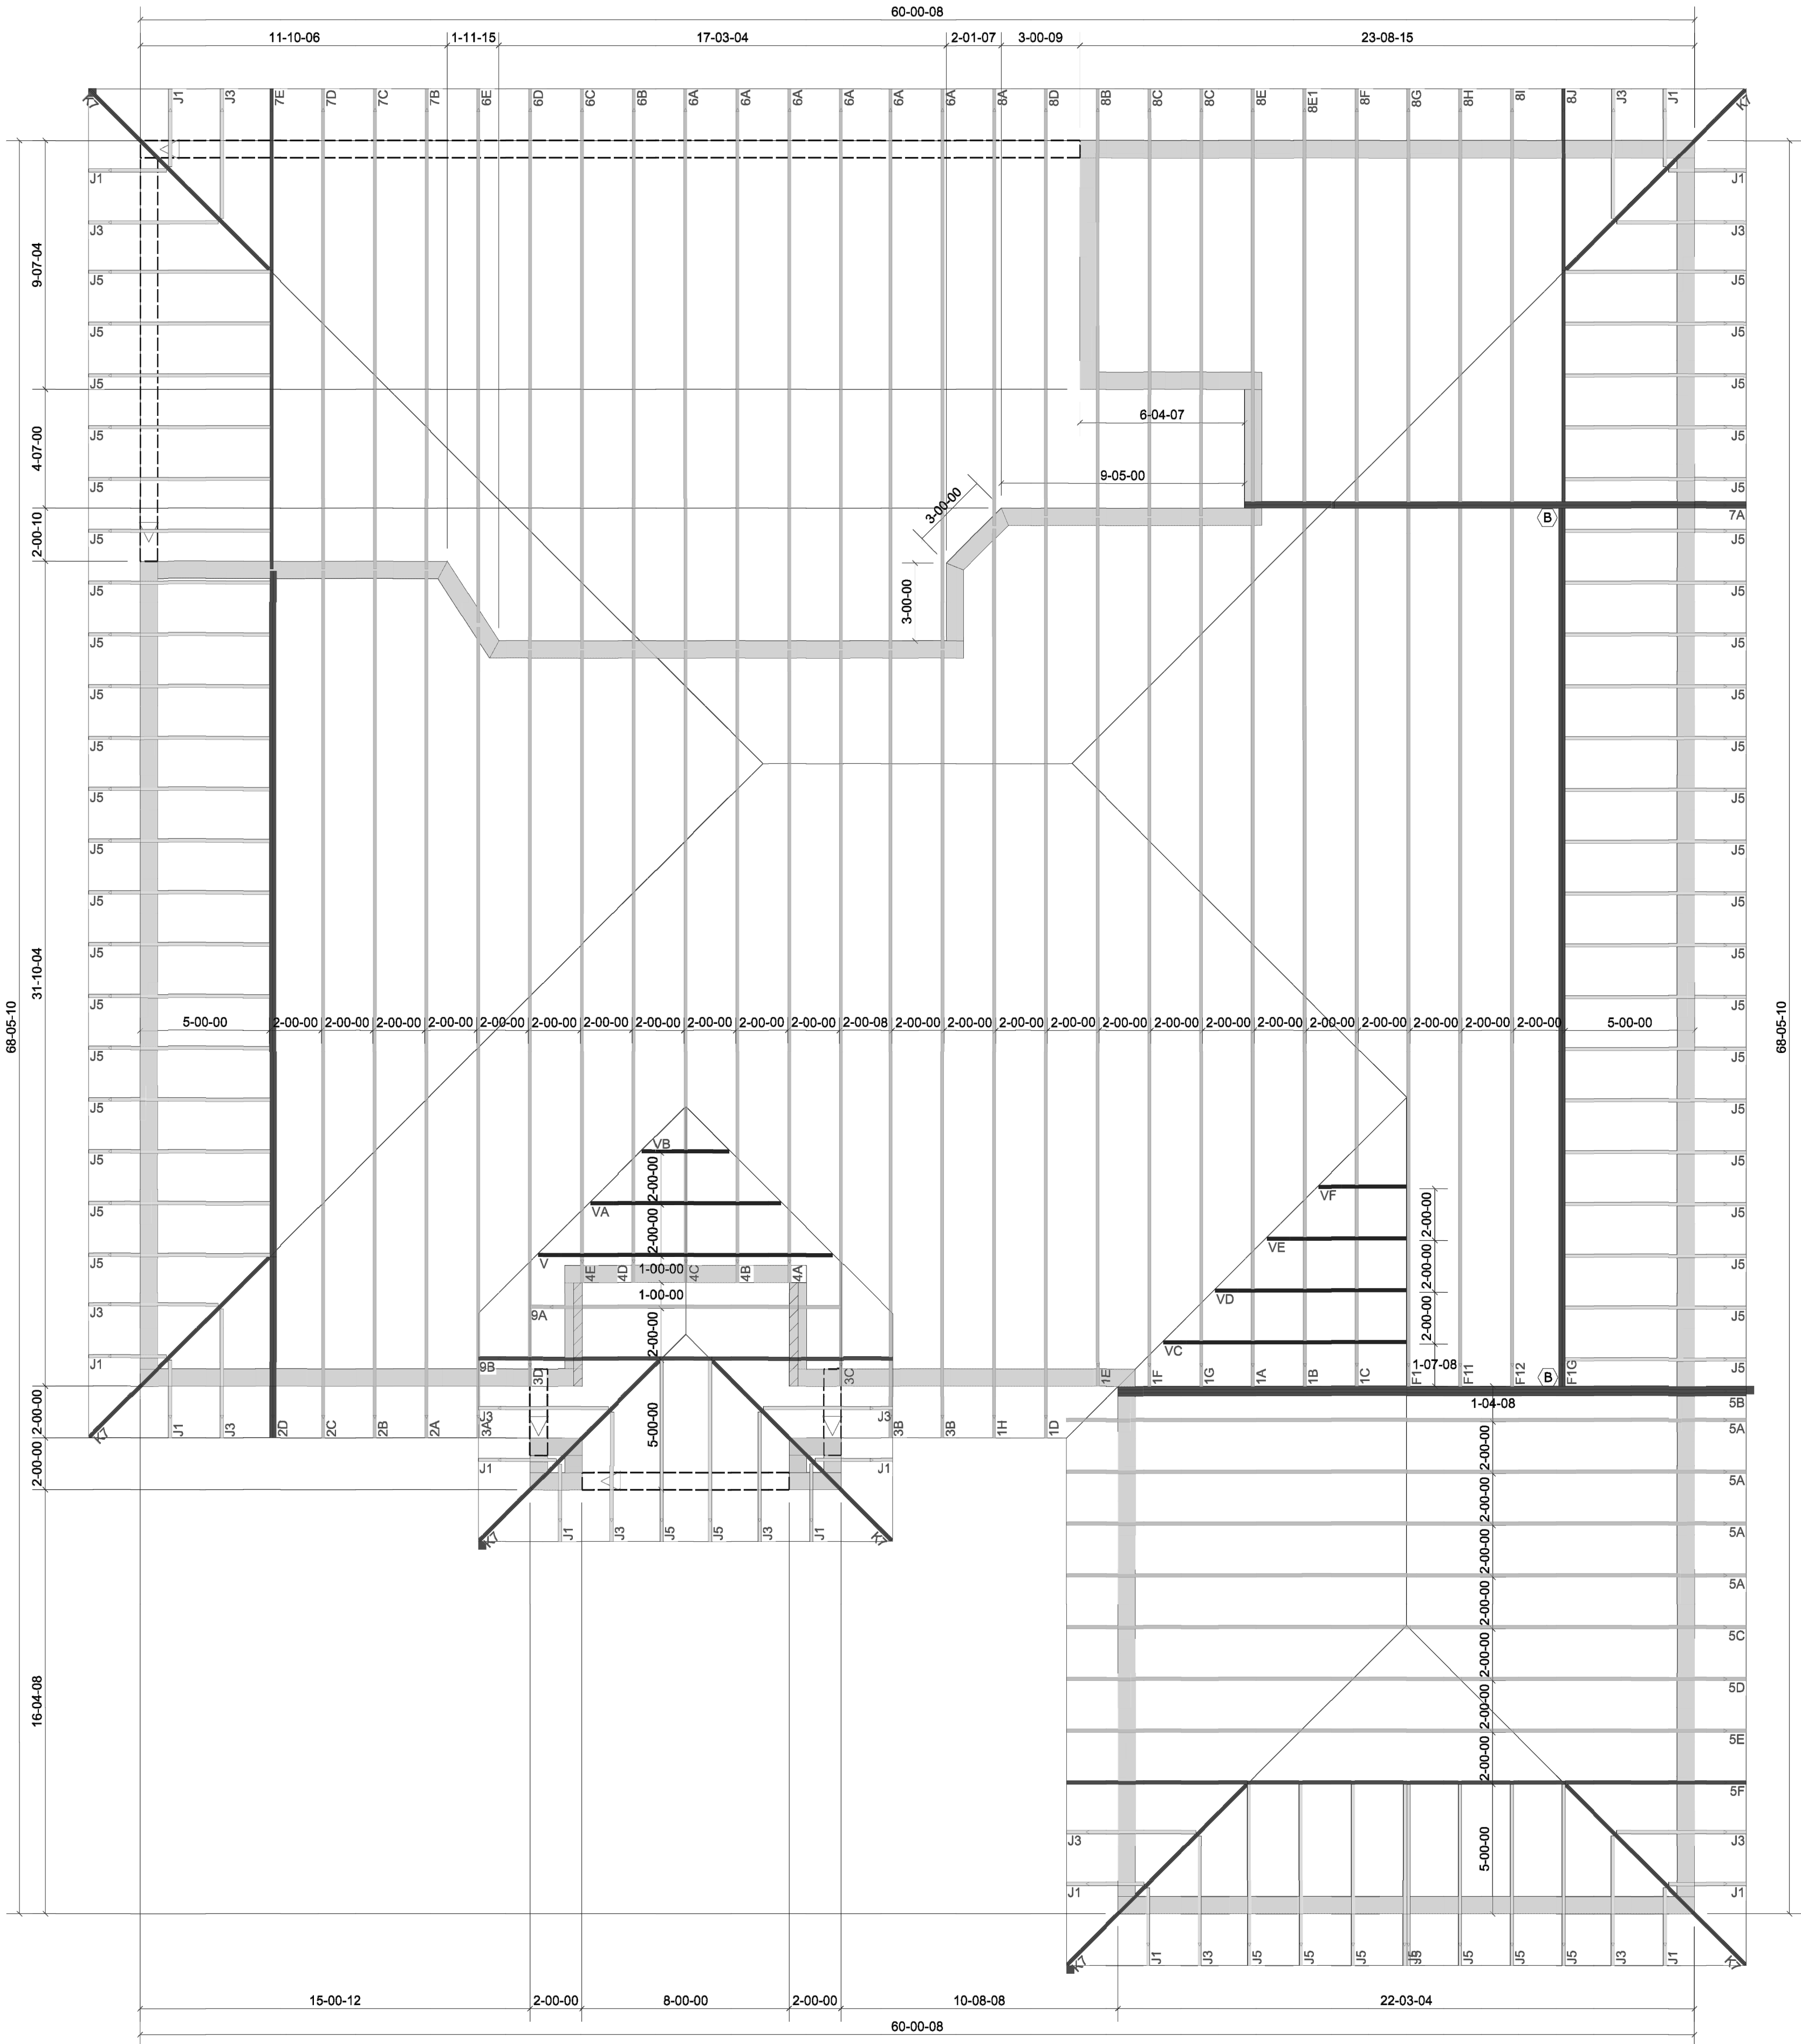

24" TALL KNEEWALL
ALL OTHER WALLS AT 9'-0"
EXCEPT FOR THE ENTRY AT 11'-0"


FLORIDA ENGINEERING, LLC
C# 30782
CRAG E. GUNDERSON, P.E.
NO. 6002, STATE OF FLORIDA
4456 TAMAMI TRAIL, SUITE B14
PORT JEFFERSON, FL 33686
(941) 391-5960

ENGINEER SEAL
THIS DOCUMENT HAS
BEEN DIGITALLY
SIGNED & SEALED IN
ACCORDANCE WITH
61G15-23.004(e) F.A.C.
WHEN THE ENGINEER'S
SEAL IS VISIBLE ON THE
FIRST PAGE.

INITIAL

REVISION DESCRIPTION

DATE

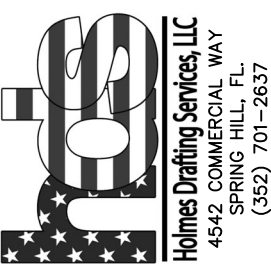

CUSTOMER:
MONTEJO
PARCEL:
R3622317170000000118
ADDRESS:
9134 ORCHARD WAY
SPRING HILL 34608

TRUSS PLAN

PAGE
05 OF 07

DRAWN BY:
ATH
SCALE:
1/4" = 1'-0"
CHECKED BY:
NRH
SAVED DATE:
11/30/2022 02:10


THESE PLANS HAVE BEEN DESIGNED
FOR OWNER-BUILDER USE.

ELECTRIC NOTES:

- E1 PROVIDE AND INSTALL LOCALLY CERTIFIED SMOKE DETECTORS AND CARBON MONOXIDE AS REQUIRED BY NATIONAL FIRE PROTECTION ASSOCIATION (NFPA) AND MEETING THE REQUIREMENTS OF ALL GOVERNING CODES.
- E2 PROVIDE AND INSTALL GROUND FAULT CIRCUIT INTERRUPTERS (GFI) AS REQUIRED BY NATIONAL ELECTRIC CODE (NEC) AND MEETING THE REQUIREMENTS OF ALL GOVERNING CODES.
- E3 UNLESS OTHERWISE INDICATED, INSTALL SWITCHES & RECEPTACLES AT THE FOLLOWING HEIGHTS ABOVE FINISH FLOOR:
SWITCHES.....42" TO BOTTOM
TELEPHONE.....14" TO BOTTOM
OUTLETS.....14" TO BOTTOM
TELEVISION.....14" TO BOTTOM
SWITCHES AND OUTLETS ABOVE LAVS.....42" TO BOTTOM
EXTERIOR OUTLETS TO BE HORIZONTAL.....24" FROM FINISHED FLOOR TO TOP WASHER
RECEPTACLE 36" O/F DRYER RECEPTACLE 36" O/F EXTERIOR
WALL LIGHTS TO BE 70" O/F UNLESS OTHERWISE NOTED.
- E4 ALL RECEPTACLES THAT SERVE KITCHEN AND BATHROOM COUNTER TOPS SHALL BE GFI PROTECTED.
- E5 ALL EXT. OUTLETS TO BE W.P. G.F.I. AND ALL GARAGE RECEPTS TO BE 42" O/F & G.F.I.
- E6 TV JACKS IN KITCHEN @ 42" O/F TO MATCH RECEPTACLES UNLESS OTHERWISE NOTED.
- E7 SET WALL MOUNT BATH LIGHTS TO TOP OF MIRROR (NO WALL SPACE BETWEEN LIGHT & MIRROR).
- E8 MUSIC SYSTEMS TO BE INSTALLED 48" O/F TO BOTTOM EXCEPT BETWEEN KITCHEN BASE & UPPER CABINETS WHICH WILL BE INSTALLED 48" O/F TO TOP R.O. = 14 1/2" W. X 7" H. UNLESS OTHERWISE NOTED.
- E9 SPEAKER TO BE MOUNTED IN LOCATIONS AS PER OWNER.
- E10 RECEPT FOR DISHWASHER TO BE INSTALLED UNDER KITCHEN SINK CABINET ON SAME SIDE AS DISHWASHER
- E11 ALL CABLE AND PHONE OUTLETS TO BE HOME RUN UNLESS OTHERWISE NOTED
- E12 RECEPTACLES AT REFRIGERATORS ARE TO BE 36" O/F
- E13 RECEPTACLES SERVING BEDROOMS SHALL BE ARC FAULT PROTECTED AS REQUIRED BY NEC.

ELECTRICAL KEY


	DUPLEX OUTLET		SWITCH
	HALF-SWITCHED DUPLEX OUTLET		3-WAY SWITCH
	FULL-SWITCHED DUPLEX OUTLET		DIMMER SWITCH
	GFI DUPLEX OUTLET		CEILING MOUNTED LIGHT FIXTURE
	QUAD OUTLET		RECESSED LIGHT FIXTURE
	FLOOR OUTLET		FLUORESCENT LIGHT
	SWITCHED FLOOR OUTLET		CEILING FAN OUTLET
	220 VOLT OUTLET		EXHAUST FAN/LIGHT COMBINATION 50 CFM
	TELEVISION/CABLE DATA/NETWORK		LED LIGHT
	TELEPHONE DATA/TELEPHONE COMBO		WALL MOUNTED LIGHT
	EXIT SIGN		FLOOD LIGHT
	EMERGENCY LIGHT		CHIMES (12" FROM CEILING)
	MUSIC SYS. SPEAKER (OPTIONAL)		PUSH-BUTTON SWITCH
			SMOKE DETECTOR (12" FROM CEILING)
			CARBON MONOXIDE DETECTOR (12" FROM CEILING)

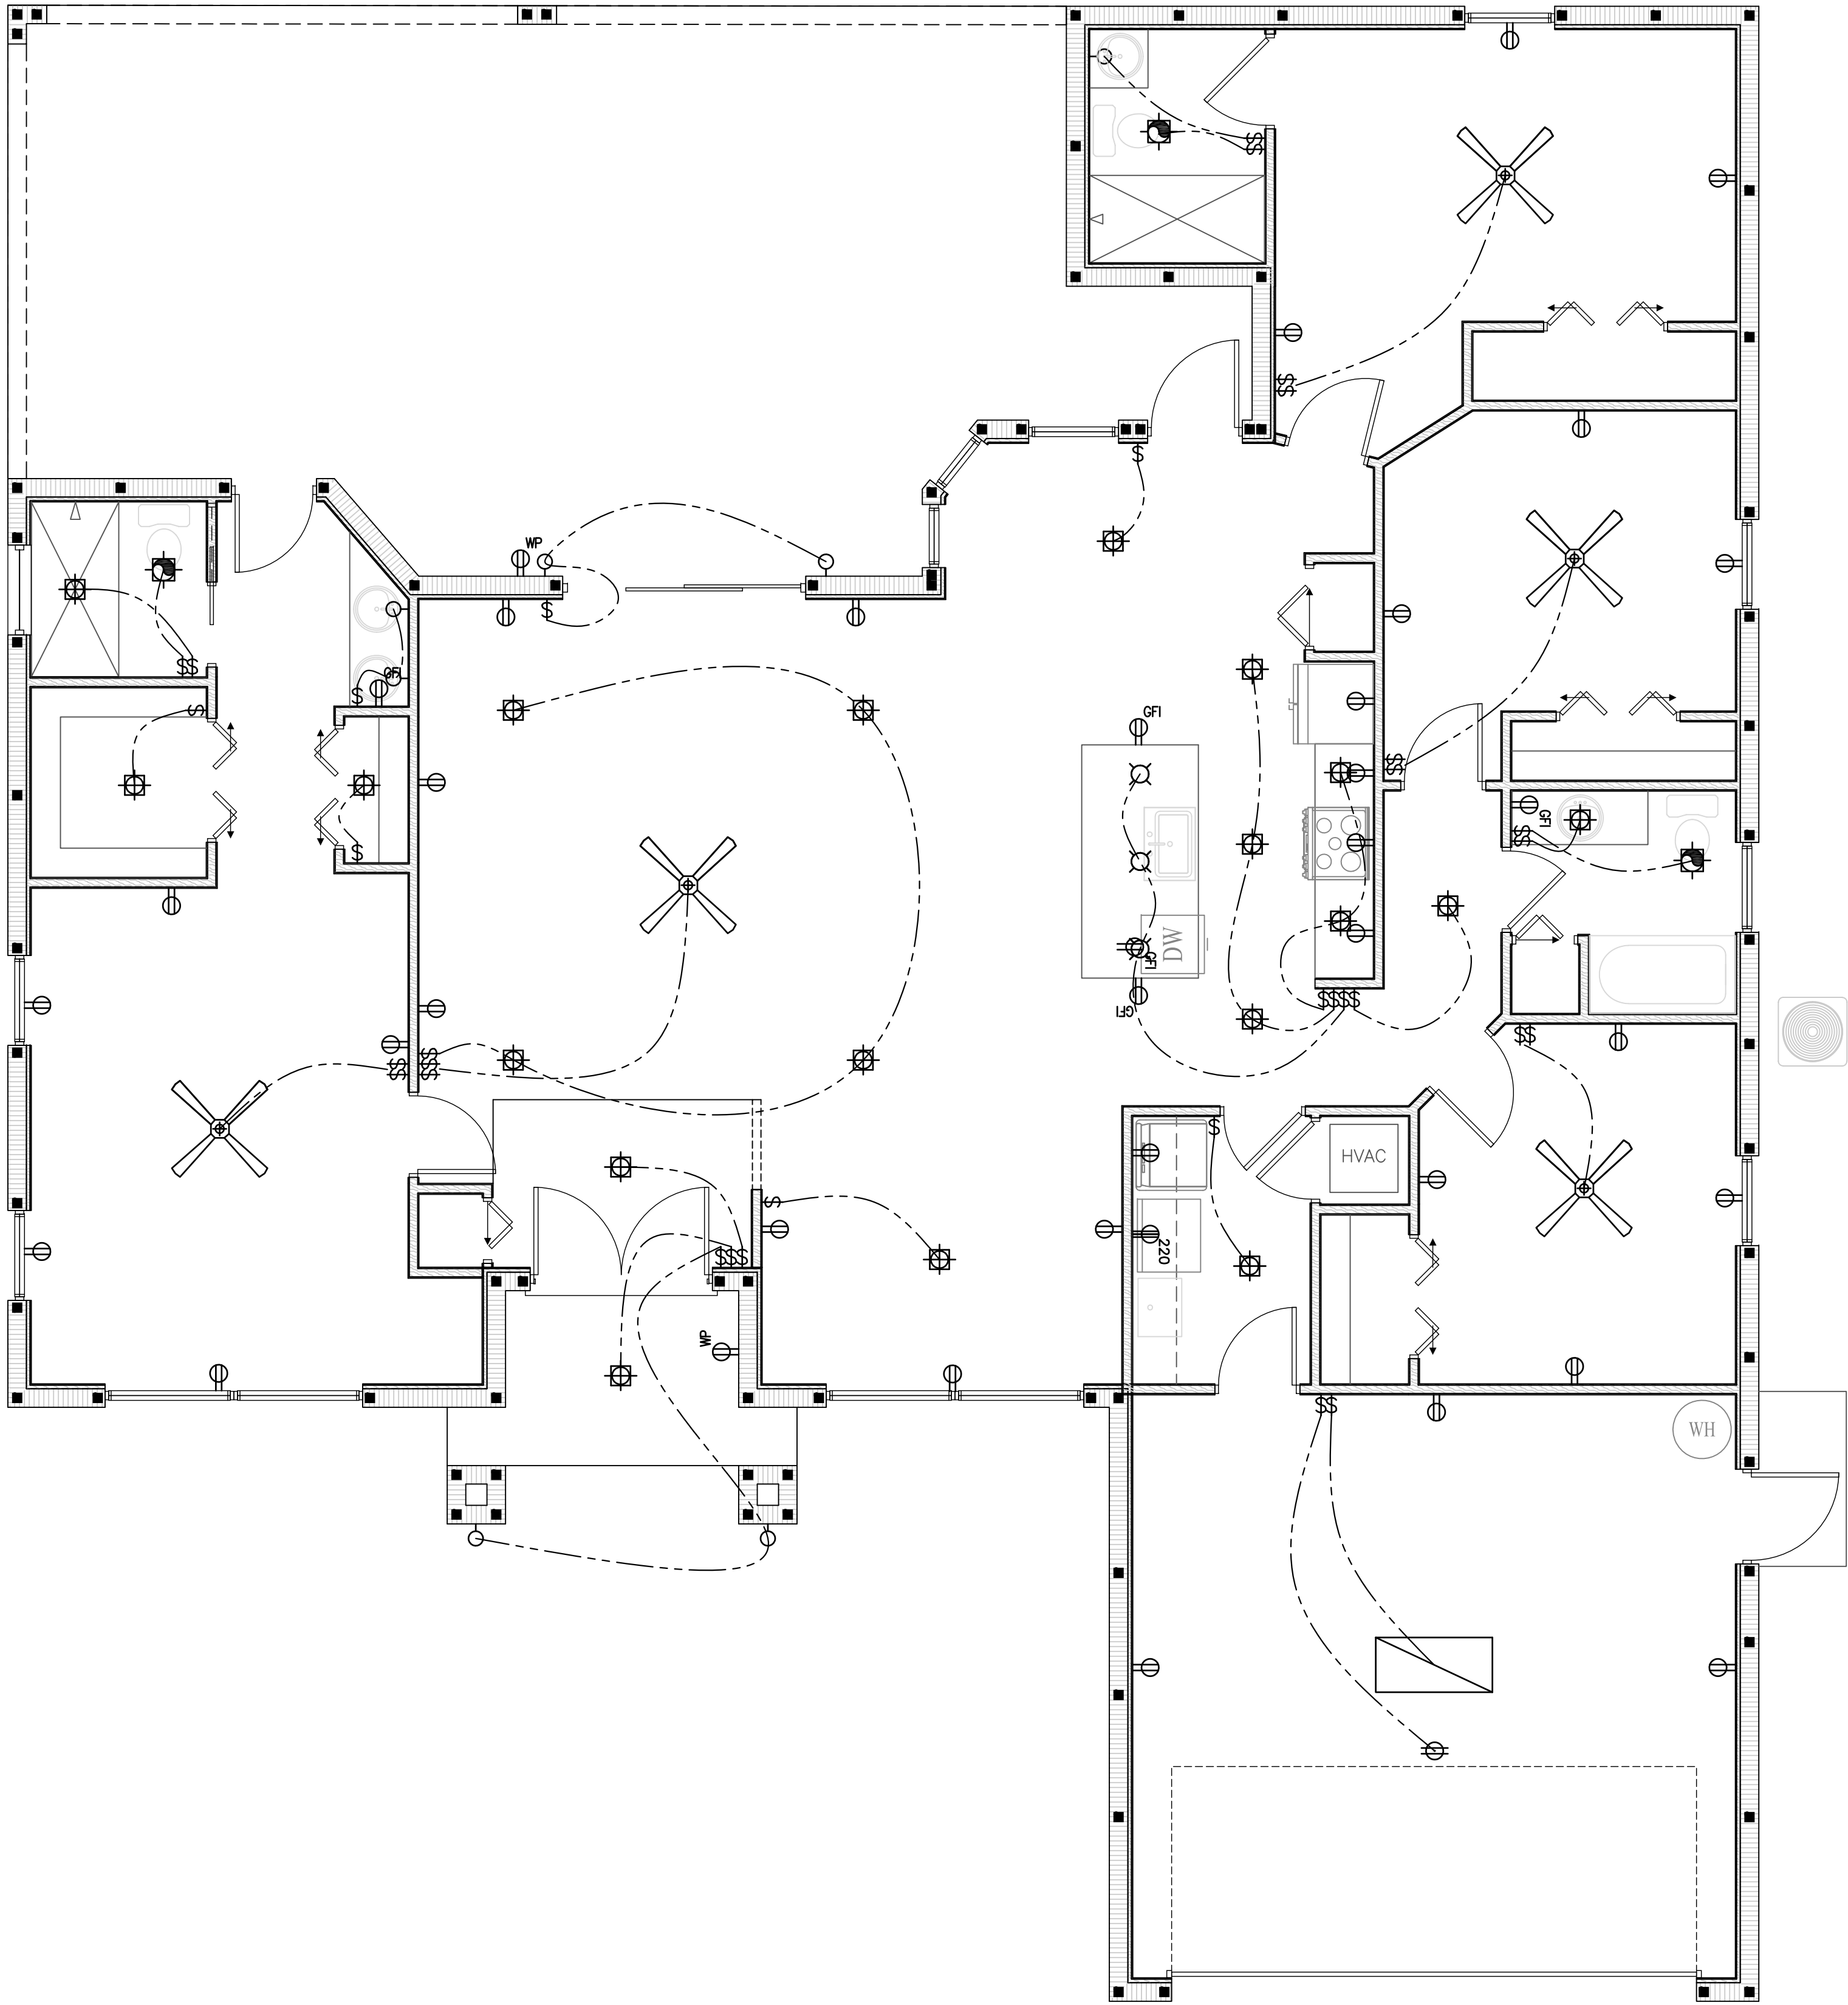

NOTE:
THIS DRAWING IS PROVIDED FOR THE EXCLUSIVE USE OF THE CLIENT. THE CLIENT SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND THE NECESSARY EDITIONS AND THE NECESSARY EDITIONS.

THESE PLANS HAVE BEEN DESIGNED FOR OWNER-BUILDER USE.

INITIAL

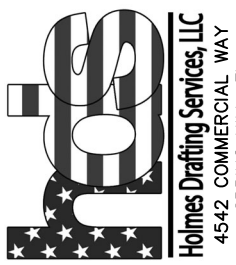

CUSTOMER: MONTEJO
PARCEL: R3622317170000000118
ADDRESS: 9134 ORCHARD WAY
SPRING HILL 34608

UTILITY PLAN

PAGE

06 OF 07

DRAWN BY: ATH SCALE: 1/4" = 1'-0"

CHECKED BY: NRS
SAVED DATE: 11/30/2022 02:10



CUSTOMER:		MONTEJO	
PARCEL #:		R36223171700000011B	
ADDRESS:		9134 ORCHARD WAY SPRING HILL 34608	
DETAILS			
PAGE			
07		07	
DRAWN BY:		SCALE:	
ATH		AS SHOWN	
CHECKED BY:		SAVED DATE:	
NRH		11/30/2022 02:16	