



PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, LLC
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512 8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 856 3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589 4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244 3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET

YOUSEF RESIDENCE

TERMITE PROTECTION		CONFLICTS & DISCREPANCIES		GENERAL NOTES		GENERAL NOTES		GENERAL NOTES		GENERAL NOTES	
ALL BUILDINGS SHALL HAVE PRE-CONSTRUCTION TREATMENT PROTECTION AGAINST SUBTERRANEAN TERMITES AS PER FBC SECTION 204.11 FOR TERMITE PROTECTION THE FLORIDA BUILDING CODE 5TH EDITION (2014) R409.13.3, R320.1. A CERTIFICATE OF COMPLIANCE SHALL BE ISSUED TO THE BUILDING DEPARTMENT BY THE LICENSED PEST CONTROL COMPANY THAT CONTAINS THE FOLLOWING STATEMENT: "THE BUILDING HAS RECEIVED A COMPLETE TREATMENT FOR THE PREVENTION OF SUBTERRANEAN TERMITES." TREATMENT IS IN ACCORDANCE WITH THE RULES AND LAWS ESTABLISHED BY THE FLORIDA DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES". SECTION R318 PROTECTION AGAINST TERMITES R318.1 TERMITES PROTECTION. TERMITE PROTECTION SHALL BE PROVIDED BY REGISTERED TERMITICIDES, INCLUDING SOIL APPLIED PESTICIDES, BAITING SYSTEMS, AND PESTICIDES APPLIED TO WOOD, OR OTHER APPROVED METHODS OF TERMITE PROTECTION LABELED FOR USE AS A PREVENTATIVE TREATMENT TO NEW CONSTRUCTION. SEE SECTION 202, REGISTERED TERMITICIDE UPON COMPLETION OF THE APPLICATION OF THE TERMITE PROTECTIVE TREATMENT, A CERTIFICATE OF COMPLIANCE SHALL BE ISSUED TO THE BUILDING DEPARTMENT BY THE LICENSED PEST CONTROL COMPANY THAT CONTAINS THE FOLLOWING STATEMENT: "THE BUILDING HAS RECEIVED A COMPLETE TREATMENT FOR THE PREVENTION OF SUBTERRANEAN TERMITES. TREATMENT IS IN ACCORDANCE WITH RULES AND LAWS ESTABLISHED BY THE FLORIDA DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES." R318.2 PENETRATION PROTECTIVE SLEEVES AROUND PIPING PENETRATING CONCRETE SLAB-ON-GRADE FLOORS SHALL NOT BE OF CELLULOSE-CONTAINING MATERIALS. IF SOIL TREATMENT IS USED FOR SUBTERRANEAN TERMITE PROTECTION, THE SLEEVE SHALL HAVE A MAXIMUM WALL THICKNESS OF 0.010 INCH (0.25 MM), AND BE SEALED WITHIN THE SLAB USING A NON-CORROSIVE CLAMPING DEVICE TO ELIMINATE THE ANNULAR SPACE BETWEEN THE PIPE AND THE SLEEVE. NO TERMITICIDES SHALL BE APPLIED INSIDE THE SLEEVE. R318.3 CLEANING CELLS AND CAVITIES IN MASONRY UNITS AND AIR GAPS BETWEEN BRICK, STONE OR MASONRY VENEERS AND THE STRUCTURE SHALL BE CLEANED OF ALL NON-PRESERVATIVE TREATED OR NON-NATURALLY DURABLE WOOD, OR OTHER CELLULOSE-CONTAINING MATERIAL PRIOR TO CONCRETE PLACEMENT. EXCEPTION, INORGANIC MATERIAL MANUFACTURED FOR CLOSING CELLS IN FOUNDATION CONCRETE MASONRY UNIT CONSTRUCTION OR CLEAN EARTH FILL PLACED IN CONCRETE MASONRY UNIT VOIDS BELOW SLAB LEVEL BEFORE TERMITE TREATMENT IS PERFORMED. R318.4 CONCRETE BEARING LEDGE BRICK, STONE OR OTHER VENEER SHALL BE SUPPORTED BY A CONCRETE BEARING LEDGE AT LEAST EQUAL TO THE TOTAL THICKNESS OF THE BRICK, STONE OR OTHER VENEER WHICH IS POURED INTEGRALLY WITH THE CONCRETE FOUNDATION. NO SUPPLEMENTAL CONCRETE FOUNDATION POURS WHICH WILL CREATE A HIDDEN COLD JOINT SHALL BE USED WITHOUT SUPPLEMENTAL TREATMENT IN THE FOUNDATION UNLESS THERE IS AN APPROVED PHYSICAL BARRIER. AN APPROVED PHYSICAL BARRIER SHALL ALSO BE INSTALLED FROM BELOW THE WALL SILL PLATE OR FIRST BLOCK COURSE HORIZONTALLY TO EMBED IN A MORTAR JOINT. IF MASONRY VENEER EXTENDS BELOW GRADE, A TERMITE PROTECTIVE TREATMENT MUST BE APPLIED TO THE CAVITY CREATED BETWEEN THE VENEER AND THE FOUNDATION, IN LIEU OF A PHYSICAL BARRIER. EXCEPTION: VENEER SUPPORTED BY A STRUCTURAL MEMBER SECURED TO THE FOUNDATION SIDEWALL IN ACCORDANCE WITH ACI 530/ASCE 5/TMS 402, PROVIDED AT LEAST A 6 INCH (152 MM) CLEAR INSPECTION SPACE OF THE FOUNDATION SIDEWALL EXTERIOR EXIST BETWEEN THE VENEER AND THE TOP OF ANY SOIL, SOD, MULCH OR OTHER ORGANIC LANDSCAPING COMPONENT, DECK, APRON, PORCH, WALK OR ANY OTHER WORK IMMEDIATELY ADJACENT TO OR ADJOINING THE STRUCTURE. R318.5 FOAM PLASTIC PROTECTION IN AREAS WHERE THE PROBABILITY OF TERMITE INFESTATION IS "VERY HEAVY" AS INDICATED IN FIGURE R301.2(6), EXTRUDED AND EXPANDED POLYSTYRENE, POLYISOCYANURATE AND OTHER FOAM PLASTICS SHALL NOT BE INSTALLED ON THE EXTERIORFACE OR UNDER INTERIOR OR EXTERIOR FOUNDATION WALLS OR SLAB FOUNDATIONS LOCATED BELOW GRADE. THE CLEARANCE BETWEEN FOAM PLASTICS INSTALLED ABOVE GRADE AND EXPOSED EARTH SHALL BE AT LEAST 6 INCHES (152 MM). EXCEPTIONS: 1. BUILDINGS WHERE THE STRUCTURAL MEMBERS OF WALLS, FLOORS, CEILINGS AND ROOFS ARE ENTIRELY OF NONCOMBUSTIBLE MATERIALS OR PRESSURE-PRESERVATIVE-TREATED WOOD. 2. WHEN IN ADDITION TO THE REQUIREMENTS OF SECTION R318.1, AN APPROVED METHOD OF PROTECTING THE FOAM PLASTIC AND STRUCTURE FROM SUBTERRANEAN TERMITE DAMAGE IS USED. 3. ON THE INTERIOR SIDE OF BASEMENT WALLS. R318.6 PROTECTION AGAINST DECAY AND TERMITES CONDENSATE LINES, IRRIGATION/SPRINKLER SYSTEM RISERS FOR SPRAY HEADS, AND ROOF DOWNSPOUTS SHALL DISCHARGE AT LEAST 1 FOOT (305 MM) AWAY FROM THE STRUCTURE SIDEWALL, WHETHER BY UNDERGROUND PIPING, TAIL EXTENSIONS OR SPLASH BLOCKS. GUTTERS WITH DOWNSPOUTS ARE REQUIRED ON ALL BUILDINGS WITH EAVES OF LESS THAN 6 INCHES (152 MM) HORIZONTAL PROJECTION EXCEPT FOR GABLE END RAKES OR ON A ROOF ABOVE ANOTHER ROOF. SECTION R317 PROTECTION OF WOOD AND WOOD BASED PRODUCTS AGAINST DECAY R317.1 LOCATION REQUIRED PROTECTION OF WOOD AND WOOD BASED PRODUCTS FROM DECAY SHALL BE PROVIDED IN THE FOLLOWING LOCATIONS BY THE USE OF NATURALLY DURABLE WOOD OR WOOD THAT IS PRESERVATIVE-TREATED IN ACCORDANCE WITH AWPA U1 FOR THE SPECIES, PRODUCT, PRESERVATIVE AND END USE. PRESERVATIVES SHALL BE LISTED IN SECTION 4 OF AWPA U1. 1. WOOD JOISTS OR THE BOTTOM OF A WOOD STRUCTURAL FLOOR WHEN CLOSER THAN 18 INCHES (457 MM) OR WOOD GIRDERS WHEN CLOSER THAN 12 INCHES (305 MM) TO THE EXPOSED GROUND IN CRAWL SPACES OR UNEXCAVATED AREA LOCATED WITHIN THE PERIPHERY OF THE BUILDING FOUNDATION. 2. ALL WOOD FRAMING MEMBERS THAT REST ON CONCRETE OR MASONRY EXTERIOR FOUNDATION WALLS AND ARE LESS THAN 8 INCHES (203 MM) FROM THE EXPOSED GROUND. 3. SILLS AND SLEEPERS ON A CONCRETE OR MASONRY SLAB THAT IS IN DIRECT CONTACT WITH THE GROUND UNLESS SEPARATED FROM SUCH SLAB BY AN IMPERVIOUS MOISTURE BARRIER. 4. THE ENDS OF WOOD GIRDERS ENTERING EXTERIOR MASONRY OR CONCRETE WALLS HAVING CLEARANCES OF LESS THAN 12 INCH (12.7 MM) ON TOPS, SIDES AND ENDS. 5. WOOD SIDING, SHEATHING AND WALL FRAMING ON THE EXTERIOR OF A BUILDING HAVING A CLEARANCE OF LESS THAN 6 INCHES (152 MM) FROM THE GROUND OR LESS THAN 2 INCHES (51 MM) MEASURED VERTICALLY FROM CONCRETE STEPS, PORCH SLABS, PATIO SLABS, AND SIMILAR HORIZONTAL SURFACES EXPOSED TO THE WEATHER. 6. WOOD STRUCTURAL MEMBERS SUPPORTING MOISTURE-PERMEABLE FLOORS OR ROOFS THAT ARE EXPOSED TO THE WEATHER, SUCH AS CONCRETE OR MASONRY SLABS, UNLESS SEPARATED FROM SUCH FLOORS OR ROOFS BY AN IMPERVIOUS MOISTURE BARRIER. 7. WOOD FURRING STRIPS OR OTHER WOOD FRAMING MEMBERS ATTACHED DIRECTLY TO THE INTERIOR OF EXTERIOR MASONRY WALLS OR CONCRETE WALLS BELOW GRADE EXCEPT WHERE AN APPROVED VAPOR RETARDER IS APPLIED BETWEEN THE WALL AND THE FURRING STRIPS OR FRAMING MEMBERS AND CONSUMER SERVICES." R317.2 QUALITY MARK LUMBER AND PLYWOOD REQUIRED TO BE PRESSURE-PRESERVATIVE-TREATED IN ACCORDANCE WITH SECTION R317.1 SHALL BEAR THE QUALITY MARK OF AN APPROVED INSPECTION AGENCY THAT MAINTAINS CONTINUING SUPERVISION, TESTING AND INSPECTION OVER THE QUALITY OF THE PRODUCT AND THAT HAS BEEN APPROVED BY AN ACCREDITATION BODY THAT COMPLIES WITH THE REQUIREMENTS OF THE AMERICAN LUMBER STANDARD COMMITTEE TREATED WOOD PROGRAM. R317.3 FASTENERS AND CONNECTORS IN CONTACT WITH PRESERVATIVE-TREATED AND FIRE-RETARDANT-TREATED WOOD FASTENERS AND CONNECTORS IN CONTACT WITH PRESERVATIVE-TREATED WOOD AND FIRE-RETARDANT-TREATED WOOD SHALL BE IN ACCORDANCE WITH THIS SECTION. THE COATING WEIGHTS FOR ZINC-COATED FASTENERS SHALL BE IN ACCORDANCE WITH ASTM A 153. R317.4 WOOD/PLASTIC COMPOSITES WOOD/PLASTIC COMPOSITES USED IN EXTERIOR DECK BOARDS, STAIR TREADS, HANDRAILS AND GUARDRAIL SYSTEMS SHALL BEAR A LABEL INDICATING THE REQUIRED PERFORMANCE LEVELS AND DEMONSTRATING COMPLIANCE WITH THE PROVISIONS OF ASTM D 7032.		1. BRING ANY DISCREPANCIES BETWEEN DIFFERENT DRAWINGS, BETWEEN THE DRAWINGS AND FIELD CONDITIONS OR BETWEEN THE DRAWINGS AND SPECIFICATIONS, OR ANY APPARENT OMISSIONS, TO THE ATTENTION OF THE ARCHITECT/ENGINEER PRIOR TO SUBMISSION OF ANY BID. AFTER AWARD OF CONTRACT, THE INTERPRETATION OF ANY CONFLICT WILL BE MADE BY THE ARCHITECT AND SHALL BE ACCEPTED AS FINAL. 2. THE FAILURE TO QUESTION ANY CONTROVERSIAL ITEM WILL CONSTITUTE ACCEPTANCE BY THE BIDDER, WHO SHALL EXECUTE SAME TO THE SATISFACTION OF THE ARCHITECT/ENGINEER AFTER BEING AWARDED THE CONTRACT. 3. SUBMIT DETAILS OF ANY DESIRED DEPARTURES FROM THE CONTRACT DOCUMENTS AS MAY BE DEEMED NECESSARY, AND THE REASONS THEREFORE, WITHIN 15 DAYS AFTER AWARD OF THE CONTRACT. MAKE NO DEPARTURES WITHOUT WRITTEN APPROVAL. 4. IF MENTION HAS BEEN OMITTED PERTAINING TO DETAILS, ITEMS OR RELATED ACCESSORIES REQUIRED FOR THE COMPLETION OF ANY ELECTRICAL, PLUMBING, HVAC OR OTHER SYSTEM, INCLUDE SUCH ITEMS AND ACCESSORIES IN THE CONTRACT WITHOUT ADDITIONAL CHARGE. 5. AFTER THE CONTRACT IS AWARDED, CLAIMS BASED ON INSUFFICIENT DATA OR INCORRECTLY ASSUMED CONDITIONS, OR CLAIMS BASED ON MISUNDERSTANDING THE NATURE OR CHARACTER OF THE WORK OR THE CONDITIONS UNDER WHICH IT MUST BE PERFORMED, WILL NOT BE RECOGNIZED. 6. PRIOR TO SUBMITTING THE BID, RESOLVE ANY APPARENT CONFLICTS IN REGARD TO LOCATIONS, INTERFERENCE AND JURISDICTION. 7. THE CONTRACTOR SHALL NOT INTERPRET THIS PROJECT TO BE A "MINIMUM CODE DESIGN", OR AN "INDUSTRY STANDARD DESIGN", WHERE MATERIALS OR METHODS SHOWN ON THE DRAWINGS, OR SPECIFIED HEREIN, INDICATE A PREMIUM MATERIAL OR METHOD. THE CONTRACTOR IS EXPECTED TO PROVIDE SAME, AND PROPOSE ALTERNATE METHODS OR MATERIALS AS A SIDE ITEM, EXCUSES SUCH AS "IT MEETS NEC REQUIREMENTS" OR "THIS IS THE INDUSTRY STANDARD" WILL NOT BE RECOGNIZED AS JUSTIFICATION FOR ACCEPTANCE OF ITEMS NOT CONFORMING TO THE INTENDED DESIGN.		71. THE CONTRACTOR IS RESPONSIBLE FOR LOCATING AND AVOIDING ANY EXISTING UTILITIES, WHETHER OR NOT SHOWN ON THE PLANS, AND RELOCATIONS, TIE-INS, OR DAMAGES INCURRED SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO CORRECT AT THEIR EXPENSE. 72. THESE CONSTRUCTION DOCUMENTS MAY HAVE BEEN DEVELOPED FROM EXISTING DRAWINGS OR SURVEYS WHICH MAY NOT REFLECT ACTUAL FIELD CONDITIONS. THE CONTRACTOR SHALL VERIFY THESE DRAWINGS WITH EXISTING FIELD CONDITIONS AND NOTIFY THE ARCHITECT IMMEDIATELY OF INCONSISTENCIES BETWEEN THESE DRAWINGS AND ACTUAL CONDITIONS BEFORE PROCEEDING WITH CONSTRUCTION. 73. THE CONTRACTOR SHALL VERIFY THAT EXIT EGRESS IS MAINTAINED FOR ALL OCCUPIED AREAS OF THE BUILDING THROUGHOUT ALL PHASES OF CONSTRUCTION. 74. THE CONTRACTOR SHALL NOT CUT STRUCTURAL WORK IN A MANNER RESULTING IN A REDUCTION OF LOAD CARRYING CAPACITY OR LOAD / DEFLECTION RATIO. THE CONTRACTOR SHALL NOTIFY THE ARCHITECT OF ALL STRUCTURAL CUTS PRIOR TO EXECUTION SO THAT APPROVAL CAN BE OBTAINED FROM THE ARCHITECT AND STRUCTURAL ENGINEER. 75. THE CONTRACTOR SHALL INSPECT THE SITE AND BE SOLELY RESPONSIBLE FOR DETERMINING THE COMPLETE SCOPE OF WORK INVOLVED. 76. PIPING EXPOSED IN STAIRWELLS SHALL BE INSTALLED IN A NEAT AND ORDERLY MANNER AND PAINTED AS DIRECTED BY THE ARCHITECT.		46. THERE SHALL NOT BE SUBSTITUTION OF MATERIALS WHERE A MANUFACTURED OR SPECIFIED, WHERE THE TERM "OR APPROVED EQUAL" IS USED, THE ARCHITECT OR PROJECT MANAGER SHALL DETERMINE EQUALITY BASED UPON INFORMATION SUBMITTED BY THE CONTRACTOR. 47. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DISTRIBUTION OF DRAWINGS TO ALL TRADES UNDER HIS JURISDICTION. 48. DO NOT PROCEED WITH ANY WORK REQUIRING ADDITIONAL COMPENSATION BEYOND THE CONTRACT AMOUNT WITHOUT WRITTEN AUTHORIZATION FROM THE OWNER. FAILURE TO OBTAIN AUTHORIZATION SHALL INVALIDATE ANY CLAIM FOR EXTRA COMPENSATION. 49. ALL INSTALLED PLUMBING, MECHANICAL, AND ELECTRICAL EQUIPMENT SHALL OPERATE QUIETLY AND FREE OF VIBRATION. 50. UPON NOTIFICATION OF COMPLETION OF THE WORK AND DELIVERY OF THE CONTRACTOR'S PUNCH LIST, THE PROJECT MANAGER AND/OR THE ARCHITECT SHALL PREPARE A PUNCH LIST OF CORRECTIONS, UNSATISFACTORY AND/OR INCOMPLETE WORK. FINAL PAYMENT WILL BE CONTINGENT UPON THE COMPLETION OF THESE ITEMS UNDER THE TERMS OF THE OWNER/CONTRACTOR AGREEMENT. 51. ALL MATERIALS SHALL BE NEW, UNUSED, AND OF THE HIGHEST QUALITY IN EVERY RESPECT UNLESS OTHERWISE NOTED. MANUFACTURED MATERIALS AND EQUIPMENT SHALL BE INSTALLED AS PER THE MANUFACTURER'S RECOMMENDATIONS AND INSTRUCTIONS, UNLESS OTHERWISE NOTED. 52. VERIFY IN THE FIELD, THAT NO CONFLICTS EXIST WHICH WOULD PROHIBIT THE LOCATION OF ALL MECHANICAL, TELEPHONE, ELECTRICAL, LIGHTING, PLUMBING AND SPRINKLER EQUIPMENT (TO INCLUDE ALL REQUIRED PIPING, DUCTWORK AND CONDUIT) AND THAT ALL REQUIRED CLEARANCES FOR INSTALLATION AND MAINTENANCE OF ABOVE EQUIPMENT IS PROVIDED. 53. "TYPICAL" OR "TYP." MEANS IDENTICAL FOR ALL SIMILAR CONDITIONS UNLESS OTHERWISE NOTED. 54. "SIMILAR" OR "SIM." MEANS COMPARABLE CHARACTERISTICS TO THE CONDITION NOTED. VERIFY DIMENSIONS AND ORIENTATION ON PLAN. 55. "VERIFY" OR "VER." MEANS TO ASCERTAIN AND CONFIRM APPLICATION WITH PROJECT MANAGER OR ARCHITECT. FURNITURE SHOWN IS FOR REFERENCE ONLY AND INSTALLED BY OTHERS UNLESS OTHERWISE NOTED. 56. PROVIDE STRICT CONTROL OF JOB CLEANING AND PREVENT DUST AND DEBRIS FROM EMANATING FROM CONSTRUCTION AREA. 57. ALL CONTRACT DOCUMENTS ARE COMPLEMENTARY, AND WHAT IS CALLED FOR BY ANY WILL BE AS BINDING AS IF CALLED FOR BY ALL. ALL WORK SHOWN OR REFERRED TO ON ANY CONTRACT DOCUMENT SHALL BE PROVIDED AS THOUGH THEY ARE ON ALL RELATED DOCUMENTS. 58. ALL CONTRACT DOCUMENTS ARE COMPLEMENTARY, AND WHAT IS CALLED FOR BY ANY WILL BE AS BINDING AS IF CALLED FOR BY ALL. ALL WORK SHOWN OR REFERRED TO ON ANY CONTRACT DOCUMENT SHALL BE PROVIDED AS THOUGH THEY ARE ON ALL RELATED DOCUMENTS. 59. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO NOTIFY THE ARCHITECT OF ANY CONFLICTS THERIN - EITHER APPARENT OR OBVIOUS - PRIOR TO THE START OF ANY WORK. IF THE ITEM OR BEAR THE RESPONSIBILITY OF CORRECTING SUCH WORK AS DIRECTED BY THE PROJECT MANAGER. 60. ALL DRAWINGS AND WRITTEN MATERIAL HEREIN CONSTITUTE THE ORIGINAL AND UNREPRODUCED. ANY REPRODUCTION, COPY, OR THE SAME MAY NOT BE DUPLICATED, USED, OR DISCLOSED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT. 61. THE ARCHITECT HAS NO KNOWLEDGE OF AND SHALL NOT BE HELD LIABLE FOR ANY ASBESTOS OR OTHER HAZARDOUS MATERIALS ON THE JOB SITE. IF ASBESTOS OR OTHER HAZARDOUS MATERIALS ARE DISCOVERED DURING CONSTRUCTION, OR DEMOLITION, STOP WORK AND CONTACT THE OWNER AND PROJECT MANAGER FOR FURTHER INSTRUCTIONS BEFORE PROCEEDING. 62. EQUIPMENT INDICATED AS O.F.C.I. SHALL BE FURNISHED BY THE OWNER AND RECEIVED AND STORED BY THE GENERAL CONTRACTOR (SEE OWNER FURNISHED EQUIPMENT MANUAL AND OWNER FURNISHED VENDOR DRAWINGS). THE CONTRACTOR SHALL COORDINATE WITH THE OWNER ON DELIVERY AND INSTALLATION OF THE EQUIPMENT. 63. THE CONTRACTOR SHALL PROVIDE CHASES FOR MECHANICAL, PLUMBING, AND ELECTRICAL AS REQUIRED AND AS NECESSARY. SEE RESPECTIVE DRAWING PLANS AND SECTIONS. 64. PIPING LOCATED ABOVE GRADE AND INSIDE THE BUILDING SHALL BE CONCEALED IN FURRED SPACES WITH THE EXCEPTION OF PIPING IN MECH/ELEC EQUIPMENT ROOMS. THE CONTRACTOR SHALL COORDINATE WITH OTHER TRADES TO PROVIDE FURRING FOR PIPING INSTALLED IN FINISHED AREAS. THE CONTRACTOR SHALL GAIN APPROVAL FROM THE ARCHITECT PRIOR TO LOCATING AND/OR PROVIDING "FURRED SPACES" NOT INDICATED ON THE FLOOR PLANS. 65. FOR ALL RATED AND/OR SMOKE PARTITIONS, THE SURFACE AREA OF AN INDIVIDUAL RECESSED METALLIC OUTLET, SWITCH BOX, ETC. SHALL NOT EXCEED 16 SQUARE INCHES. THE AGGREGATE SURFACE AREA OF THE RECESSED OUTLETS, BOXES, ETC. SHALL NOT EXCEED 100 SQUARE INCHES PER 100 SQUARE FEET OF SURFACE WALL AREA, BOXES THAT EXCEED EITHER 16 SQUARE INCHES OR THE AGGREGATE AREA LIMITATION WILL REQUIRE SPECIAL TREATMENT IN ORDER TO MAINTAIN FIRE RATINGS. RECESSED BOXES LOCATED ON OPPOSITE SIDES OF WALLS OR PARTITIONS, REGARDLESS OF THEIR VERTICAL SEPARATION IN THE WALL, SHALL BE SEPARATED BY A HORIZONTAL DISTANCE OF 24 INCHES MINIMUM. 66. ITEMS WITH A SURFACE AREA GREATER THAN 16 SQUARE INCHES SHALL NOT BE RECESSED IN A RATED AND/OR RATED SMOKE WALL. 67. MILLWORK DIMENSIONS SHALL BE FIELD VERIFIED PRIOR TO FABRICATION AND INSTALLATION. 68. PROVIDE METAL STUD FRAMING AROUND ALL PENETRATIONS THRU METAL STUD/GYPSUM BOARD WALLS. 69. THE CONTRACTOR SHALL VERIFY THAT ACCESS PANELS OF TYPE SPECIFIED ARE INSTALLED IN WALLS AND NON-ACCESSIBLE TYPE CEILINGS AND SOFFITS WHERE ACCESS, SERVICE OR ADJUSTMENT TO MECHANICAL, PLUMBING OR ELECTRICAL ITEMS MAY BE REQUIRED. IF LOCATED IN A RATED ASSEMBLY, ACCESS PANELS SHALL BE THE FIRE RATED TYPE EQUAL TO THE RATING OF THE WALL, SOFFIT OR CEILING IN WHICH THEY OCCUR. COORDINATE ALL LOCATIONS WITH ARCHITECT PRIOR TO INSTALLATION. 70. CAULK AT JUNCTURE OF INTERIOR FACES OF DOOR FRAMES, VIEW WINDOW FRAMES, EXTERIOR WINDOW FRAMES, CABINET WORK, CASEWORK, RECESSED TOILET ACCESSORIES, SURFACE MOUNTED TOILET ACCESSORIES, ETC., WITH ADJACENT MATERIALS EVEN THOUGH JOINT MAY NOT BE VISIBLE.		23. GENERAL CONTRACTOR SHALL COORDINATE ALL ABOVE CEILING ELEMENTS, SYSTEMS W/STRUCTURE TO ASSURE THAT ALL REQ. CLEARANCES ARE PROVIDED. A/C SUB CONTRACTOR SHALL COORDINATE DUCT TRANSITIONS W/ MECHANICAL ENGINEER. 24. SAW CUT EXISTING CONC. SLAB AS REQ. TO ACCOMMODATE NEW ELECTRICAL, PLUMBING AND MECHANICAL WORK. INFILL NEW TRENCHES WITH 5" CONCRETE SLABS W/ 6"X8" W/ 2.9 X 2.9 W.W.F. OVER VAPOR BARRIER ON WELL COMPACTED FILL. MATCH EXISTING ADJACENT FLOOR FINISH. 25. THE CONTRACTOR SHALL WARRANT ALL BUILDING MATERIALS AND WORKMANSHIP FOR A PERIOD OF ONE YEAR FROM THE DATE OF SUBSTANTIAL COMPLETION UNLESS OTHERWISE STIPULATED IN THESE DOCUMENTS. 26. THE CONTRACTOR SHALL WARRANT ALL BUILDING MATERIALS AND WORKMANSHIP FOR A PERIOD OF ONE YEAR FROM THE DATE OF SUBSTANTIAL COMPLETION UNLESS OTHERWISE STIPULATED IN THESE DOCUMENTS. 27. PIPING LOCATED ABOVE GRADE AND INSIDE THE BUILDING SHALL BE CONCEALED IN FURRED SPACES WITH THE EXCEPTION OF PIPING IN STAIRWAYS, EQUIPMENT ROOMS AND THE POWERHOUSE. THE CONTRACTOR SHALL COORDINATE WITH OTHER TRADES TO PROVIDE FURRING FOR PIPING INSTALLED IN FINISHED AREAS. THE CONTRACTOR SHALL GAIN APPROVAL FROM THE ARCHITECT PRIOR TO LOCATING AND/OR PROVIDING "FURRED SPACES" NOT INDICATED ON THE FLOOR PLANS. 28. FINISH FOR ALL WALLS - FLOORS AND CEILINGS FBC S03 CLASS B 75 FLAME/450 SMOKE RATING REQ'd ALL EXPOSED WOOD TRIM AND CEILING STRUCTURE WILL REQUIRE A FIRE-RETARDANT PAINT OR FINISH. 29. NOTES APPEAR ON VARIOUS DRAWINGS FOR DIFFERENT SYSTEMS AND MATERIALS. REVIEW ALL SHEETS AND APPLY NOTES TO RELATED BUILDING COMPONENTS. 30. ALL CONCEALED INSULATION SHALL HAVE A FLAME SPREAD INDEX OF NOT MORE THAN 25 AND A SMOKE INDEX OF 450. 31. SPRINKLER PIPING SHALL BE RELOCATED AS REQ. TO ACCOMMODATE LIGHTING LAYOUT AS DESIGNED. 32. GENERAL CONTRACTOR SHALL COORDINATE ALL WOOD BLOCKING, STEEL SUPPORTS AND ANY OTHER ITEMS WHICH ARE EMBEDDED IN DRYWALL PARTITIONS OR ENCLOSURES WHICH RELATE TO HIS WORK OR THE WORK OF ANY SEPARATE CONTRACTORS, ALL WOOD BLOCKING, BRIDGING, BRACING, FRAMING, ETC., SHALL BE FIRE RETARDANT TREATED AS CALLED FOR BY THE GOVERNING BUILDING CODE AND THE CONTRACTOR MUST SUBMIT AFFIDAVITS OF SUCH FIRE TREATMENT TO THE OWNERSHIP. 33. LOCATION AND NUMBER OF FIRE EXTINGUISHERS ARE TO BE INSTALLED PER THE DIRECTION OF THE LOCAL AUTHORITIES AND NFPA 13. 34. PROVIDE OCCUPANCY SENSORS FOR LIGHTING CONTROLS PER 405.2.1. 35. DURING DEMO PHASE, "LOCKOUT - TAGOUT" PROCEDURES SHALL BE FOLLOWED. 36. THE INTENT OF THE CONTRACT DOCUMENTS IS TO ALLOW FOR THE PERFORMANCE OF THE WORK, ALL ASSEMBLIES AND ACCESSORIES REQUIRED FOR THE EXECUTION OF THE WORK, THOUGH NOT DETAILED IN THE PLANS, SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, UNLESS EXPRESSLY STATED. ALL SYSTEMS AND EQUIPMENT SHALL BE COMPLETED AND APPROPRIATELY OPERABLE. FURNISH AND INSTALL ALL SPECIFIED AND APPROPRIATE ITEMS, AND ALL INCIDENTAL ACCESSORY AND OTHER ITEMS NOT SPECIFIED BUT REQUIRED FOR A COMPLETE AND FINISHED ASSEMBLY. 37. NO WORK DEFECTIVE IN WORKMANSHIP OR QUALITY OR DEFICIENT IN ANY REQUIREMENTS OF THE CONTRACT DOCUMENTS WILL BE ACCEPTABLE DESPITE THE ARCHITECT'S FAILURE TO DISCOVER OR POINT OUT DEFECTS OR DEFICIENCIES DURING CONSTRUCTION. WORK CONFORMING TO THE INTENT OF THE CONTRACT SHALL REPLACE DEFECTIVE WORK REVEALED WITHIN THE TIME REQUIRED BY GUARANTEES. NO PAYMENT, EITHER PARTIAL OR FINAL, SHALL BE CONSTRUED AS AN ACCEPTANCE OF DEFECTIVE WORK OR IMPROPER MATERIALS. 38. DURING THE COURSE OF CONSTRUCTION, ACTUAL LOCATIONS OF CONSTRUCTION ITEMS DENOTED IN THE CONSTRUCTION DOCUMENTS SHALL BE INDICATED TO SCALE, IN CONTRASTING INK ON THE DRAWINGS FOR ALL RUNS OF MECHANICAL, SPRINKLER, PLUMBING, AND ELECTRICAL WORK, INCLUDING SITE UTILITIES AND CONCEALED DEVIATIONS FROM THE DRAWINGS. THIS SET SHALL BE CONSPICUOUSLY MARKED "AS-BUILT" AND DELIVERED TO THE ARCHITECT UPON COMPLETION OF THE PROJECT. 39. IT IS INTENDED THAT THE CONTRACTOR PROVIDE A COMPLETE JOB AND ANY OMISSIONS IN THESE NOTES OR IN THE OUTLINE OF WORK SHALL NOT BE CONSTRUED AS RELIEVING THE CONTRACTOR OF SUCH RESPONSIBILITIES IMPLIED BY SCOPE OF WORK EXCEPT FOR ITEMS SPECIFICALLY NOTED. 40. SHOULD ANY PORTION OF THE CONTRACT DOCUMENTS PROVE TO BE, FOR WHATEVER REASONS, UNENFORCEABLE, SUCH UNENFORCEABILITY SHALL NOT EXTEND TO THE REMAINDER OF THE CONTRACT NOR SHALL IT VOID ANY OTHER PROVISIONS OF THE CONTRACT. 41. THROUGHOUT THE DURATION OF THE PROJECT REFRAIN FROM ACTIONS THAT COULD LEAD TO THE FILING OF CLAIMS OF LIEN BY SUBCONTRACTORS, SUPPLIERS OF MATERIALS, LABOR, SERVICE, EQUIPMENT OR ANY OTHER INDIVIDUAL OR COMPANY SO ENTITLED UNDER GOVERNING LAWS AND REGULATIONS UNLESS REASONABLE AND JUSTIFIABLE CAUSE CAN BE SHOWN. APPROVAL FOR PAYMENTS SHALL BE CONTINGENT UPON THE CONTRACTORS OBTAINING AND FURNISHING TO THE PROJECT MANAGER SIGNED RELEASES FROM SUCH INDIVIDUALS OR COMPANIES. 42. THE CONTRACTOR IS RESPONSIBLE FOR CHECKING CONTRACT DOCUMENTS, FIELD CONDITIONS AND DIMENSIONS FOR ACCURACY AND CONFIRMING THAT WORK IS BUILDABLE AS SHOWN BEFORE PROCEEDING WITH CONSTRUCTION. IF THERE ARE ANY QUESTIONS REGARDING THESE OR OTHER COORDINATION ISSUES, THE CONTRACTOR SHALL SUBMIT THEM, IN WRITING, TO THE ARCHITECT AND THE PROJECT MANAGER, AND IS RESPONSIBLE FOR OBTAINING A WRITTEN CLARIFICATION FROM THE ARCHITECT AND PROJECT MANAGER BEFORE PROCEEDING WITH WORK IN QUESTION, OR RELATED WORK. 43. EXECUTE WORK IN ACCORDANCE WITH ANY AND ALL APPLICABLE LOCAL, STATE, FEDERAL CODES, MANUFACTURER'S RECOMMENDATIONS, TRADE AND REFERENCE STANDARDS. 44. DO NOT SCALE DRAWINGS; DIMENSIONS SHALL GOVERN. DETAILS SHALL GOVERN OVER PLANS AND ELEVATIONS. LARGE SCALE DETAILS SHALL GOVERN OVER SMALL-SCALE DETAILS. WRITTEN SPECIFICATIONS SHALL GOVERN OVER ALL. IF DIMENSIONS ARE IN QUESTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE ARCHITECT BEFORE CONTINUING WITH CONSTRUCTION. 45. CLARIFY ALL DISCREPANCIES RELATIVE TO CONSTRUCTION DOCUMENTS, SPECIFICATIONS, AND FIELD CONDITIONS PRIOR TO SUBMITTING BIDS AND COMMENCING WORK.		1. ALL WORK SHALL CONFORM TO THE LATEST EDITION OF THE FLORIDA BUILDING CODE AND CITY OF TEMPLE TERRACE ORDINANCES, AND ALL OTHER GOVERNMENTAL AND OR REGULATORY AUTHORITIES. ALL NEW CONSTRUCTION ELEMENTS, COMPONENTS, SYSTEMS, AND SPACES SHALL COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE, BUILDING. 2. THE CONTRACTORS SHALL BE RESPONSIBLE FOR FAMILIARIZING THEMSELVES WITH THE INTENT OF THE DRAWINGS. FINAL INTERPRETATION OF THE SCOPE OF WORK SHALL BE THAT OF THE ARCHITECT. "CHANGE ORDERS" FOR MISSED ITEMS SHALL NOT BE ALLOWED. THE CONTRACTOR SHALL PROMPTLY NOTIFY THE ARCHITECT IN WRITING OF INCONSISTENCY, ERROR OR CLARIFICATION UPON REVIEW OF THESE DRAWINGS AND THE SITE. THE GENERAL CONTRACTOR SHALL MAINTAIN A RECORD SET OF DRAWINGS OF ALL DEVIATIONS FROM THESE DRAWINGS. THESE DRAWINGS SHALL BE MADE AVAILABLE FOR INSPECTION. A COPY OF THE "AS-BUILT" DRAWINGS SHALL BE SENT TO THE ARCHITECT UPON COMPLETION OF THE PROJECT. 3. CONTRACTOR TO PROVIDE ALL BARRICADES, SCAFFOLDING, AND OTHER MEANS OF PROTECTION AS REQUIRED TO COMPLY WITH ALL STATE LAWS AND LOCAL ORDINANCES TO SAFEGUARD PROPERTY AND PERSONS. OBSTRUCTIONS SHALL BE PLACED SO AS NOT TO DIMINISH THE LIFE SAFETY REQUIREMENTS. 4. THE OWNER AND THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE SCHEDULE, PHASING, INSPECTION, C.O. AND PERMITTING OF THE WORK. THE OWNER AND THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONFORMANCE AND REQUIREMENTS OF THE HEALTH DEPARTMENT. 5. GENERAL CONTRACTOR TO PATCH, REPAIR, AND/OR REPLACE ALL ADJACENT CONSTRUCTION WHICH HAS BEEN DAMAGED DURING DEMOLITION AND/OR NEW CONSTRUCTION. 6. EXISTING CONCRETE SLAB TO REMAIN SMOOTH AND FREE OF ANY GAPPING OPENINGS IN THE SLAB, FOR A SOLID SUBSTRATE OF NEW FINISHES. 7. NO WORK DEFECTIVE IN WORKMANSHIP OF QUALITY OR DEFICIENT IN ANY REQUIREMENTS OF THESE DRAWINGS WILL BE ACCEPTABLE DESPITE THE ARCHITECT'S FAILURE TO DISCOVER OR POINT OUT DEFECTS OR DEFICIENCIES DURING CONSTRUCTION. WORK NOT CONFORMING TO THE INTENT OF THE DRAWINGS SHALL BE REPLACED. DEFECTIVE WORK REVEALED WITHIN THE TIME REQUIRED BY GUARANTEES SHALL BE REPLACED. NO PAYMENT EITHER PARTIAL OR FINAL SHALL BE CONSTRUED AS AN ACCEPTANCE OF DEFECTIVE WORK OR IMPROPER MATERIALS. 8. THE ARCHITECT SHALL NOT BE RESPONSIBLE FOR ANY DEVIATION FROM THESE DRAWINGS AS DATED ON THESE SHEETS. ANY DEVIATION FROM THESE DRAWINGS AND SPECIFICATIONS MUST BE SUBMITTED TO THE ARCHITECT FOR REVIEW AND APPROVAL PRIOR TO IMPLEMENTATION. ONLY THE ARCHITECT DETERMINES & INTERPRETS THE INTENT OF THE DRAWINGS. ANY CHANGES REQUESTED BY THE CITY OR THE OWNER AFTER THE INITIAL PERMIT SHALL BE ADDITIONAL SERVICES. 9. IT SHALL BE THE RESPONSIBILITY OF ALL SUBCONTRACTORS TO HAVE EXAMINED AND REVIEWED THE COMPLETE SET OF WORKING DRAWINGS AND/OR SPECIFICATIONS TO PROVIDE ALL LABOR AND MATERIALS FOR THEIR RESPECTIVE AREA OF WORK, FOR THE COMPLETE AND FINISHED INSTALLATION IN COMPLIANCE WITH THE INTENT OF THE DRAWINGS AND/OR SPECIFICATIONS WHETHER IT IS INDICATED OR NOT. ALL WORK, WHETHER INDICATED OR NOT, SHALL BE IN COMPLIANCE WITH ALL BUILDING CODES AND ORDINANCES WHICH ARE APPLICABLE TO THE PROJECT. 10. SUBCONTRACTORS SHALL COOPERATE WITH EACH OTHER AND WITH THE CONSTRUCTION SCHEDULE IS NOT AFFECTED. THIS INTERFACING SHALL BE THE GENERAL CONTRACTOR TO PROVIDE MATERIALS AND LABOR THAT ARE THE RESPONSIBILITY OF THE CONTRACTORS WHOSE WORK IS AFFECTED AS SUCH NECESSARY IN OTHERS WORK AT THE APPROPRIATE TIME SO THAT THE. 11. ALL WORK SHALL BE PERFORMED BY QUALIFIED CONTRACTORS IN STRICT ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS AND RECOMMENDATIONS. ALL MATERIALS AND EQUIPMENT SHALL BE INSTALLED AS PER MANUFACTURERS SPECIFICATIONS AND REQUIREMENTS AS INDICATED ON THESE DRAWINGS OR NOT. 12. THIS DRAWING PACKAGE IS BASED ON DOCUMENTS, SPECIFICATIONS AND RELATED INFORMATION PROVIDED BY THE OWNER AND/OR OWNER'S AGENT. 13. THE DESIGN INFORMATION INDICATED ON THE PLANS IS INDICATED TO BE A COMPLETE AND WORKABLE SYSTEM IN ACCORDANCE WITH ALL PRODUCT MANUFACTURER'S SPECIFICATIONS, EXISTING AND/OR PROPOSED BUILDING DESIGN, FIELD CONDITIONS, ETC. ALL MISCELLANEOUS MATERIALS, PARTS, DESIGN DIMENSIONS, WHETHER INDICATED ON THE PLANS OR NOT, SHALL BE INCLUDED AS PART OF THIS DRAWING PACKAGE, INCLUDING ALL DETAILS AND SPECIFICATIONS ON THE PRODUCT APPROVAL DOCUMENTS. 14. THE GENERAL CONTRACTOR OR SUBCONTRACTORS SHALL BE HELD RESPONSIBLE FOR THE REMOVAL AND THE PROPER DISPOSAL OF MATERIALS AND ITEMS REFERRED TO AS "DEBRIS" OR DETERMINED BY THE OWNER OR ARCHITECT TO BE REFUSE. 15. THE GENERAL CONTRACTOR SHALL HAVE MADE ALL REQUIRED PROVISIONS FOR THE REMOVAL OF THE DEBRIS ON SITE, HAVING CHARGES, DUMPING FEES, ETC. IN THEIR ORIGINAL BID SUBMISSION. 16. PROVIDE ALL CUTTING AND PATCHING IN EXISTING FLOORS, WALLS, AND CEILINGS AS REQUIRED FOR ALL TRADES, EXCLUDING REMOVAL AND RELOCATION OF ITEMS AS SHOWN. 17. REMOVE ALL SPECIFIC ITEMS INDICATED ON DRAWINGS, ALSO REMOVE ANY OTHER ITEMS OR CONSTRUCTION AS REQUIRED TO ACCOMPLISH ALL NEW WORK AND/OR REVISION WORK TO EXISTING AREAS AS SHOWN OR DESCRIBED ELSEWHERE IN THE CONTRACT DOCUMENTS. (SEE DEMO) 18. GRIND AND/OR FILL ALL PROJECTIONS AND VOIDS IN EXISTING FLOORS AND WALLS AS REQUIRED FOR ALL NEW FINISH, PATCH AND REPAIR AS REQUIRED. 19. THE GENERAL CONTRACTOR SHALL PROVIDE AND INSTALL SIGNS, BARRICADES, FENCES, LIGHTING, ETC., AS REQUIRED FOR THE PREVENTION OF THE PERSONAL INJURIES TO THE OWNERS, ITS EMPLOYEES, REPRESENTATIVES, CLIENTELE, OR OTHERS WITHIN THE AREAS OF CONSTRUCTION. THE ARCHITECT SHALL NOT BE RESPONSIBLE FOR, NOR HAVE CONTROL OVER THE CONSTRUCTION METHODS, SEQUENCES, OR PROCEDURES OR THE SAFETY PRECAUTION PROGRAMS. THE CONTRACTOR IS SOLELY RESPONSIBLE FOR DAMAGES OR INJURIES DUE TO THEIR ACTS OR NEGLIGENCE. 20. THE GENERAL CONTRACTOR SHALL TAKE ORDINARY PRECAUTIONS TO PREVENT THE DISRUPTION OF PROTECTIVE DEVICES DURING THE COURSE OF THE WORK. 21. GENERAL CONTRACTOR SHALL TAKE ORDINARY PRECAUTIONS TO SECURE AND PROTECT MATERIALS. MATERIALS ARE TO BE RELOCATED OR WAREHOUSED AS DETERMINED BY THE OWNER. 22. FAILURE BY THE CONTRACTOR TO OBTAIN WRITTEN APPROVAL BY THE OWNER FOR CHANGES IN THE WORK PRIOR TO THE EXECUTION OF SAID WORK SHALL CAUSE SAID CONTRACTOR AND SUBCONTRACTORS TO FORFEIT ANY OR ALL CLAIMS FOR COMPENSATION FOR SAID ITEMS.	
PROJECT DESIGN TEAM:		PROJECT ADDRESS:		PERMIT SET		YOUSEF RESIDENCE					
ARCHITECT MODULDESIGN, LLC 1704 W NORTH A ST TAMPA, FL 33606 PH: (813) 512.8872 E-MAIL: info@moduldesignstudio.com		1927 FRENCH LANE LUTZ, FL 33549		NO.		REVISION		DATE			
STRUCTURAL GLOBAL CONSULTING ENGINEERS, INC. PH: (727) 656.3475											
MECHANICAL + PLUMBING EXECUTIVE ENGINEERING, INC. PH: (813) 244.3473											
ELECTRICAL ELECTRICAL POWER DESIGNS, INC. PH: (813) 244.3473											

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, LLC.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET

NO.	REVISION	DATE

SITE PLAN

PROJECT # 2301
ISSUE DATE 11.21.23

A1.010

3/4/2025 4:28:59 PM

LEGAL DESCRIPTION

LEGAL DESCRIPTION: (INSTRUMENT #2021023511)
THAT PART OF NORTHEAST 1/4 OF THE NORTHEAST 1/4 OF THE NORTHEAST 1/4, SECTION 1, TOWNSHIP 27 SOUTH, RANGE 18 EAST, HILLSBOROUGH COUNTY, FLORIDA, DESCRIBED AS FOLLOWS:
COMMENCE AT AN IRON AXEL MARKING THE NORTHEAST CORNER OF SECTION 1, TOWNSHIP 27 SOUTH, RANGE 18 EAST, HILLSBOROUGH COUNTY, FLORIDA AND RUN THENCE NORTH 89°36' WEST ALONG A NORTH BOUNDARY OF SAID SECTION 1, A DISTANCE OF 651.44 FEET; THENCE SOUTH 00°04'00" EAST, 16.00 FEET TO AN IRON ROD, THENCE CONTINUE SOUTH 00°04'00" EAST, 658.70 FEET TO AN IRON ROD AND AN 8" X 8" CONCRETE MONUMENT; THENCE SOUTH 89°02'30" EAST, 293.45 FEET TO AN IRON ROD MARKING A POINT OF BEGINNING; THENCE SOUTH 89°02'30" EAST, 357.12 FEET MORE OR LESS TO THE EAST BOUNDARY OF SAID SECTION 1, A DISTANCE OF 100 FEET; THENCE NORTH 89°02'30" WEST, 357.24 FEET MORE OR LESS TO AN IRON ROD; THENCE SOUTH 00°04'00" EAST, 100.00 FEET TO THE POINT OF BEGINNING.

AND

BEGINNING AT NORTHEAST CORNER AND RUN SOUTH 16.00 FEET, THENCE RUN WEST 188.00 FEET, THENCE RUN SOUTH 330.00 FEET, THENCE RUN SOUTH 52°50' EAST, 110.43 FEET, THENCE RUN NORTH 91.00 FEET, THENCE RUN SOUTH 38°49' EAST, 133.55 FEET, THENCE RUN NORTH 26° EAST, 30.00 FEET TO THE EAST BOUNDARY, THENCE RUN SOUTH TO A POINT 100.00 FEET NORTH OF THE SOUTHEAST CORNER, THENCE RUN WEST 357.24 FEET, THENCE RUN SOUTH 100.00 FEET, THENCE RUN WEST 293.45 FEET TO THE SOUTHWEST CORNER, THENCE RUN NORTH TO THE NORTHEAST CORNER, THENCE RUN EAST TO THE POINT OF BEGINNING.

LESS: TRACT BEGINNING 16.00 FEET SOUTH AND 457.00 FEET WEST OF THE NORTHEAST CORNER OF THE NORTHEAST 1/4 AND RUN SOUTH 274.00 FEET, THENCE RUN WEST 88.00 FEET, THENCE RUN NORTH 271.00 FEET, THENCE RUN EAST 88.00 FEET TO THE POINT OF BEGINNING.

AND LESS: FROM THE NORTHEAST CORNER OF SECTION 1, TOWNSHIP 27 SOUTH, RANGE 18 EAST, HILLSBOROUGH COUNTY, FLORIDA, RUN DUE SOUTH (ASSUMED) ALONG THE EAST BOUNDARY OF SAID SECTION 1, A DISTANCE OF 16.00 FEET TO THE SOUTH RIGHT-OF-WAY LINE OF COUNTY LINE ROAD; RUN THENCE NORTH 88°36'00" WEST, ALONG SAID RIGHT-OF-WAY LINE, A DISTANCE OF 100 FEET FOR A POINT OF BEGINNING, FROM SAID POINT OF BEGINNING RUN THENCE SOUTH AND PARALLEL TO SAID EAST BOUNDARY OF SECTION 1, A DISTANCE OF 395.00 FEET; RUN THENCE NORTH 52°50'00" WEST, A DISTANCE OF 110.43 FEET; RUN THENCE NORTH A DISTANCE OF 330.00 FEET TO SAID SOUTH RIGHT-OF-WAY LINE OF COUNTY LINE ROAD; RUN THENCE SOUTH 88°36'00" EAST, ALONG SAID RIGHT-OF-WAY LINE, A DISTANCE OF 88.00 FEET TO THE POINT OF BEGINNING.

AND LESS: FROM THE NORTHEAST CORNER OF SECTION 1, TOWNSHIP 27 SOUTH, RANGE 18 EAST, HILLSBOROUGH COUNTY, FLORIDA, RUN DUE SOUTH (ASSUMED) ALONG THE EAST BOUNDARY OF SAID SECTION 1, A DISTANCE OF 16.00 FEET TO THE SOUTH RIGHT-OF-WAY LINE OF COUNTY LINE ROAD; RUN THENCE NORTH 88°36'00" WEST, ALONG SAID RIGHT-OF-WAY LINE, A DISTANCE OF 100 FEET FOR A POINT OF BEGINNING, FROM SAID POINT OF BEGINNING RUN THENCE SOUTH AND PARALLEL TO SAID EAST BOUNDARY OF SECTION 1, A DISTANCE OF 395.00 FEET; RUN THENCE NORTH 52°50'00" WEST, A DISTANCE OF 110.43 FEET; RUN THENCE NORTH A DISTANCE OF 330.00 FEET TO SAID SOUTH RIGHT-OF-WAY LINE OF COUNTY LINE ROAD; RUN THENCE SOUTH 88°36'00" EAST, ALONG SAID RIGHT-OF-WAY LINE, A DISTANCE OF 88.00 FEET TO THE POINT OF BEGINNING.

SURVEY - SITE DATA

WETLAND LINE DATA:

- WL-1: N 88°00'51" W 18.10' (M)
- WL-2: S 34°35'16" W 34.47' (M)
- WL-3: S 08°05'02" E 36.76' (M)
- WL-4: S 36°36'46" E 34.07' (M)
- WL-5: S 38°54'44" E 19.85' (M)
- WL-6: N 81°32'29" E 18.25' (M)
- WL-7: S 88°36'59" E 51.48' (M)
- WL-8: S 88°42'24" E 115.15' (M)
- WL-9: S 84°44'49" E 91.85' (M)
- WL-10: S 60°34'29" E 68.41' (M)
- WL-11: S 42°28'21" E 66.01' (M)
- WL-12: S 28°43'05" E 48.49' (M)
- WL-13: S 65°45'30" E 57.41' (M)
- WL-14: S 19°42'06" E 38.08' (M)
- WL-15: S 27°44'17" E 68.30' (M)
- WL-16: S 36°44'17" E 24.36' (M)
- WL-17: S 21°21'08" E 43.48' (M)
- WL-18: S 30°06'29" W 12.51' (M)
- WL-19: S 85°37'03" W 83.43' (M)
- WL-20: S 62°39'58" W 2.83' (M)
- WL-21: S 62°39'58" W 43.08' (M)
- OFF PROPERTY
- WL-22: N 88°37'50" W 24.10' (M)
- WL-23: S 10°30'04" W 13.70' (M)
- OFF PROPERTY

WETLAND LINEAR LINE LENGTH:

ON PROPERTY: 923.26'
OFF PROPERTY: 80.89'

AREA DATA:



UPLAND: ±213304.89 SF / ±4.90 ACRES
WETLAND: ±52694.17 SF / ±1.20 ACRES
TOTAL: ±265999.06 SF / ±6.10 ACRES

LINE DATA:

- L-1: S 00°04'00" E 16.00'(L)
S 00°04'05" E 15.79'(L2)
S 00°01'17" E 15.89'(M)
120'(L)
- L-2: S 89°02'18" E 120.13'(M)
S 89°13'02" E 88.00'(C)
- L-3: EAST 88.00'(L)
SOUTH 16'(L3)
S 00°02'37" W 16.58'(M)
- L-4: NORTH 91.00'(L)
N 00°39'17" W 91.00'(C)
S 38°49' E 133.55'(L)
S 37°53'21" E 133.55'(C)
- L-5: N 26° E 30.00'(L)
N 38°29'46" E 30.00'(C)
- L-6: OVERALL
SOUTH 271.00'(L)
S 00°42'28" E 271.00'(C)
- L-7: S 00°42'28" E 225.00'(M) TO WC
L-10: S 00°42'28" E 48.00'(C) TO WC
L-11: N 89°36'46" W 17.25'(C) TO WC
L-12: N 89°36'47" W (M)
482.61'(M) TO ORIGINAL WC
647.00'(M) TO CURRENT WC

SPECIFIC NOTES

- 1 NEW YOUSEF RESIDENCE PROJECT LOCATION.
- 2 NEW DRIVEWAY
- 3 MAIN BLDG SETBACK
- 4 ENCLOSURE FOR CU #1, CU #2, GENERATOR, & POOL
- 5 EQPM
- 6 POOL
- 7 POOL DECK
- 8 PROTECTIVE TREE BARRIER, TYP. SEE A0.01 FOR DETAILS & NOTES.

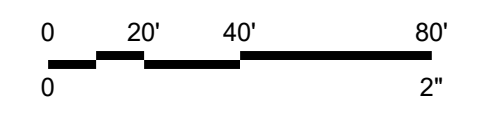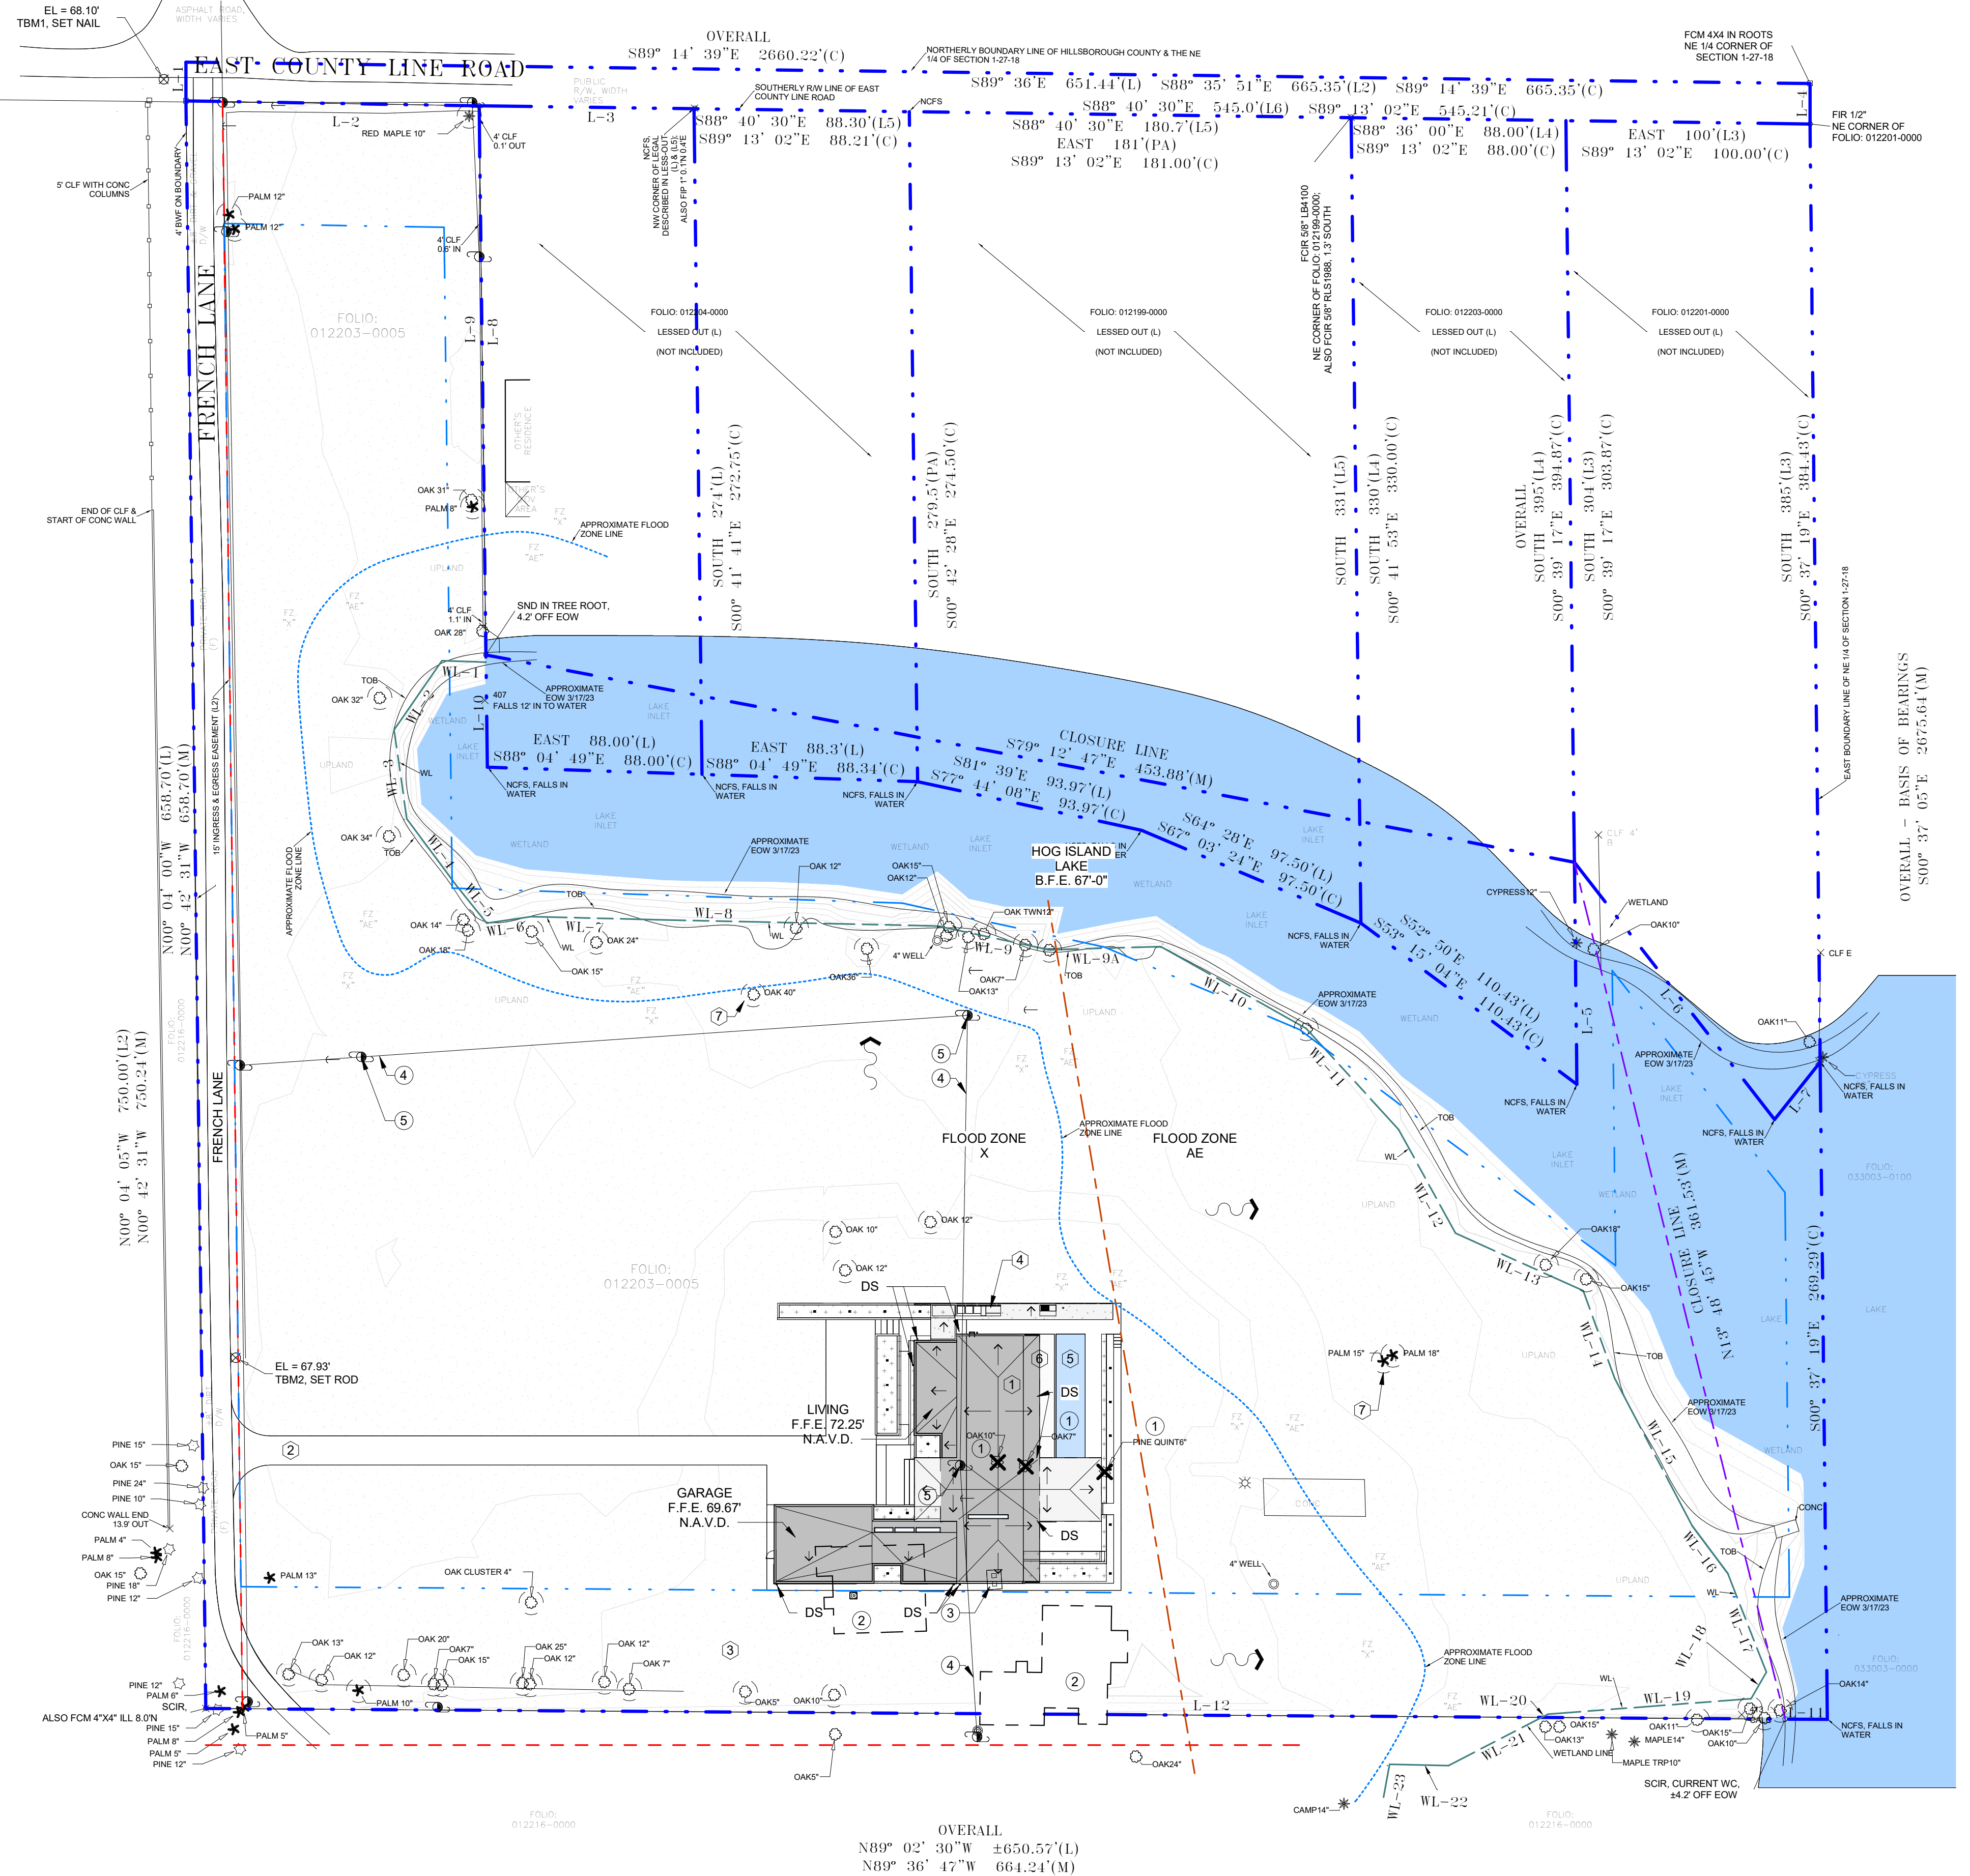

SITE PLAN
1" = 40'-0"

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, LLC.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET


YOUSEF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

FIRST FLOOR PLAN

PROJECT #	2301
ISSUE DATE	11.21.23

A1.101

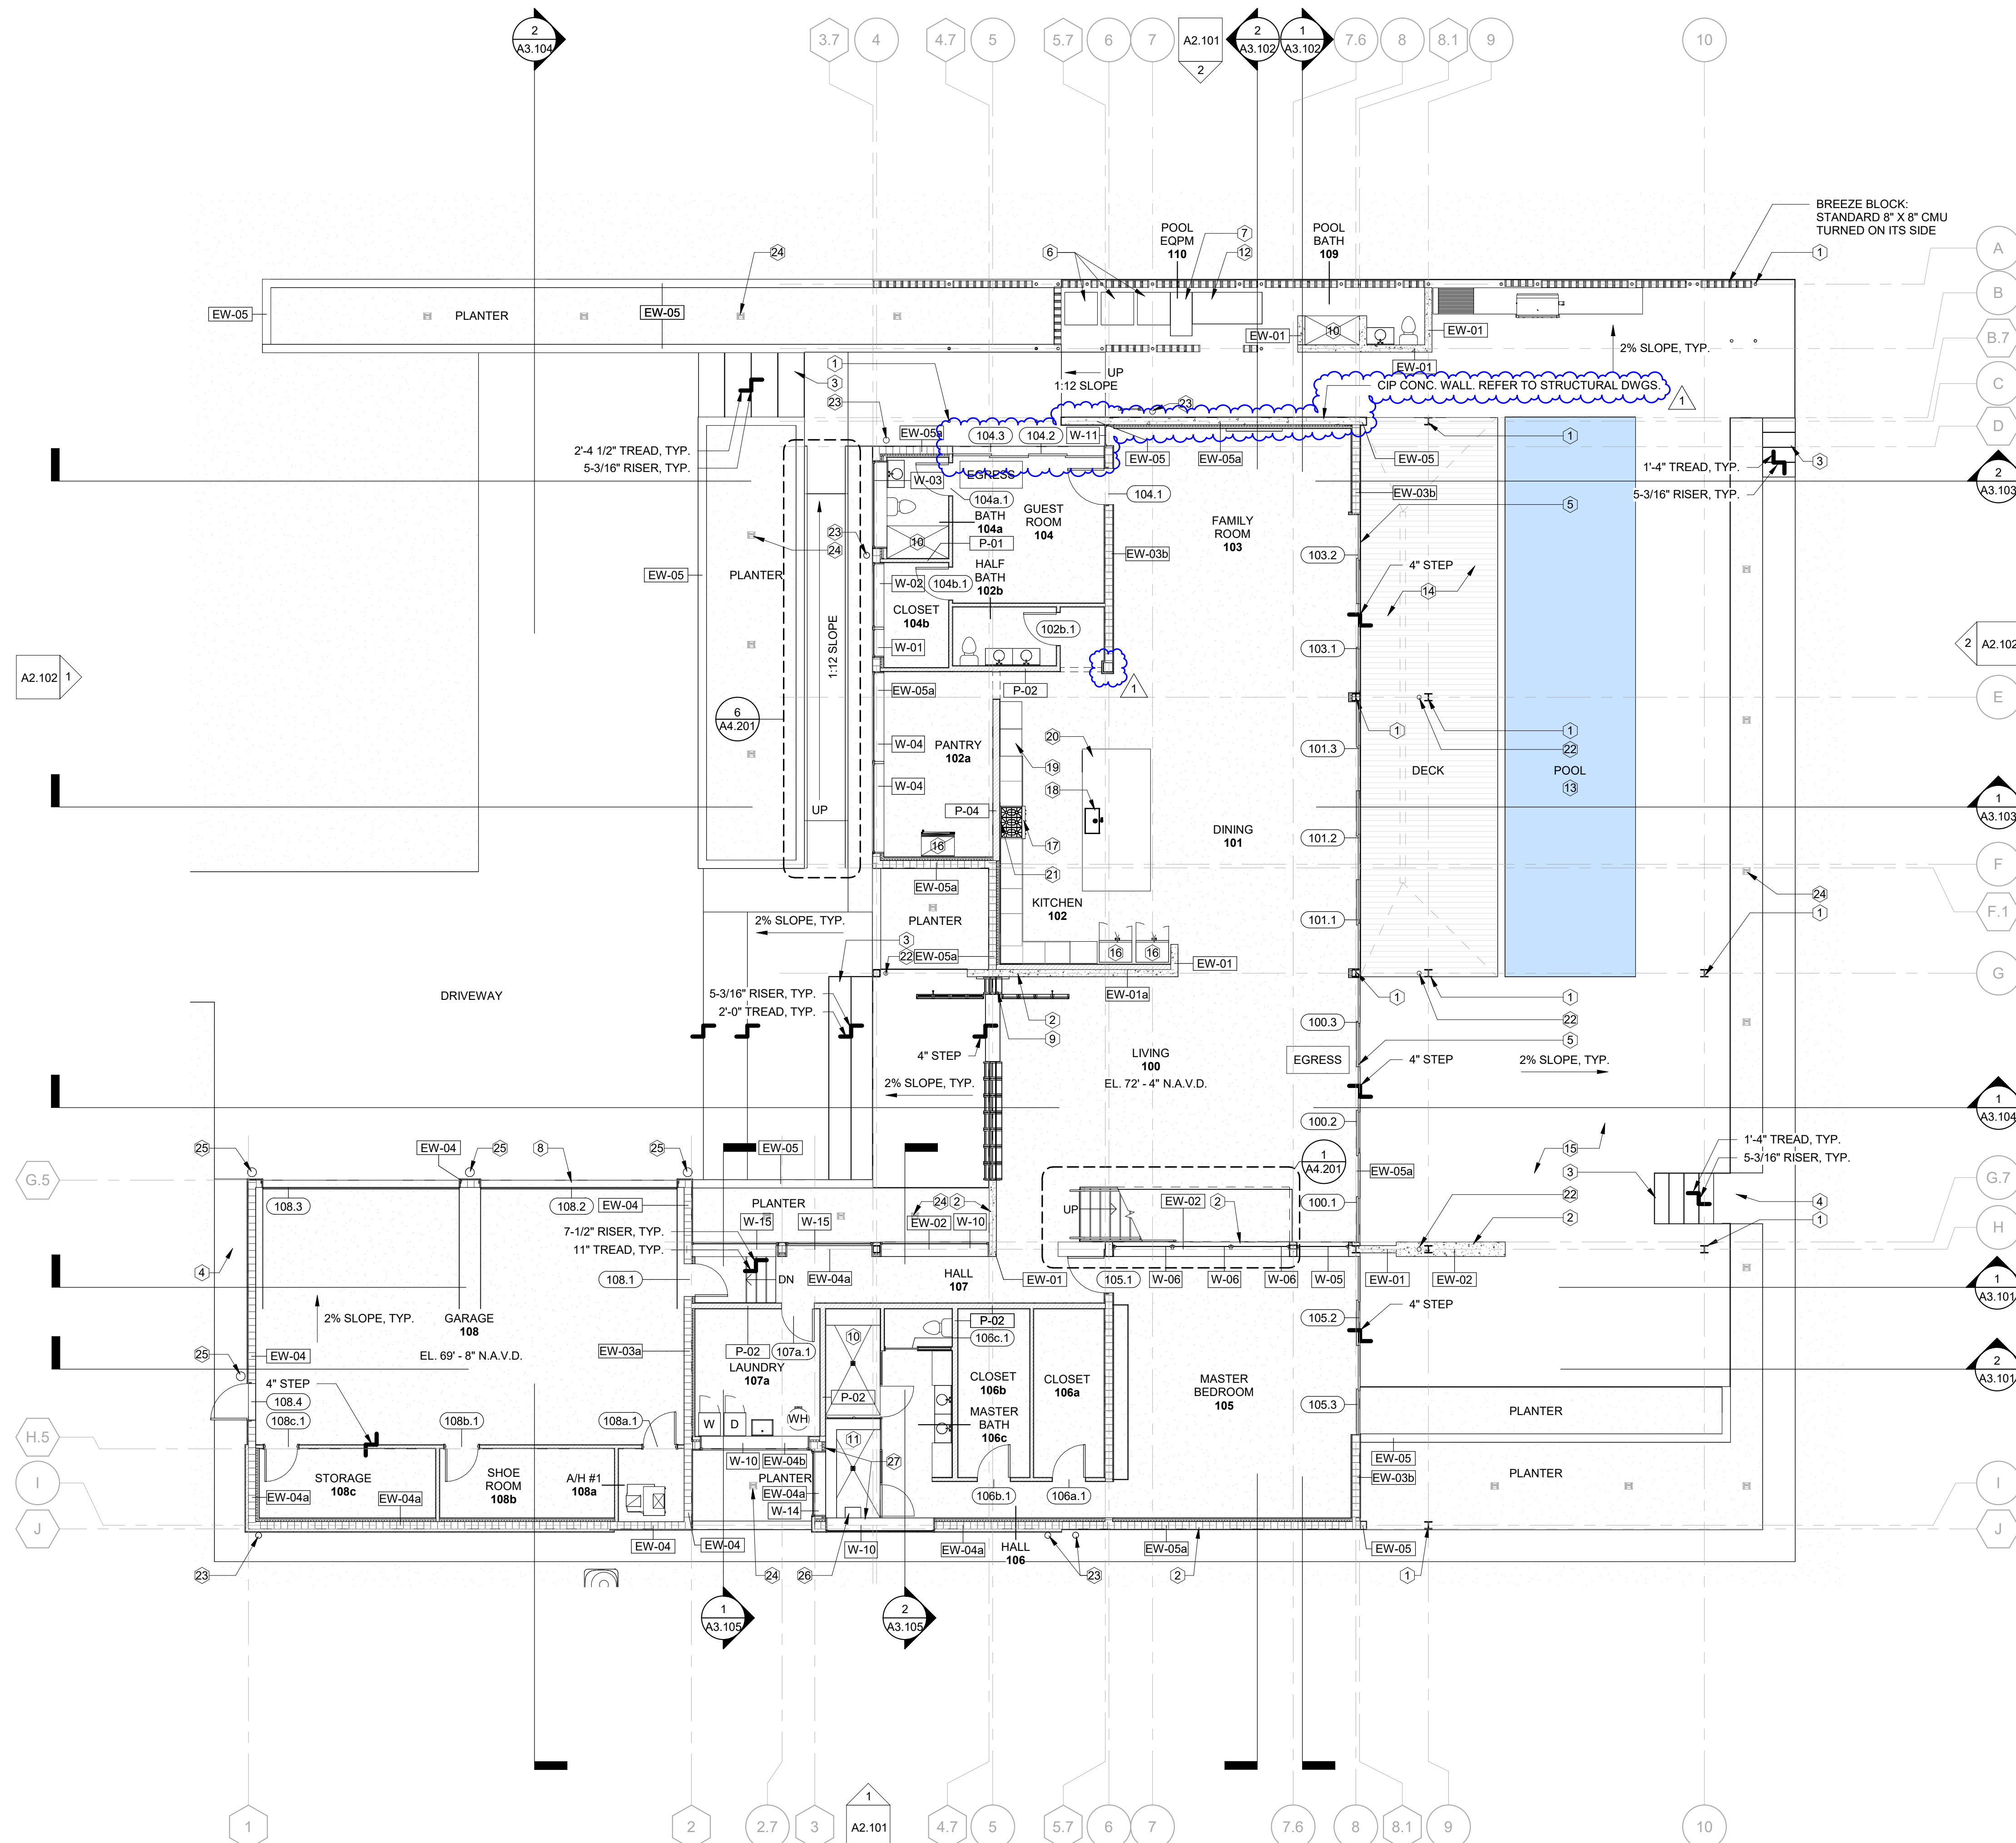

SPECIFIC NOTES

- STRUCT. STL. COL., TYP. REFER TO STRUCT. DWGS.
- C.I.P. EXT. CONC. WALL. REFER TO STRUCTURAL DWGS.
- CONC. STEPS
- P.I.P. CONC. SITE PAVING
- SLIDING GLASS DOOR ASSEMBLY (IMPACT RATED), TYP.
- CONDENSING UNITS
- POOL EQPM
- GARAGE DOOR, TYP.
- CUSTOM ENTRY CURTAIN WALL & DOOR SYSTEM. PREFABRICATED / PRE-ENGINEERED. PROVIDE SHOP DWGS.
- SHOWER
- SAUNA ROOM. REFER TO MEP DWGS.
- GENERATOR
- POOL BY OTHERS (UNDER SEPERATE PERMIT)
- WOOD DECK BY OTHERS (SUBMIT SHOP DWGS)
- P.I.P. CONC. POOL DECK
- REFRIGERATOR
- GAS RANGE
- SINK IN KITCHEN ISLAND
- GAS DOUBLE OVEN
- UNDERCOUNTER DISHWASHER
- WALL MNTD POT FILLER
- 4" CIRCULAR DOWNSPOUT TO BE TIED TO 6" DIA. ADS PIPE U3. SYSTEM. REFER TO PLUMBING & CIVIL DWGS. FOR CONTINUATION.
- 6" CIRCULAR DOWNSPOUT TO BE TIED TO 6" DIA. ADS PIPE UG. SYSTEM. REFER TO PLUMBING & CIVIL DWGS. FOR CONTINUATION.
- SITE LIGHTING, TYP. REFER TO ELEC. DWGS.
- FLUSH MNTD GROUND SITE LIGHTING
- DRY SAUNA HEATER. HARVIA MODEL # HSW8U3B. REFER TO MEP DWGS.
- WALLS & CLNG @ SAUNA ROOM TO BE CEDAR CLAD W/ TYPE-X MR GWB.

FLOOR PLAN LEGEND

- WD STUD WALL, TYP.
- CMU WALL, TYP. REFER TO STRUCT. DWGS.
- CIP CONC. WALL, TYP. REFER TO STRUCT. DWGS.
- WIDE FLANGE STL. COL., TYP. REFER TO STRUCT. DWGS.
- TUBE STL. COL., TYP. REFER TO STRUCT. DWGS.



FIRST FLOOR PLAN
1/8" = 1'-0"

1



1



FIRST FLOOR REFLECTED CEILING PLAN

A1.104

3/4/2025 4:29:06 PM

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, L.L.C.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET


YOUSEF RESIDENCE



NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

SECOND FLOOR PLAN

PROJECT #	2301
ISSUE DATE	11.21.23

A1.201

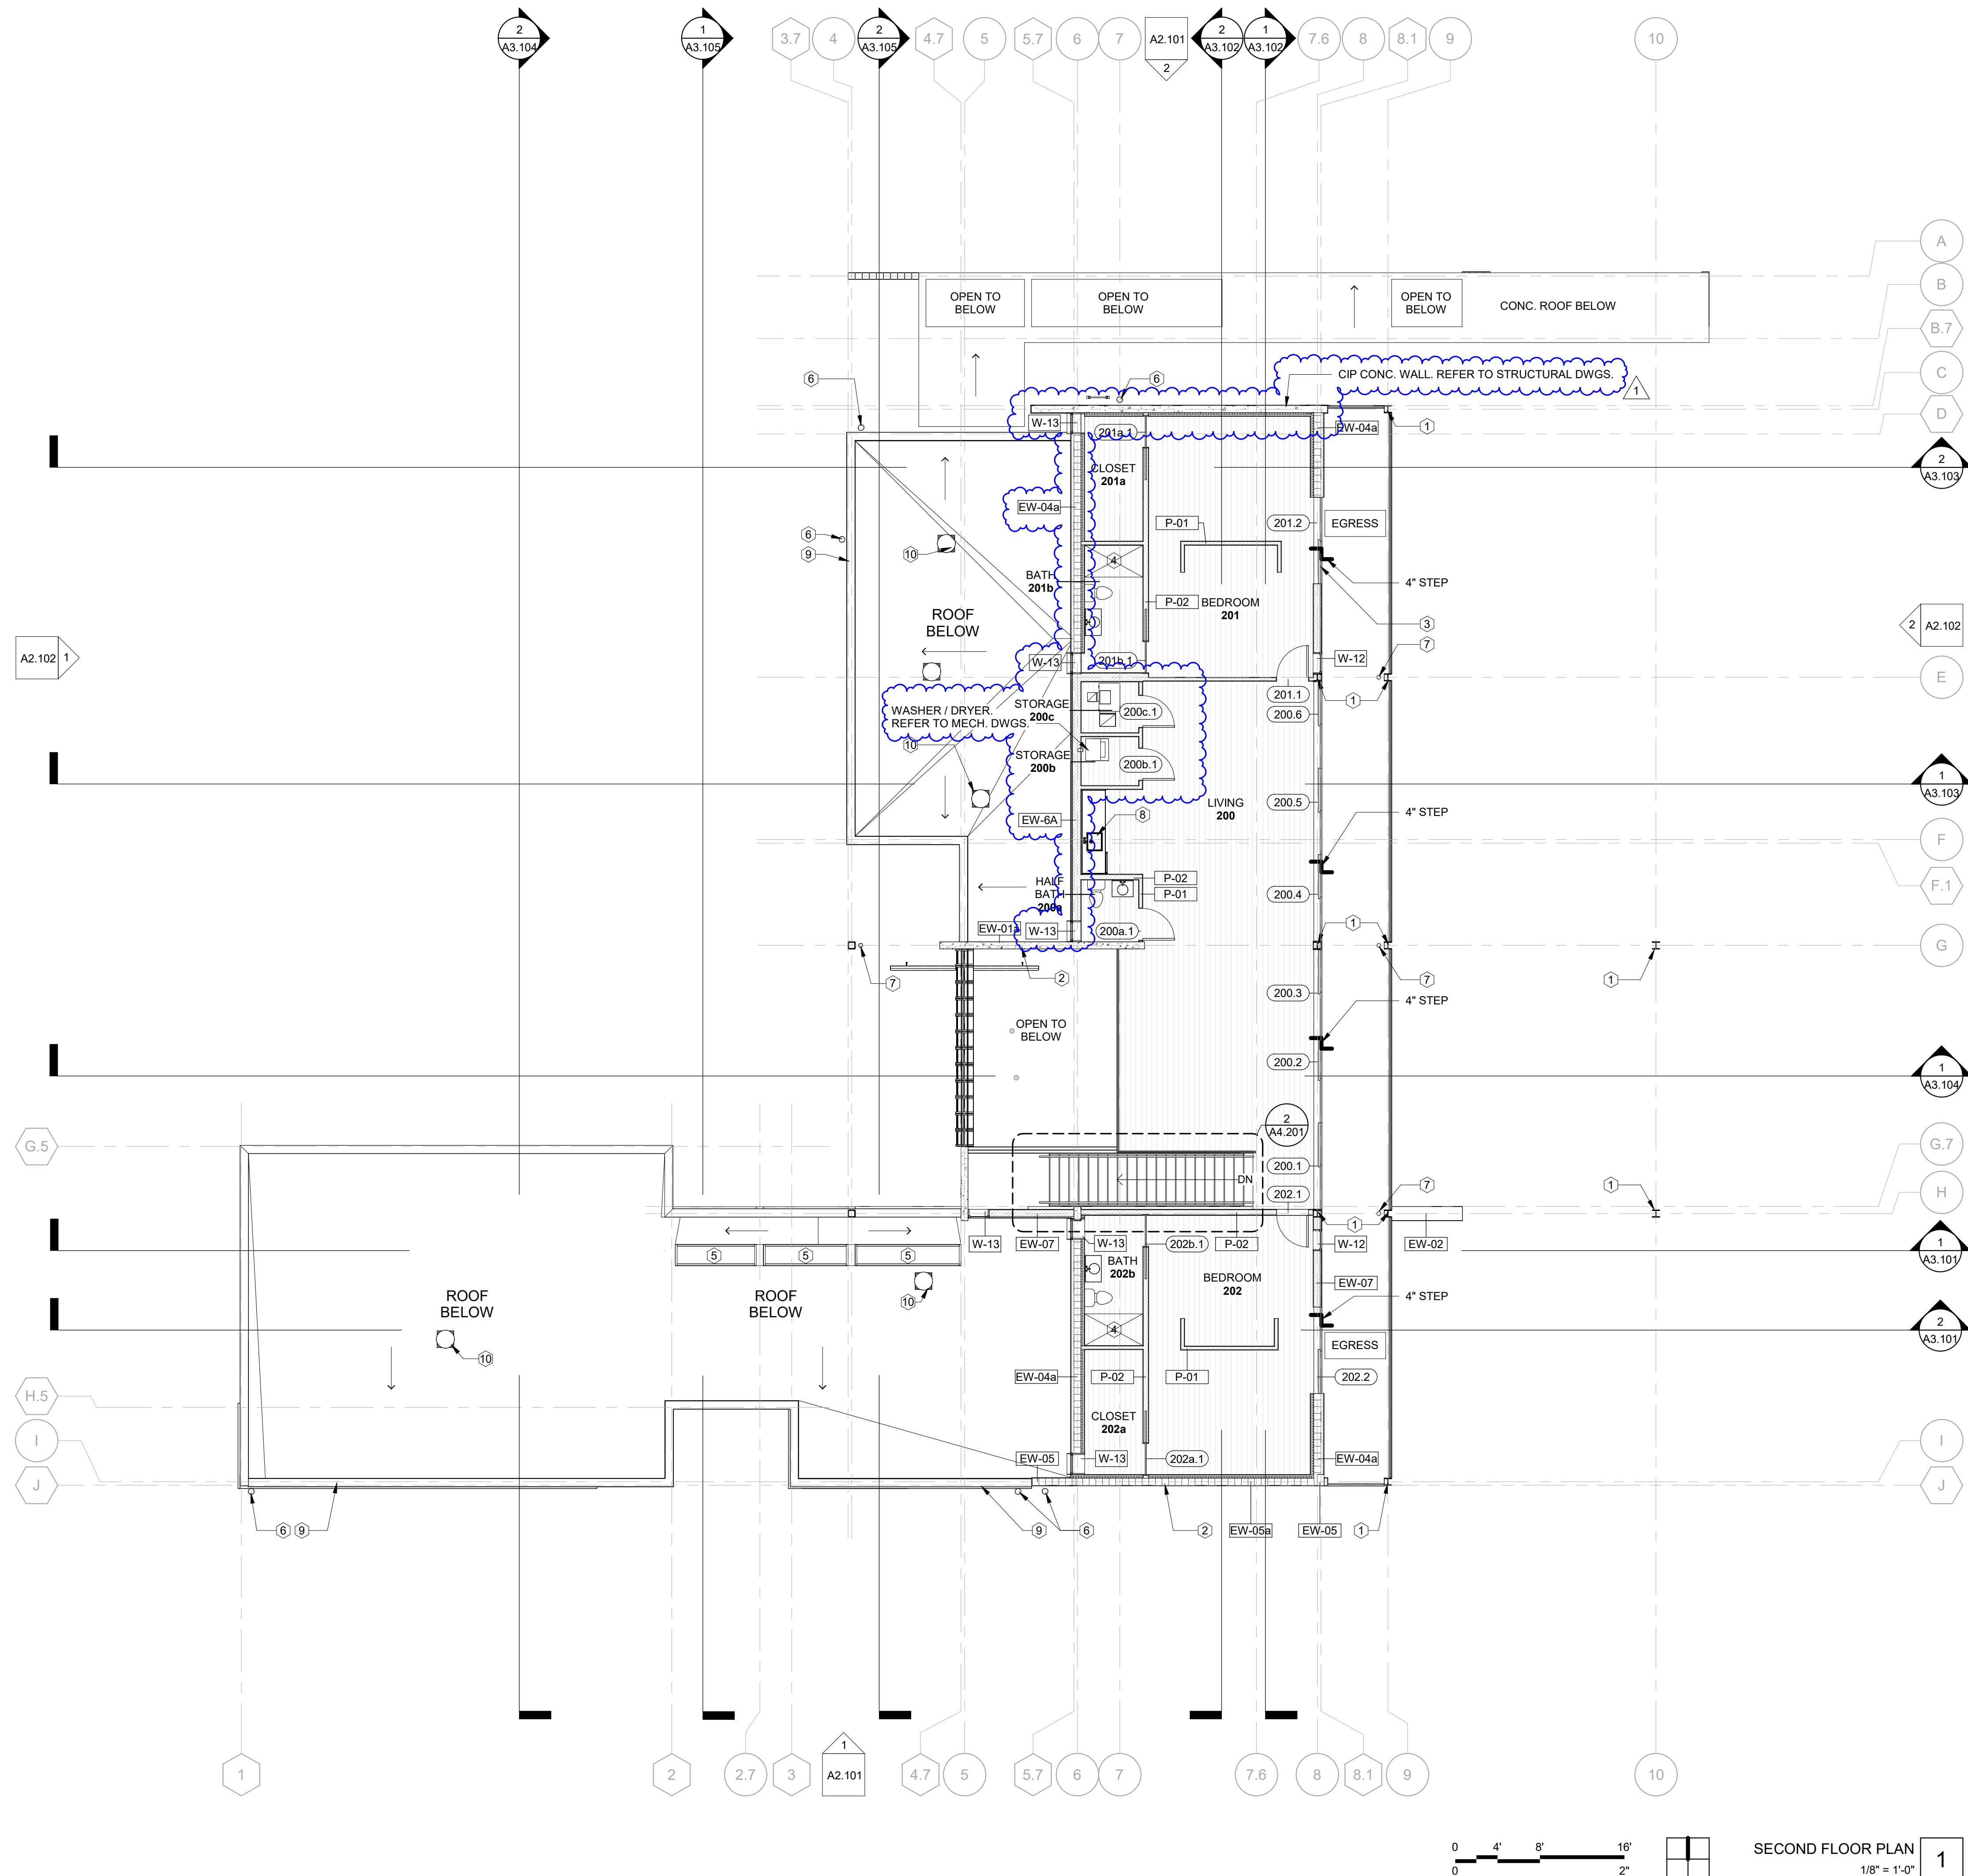

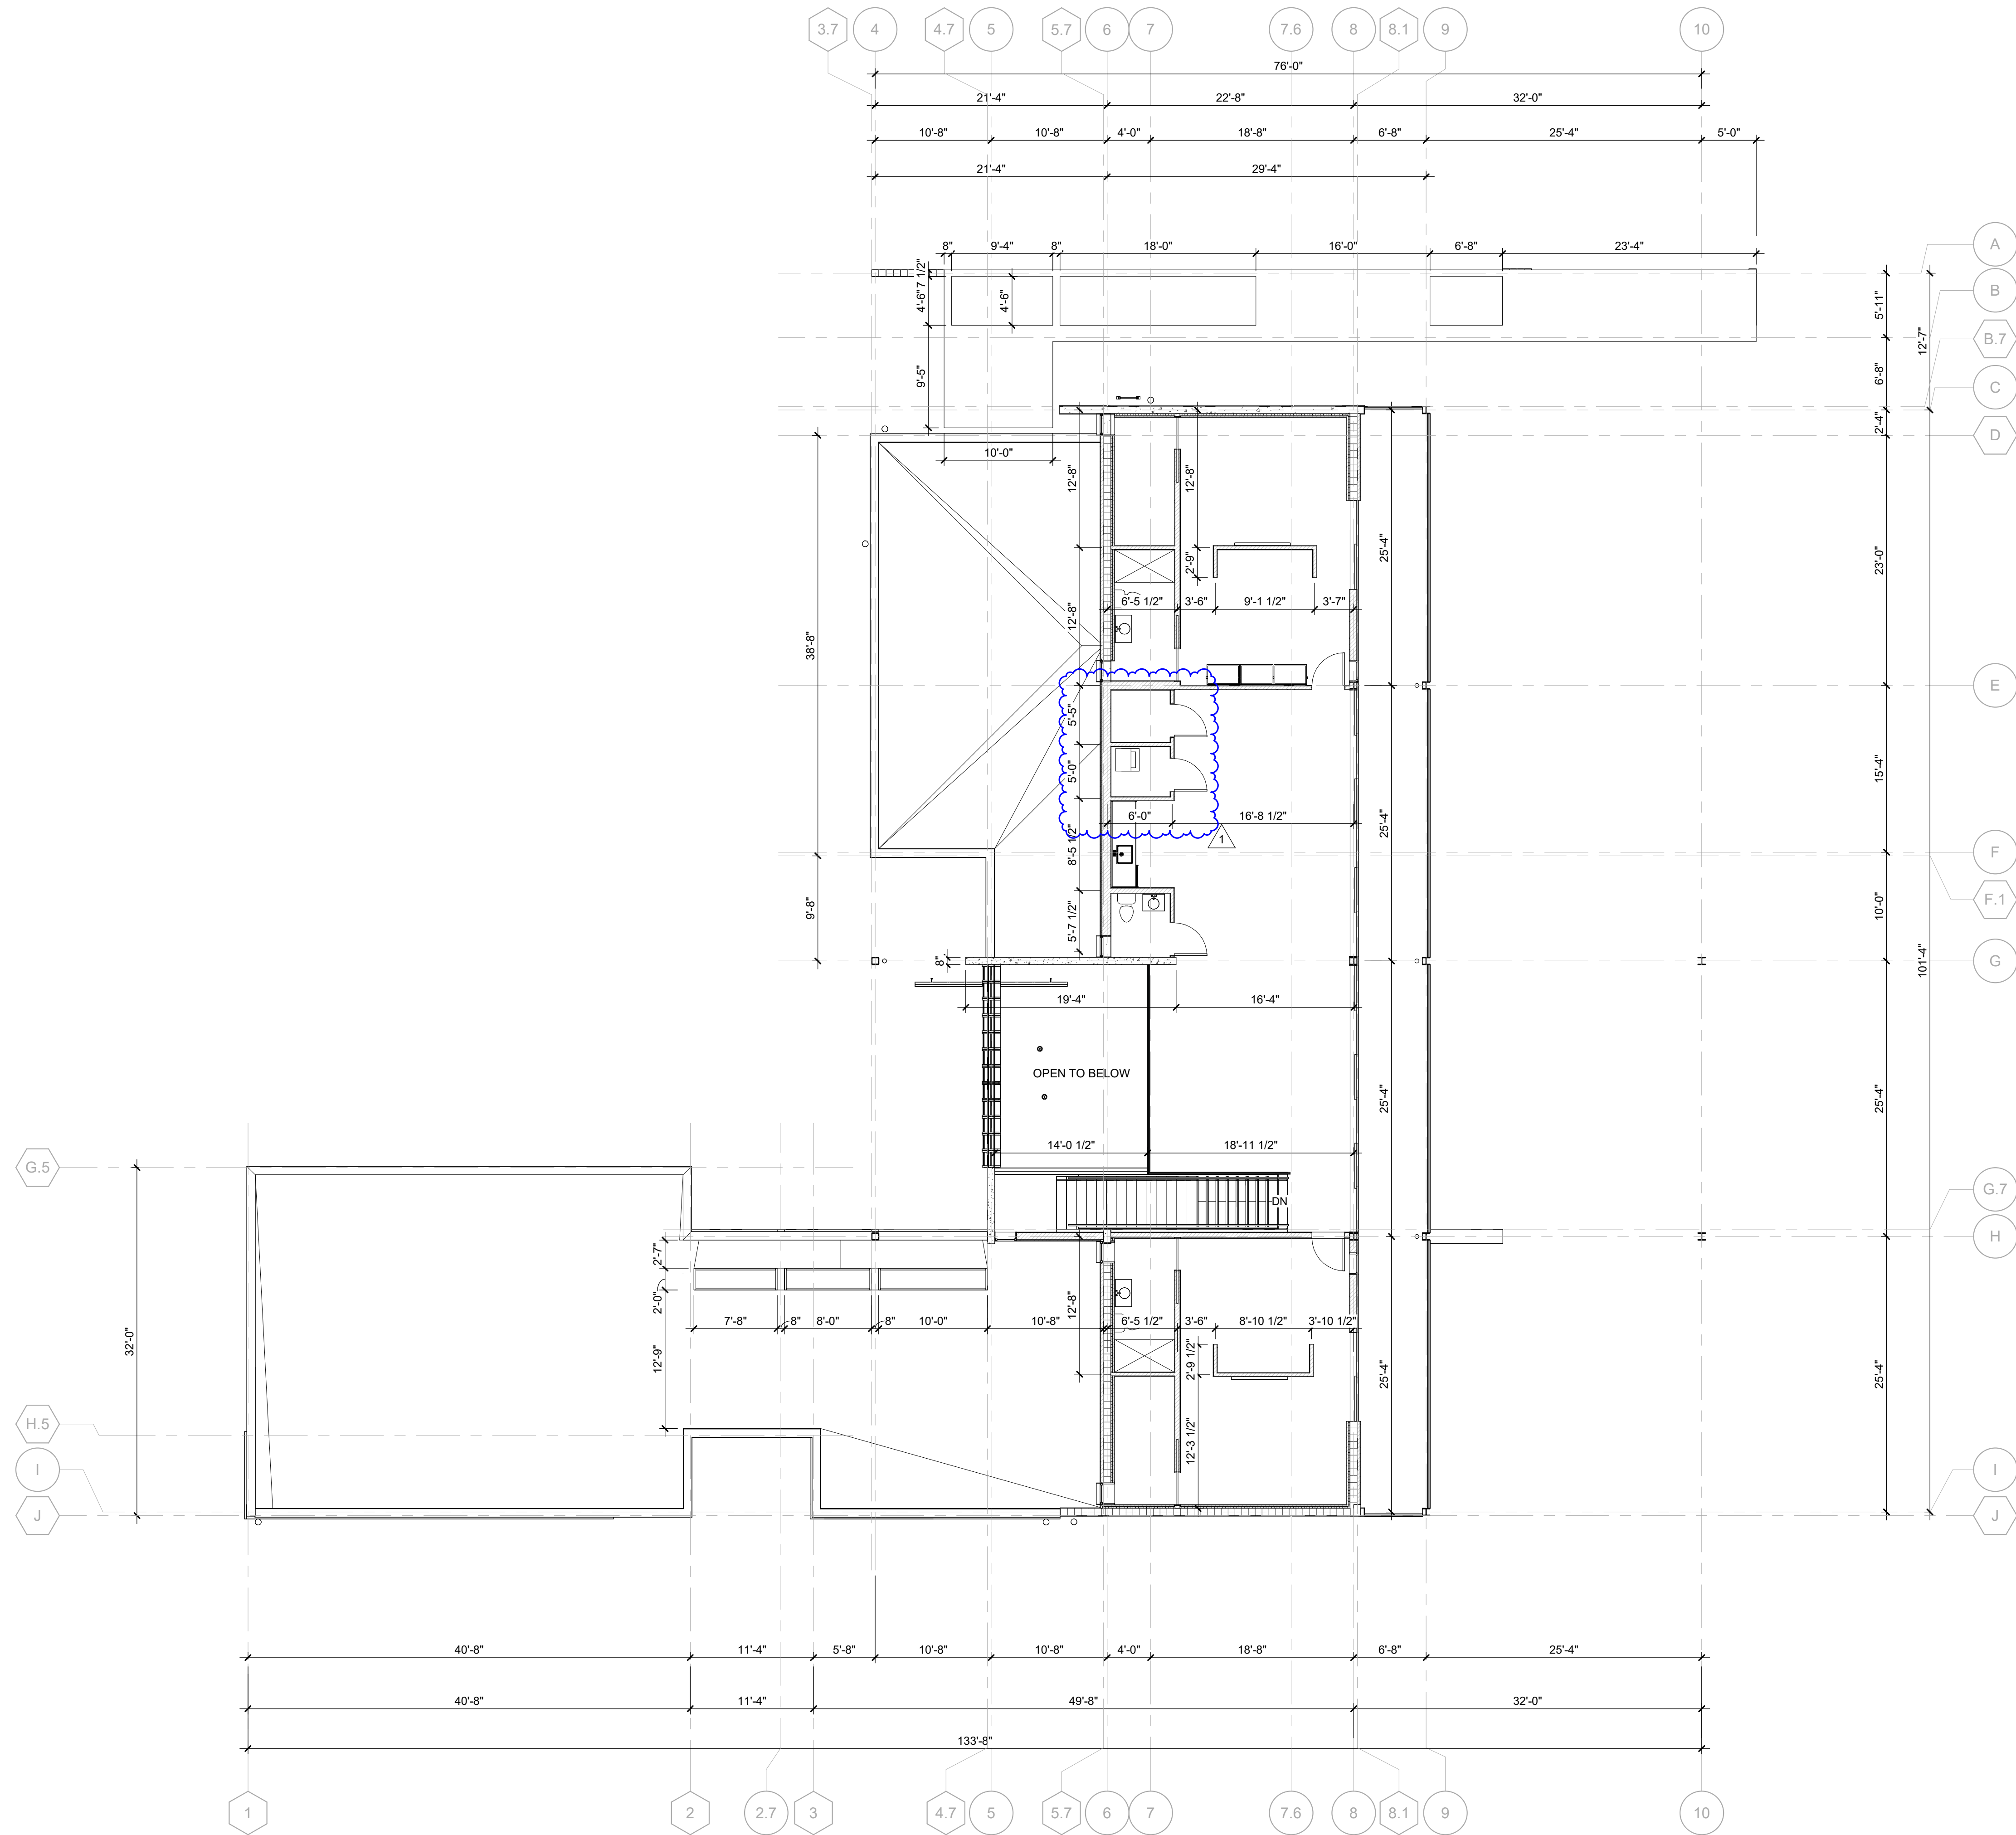

SECOND FLOOR DIMENSION PLAN

1

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, L.L.C.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549


PERMIT SET

YOUSEF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

SECOND FLOOR
DIMENSION PLAN

PROJECT #	2301
ISSUE DATE	11.21.23

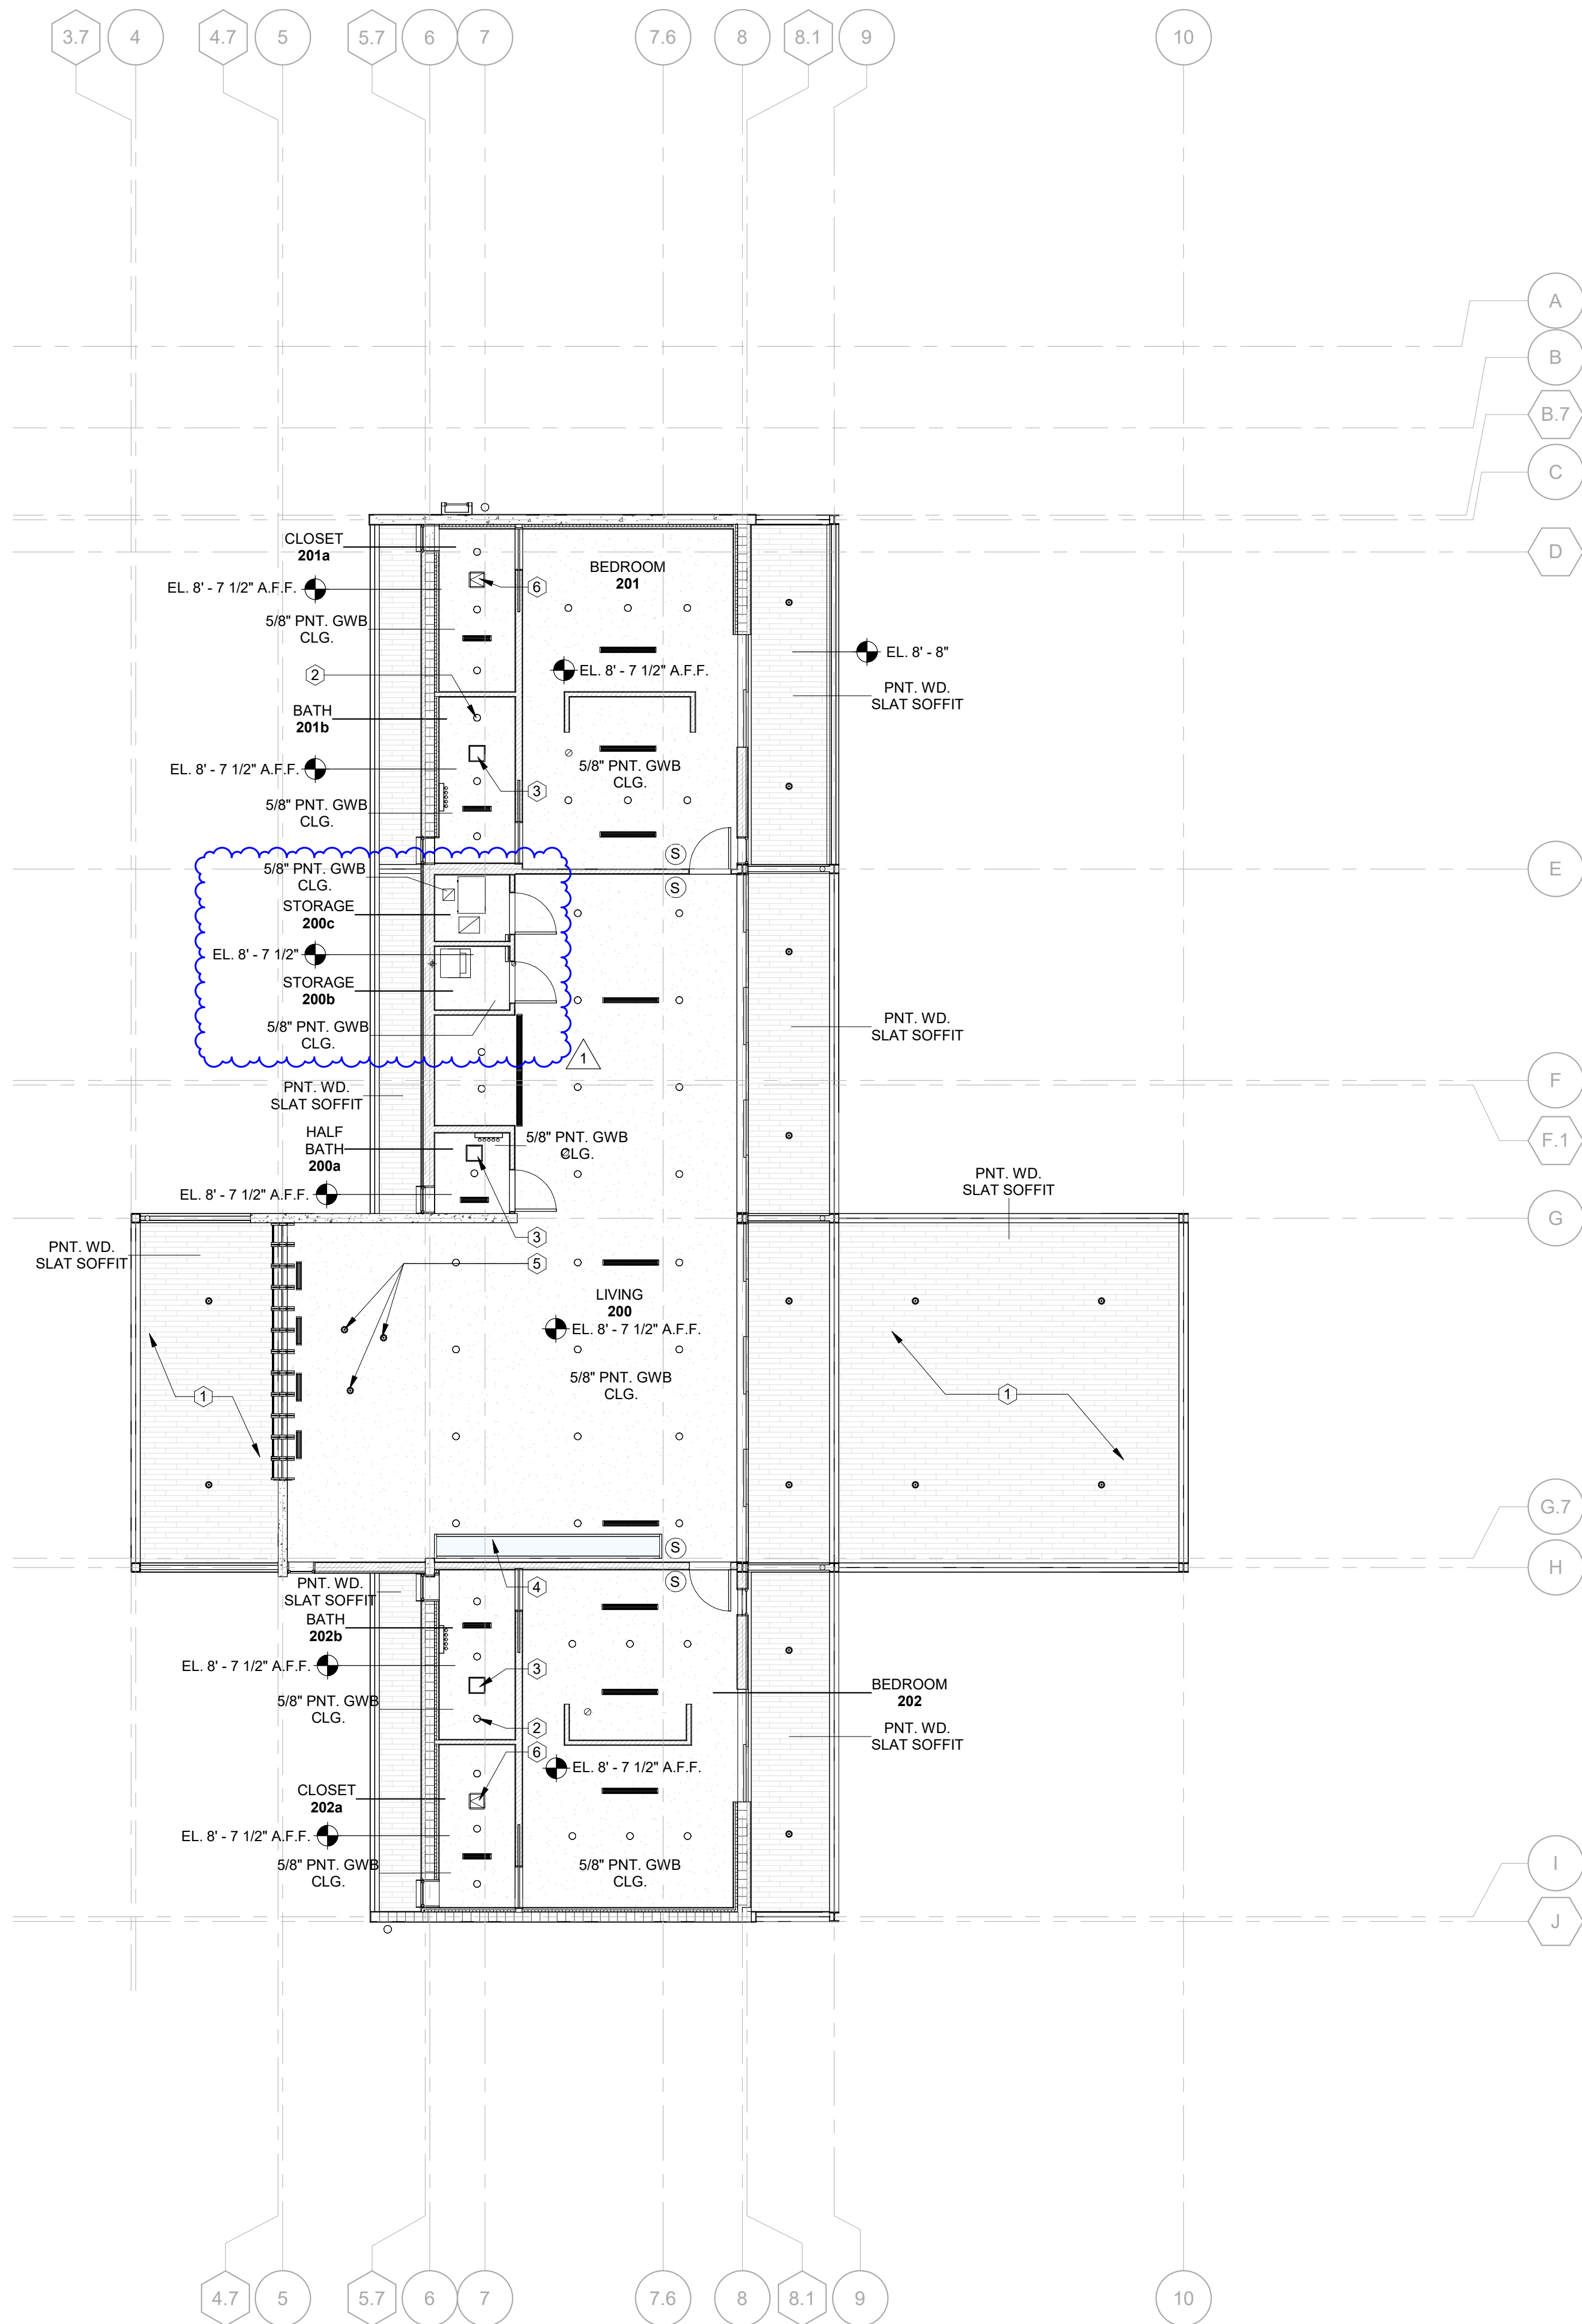

REVISION NOTES - RCP

MULTIPLE LOCATIONS OF LIGHTING FIXTURES,
MECHANICAL DIFFUSERS, & RETURNS REVISED.

- SPECIFIC NOTES
- EXT. CONC. CANOPY.
 - SHOWER LIGHT
 - EXHAUST FAN, TYP.
 - SKYLIGHT (IMPACT RATED)
 - ORNAMENTAL LIGHT FIXTURE @ ATRIUM
 - 12" x 12" MTL. CLG. ACCESS PANEL
PRE-FINISHED TO MATCH ADJ. WALL COLOR.

- REFLECTED CEILING PLAN LEGEND
- GWB - PNT. GWB CLG. / SOFFIT
 - PENDANT FIXTURE (HEIGHT VARIES)
REFER TO ELEC. DWGS.
 - RECESSED CAN FIXTURE
REFER TO ELEC. DWGS.
 - LINEAR SURF. MTD FIXTURE
REFER TO ELEC. DWGS.
 - VANITY LIGHT FIXTURE
REFER TO ELEC. DWGS.
 - SURF. MTD. LIGHT FIXTURE
@ RM 108a & 200b
REFER TO ELEC. DWGS.
 - SMOKE DETECTOR / CO2
TO BE ON BATTERY BACKUP,
INTERCONNECTED & HARDWIRED PER
FBC R. 2017 SEC. R314.3 & R314.4
SEE 2/A10 FOR ADDITIONAL
SMOKE DETECTOR LOCATIONS ON 2ND
FLOOR
 - LINEAR DIFFUSER / RETURN. REFER TO
MECH. DWGS.

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, LLC.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET

YOUSEF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

SECOND FLOOR
REFLECTED CEILING
PLAN

PROJECT # 2301
ISSUE DATE 11.21.23

A1.203

SECOND FLOOR REFLECTED CEILING PLAN 1

3/4/2025 4:20:14 PM




PERMIT SET

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

A1.301

3/4/2025 4:29:20 PM

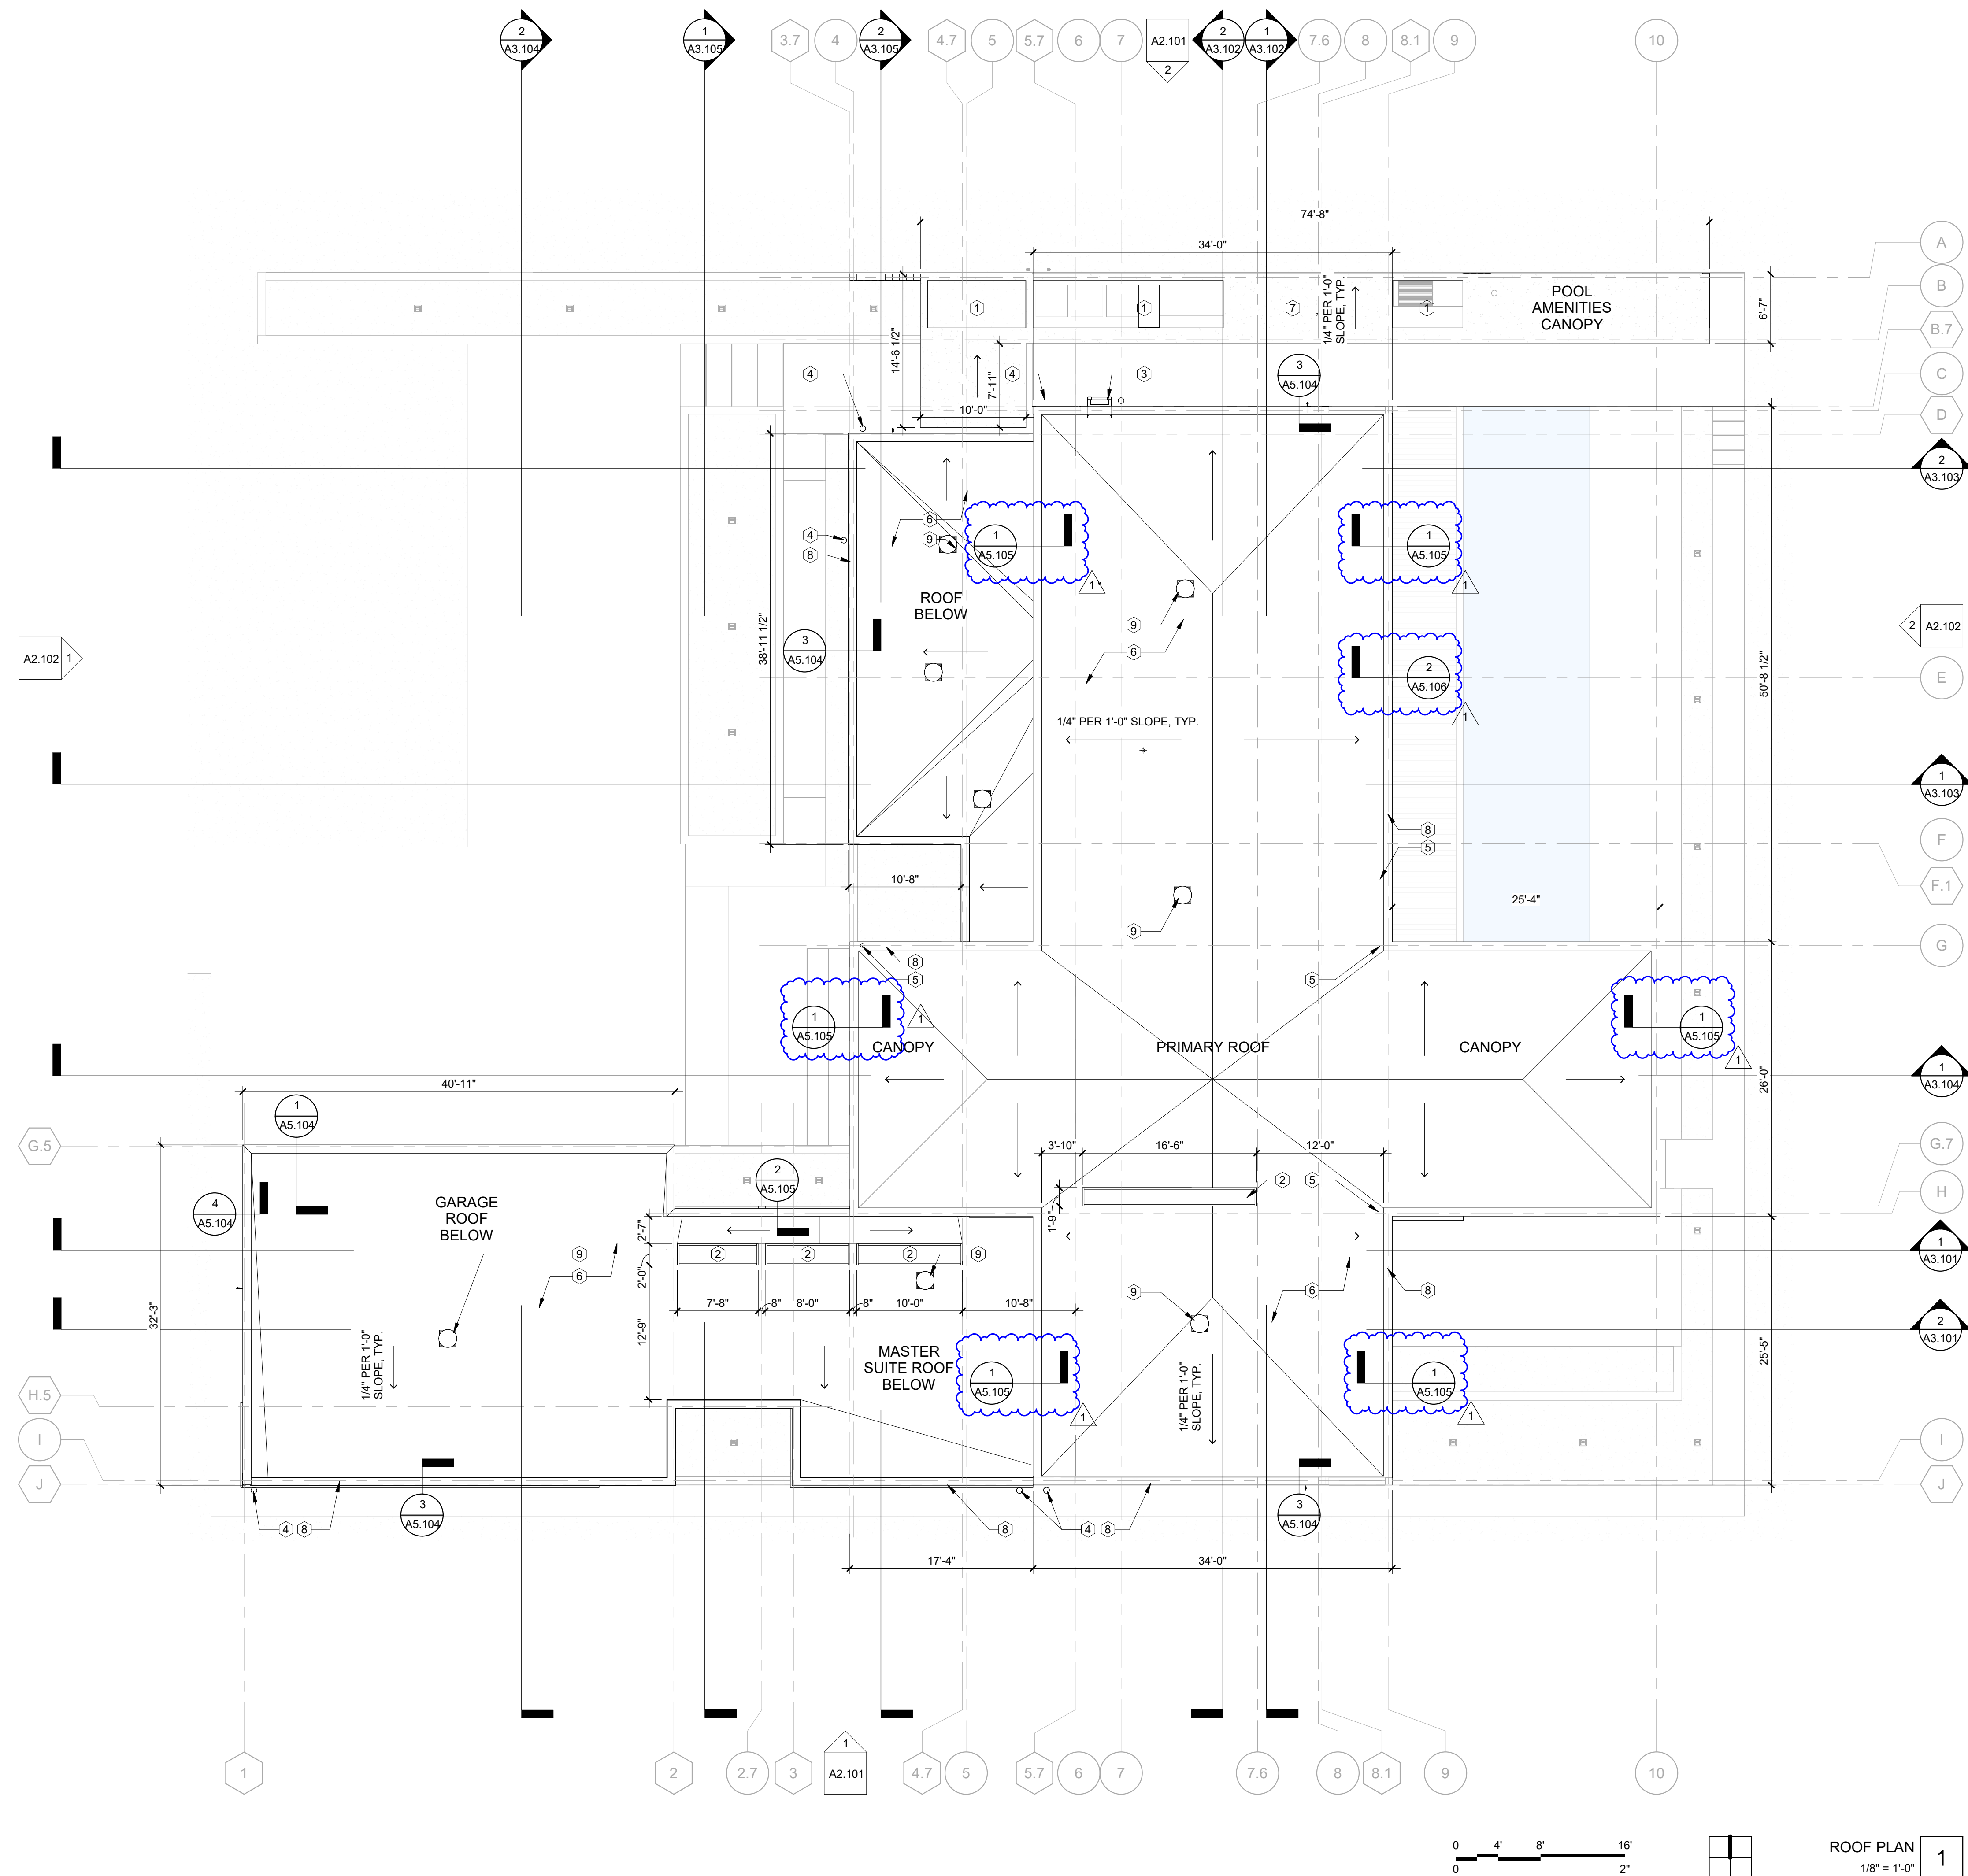

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, L.L.C.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET

YOUSEF RESIDENCE


NO.	REVISION	DATE

ELEVATIONS


PROJECT #	2301
ISSUE DATE	11.21.23

A2.101



3/4/2025 4:30:16 PM

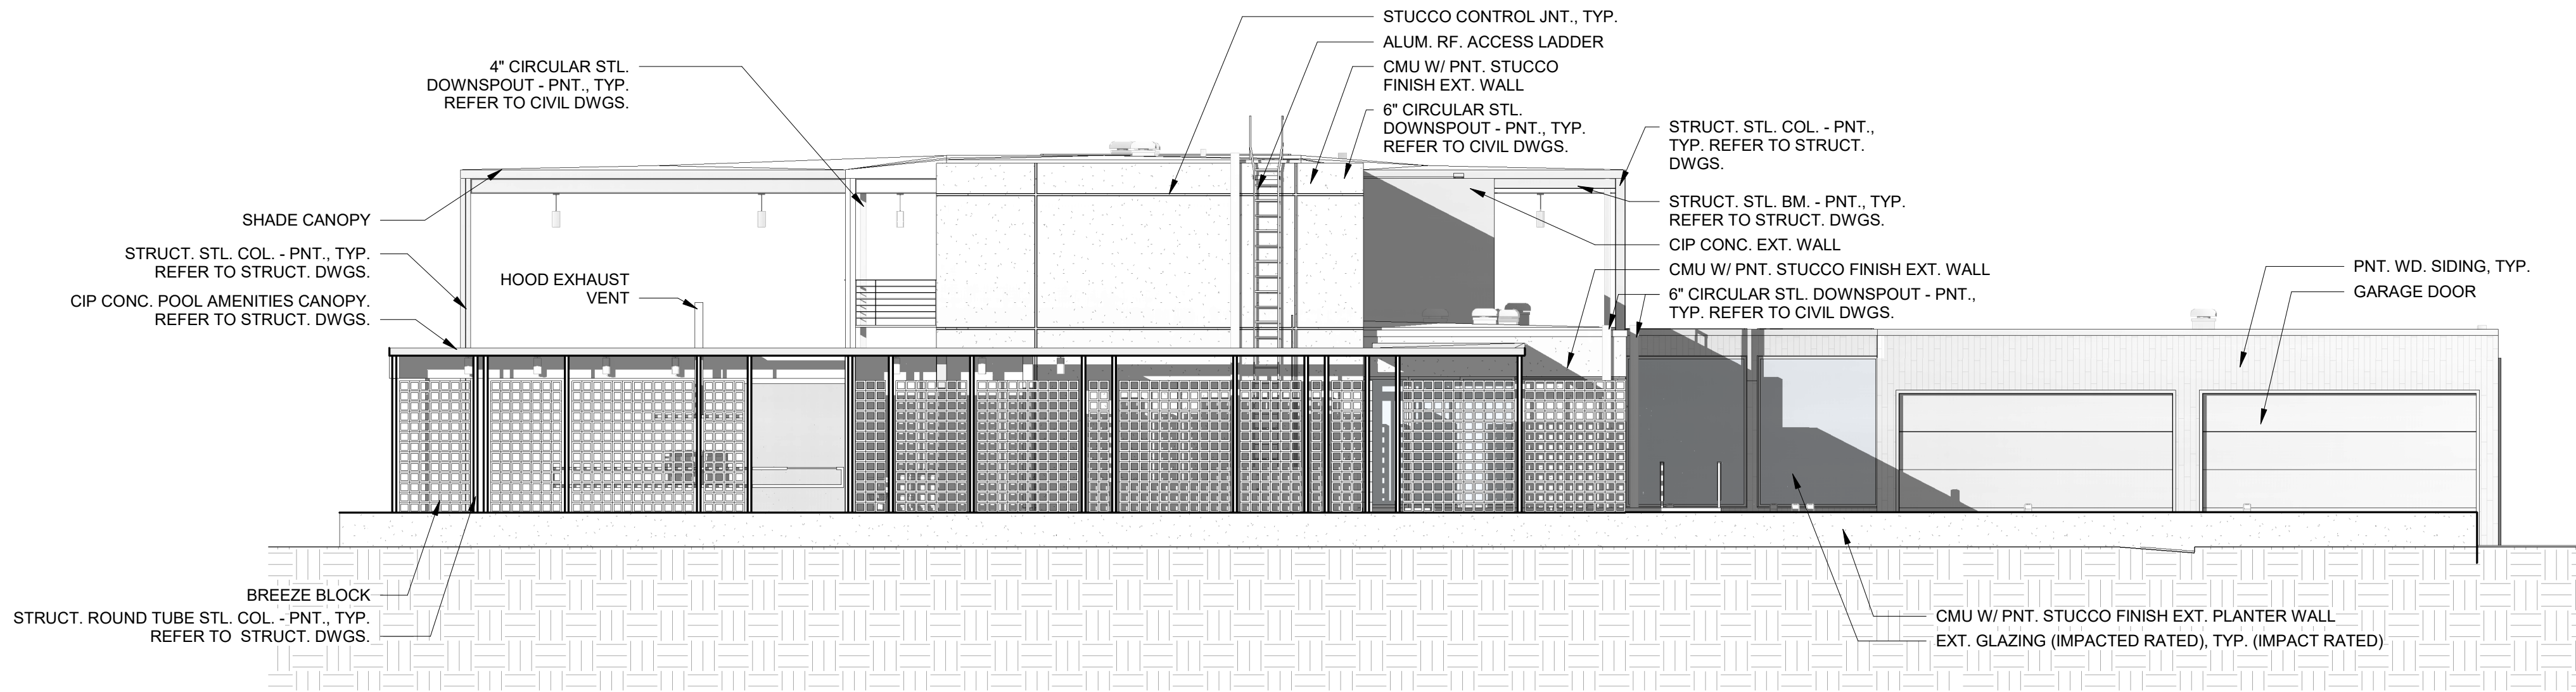

ELEVATION - NORTH 2
1/8" = 1'-0"

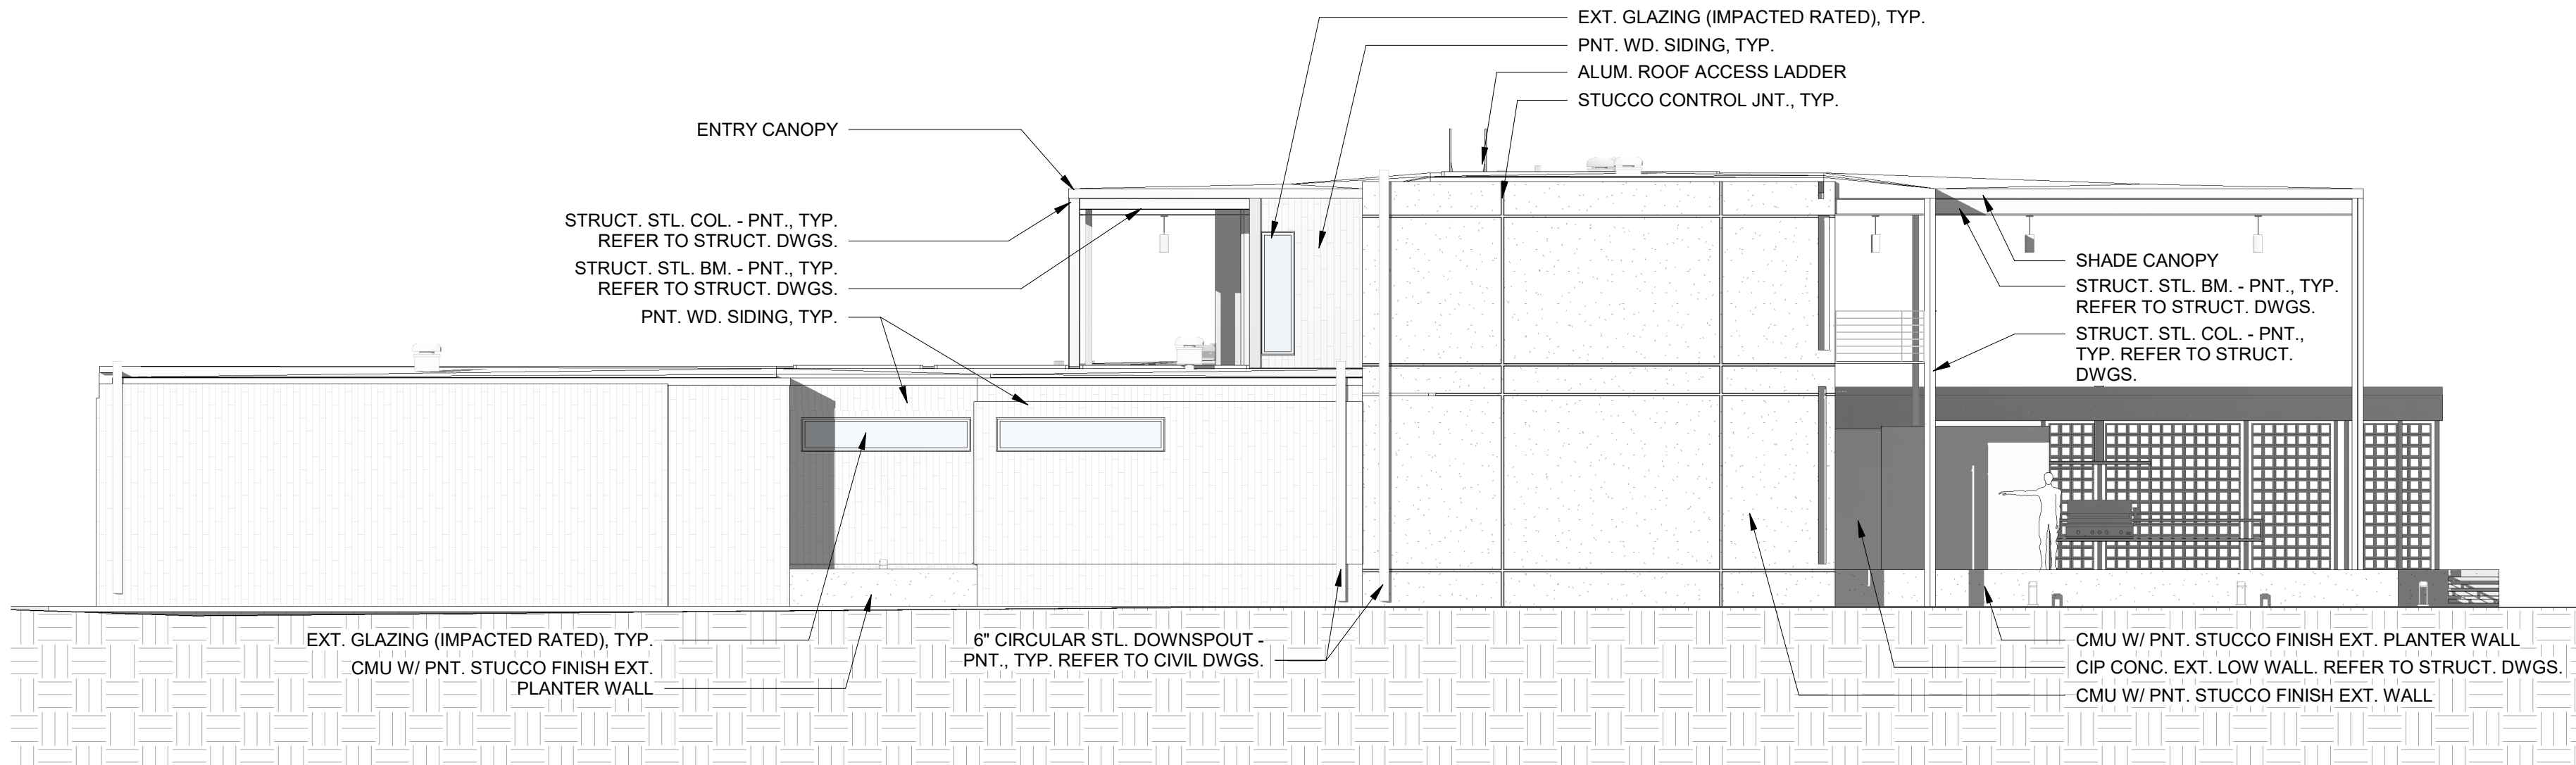

ELEVATION - SOUTH 1
1/8" = 1'-0"



olap

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, LLC.
1704 W NORTH A ST
TAMPA, FL 33606
PH:
(813) 512.8872
E-MAIL:
info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH:
(727) 656.3475

**MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.**
PH:
(904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH:
(813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET

YOUSSEF RESIDENCE


[illegible]

ELEVATIONS


PROJECT #	230
ISSUE DATE	11.21.23

A2.102

3/4/2025 4:31:08 PM

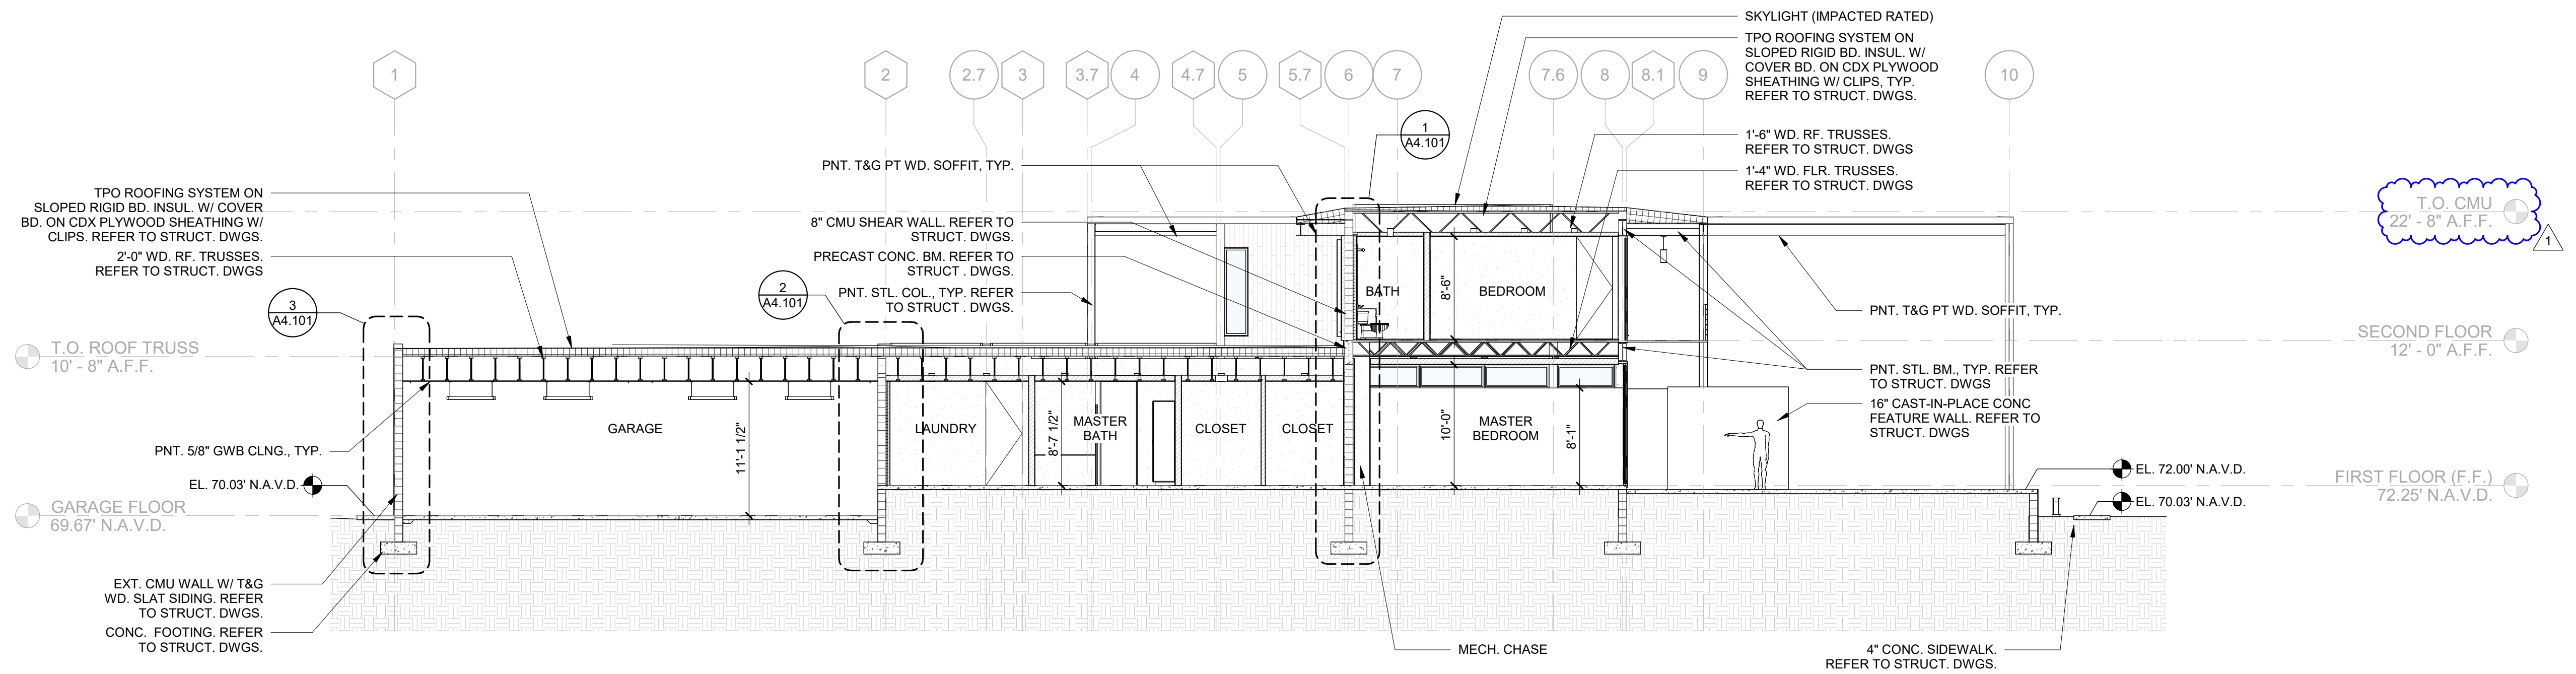

BUILDING SECTION E/W 2
1/8" = 1'-0"

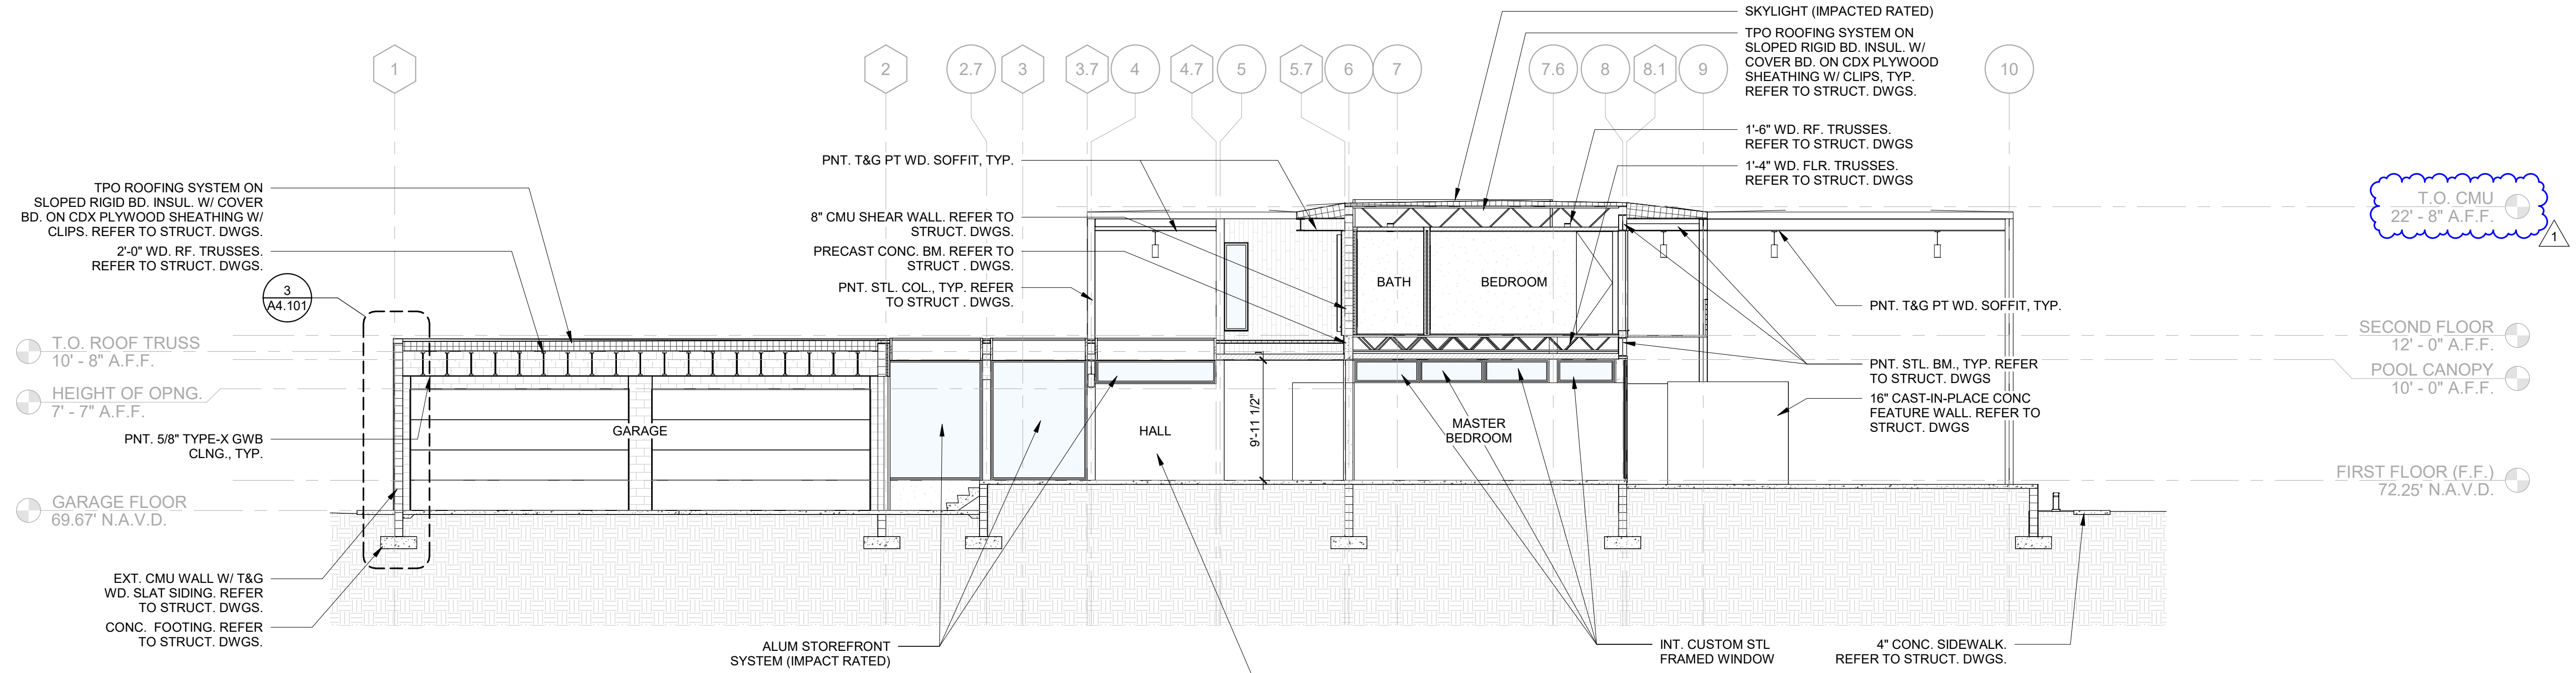

BUILDING SECTION E/W 1
1/8" = 1'-0"

modulo

PROJECT DESIGN TEAM:
ARCHITECT
MODULO A+I, LLC.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com
STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475
MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625
ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473
OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET

YOUSEF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

BUILDING SECTIONS

PROJECT #	2301
ISSUE DATE	11.21.23

A3.101

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, LLC.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET



YOUSEF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

BUILDING SECTIONS

PROJECT # 2301
ISSUE DATE 11.21.23

A3.102

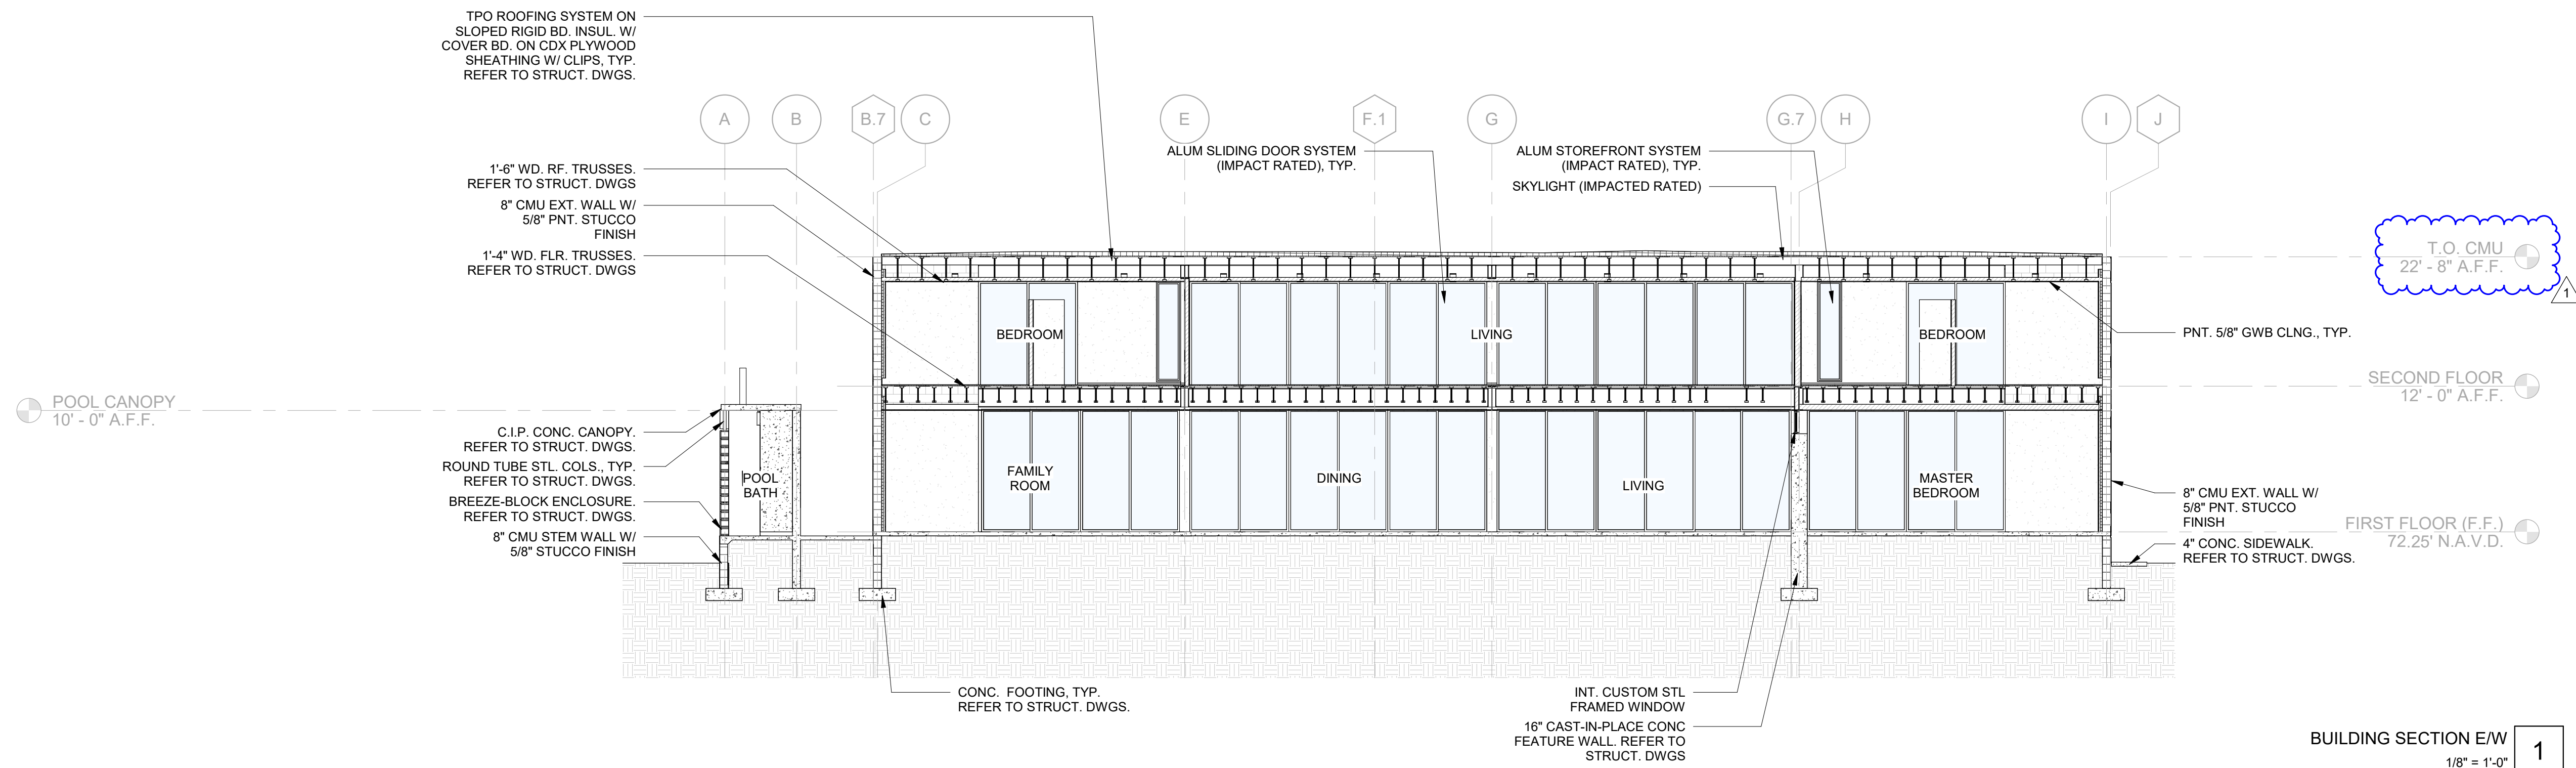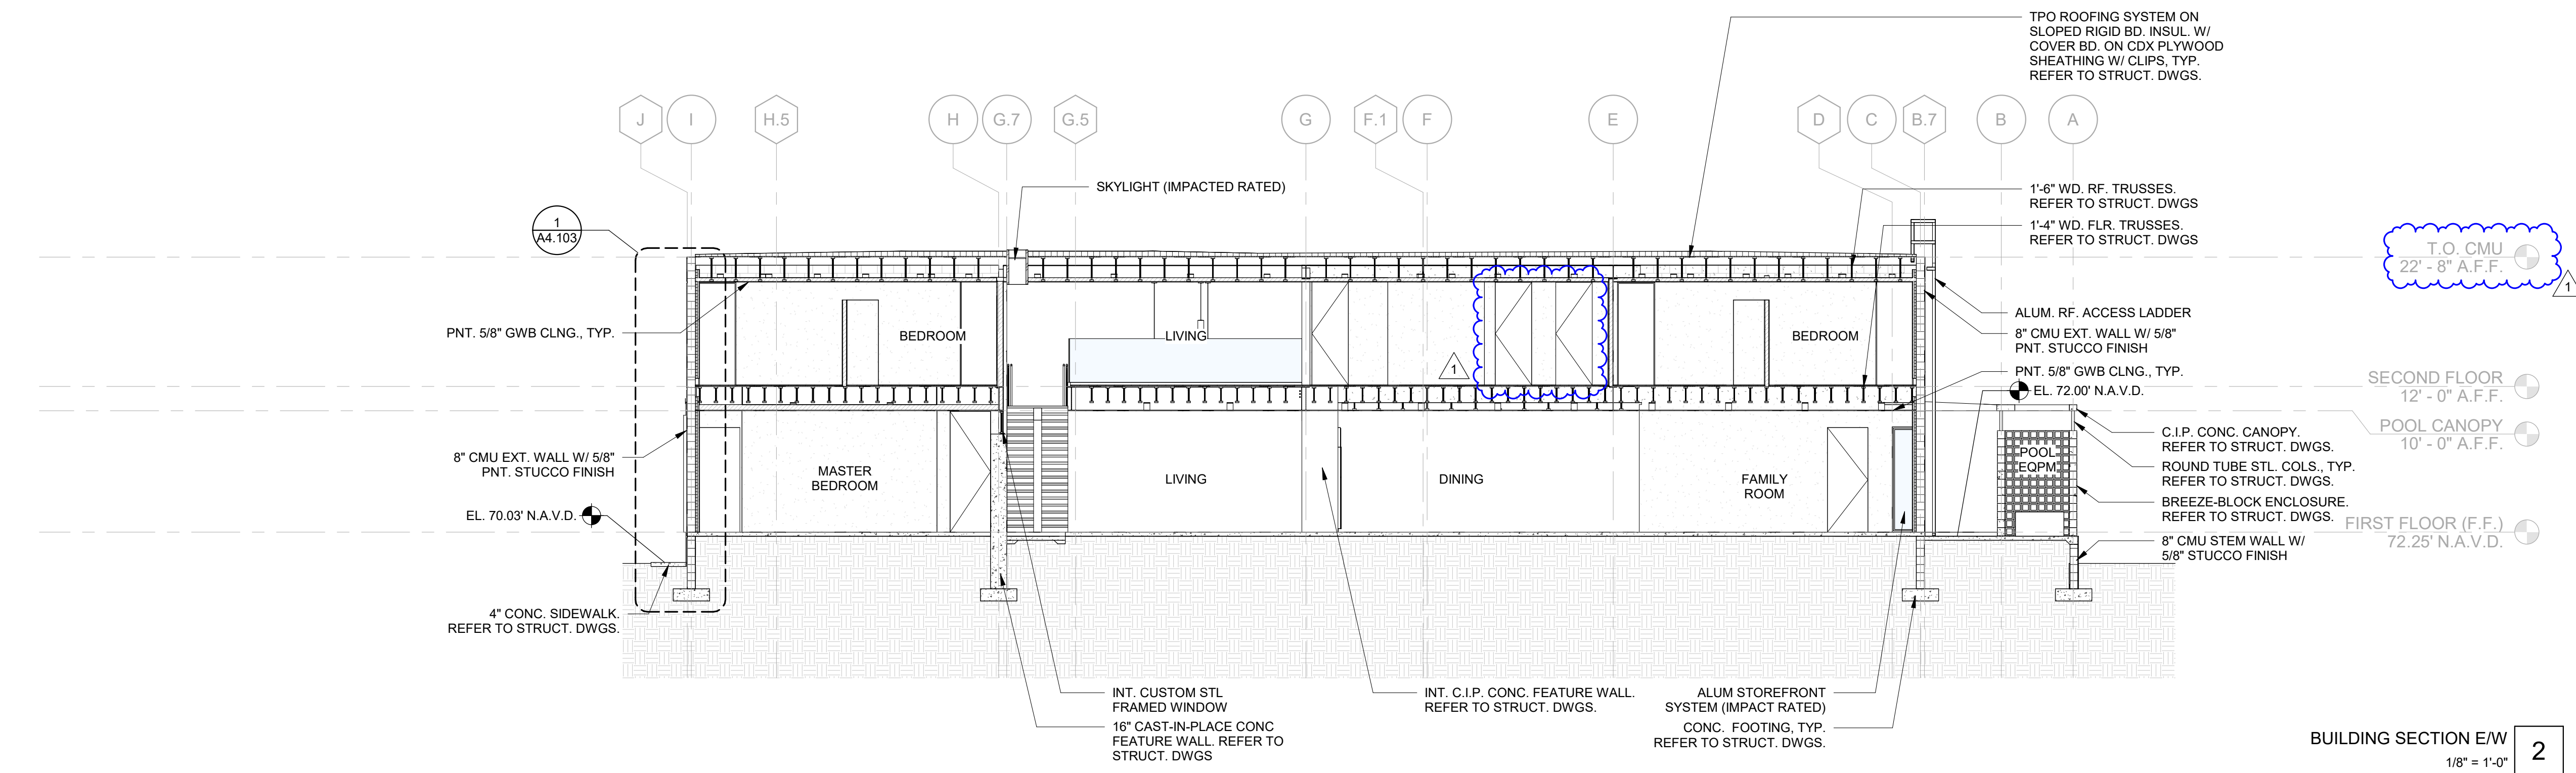

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, LLC.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET

YOUSEF RESIDENCE



NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

BUILDING SECTIONS

PROJECT # 2301
ISSUE DATE 11.21.23

A3.103

3/4/2025 4:31:10 PM

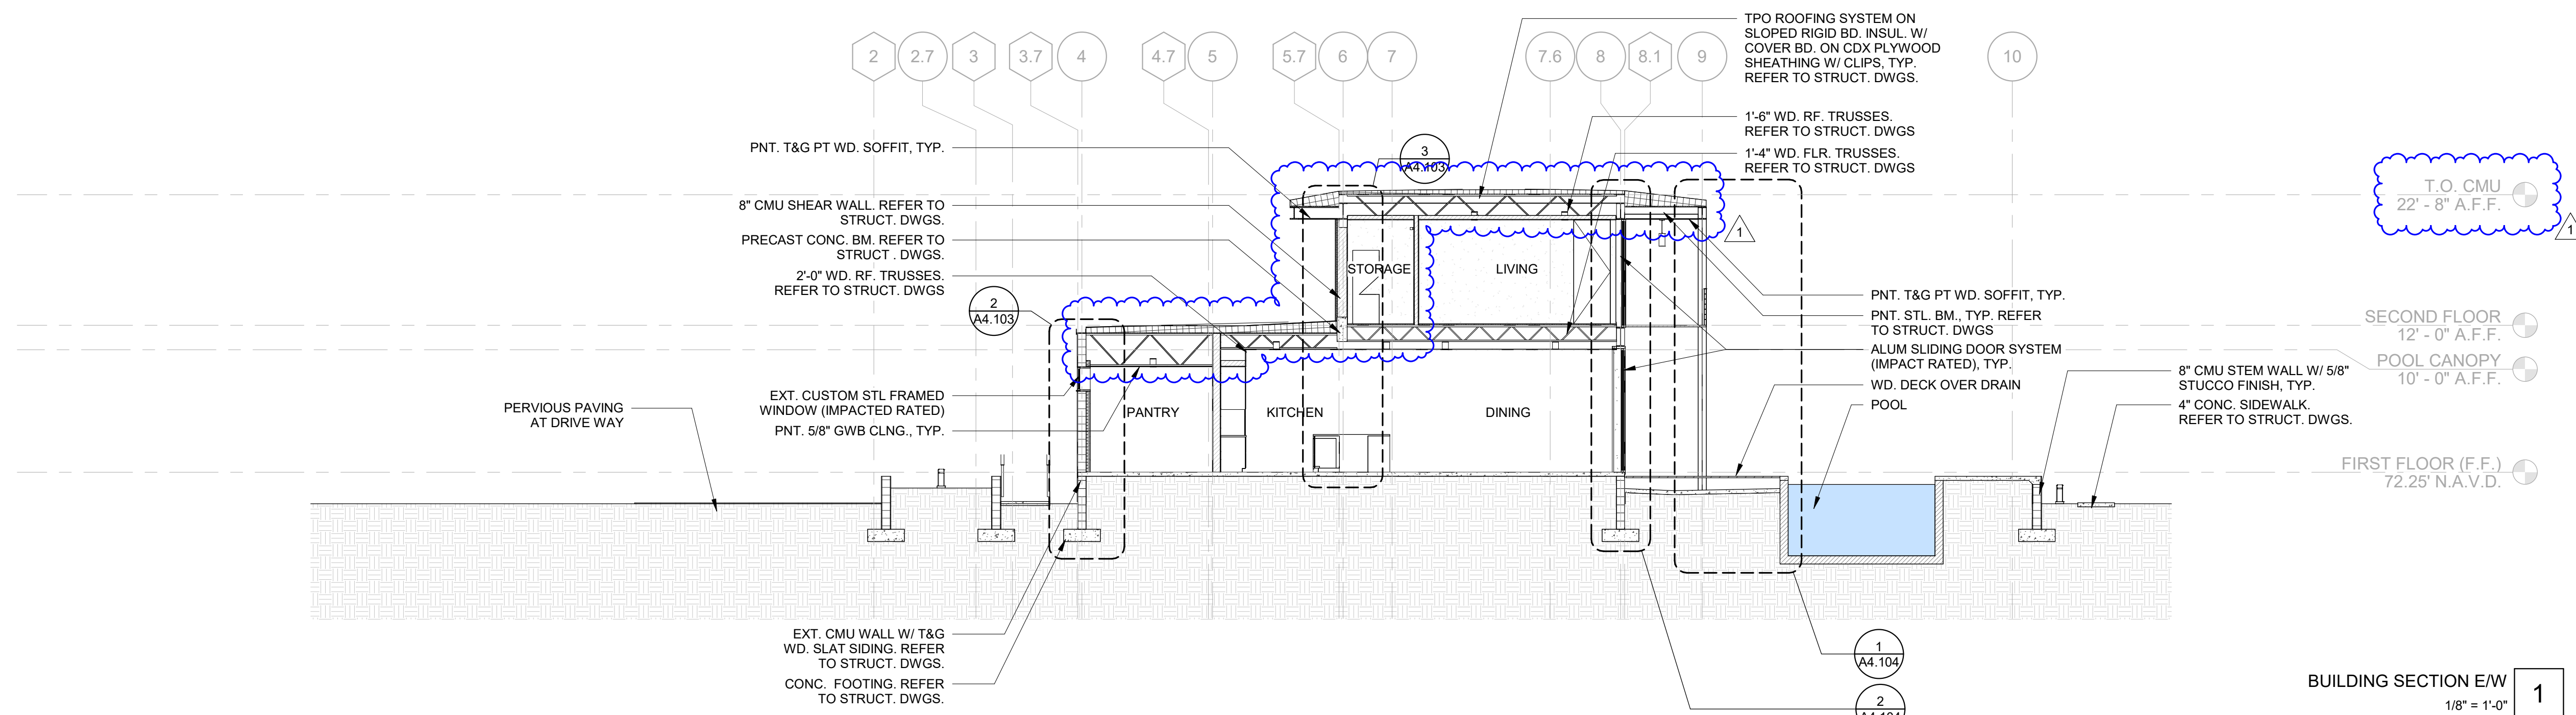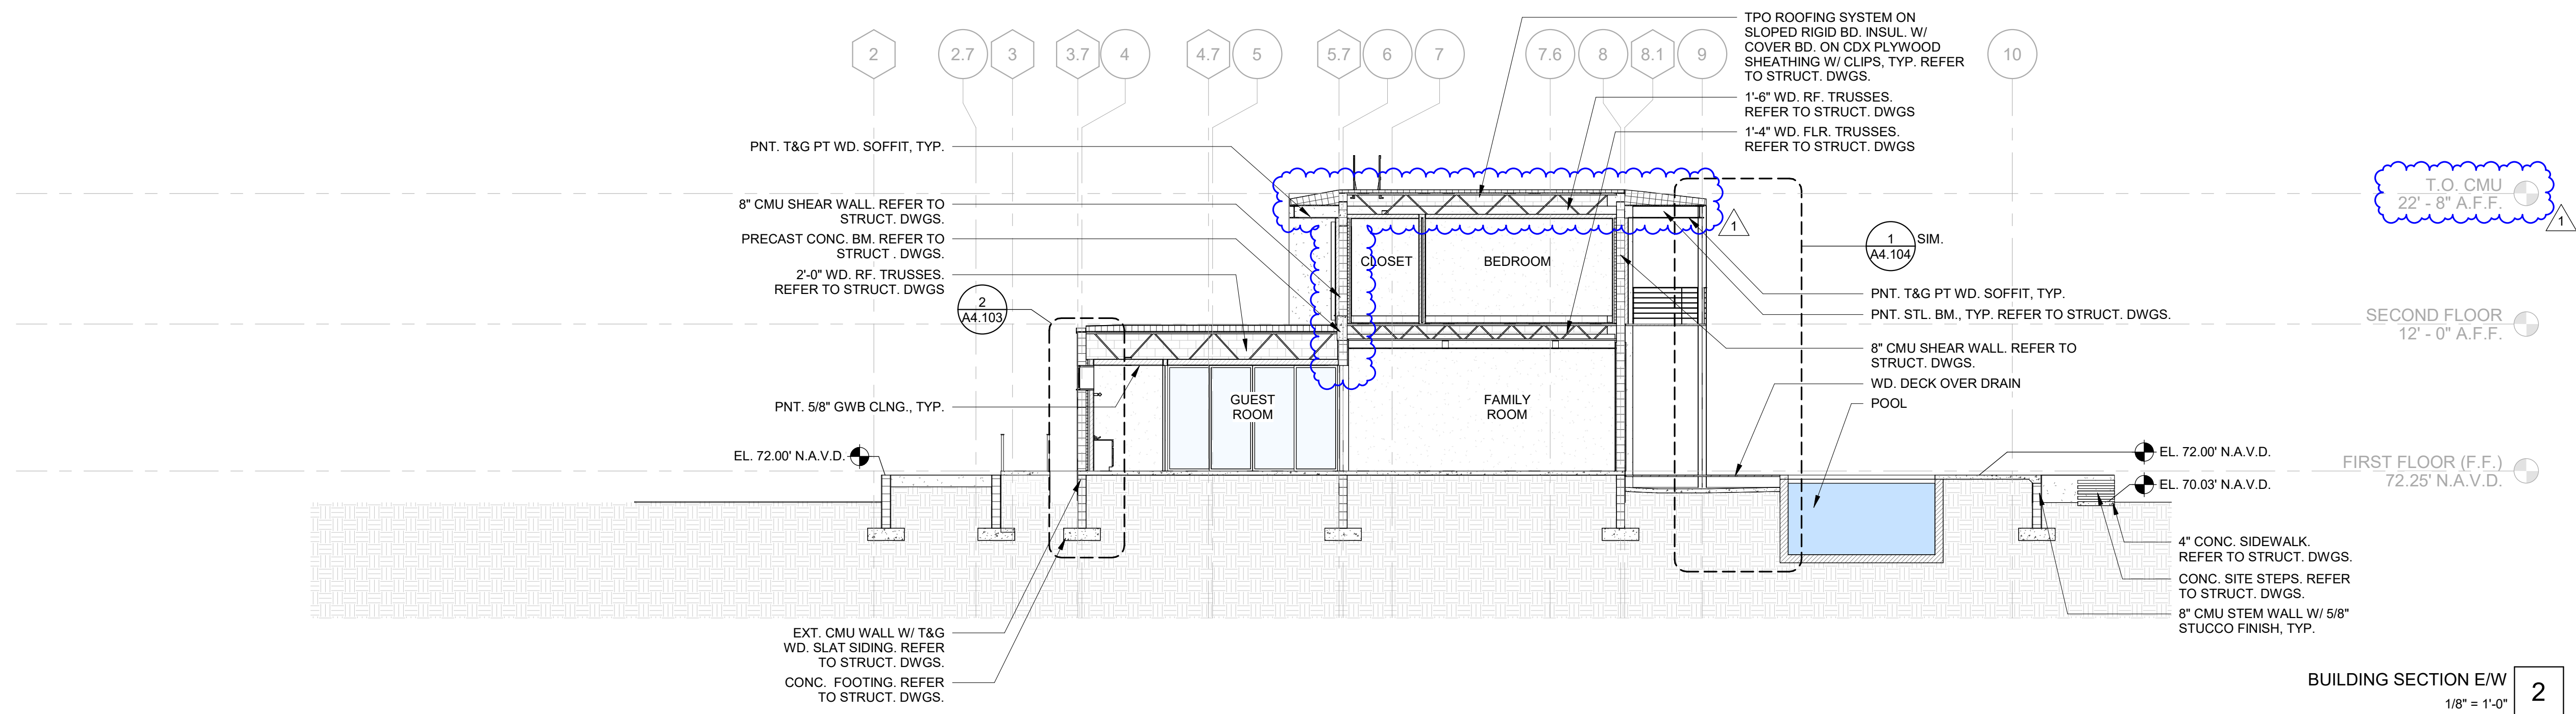

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, LLC.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET


YOUSEF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

BUILDING SECTIONS


PROJECT # 2301
ISSUE DATE 11.21.23

A3.104

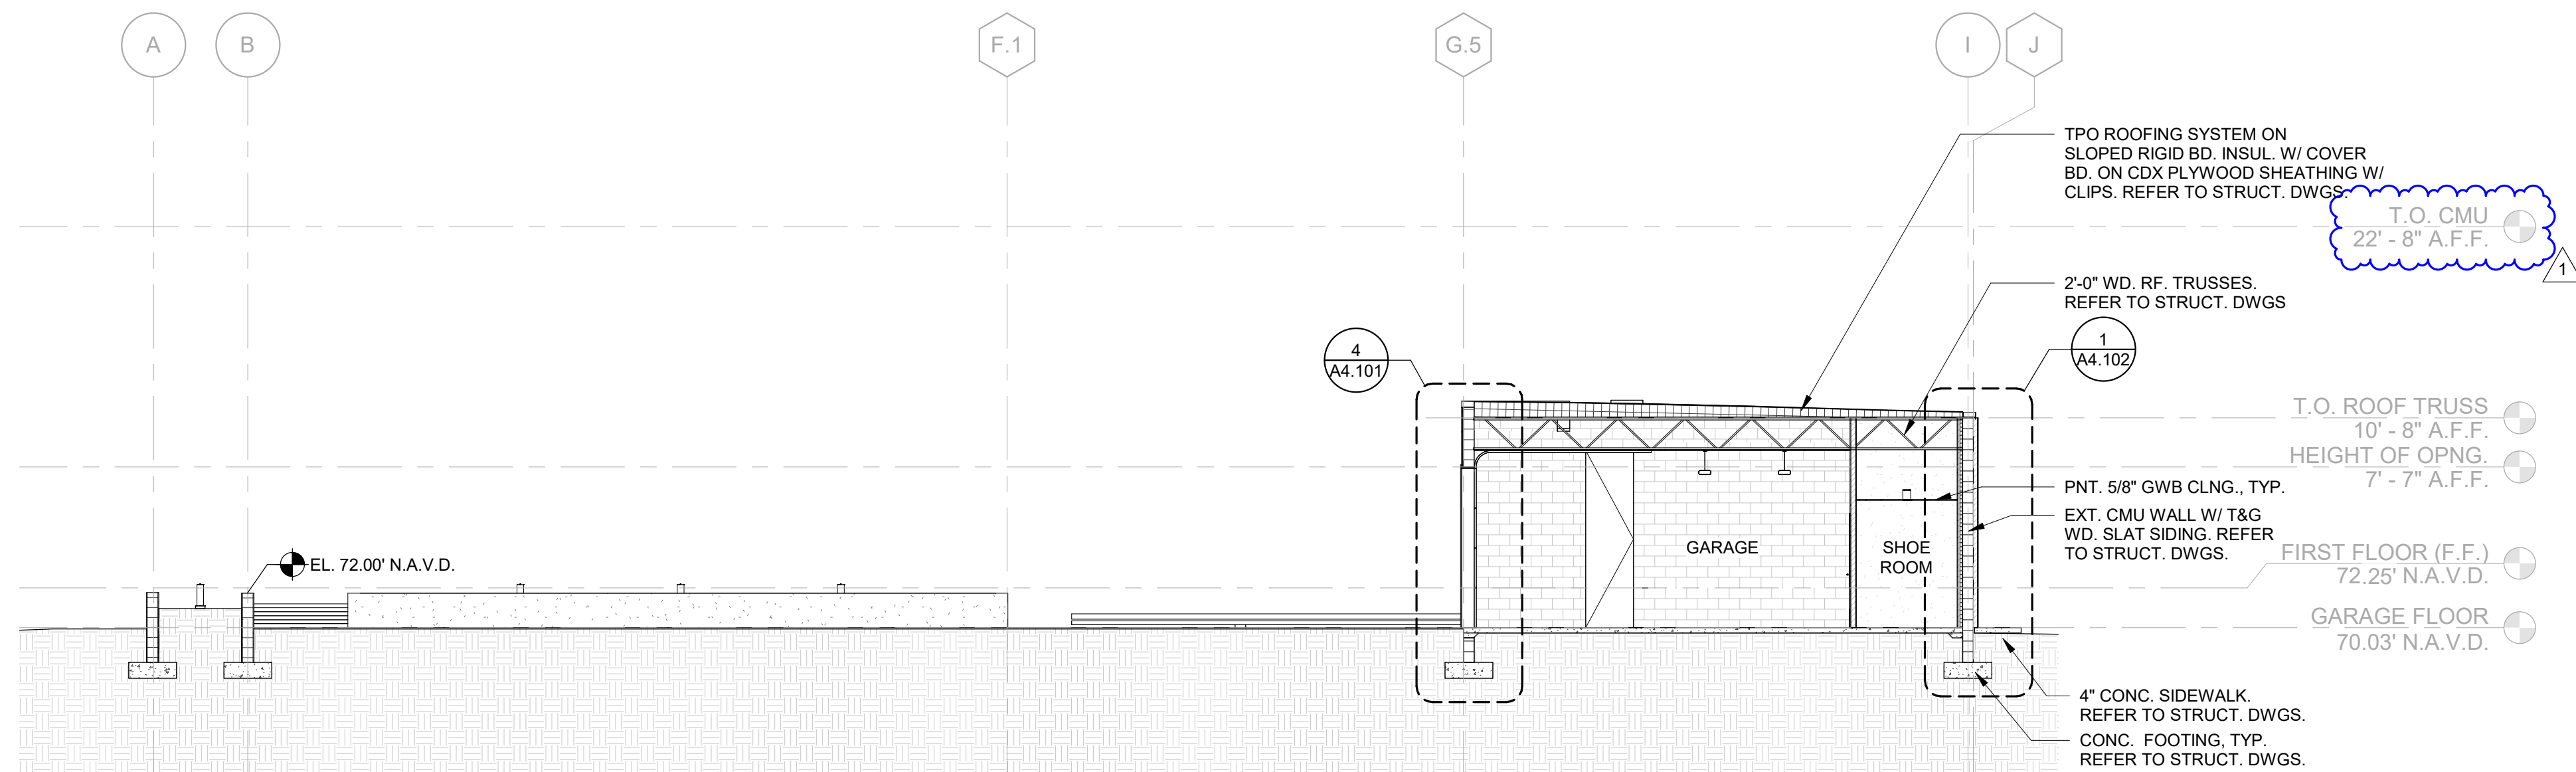

BUILDING SECTION E/W
1/8" = 1'-0"

2

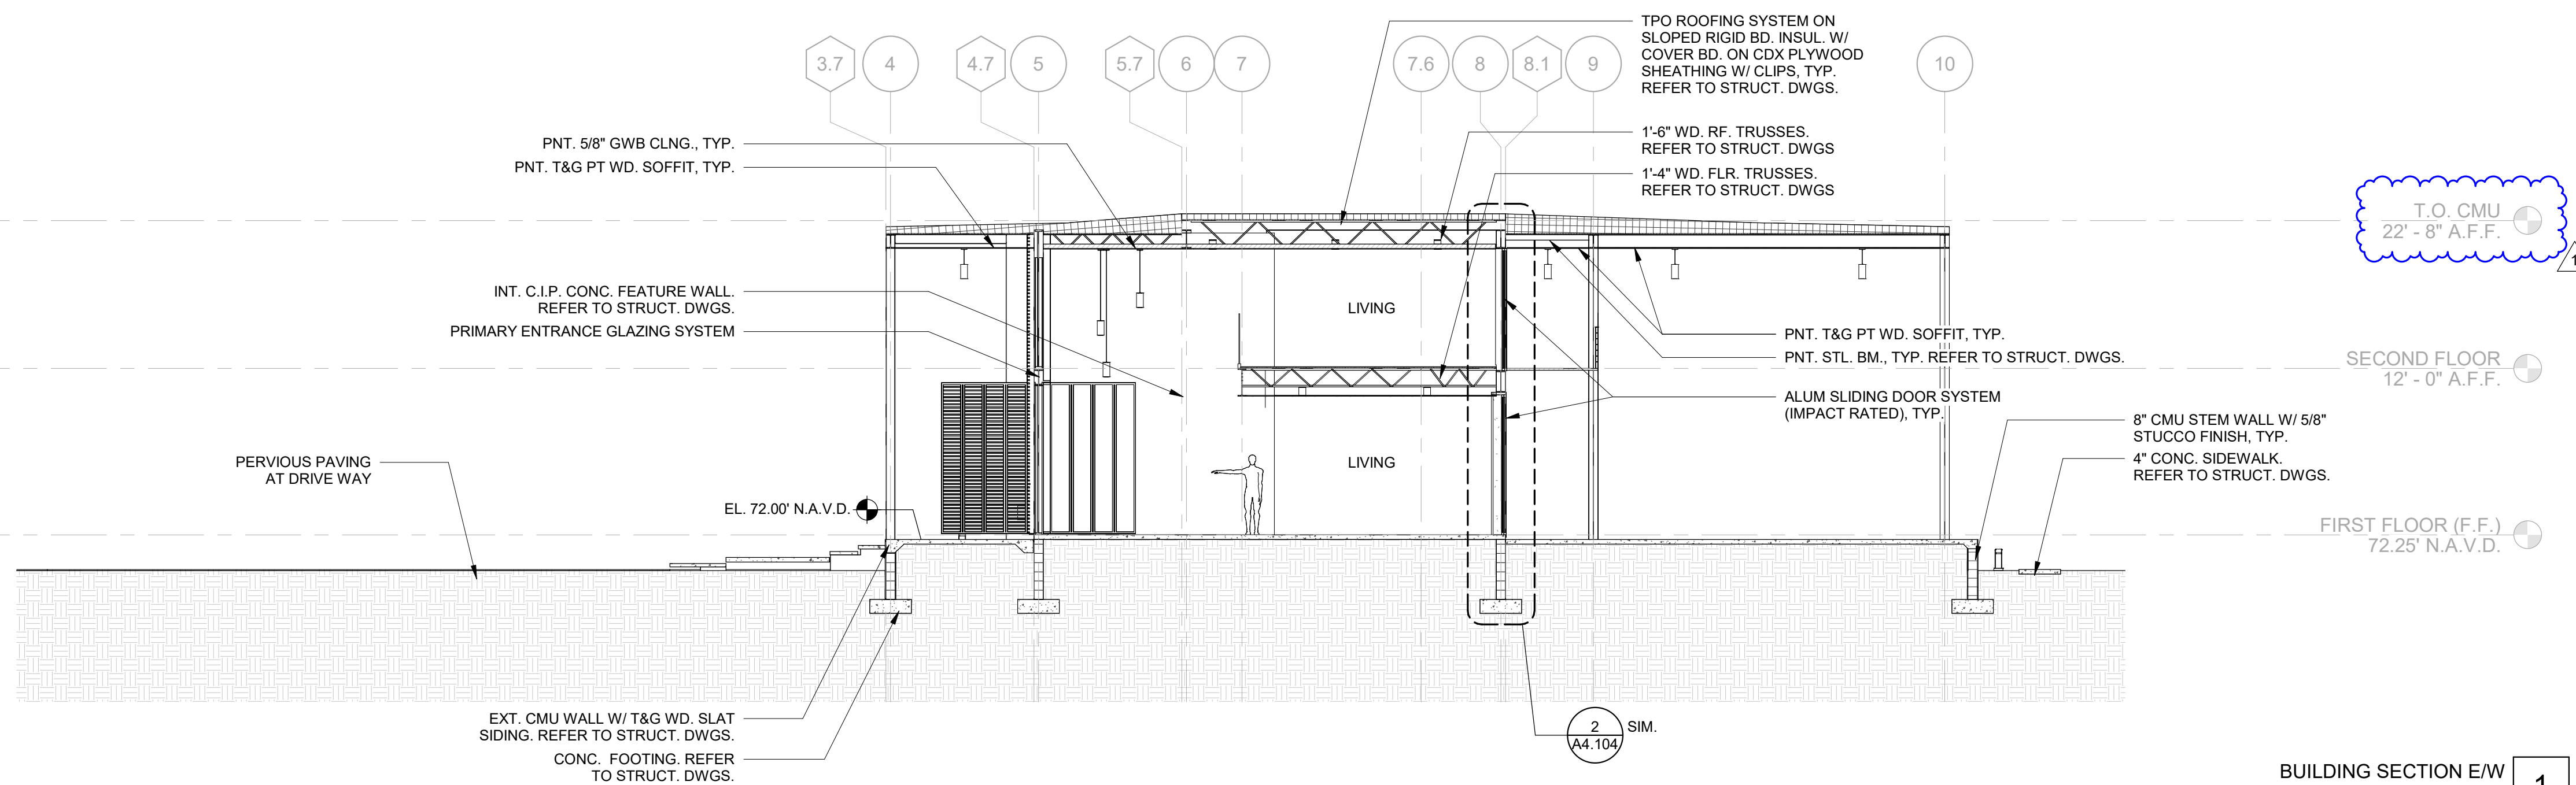

BUILDING SECTION E/W
1/8" = 1'-0"



1

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

[illegible]

BUILDING SECTIONS

PROJECT #	2301
ISSUE DATE	11.21.23



PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, LLC.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET
YOUSEF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

WALL SECTIONS


PROJECT # 2301
ISSUE DATE 11.21.23

A4.101


3/4/2025 4:31:18 PM

FIREBLOCKING SHALL BE PROVIDED IN WOOD-FRAMED CONSTRUCTION IN THE FOLLOWING LOCATIONS:


- IN CONCEALED SPACES OF STUD WALLS AND PARTITIONS, INCLUDING FURRED SPACES AND PARALLEL ROWS OF STUDS OR STAGGERED STUDS, AS FOLLOWS:
 - VERTICALLY AT THE CEILING AND FLOOR LEVELS.
 - HORIZONTALLY AT INTERVALS NOT EXCEEDING 10 FEET (3048 MM).
- AT INTERCONNECTIONS BETWEEN CONCEALED VERTICAL AND HORIZONTAL SPACES AT SOFFITS, DROP CEILINGS AND COVE CEILINGS.

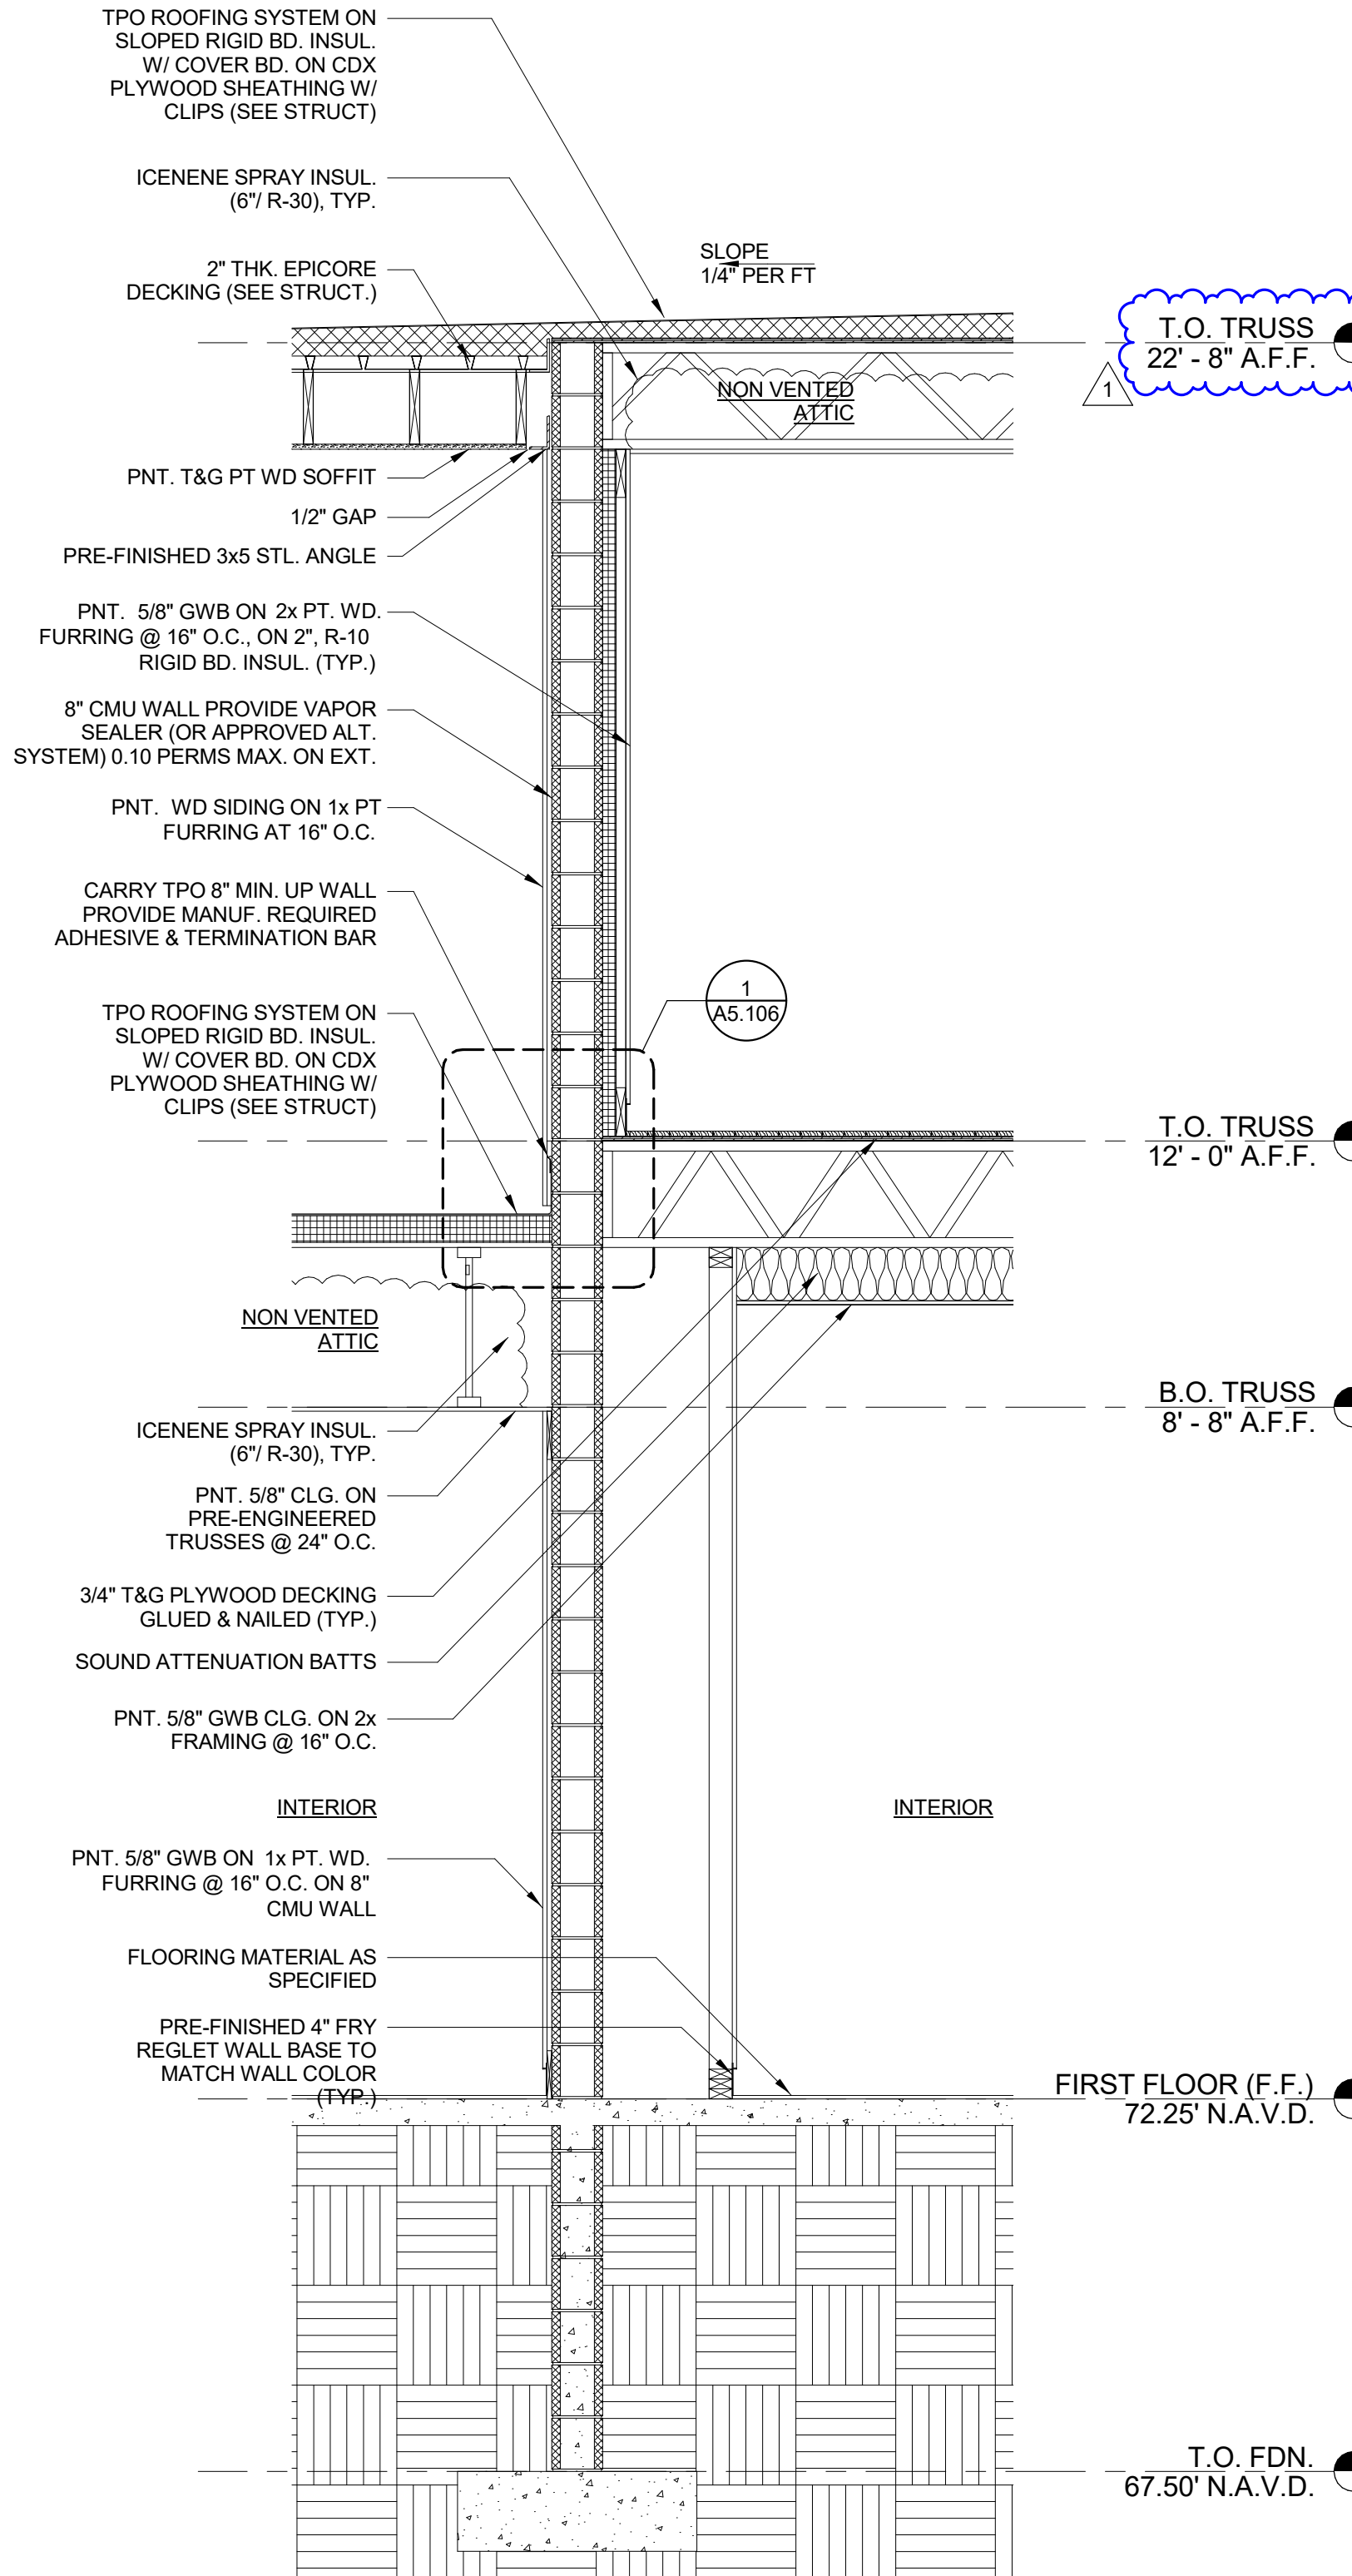


WALL SECTION 1
1/2" = 1'-0"

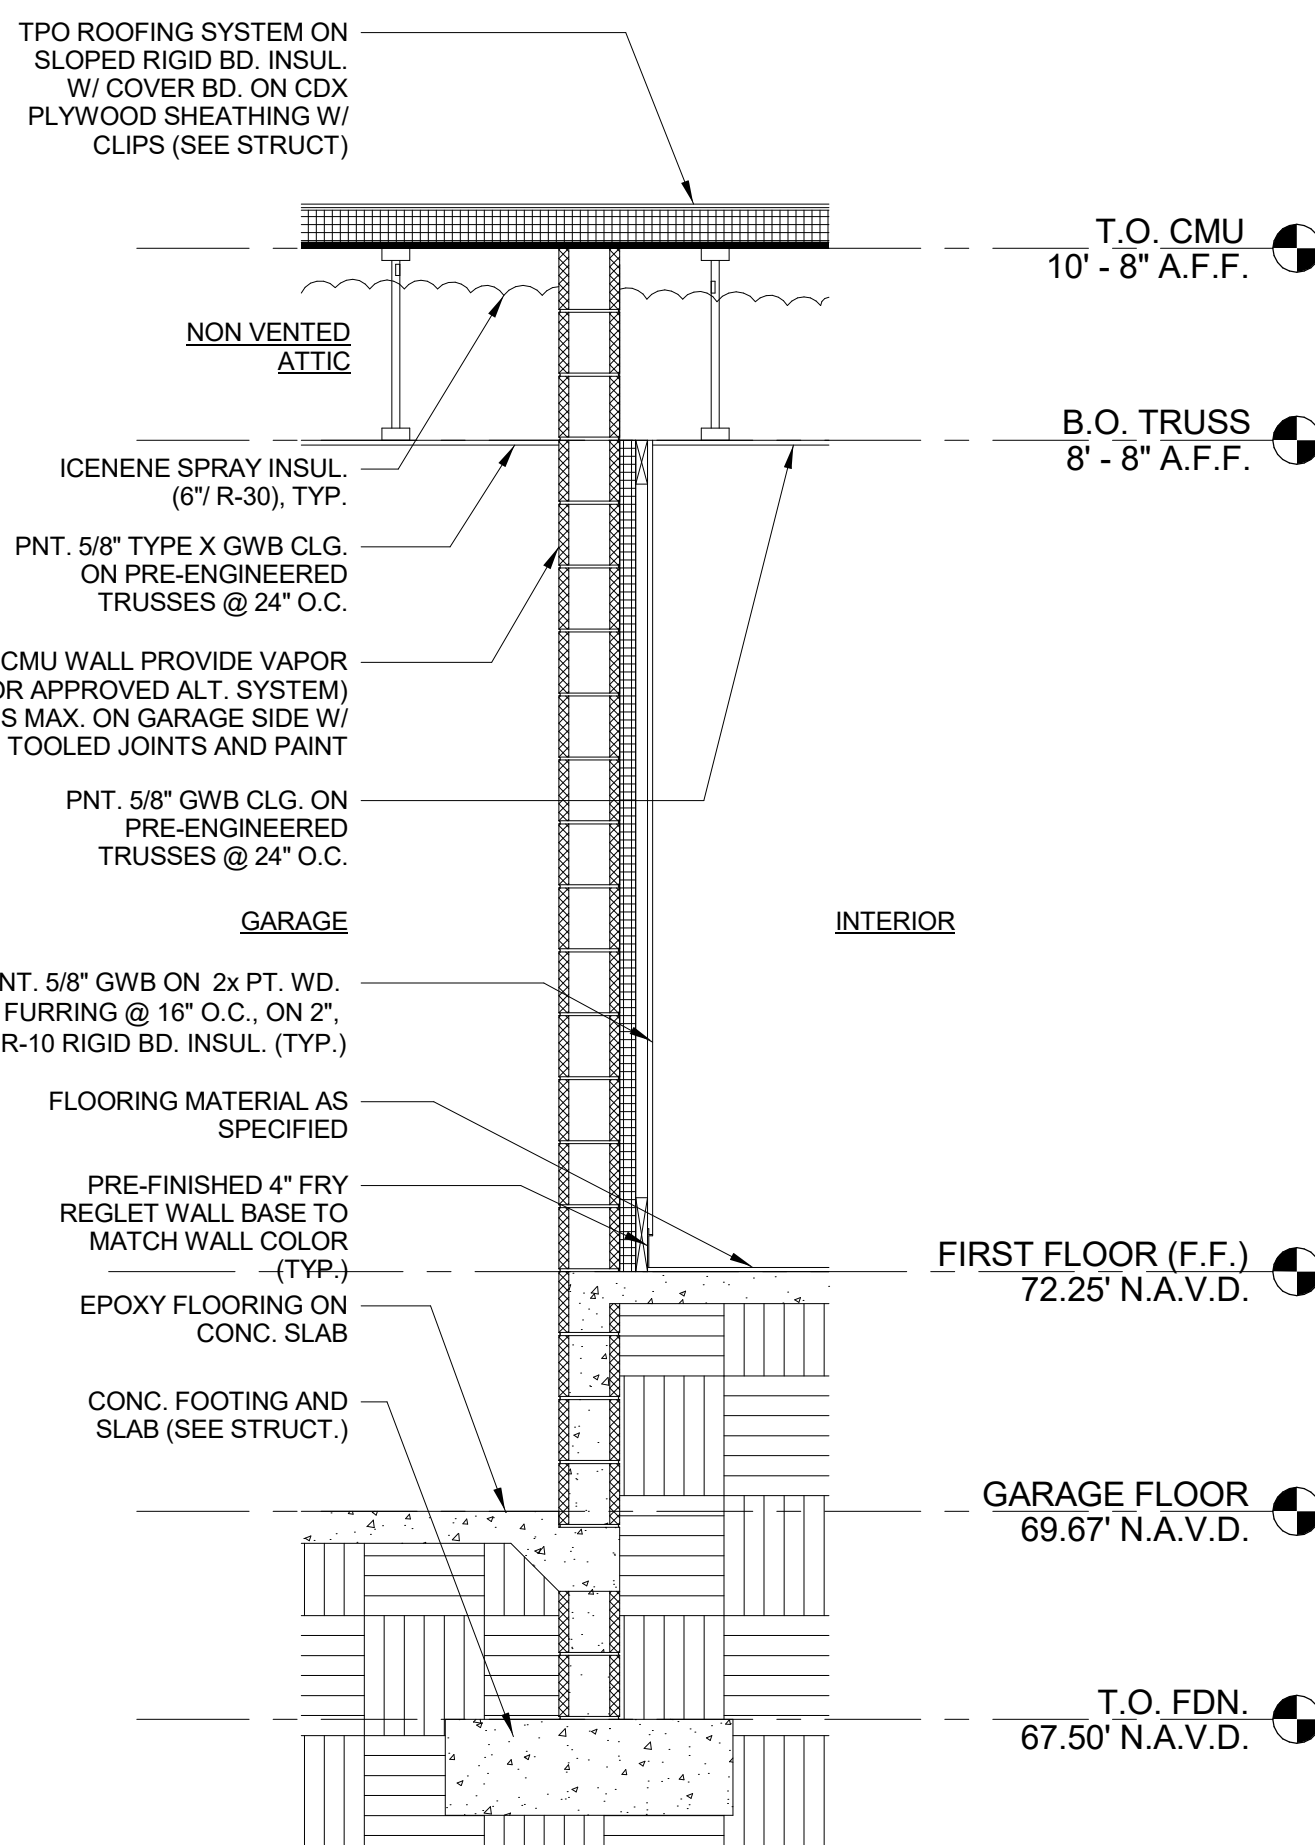

WALL SECTION 2
1/2" = 1'-0"

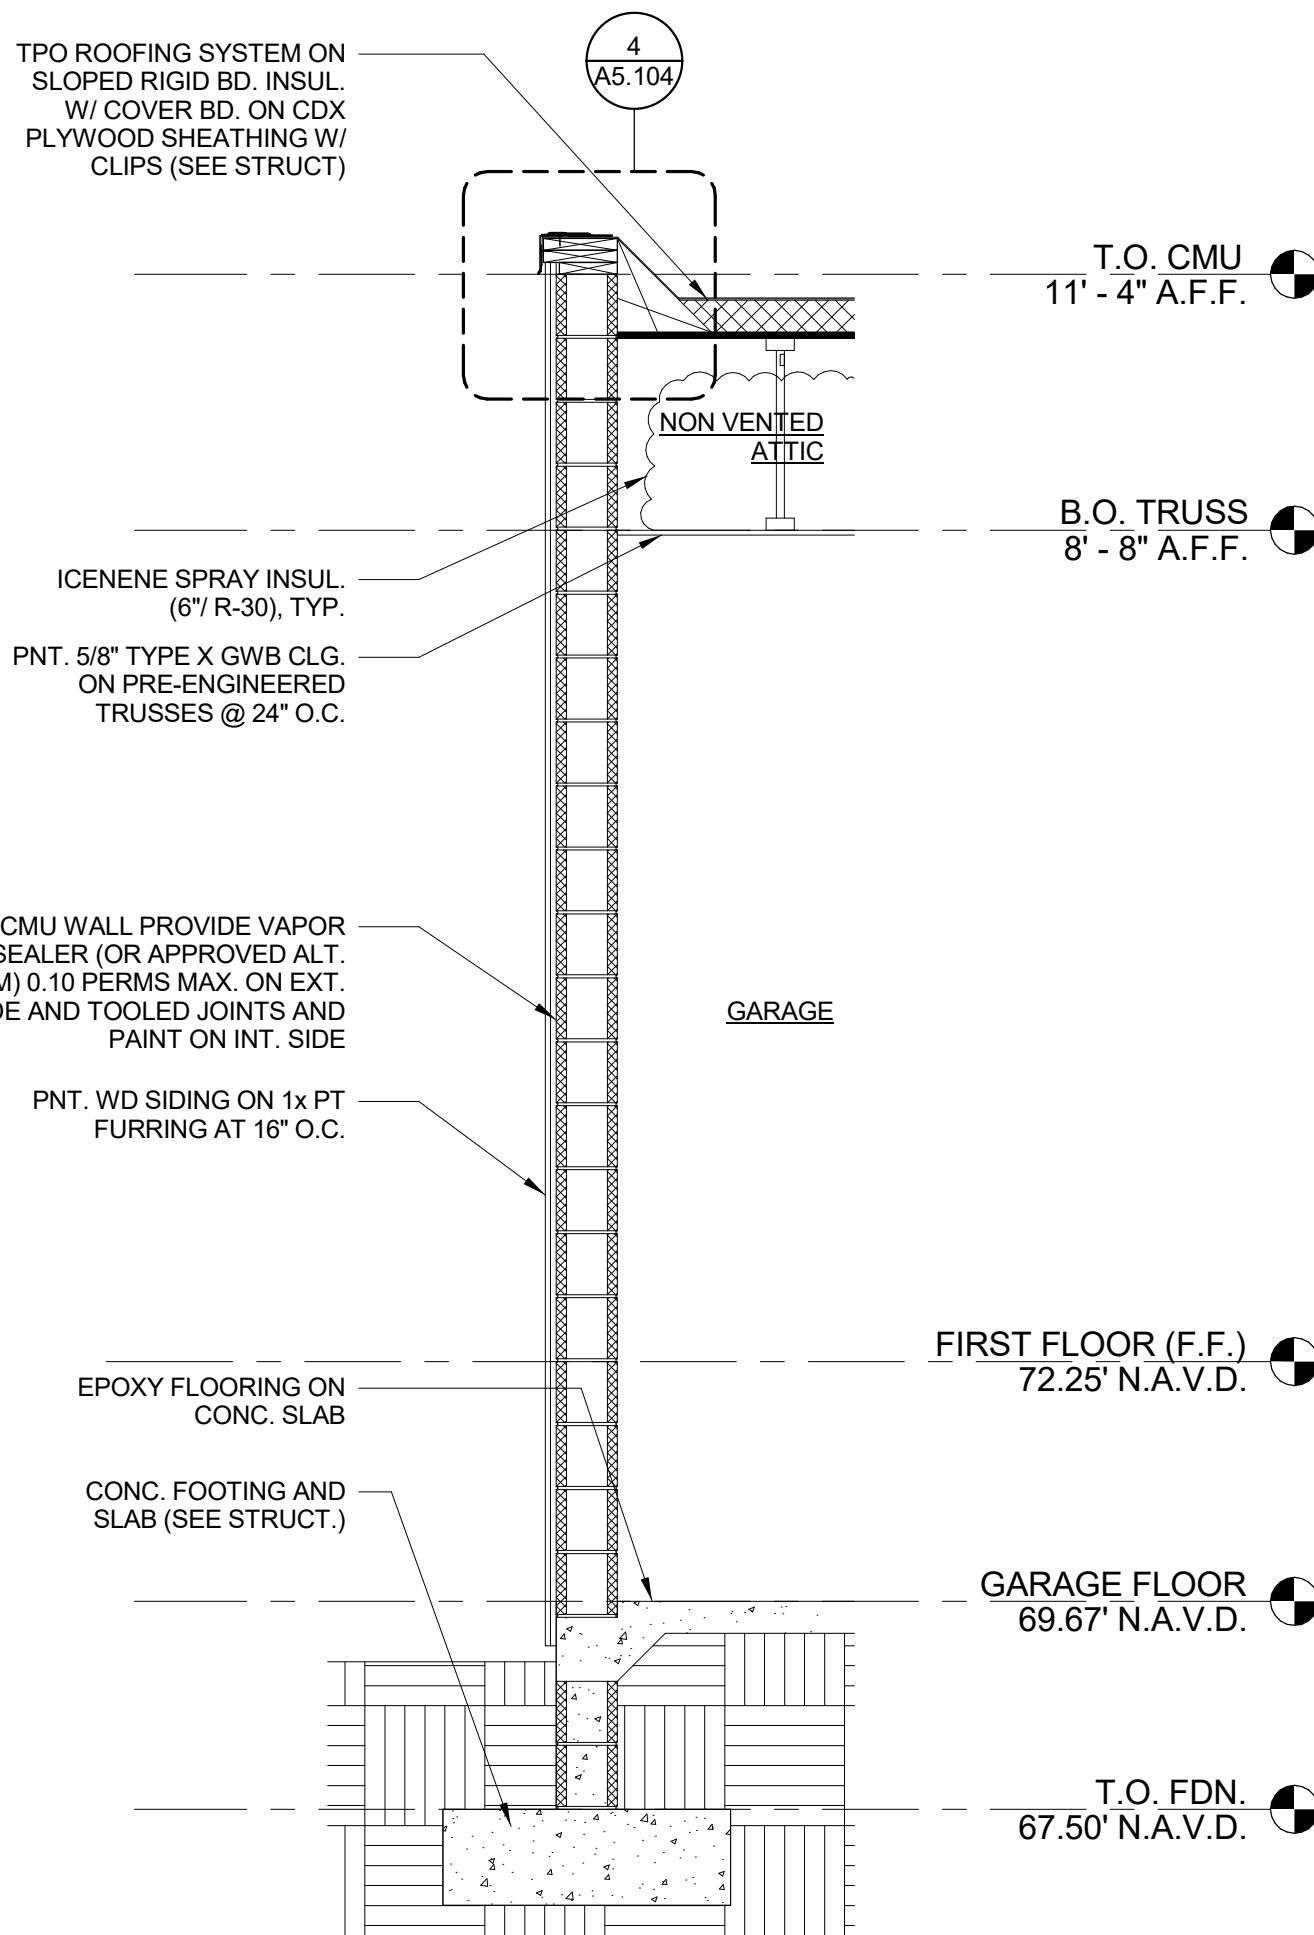

WALL SECTION 3
1/2" = 1'-0"

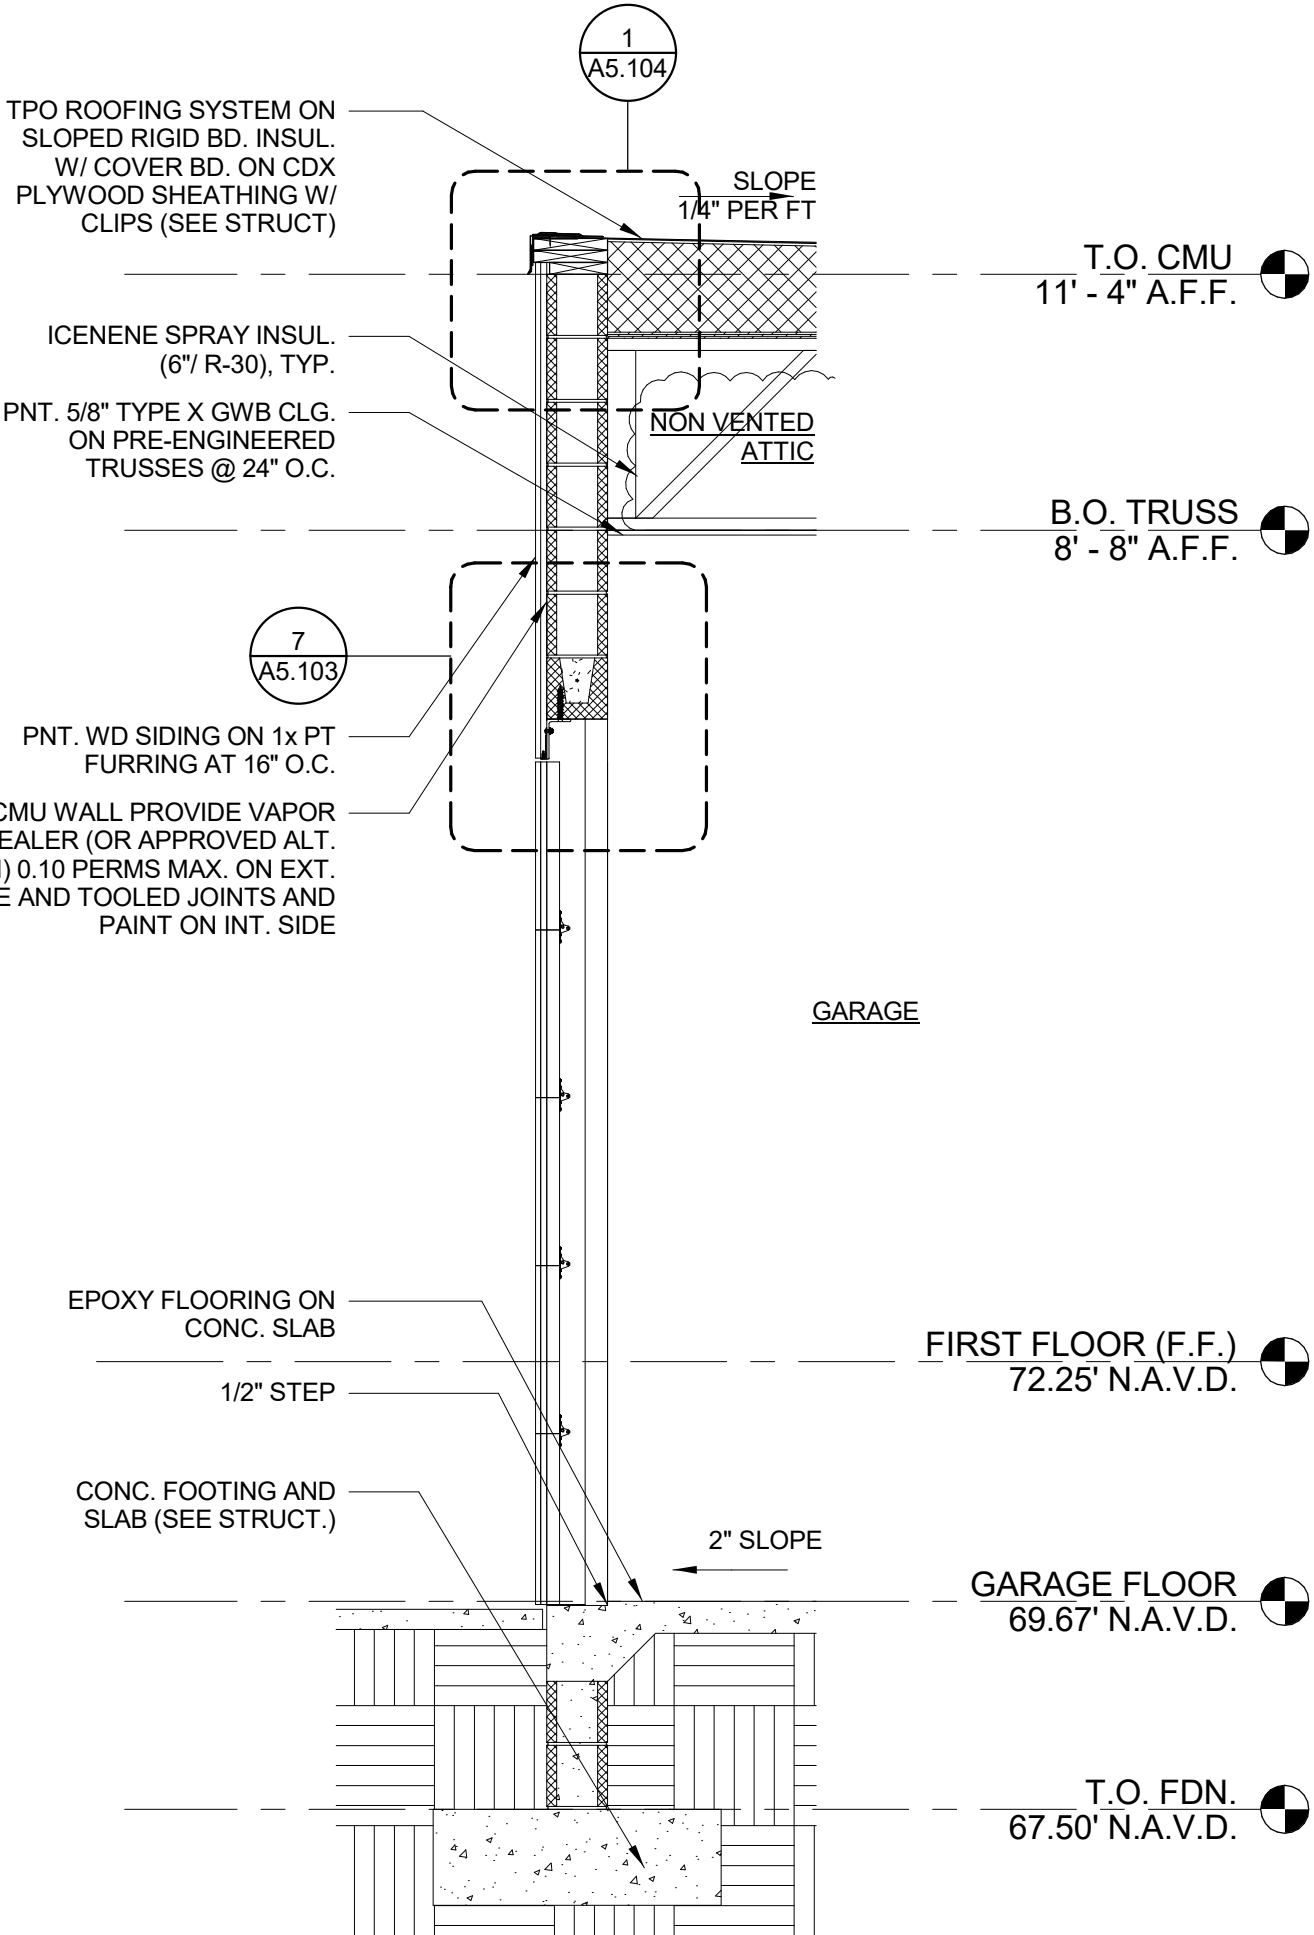

WALL SECTION @ GARAGE DOOR 4
1/2" = 1'-0"

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, L.L.C.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET

YOUSEF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13




WALL SECTIONS

PROJECT #	2301
ISSUE DATE	11.21.23

A4.102

FIREBLOCKING SHALL BE PROVIDED IN WOOD-FRAMED CONSTRUCTION IN THE FOLLOWING LOCATIONS:

- IN CONCEALED SPACES OF STUD WALLS AND PARTITIONS, INCLUDING FURRED SPACES AND PARALLEL ROWS OF STUDS OR STAGGERED STUDS, AS FOLLOWS:
 - VERTICALLY AT THE CEILING AND FLOOR LEVELS.
 - HORIZONTALLY AT INTERVALS NOT EXCEEDING 10 FEET (3048 MM), AT INTERCONNECTIONS BETWEEN CONCEALED VERTICAL AND HORIZONTAL SPACES AT SOFFITS, DROP CEILINGS AND COVE CEILINGS.

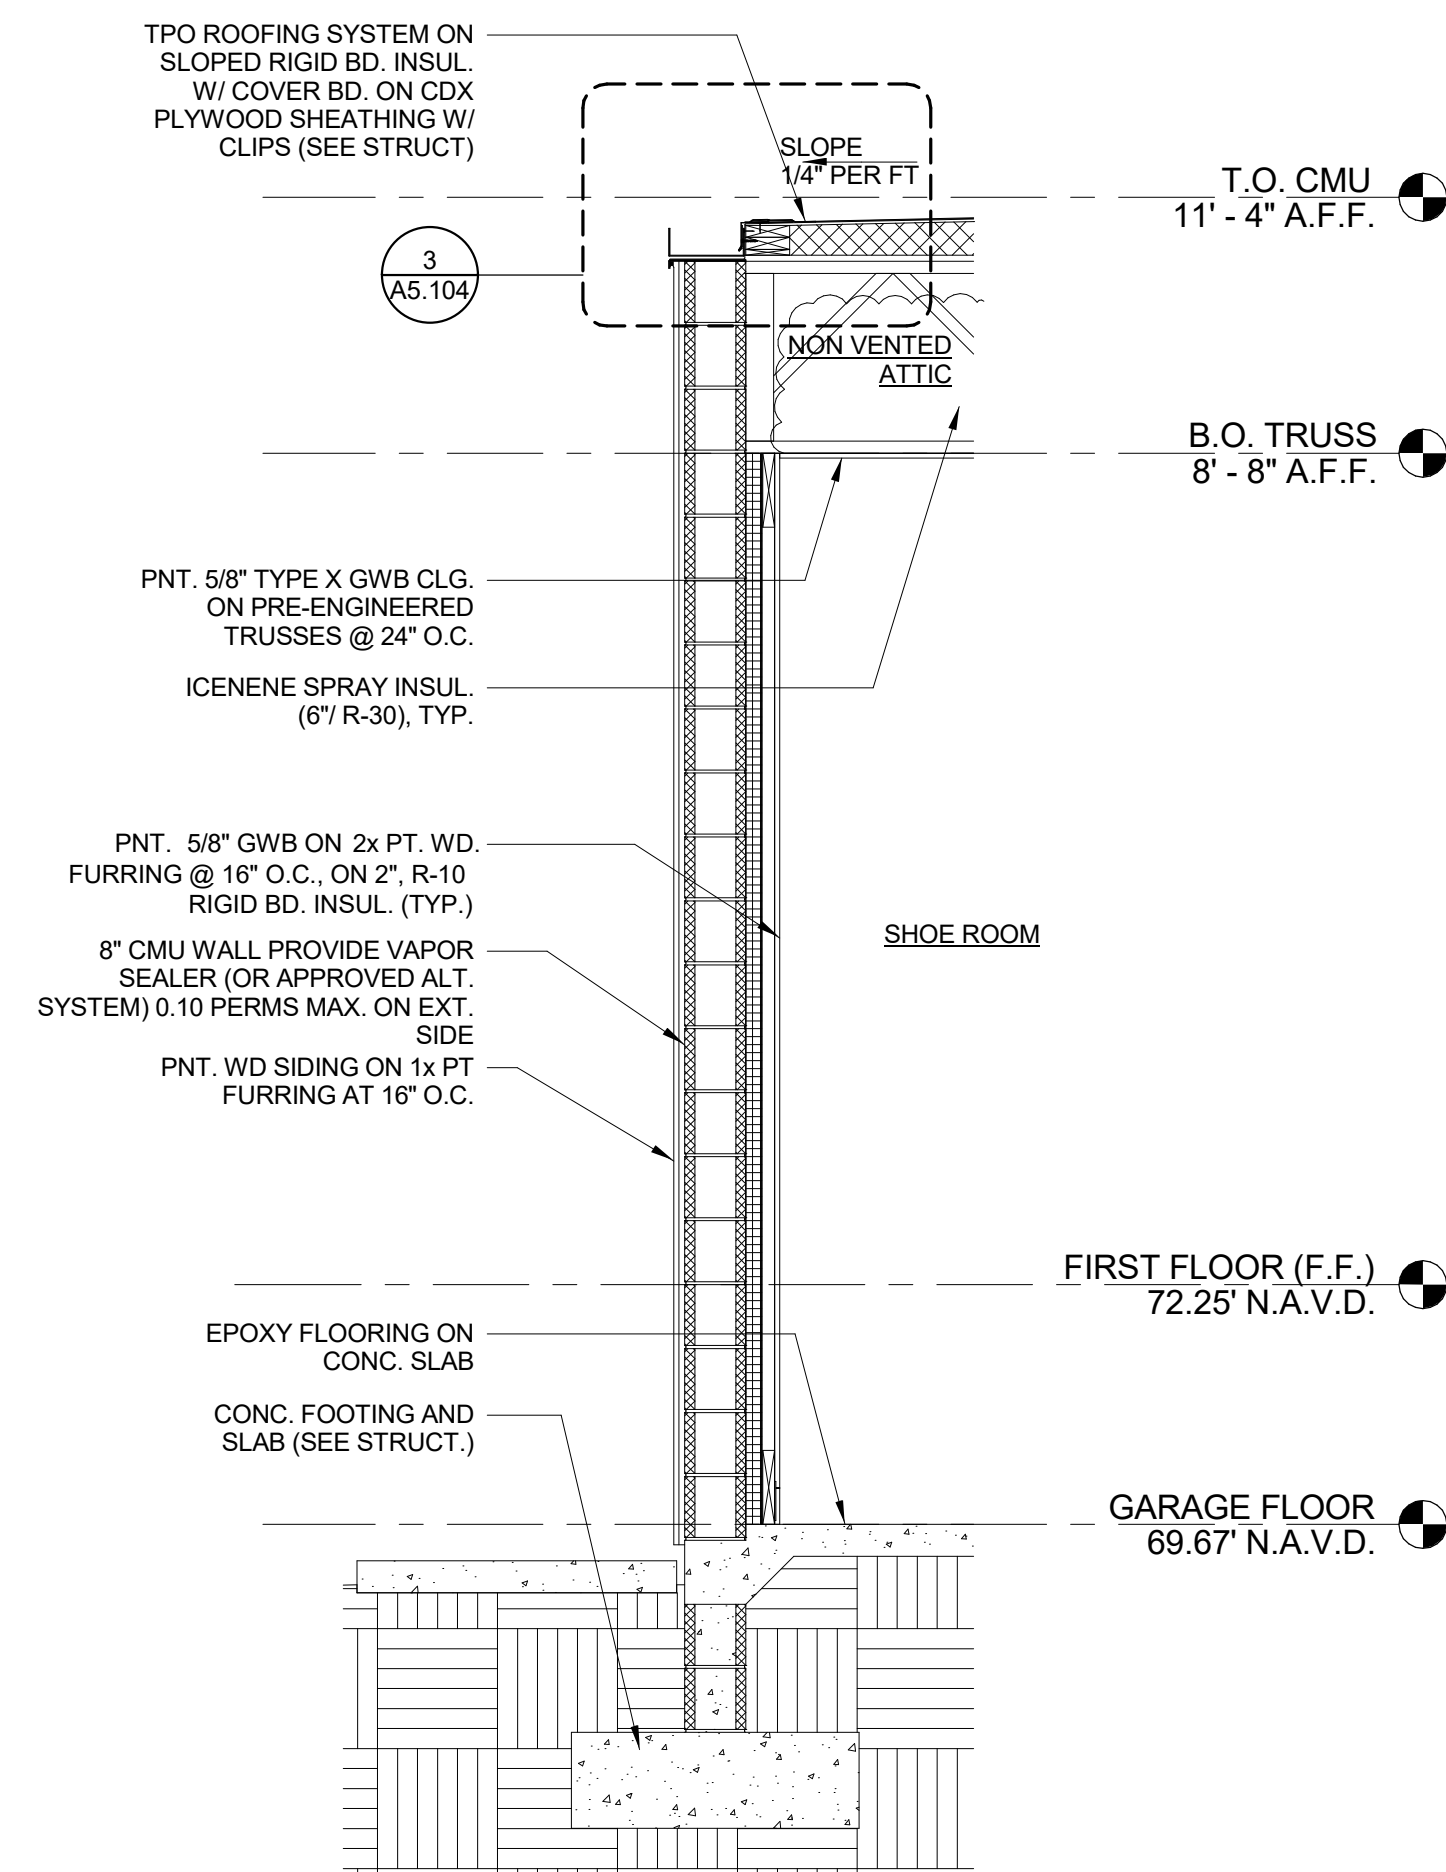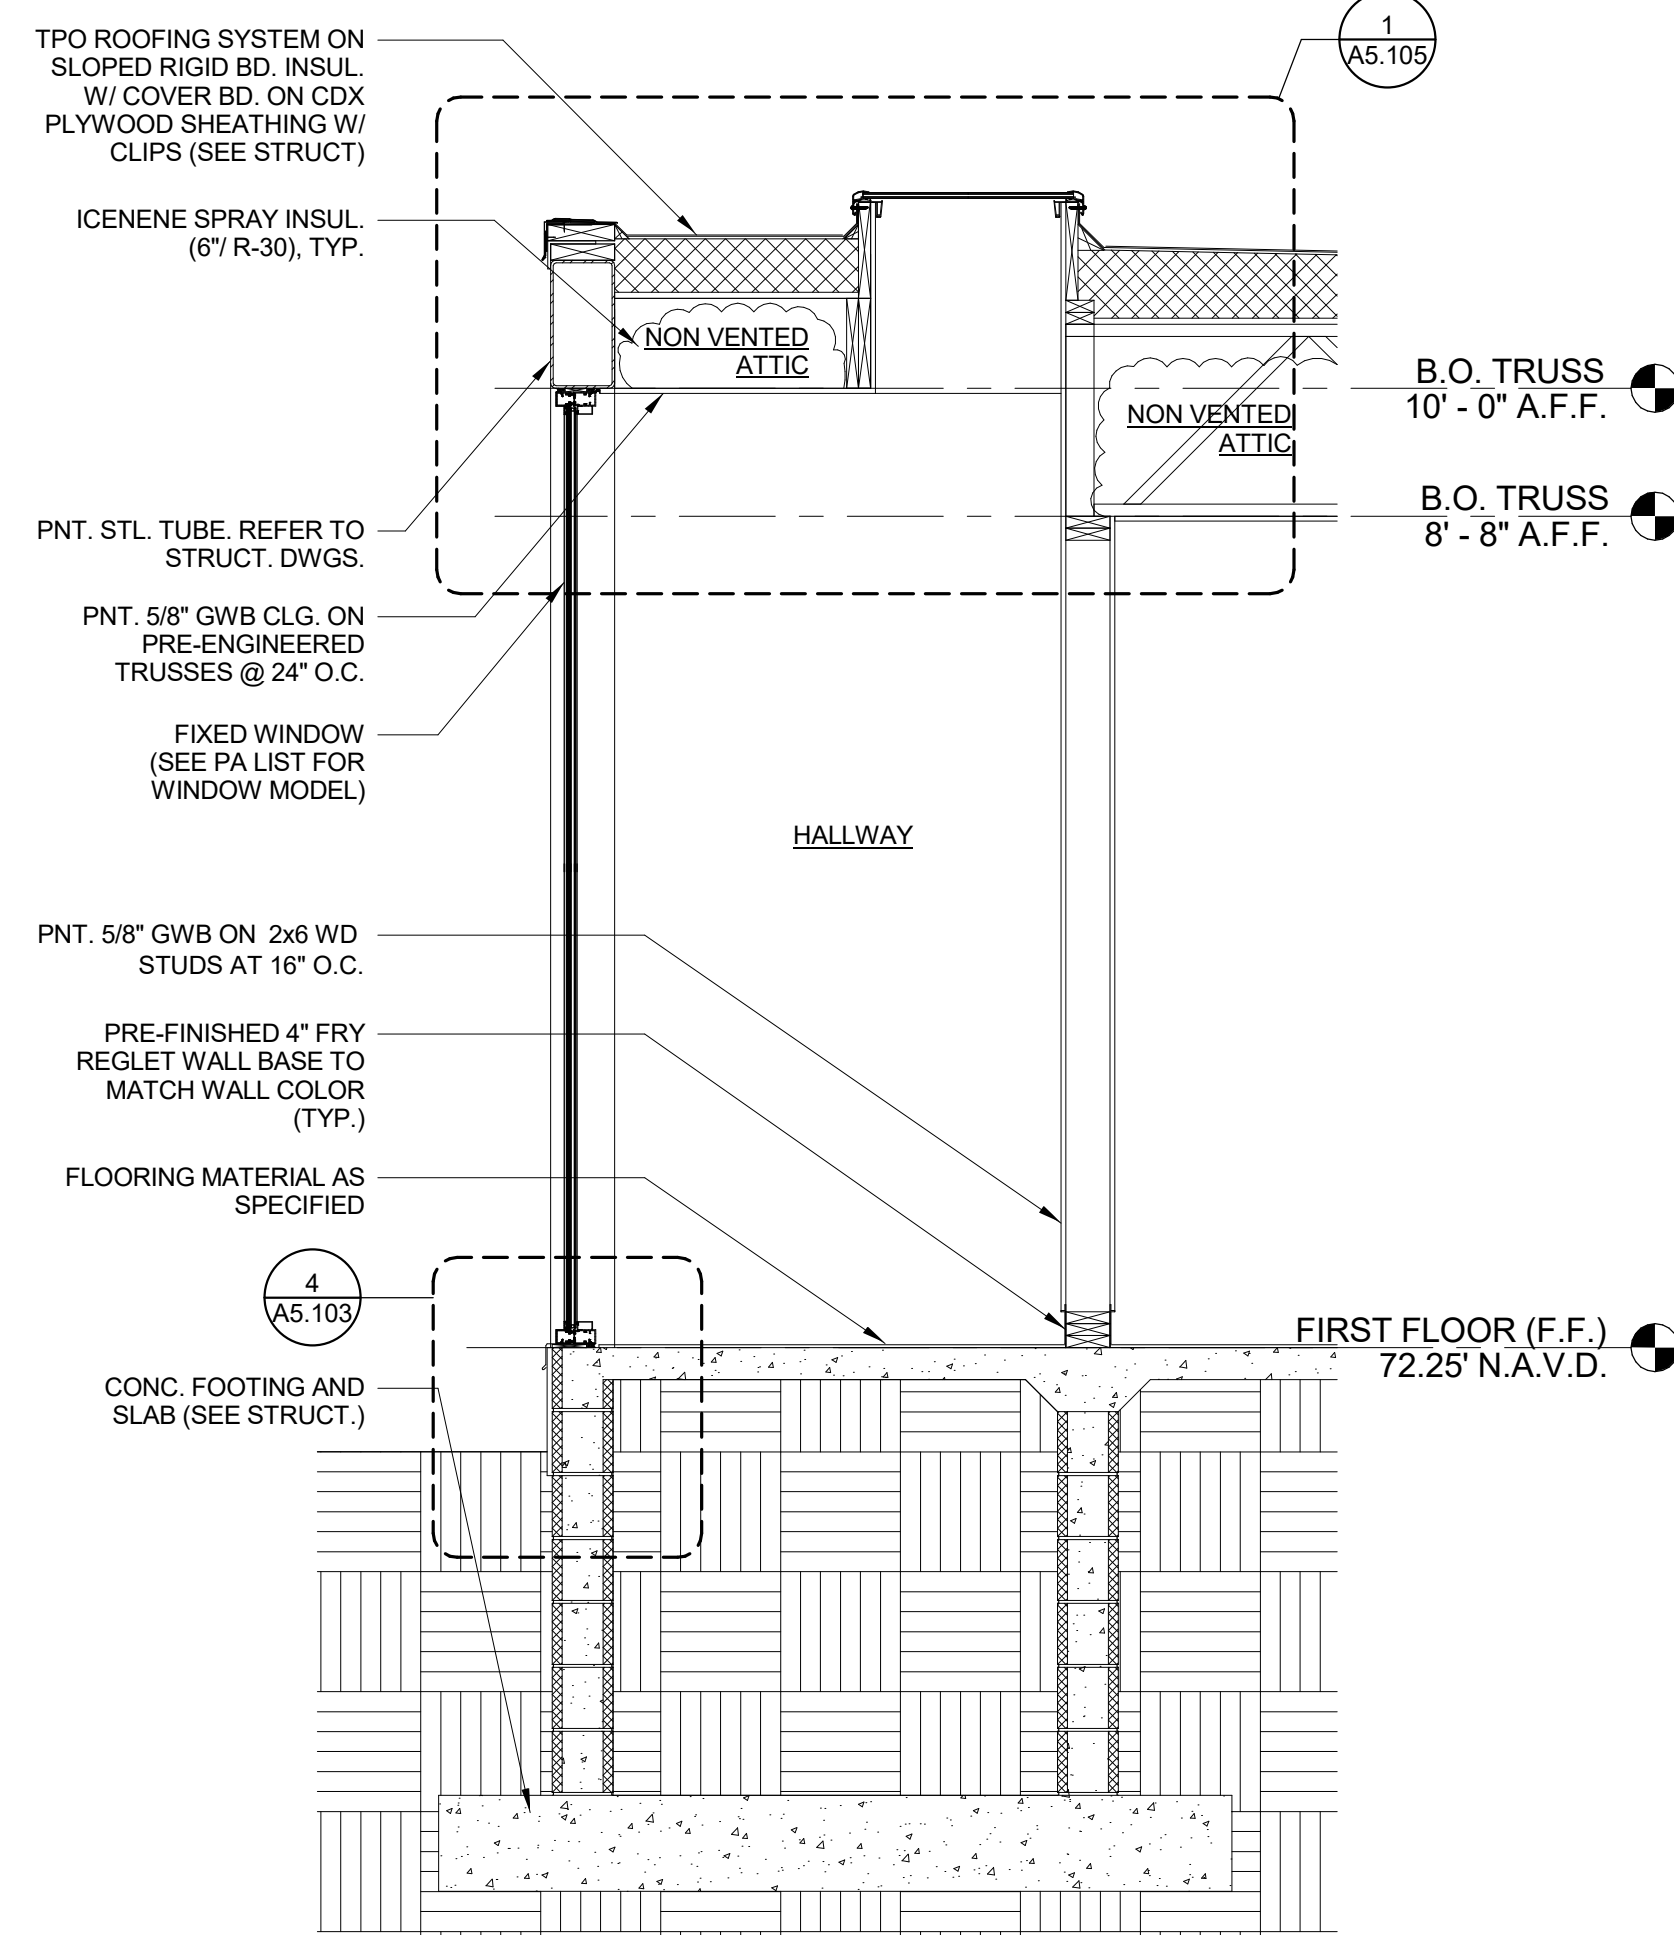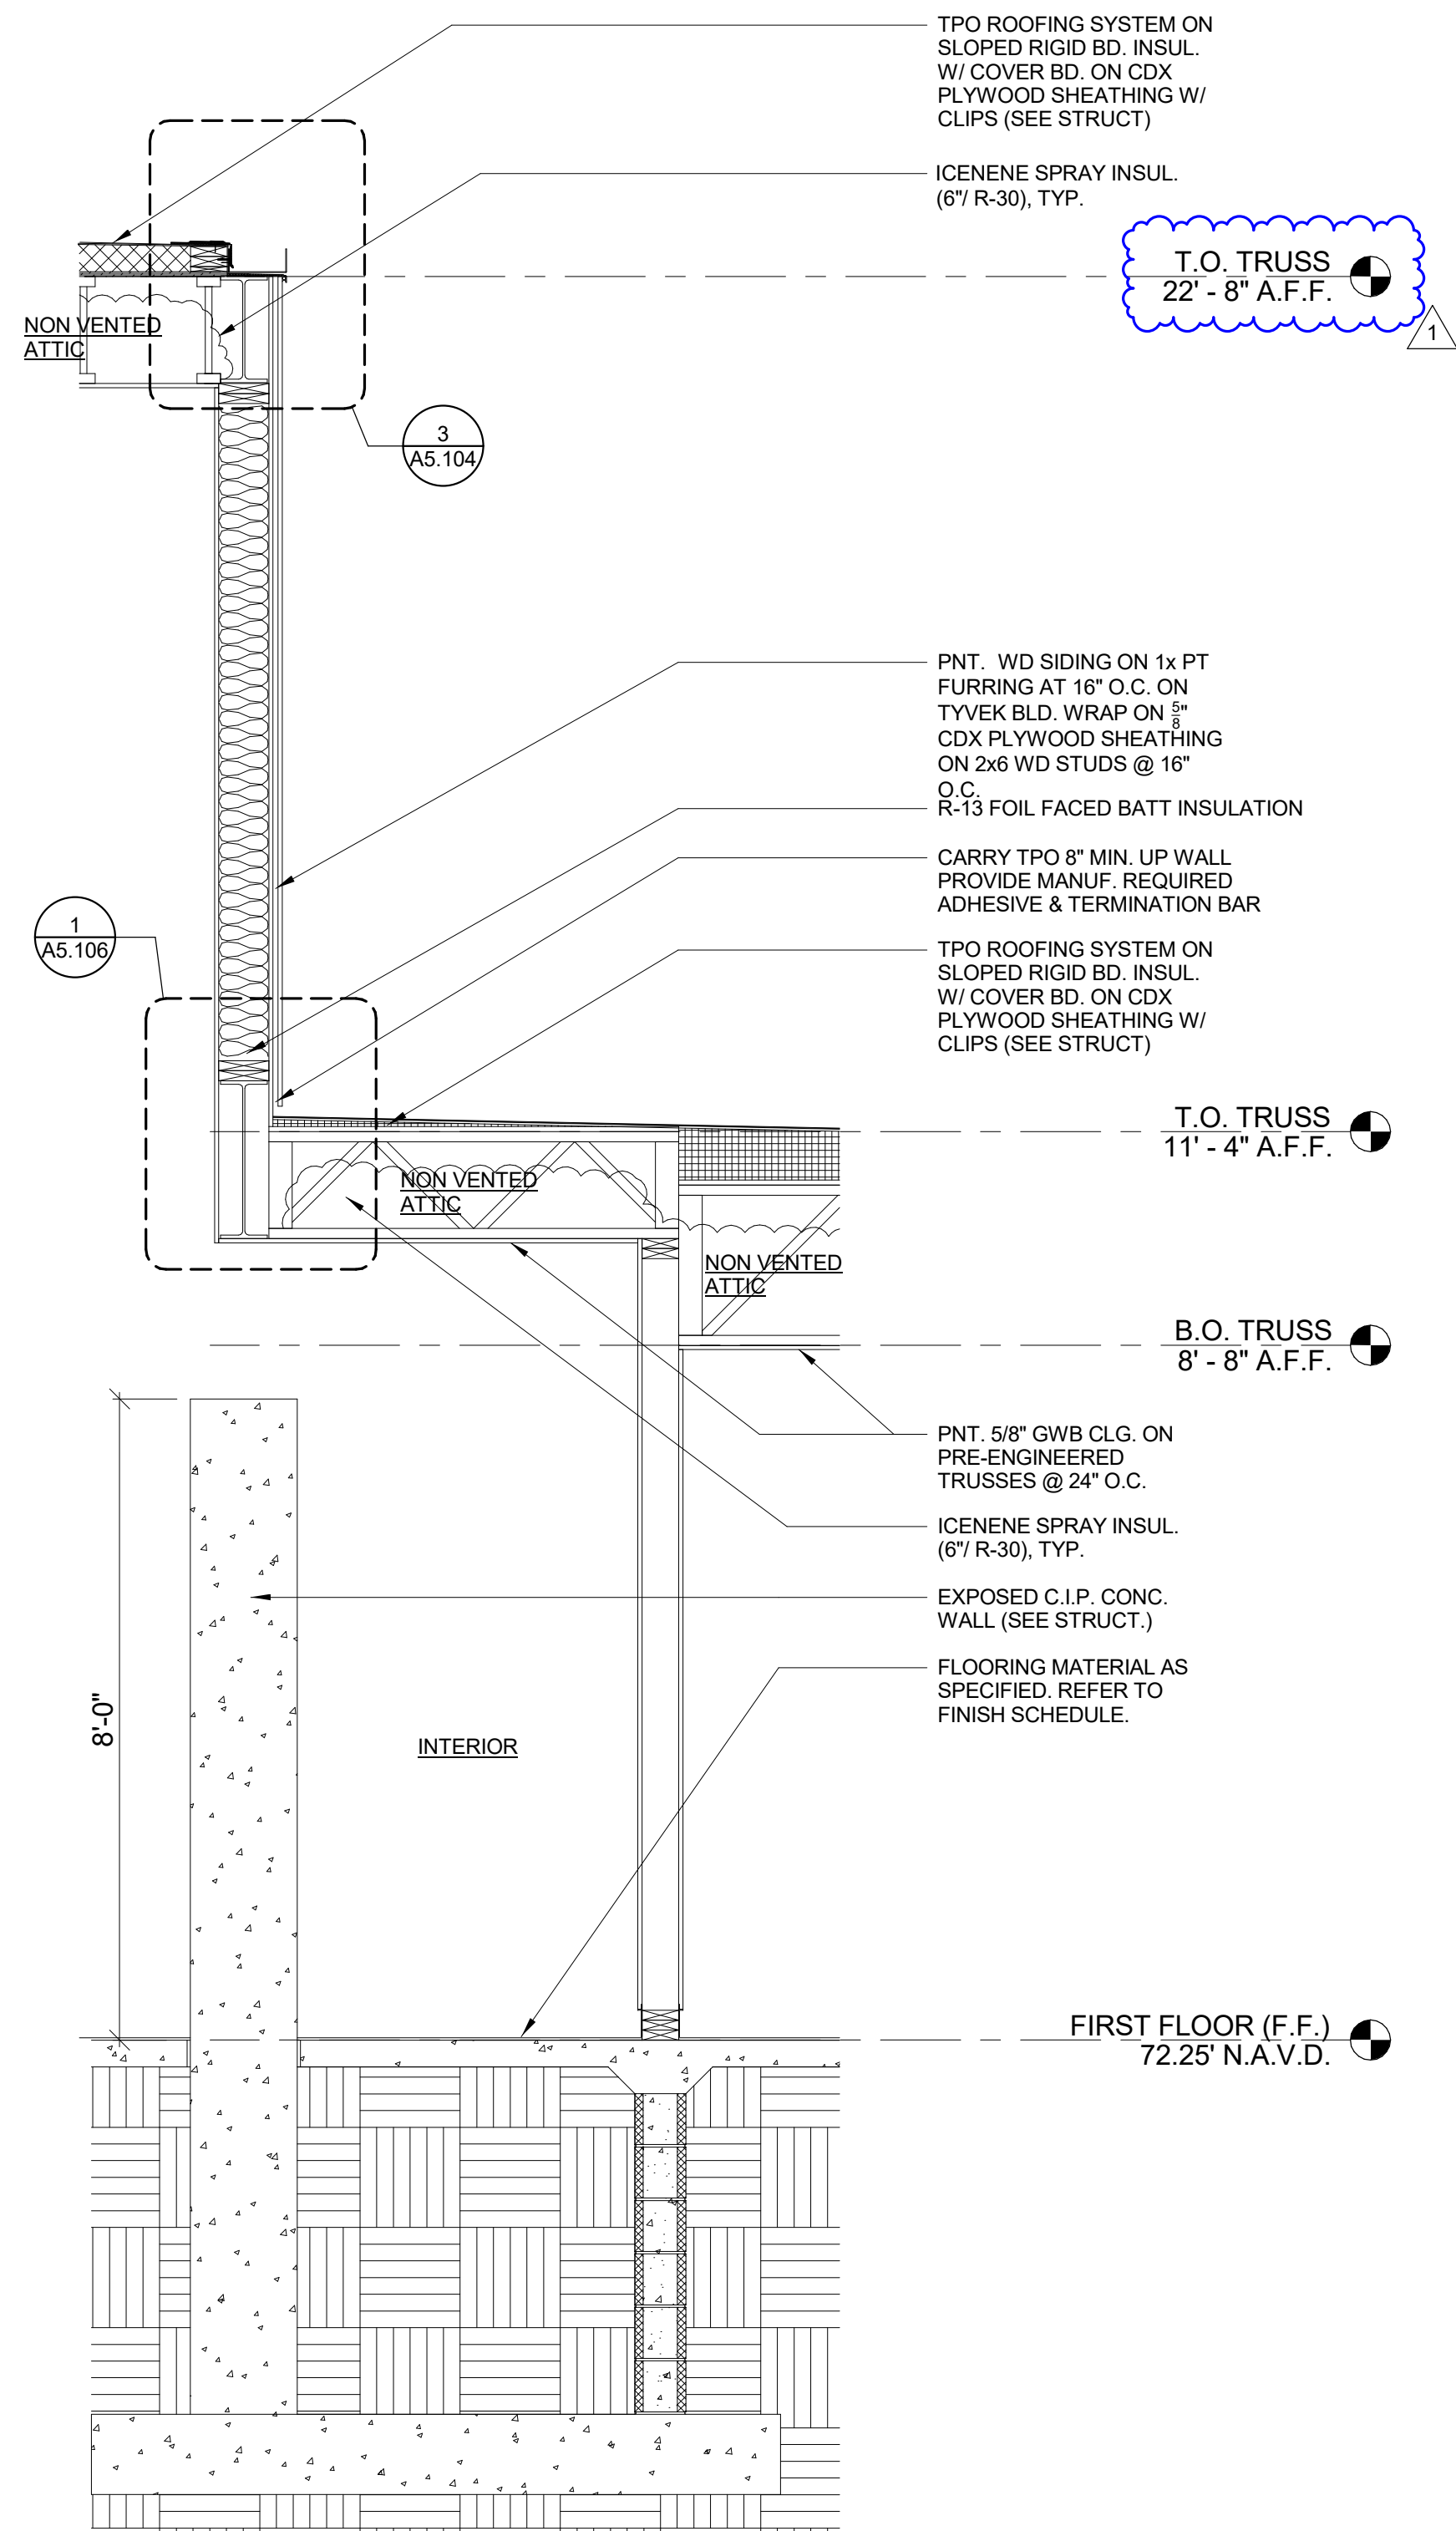

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, L.L.C.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERS, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

YOUSEF RESIDENCE

PERMIT SET

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13


WALL SECTIONS

PROJECT #	2301
ISSUE DATE	11.21.23


A4.103

FIREBLOCKING SHALL BE PROVIDED IN WOOD-FRAMED CONSTRUCTION IN THE FOLLOWING LOCATIONS:


- IN CONCEALED SPACES OF STUD WALLS AND PARTITIONS, INCLUDING FURRED SPACES AND PARALLEL ROWS OF STUDS OR STAGGERED STUDS, AS FOLLOWS:
 - VERTICALLY AT THE CEILING AND FLOOR LEVELS.
 - HORIZONTALLY AT INTERVALS NOT EXCEEDING 10 FEET (3048 MM).
- AT INTERCONNECTIONS BETWEEN CONCEALED VERTICAL AND HORIZONTAL SPACES AT SOFFITS, DROP CEILINGS AND COVE CEILINGS.

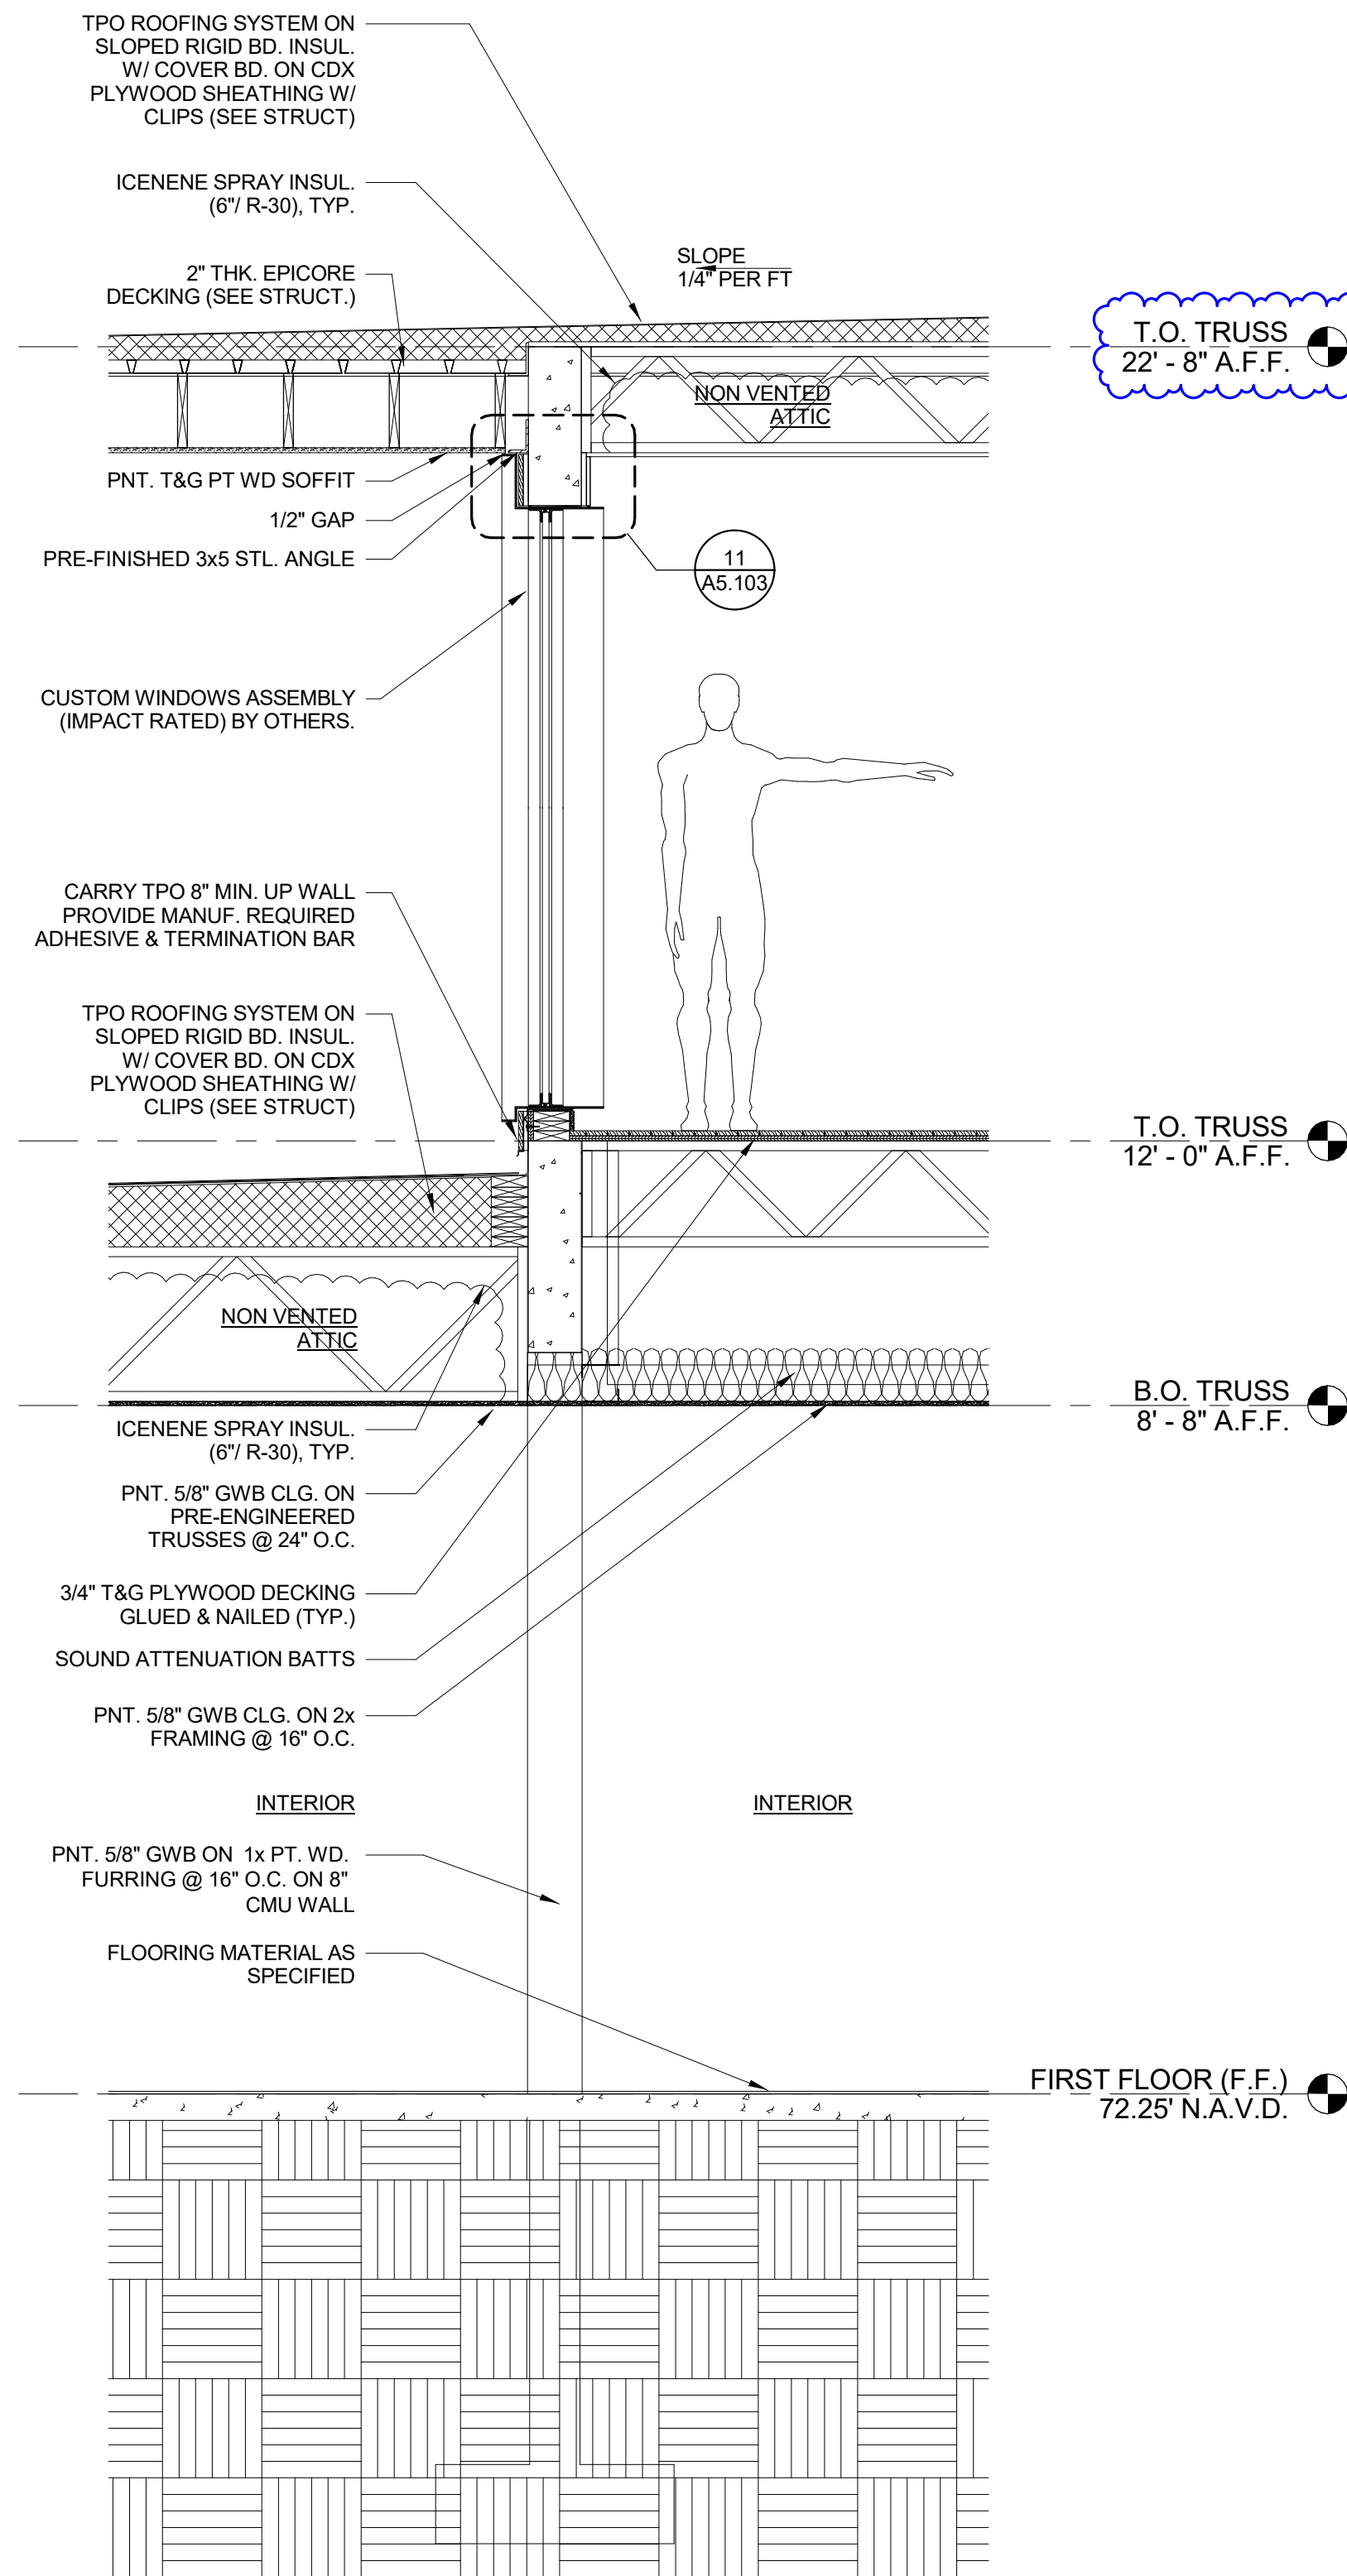


WALL SECTION 4
1/2" = 1'-0"

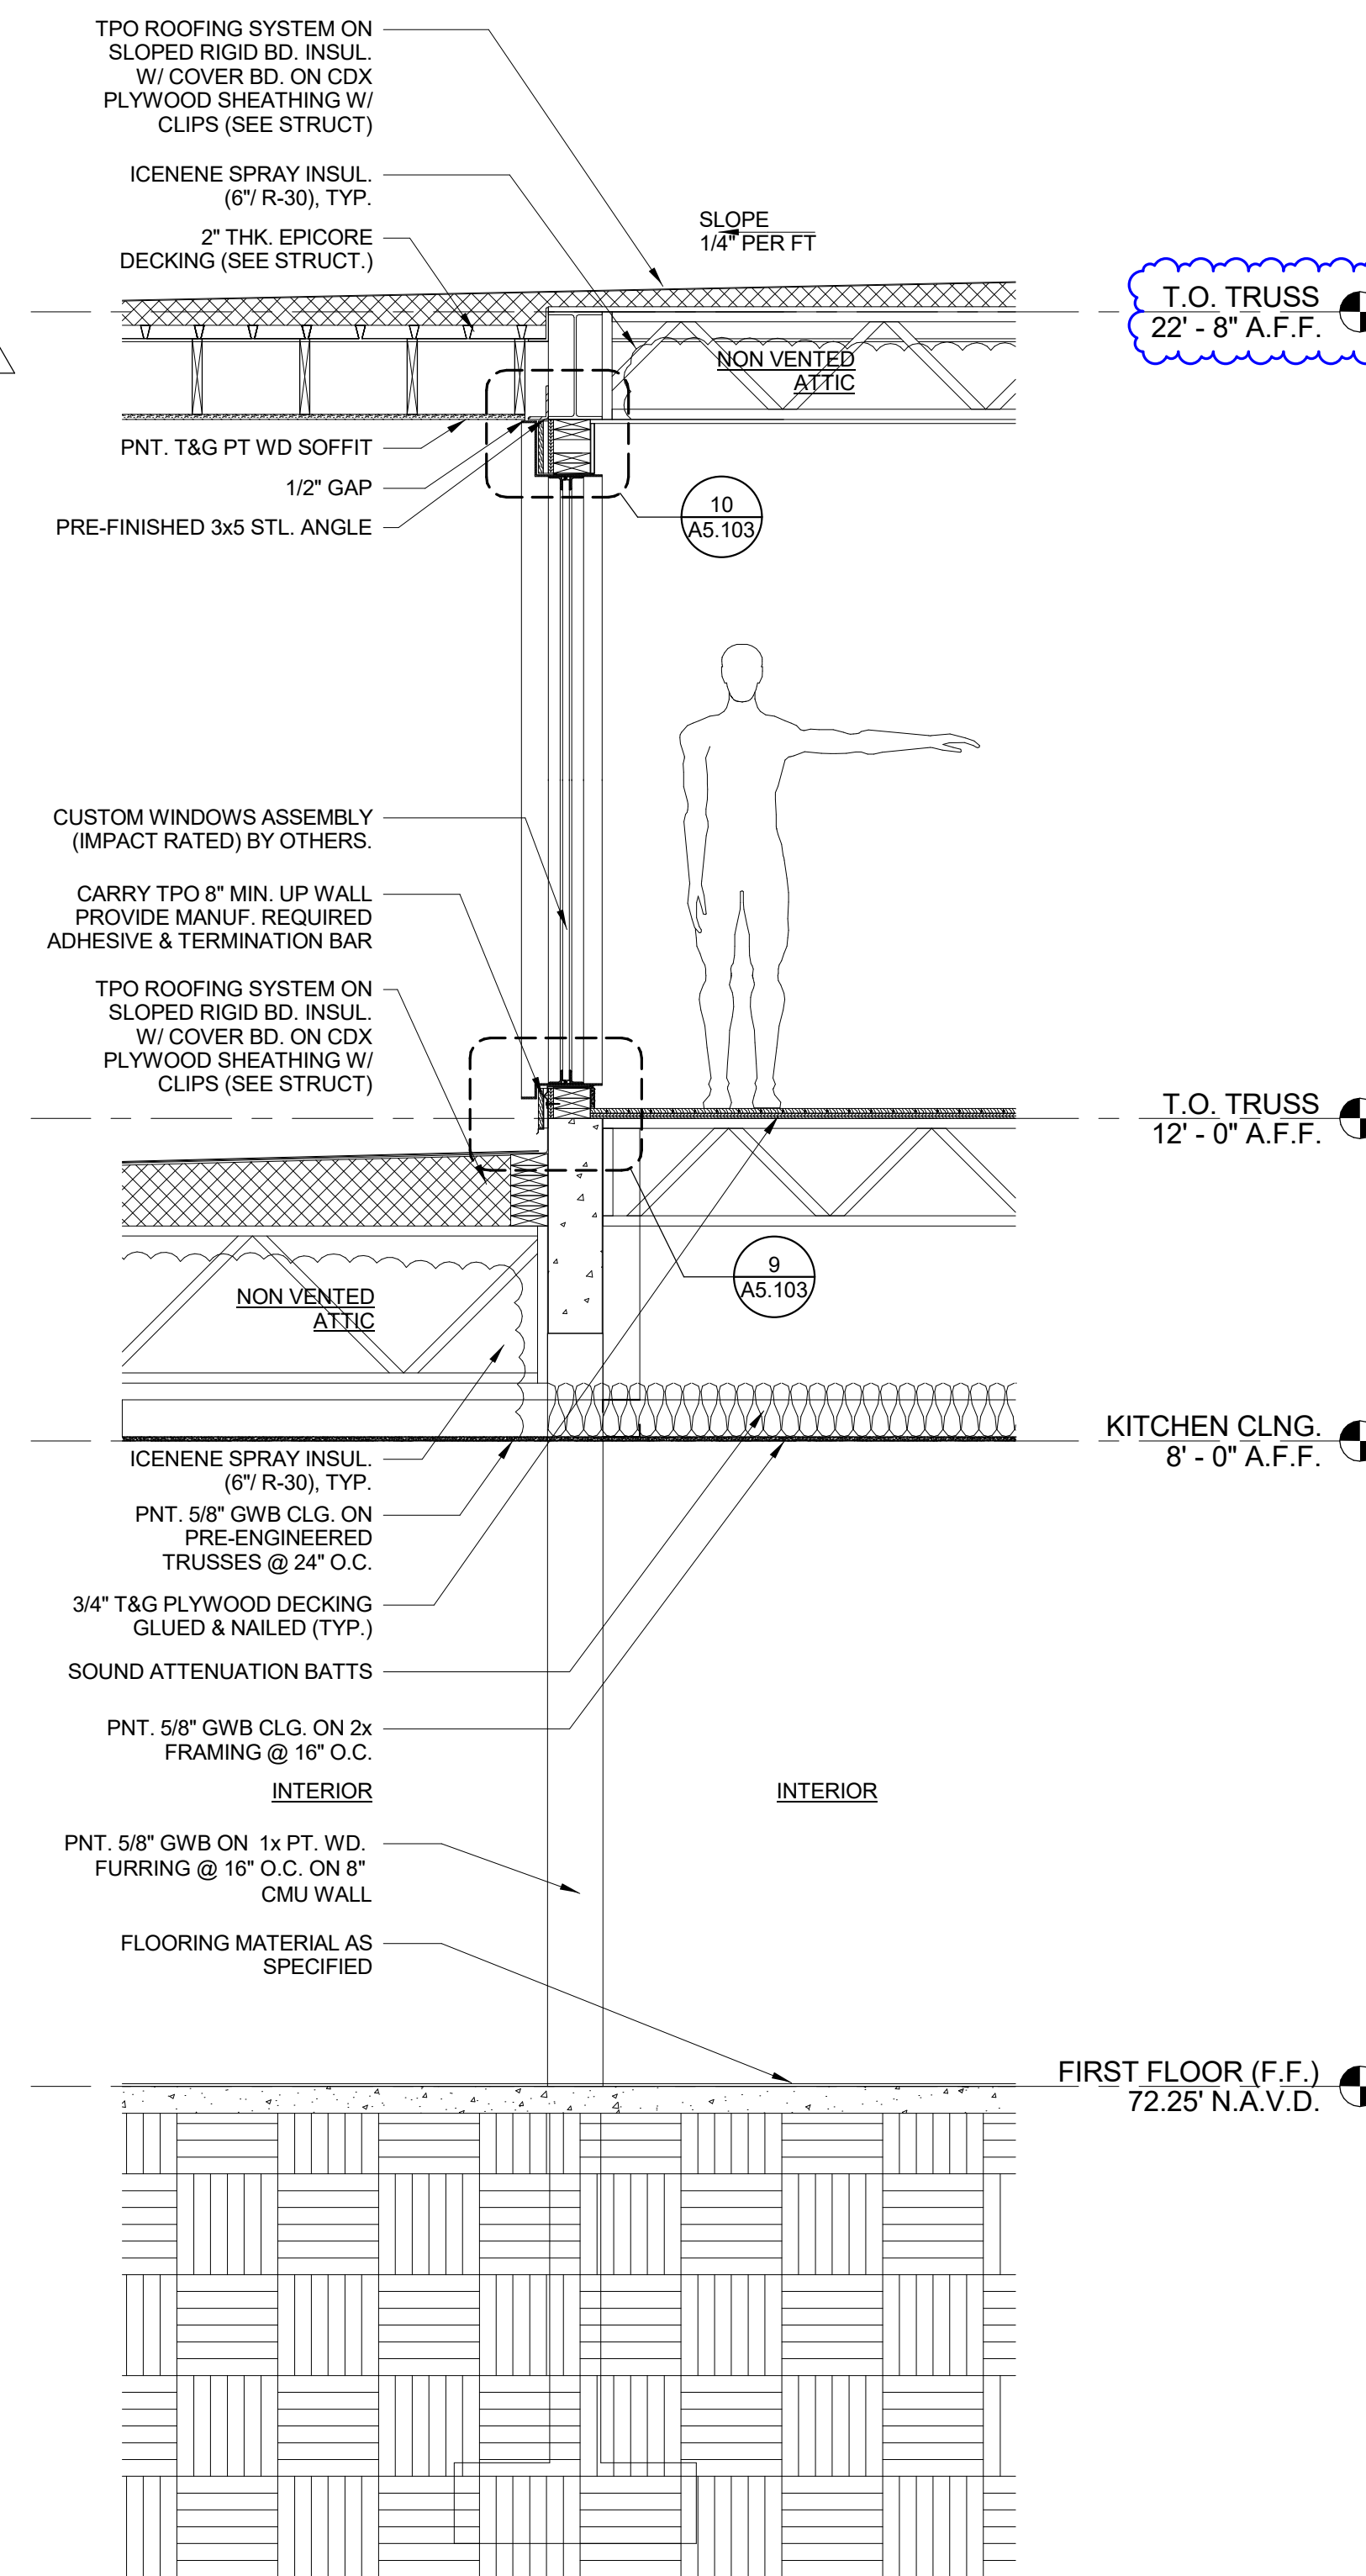


WALL SECTION 3
1/2" = 1'-0"

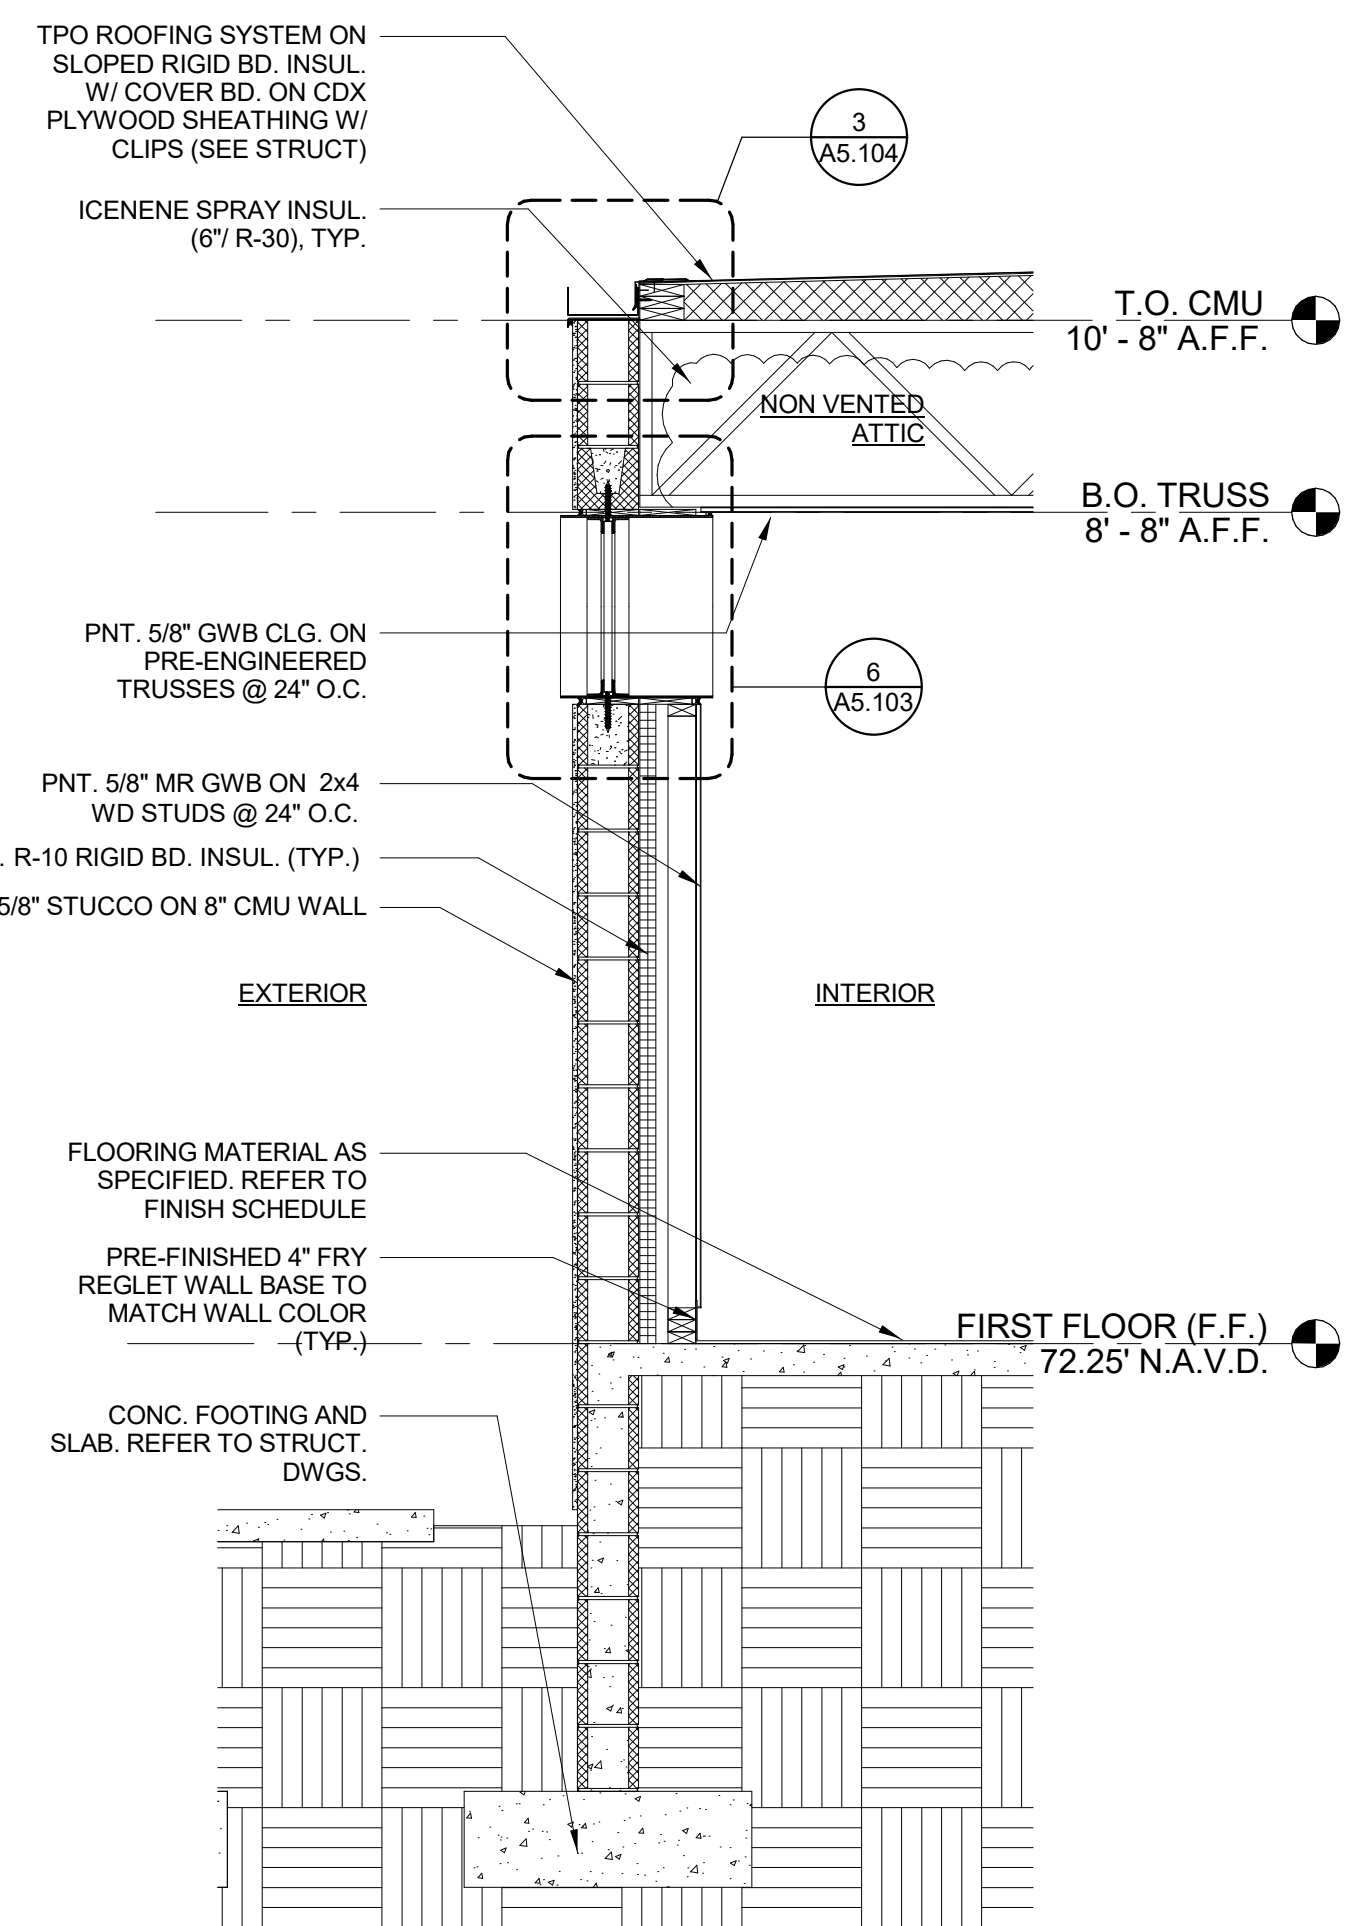

WALL SECTION 2
1/2" = 1'-0"

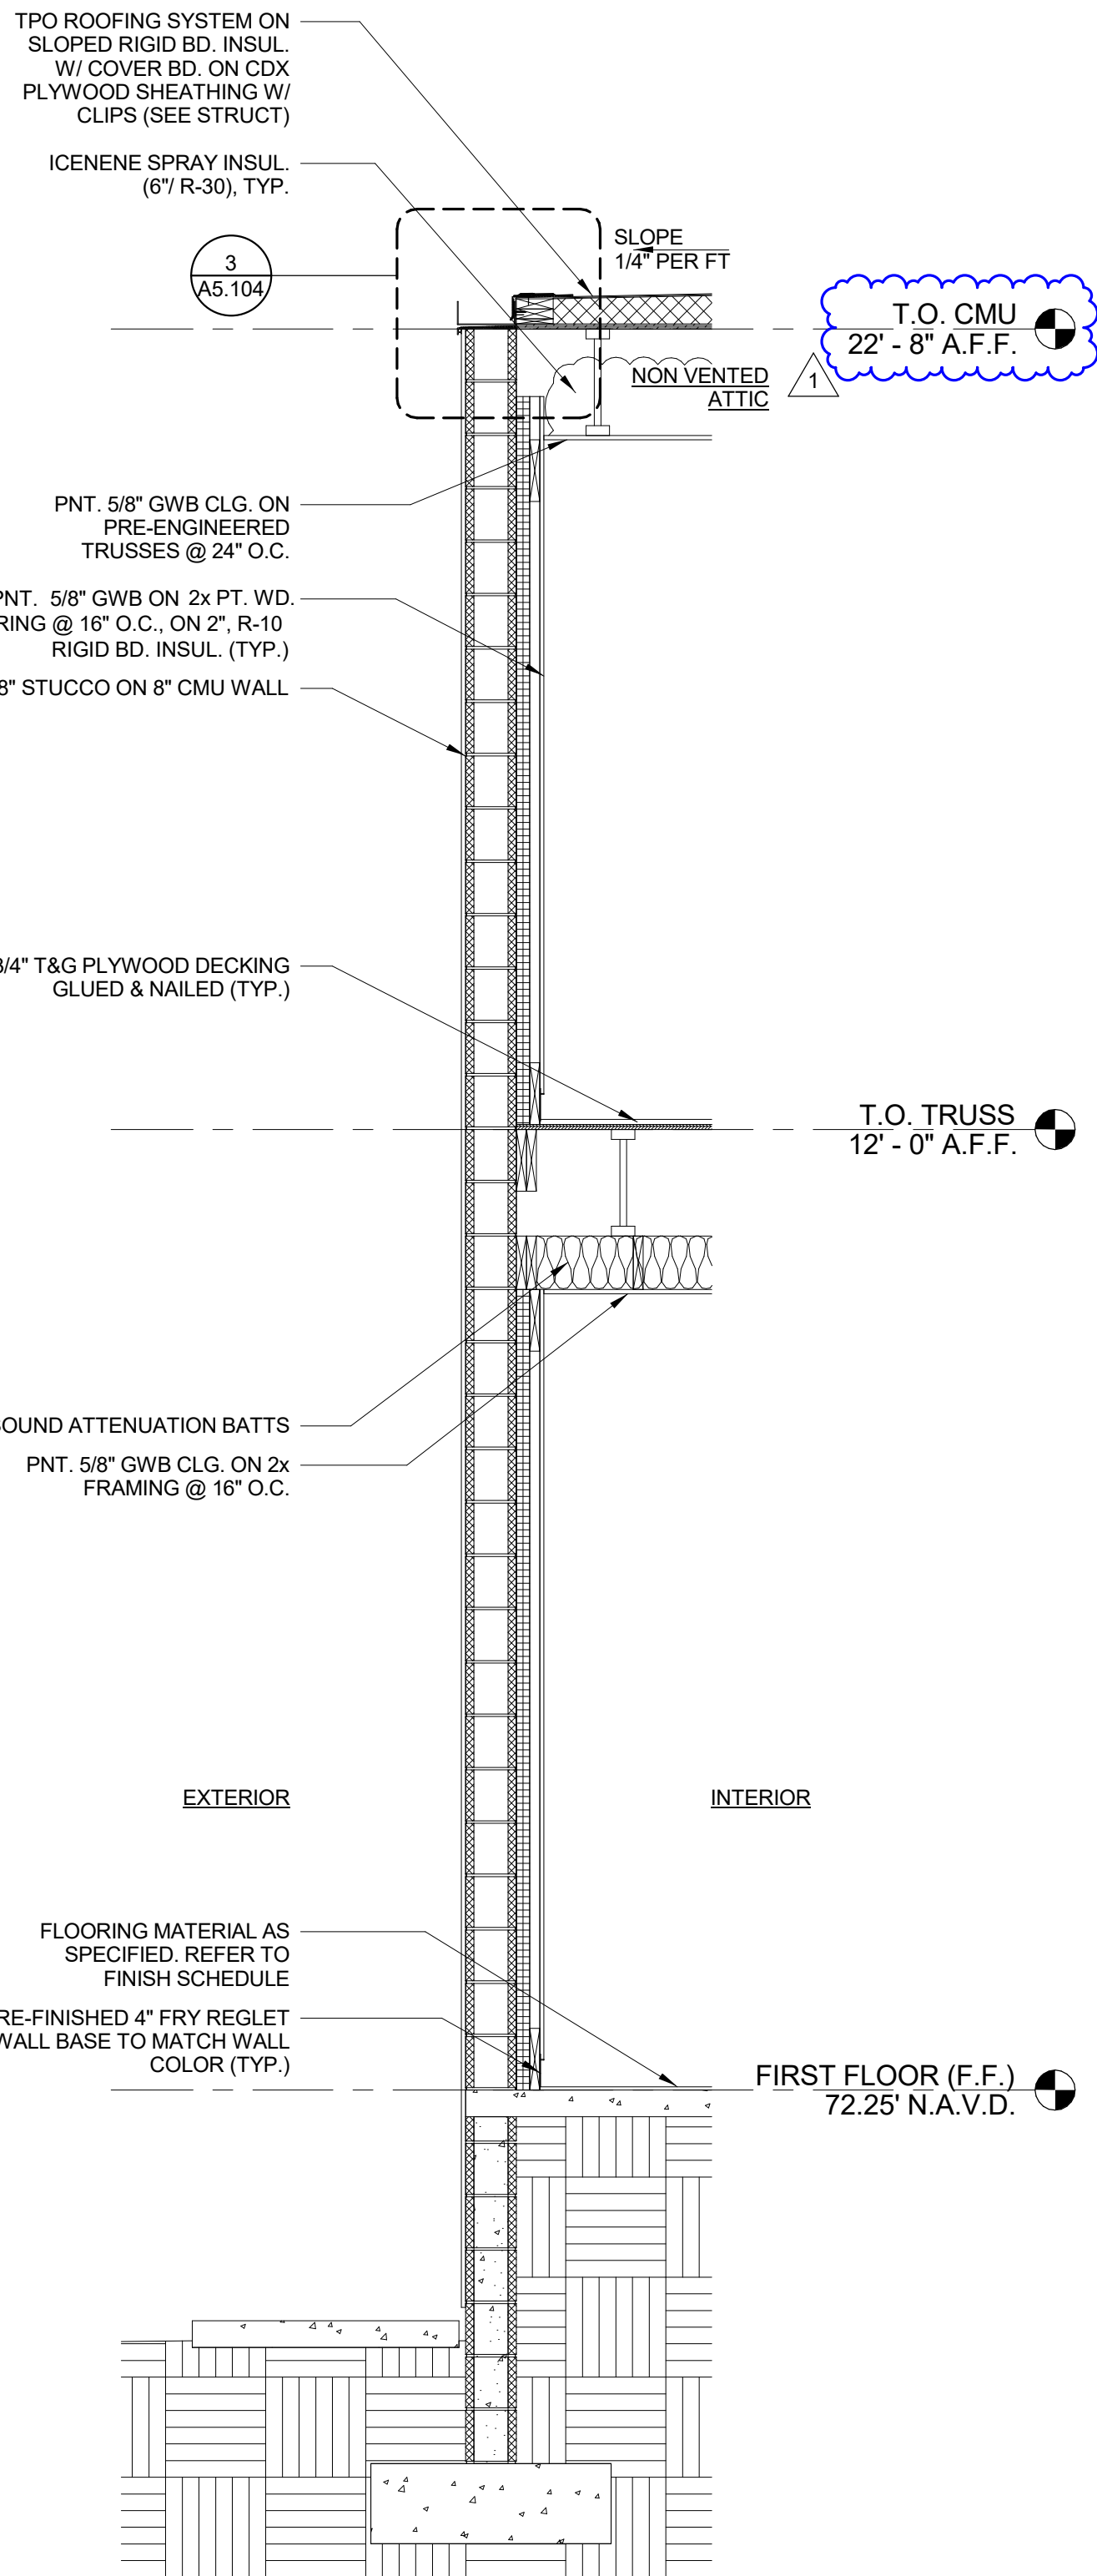


WALL SECTION 1
1/2" = 1'-0"

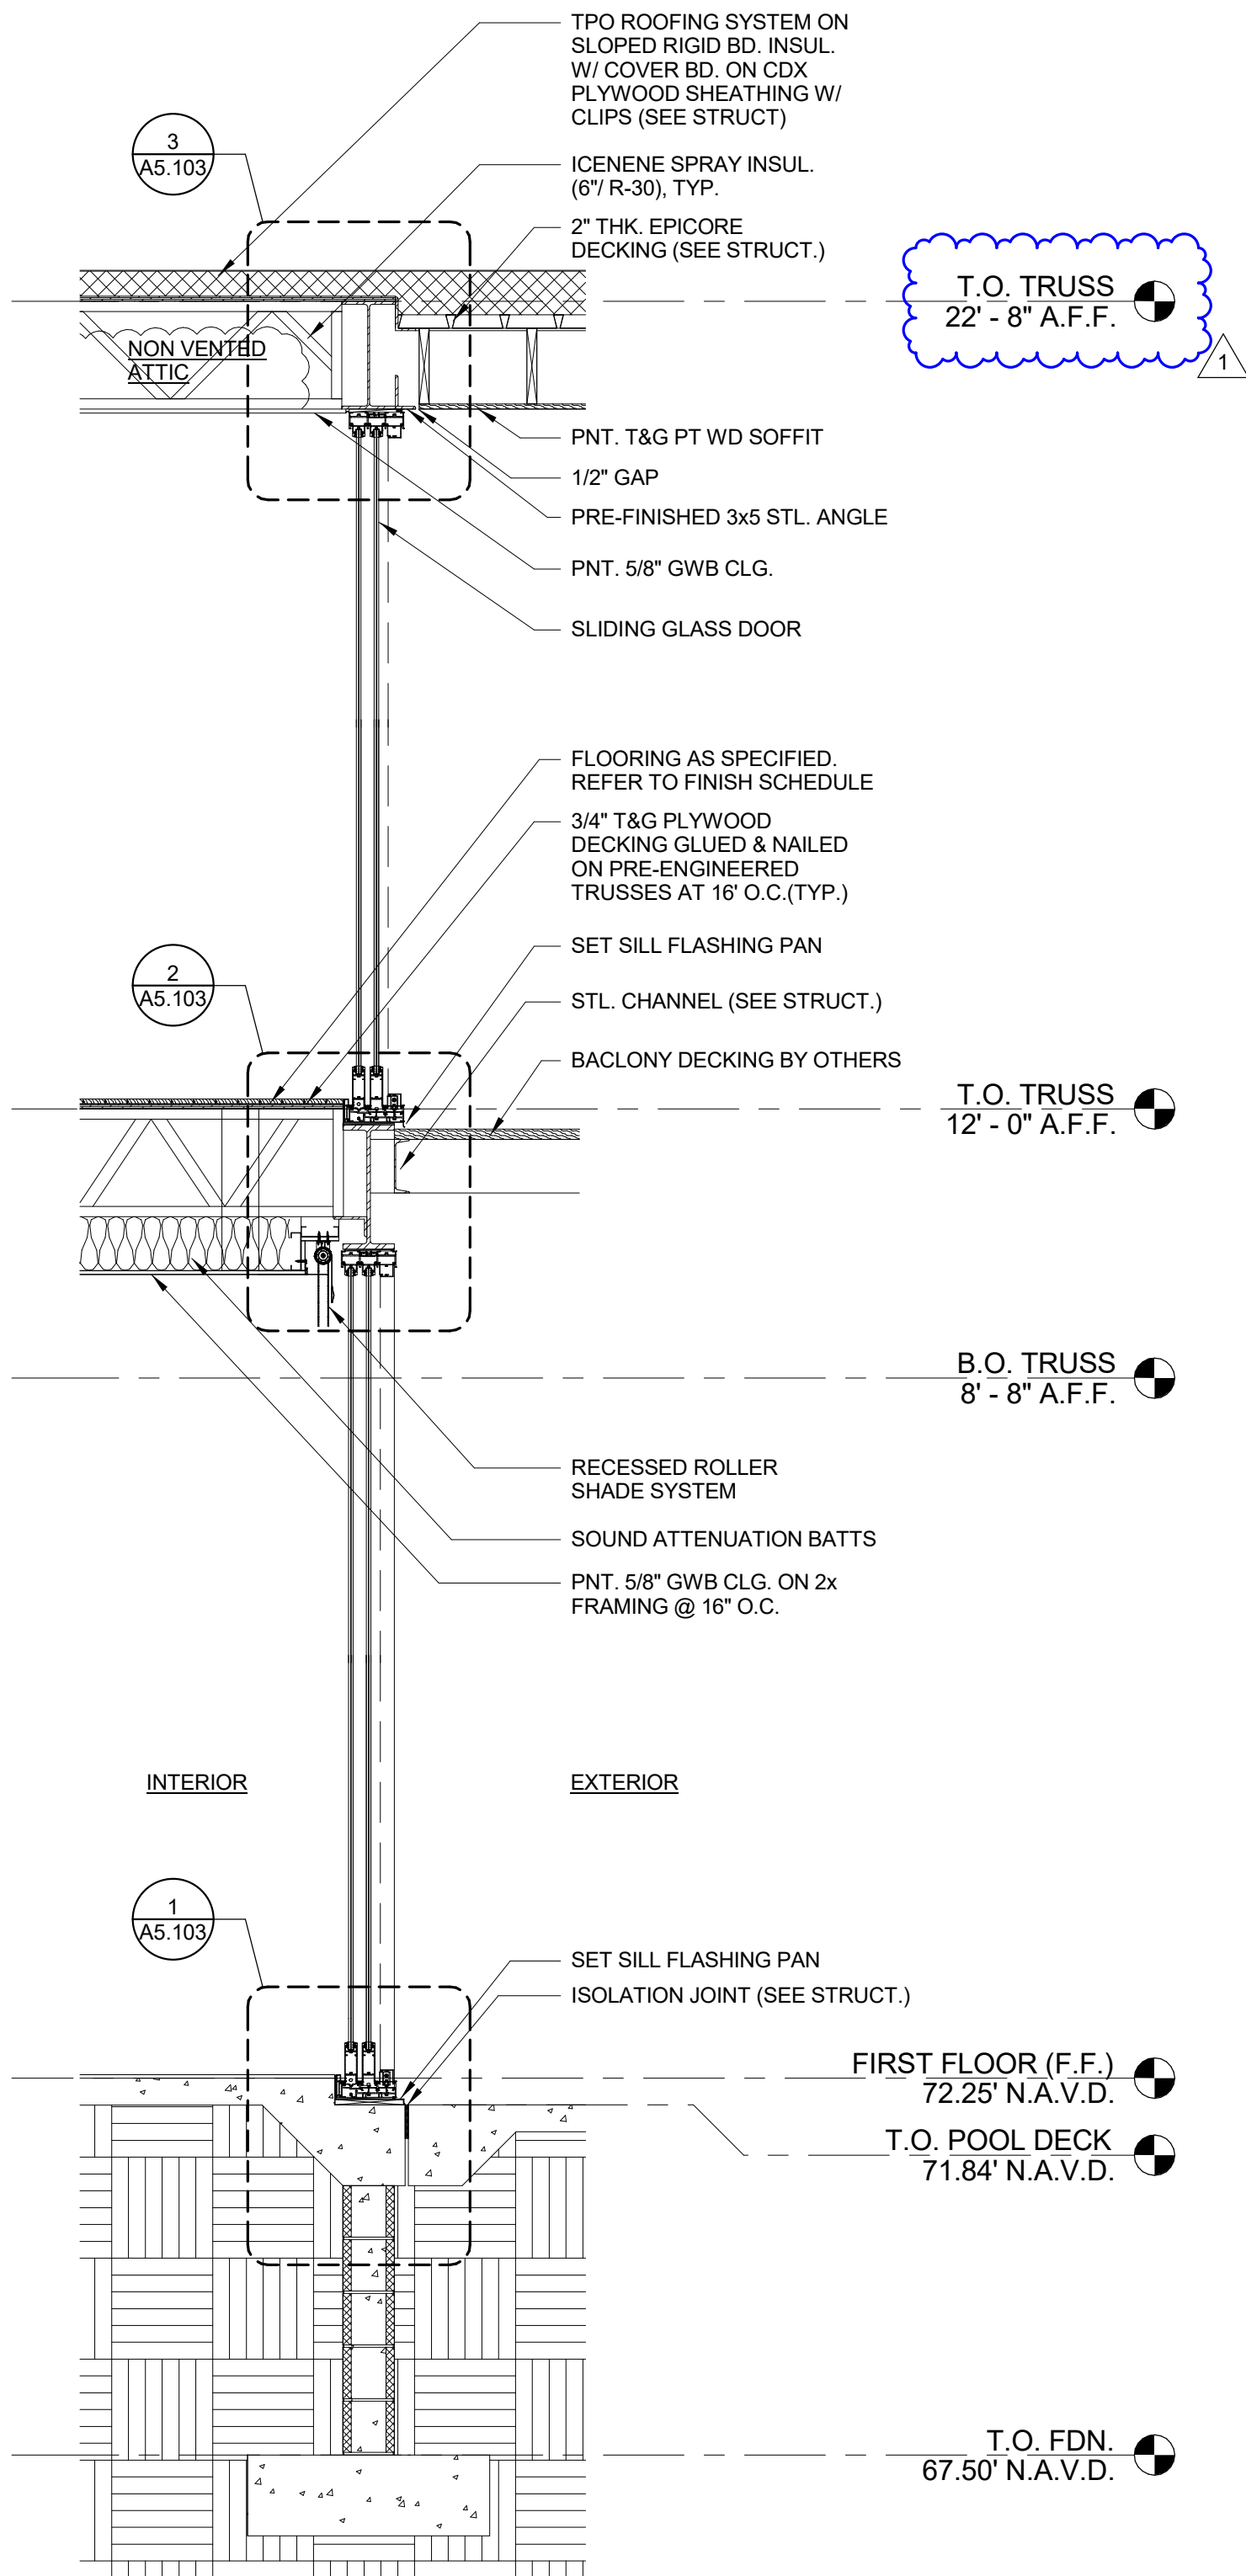

WALL SECTION
1/2" = 1'-0"

2

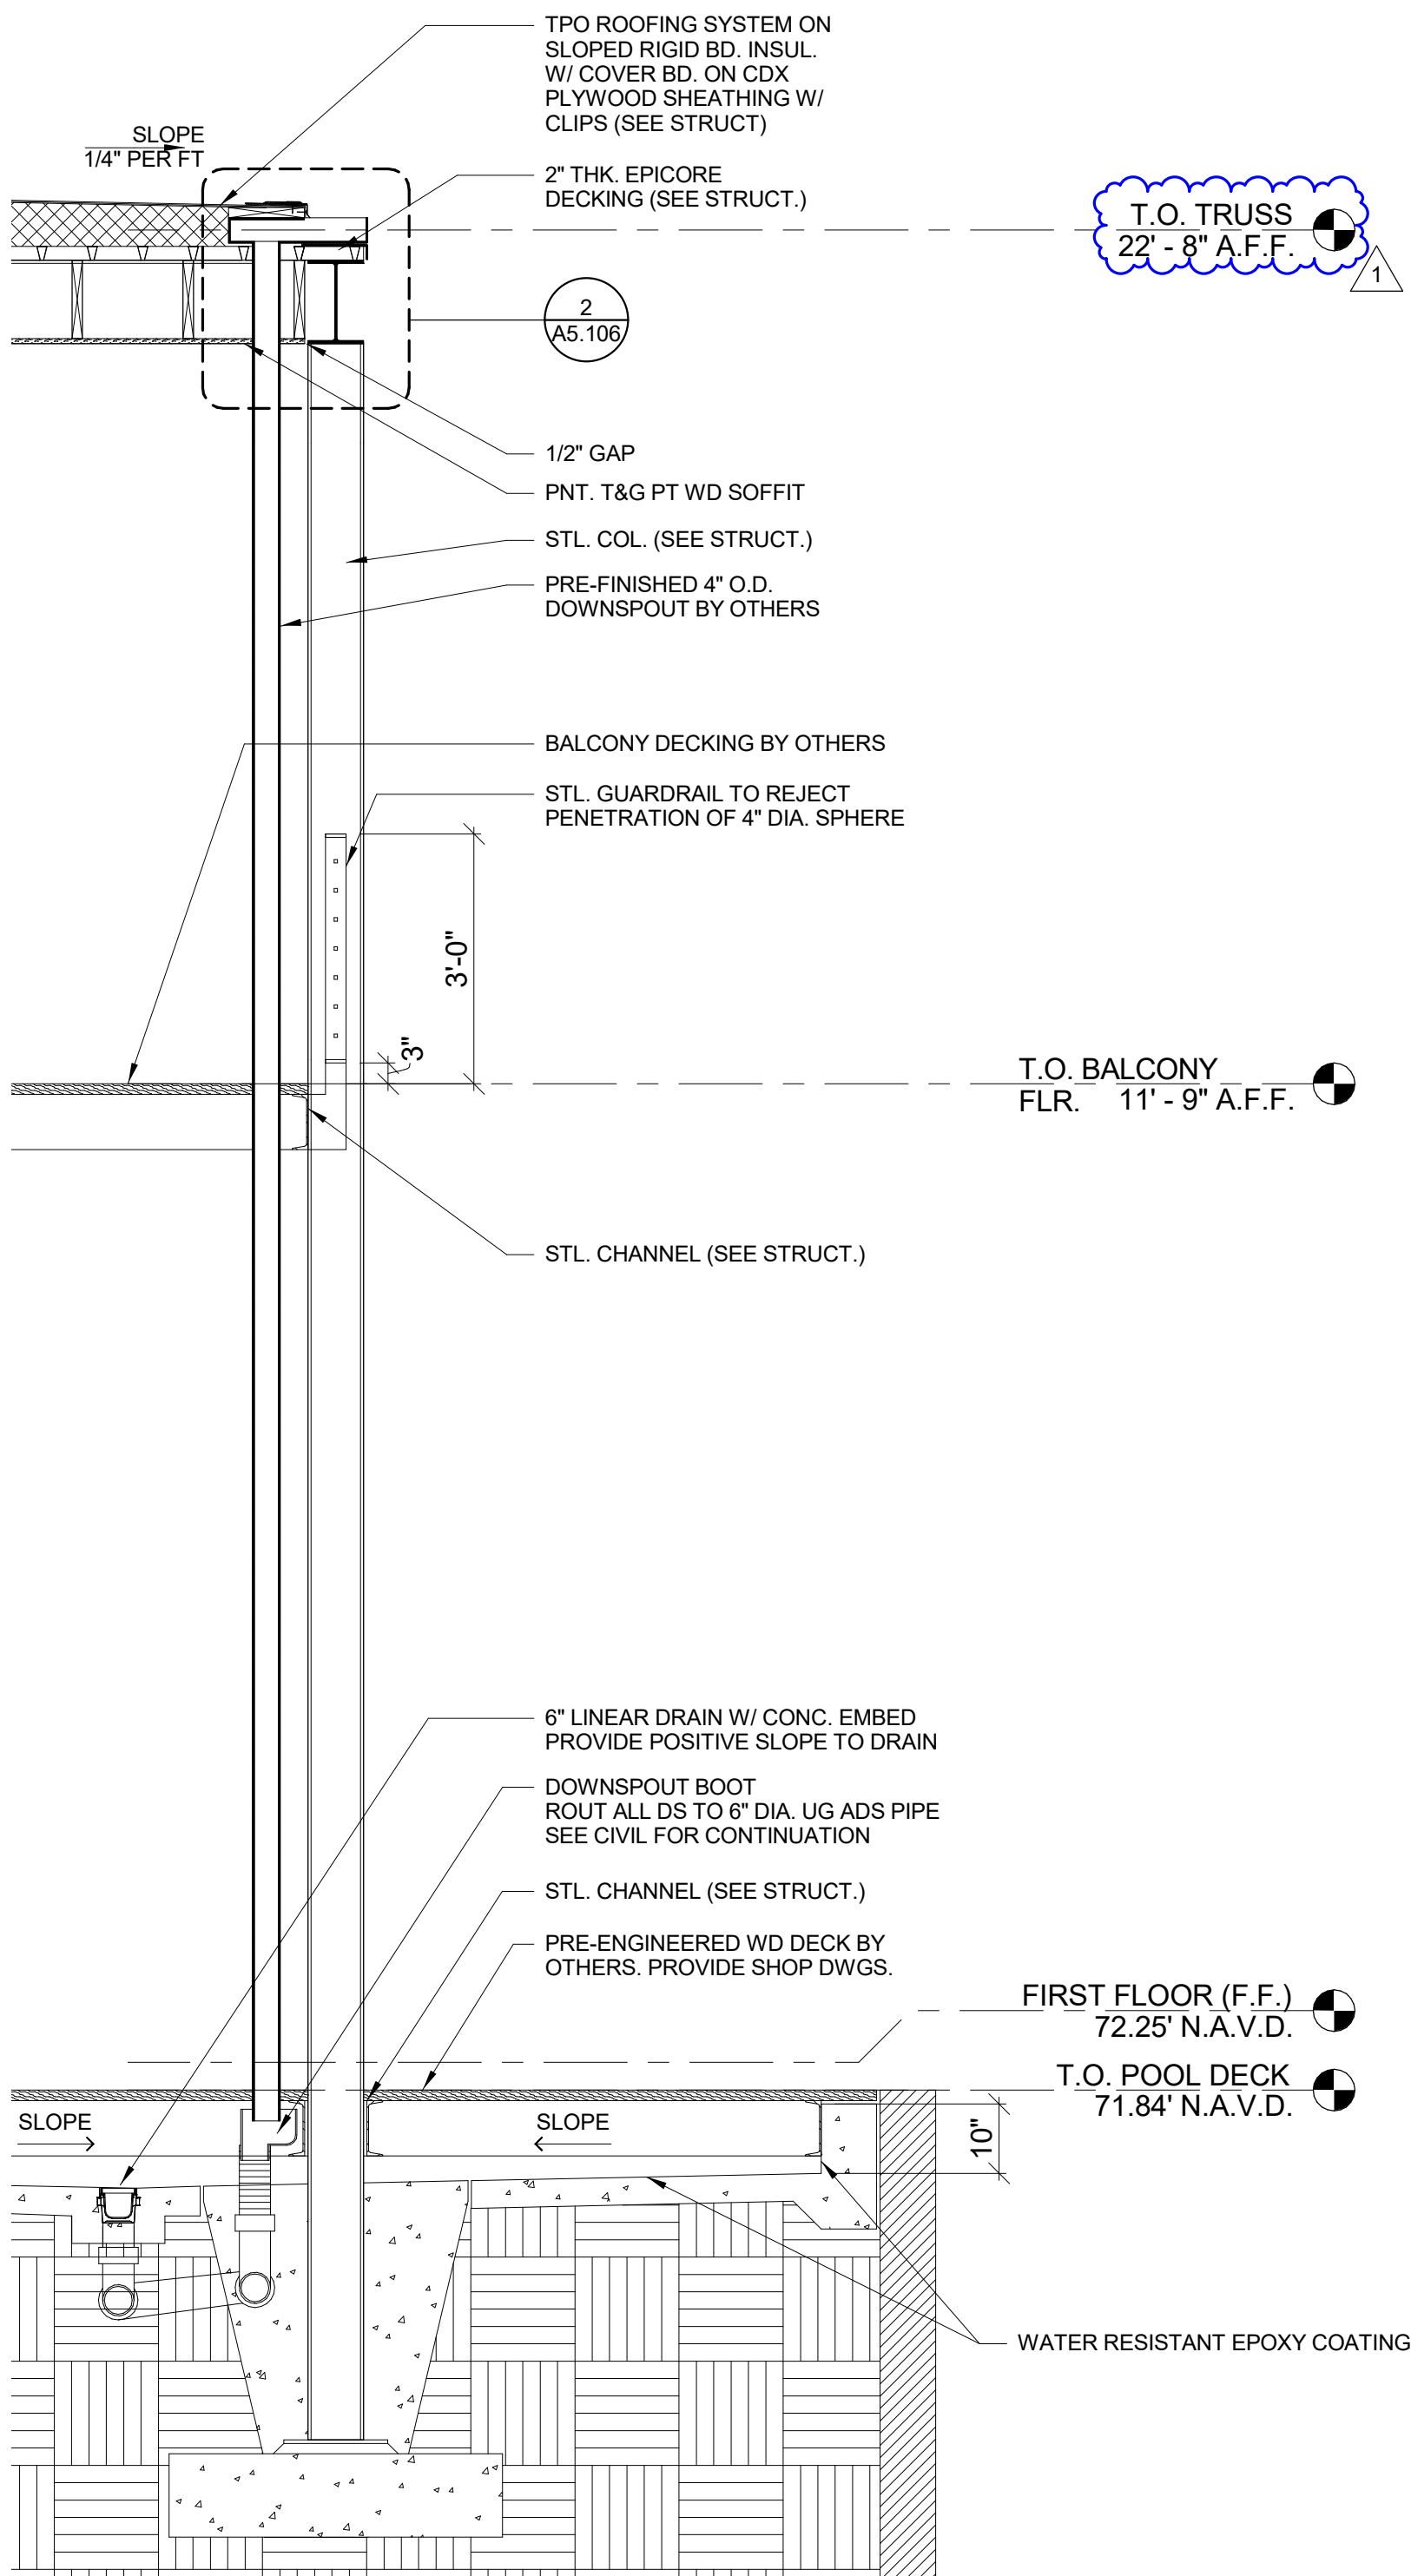

WALL SECTION
1/2" = 1'-0"

1

FIREBLOCKING SHALL BE PROVIDED IN WOOD-FRAMED CONSTRUCTION IN THE FOLLOWING LOCATIONS:

1. IN CONCEALED SPACES OF STUD WALLS AND PARTITIONS, INCLUDING FURRED SPACES AND PARALLEL ROWS OF STUDS OR STAGGERED STUDS, AS FOLLOWS:
 - 1.1. VERTICALLY AT THE CEILING AND FLOOR LEVELS.
 - 1.2. HORIZONTALLY AT INTERVALS NOT EXCEEDING 10 FEET (3048 MM).
2. AT INTERCONNECTIONS BETWEEN CONCEALED VERTICAL AND HORIZONTAL SPACES AT SOFFITS, DROP CEILINGS AND COVE CEILINGS.

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, L.L.C.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13


WALL SECTIONS

PROJECT # 2301
ISSUE DATE 11.21.23


A4.104

modulo


YOUSEF RESIDENCE

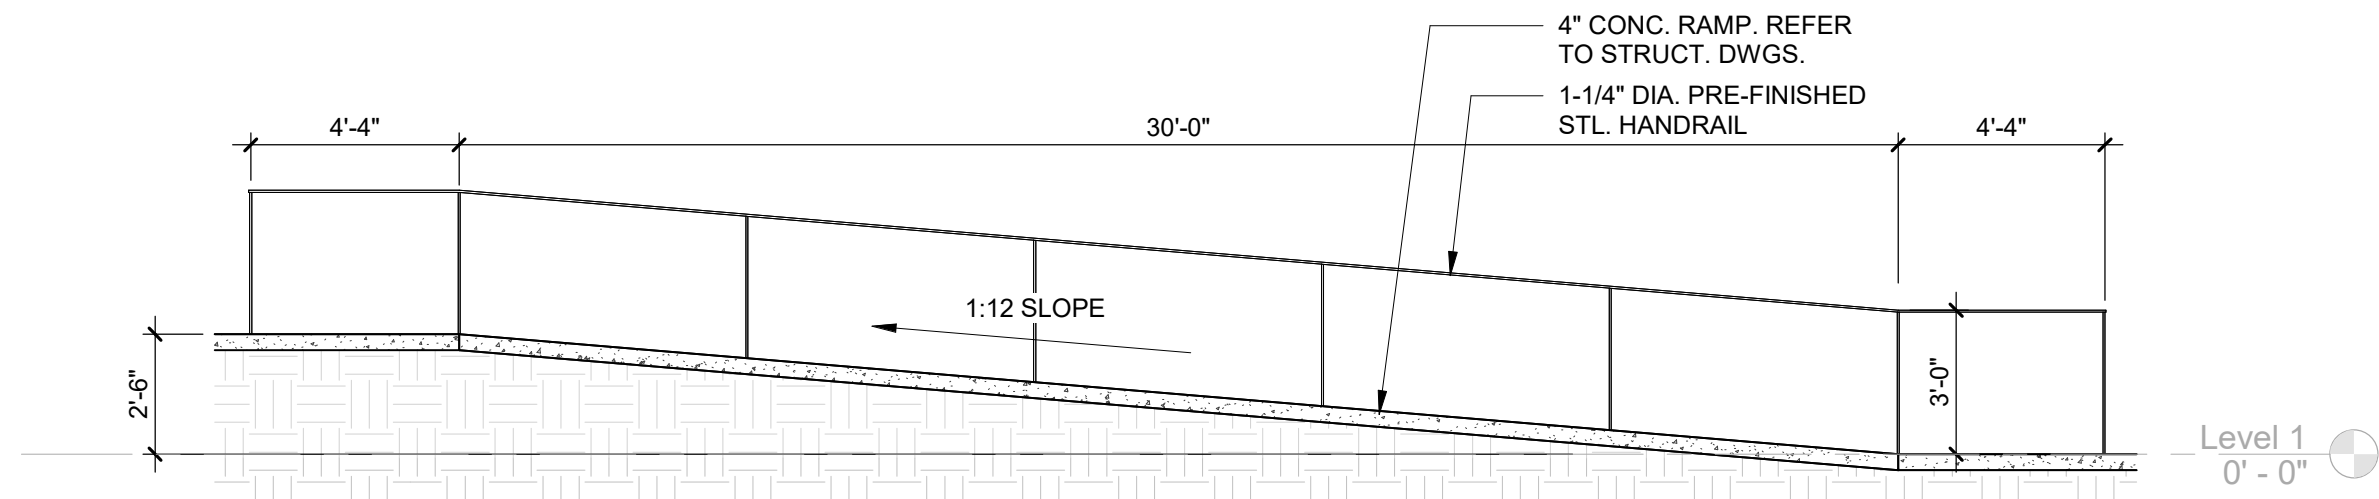


CIRCULATION SECTION - SITE RAMP
1/4" = 1'-0"

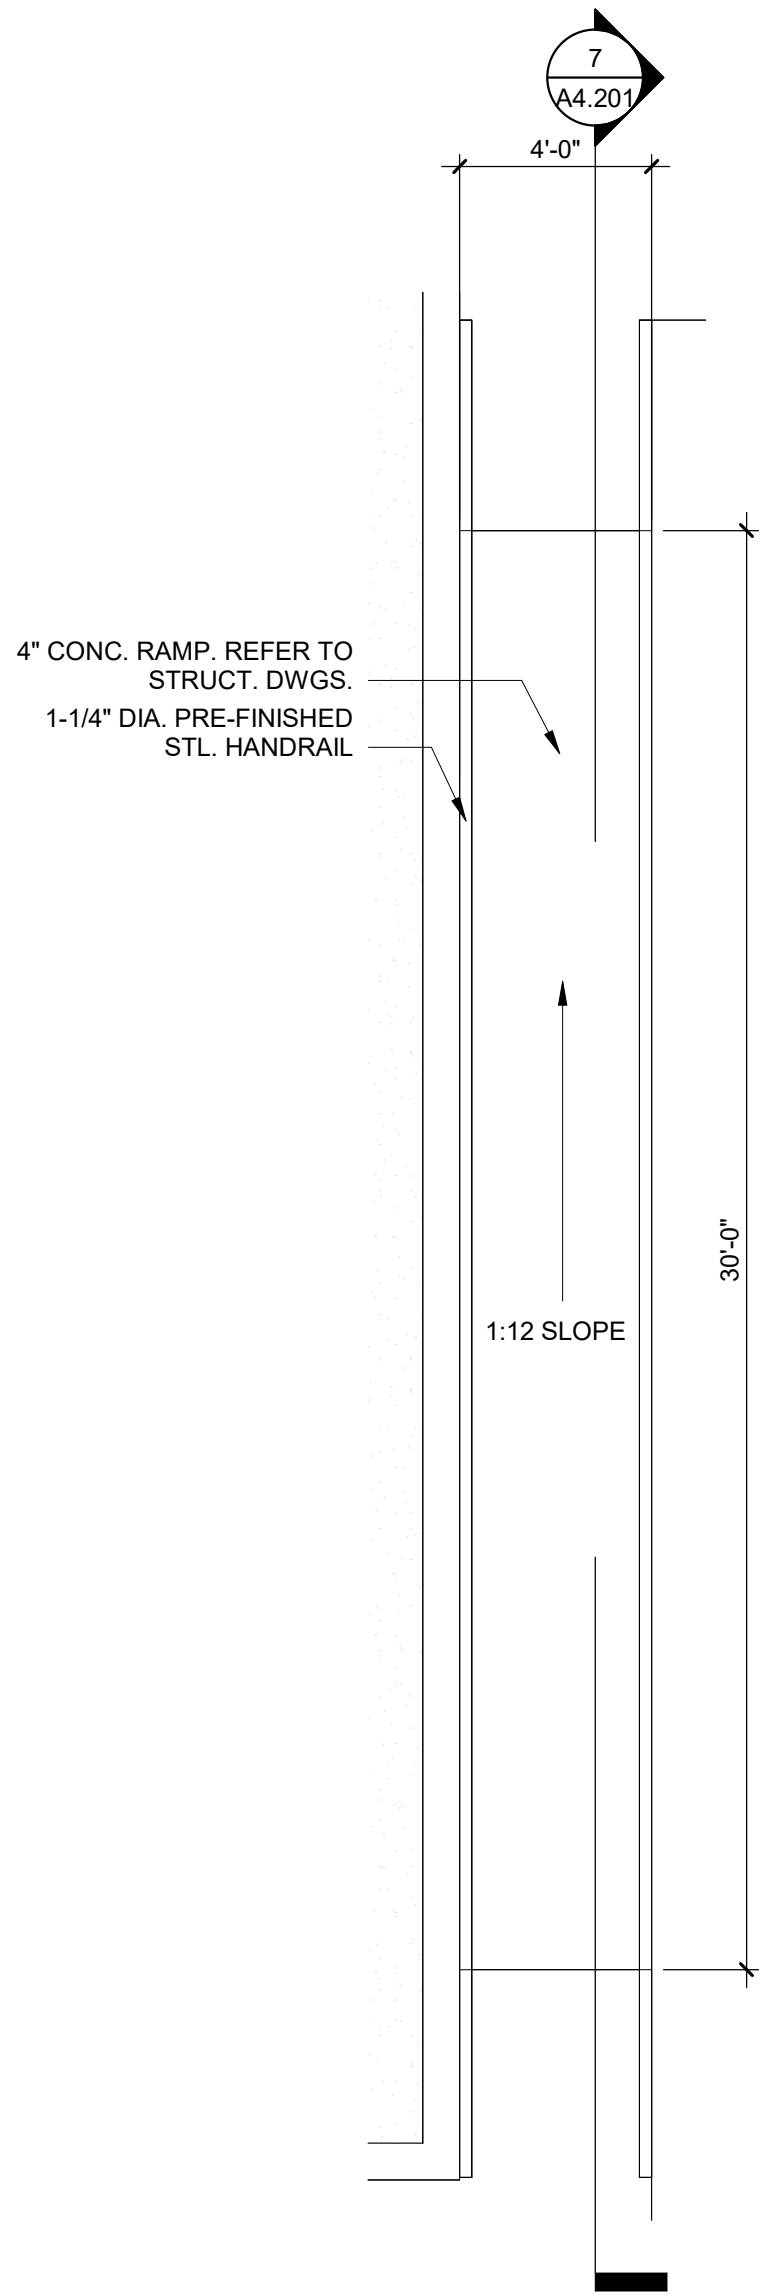


ENLARGED PLAN - SITE RAMP
1/4" = 1'-0"

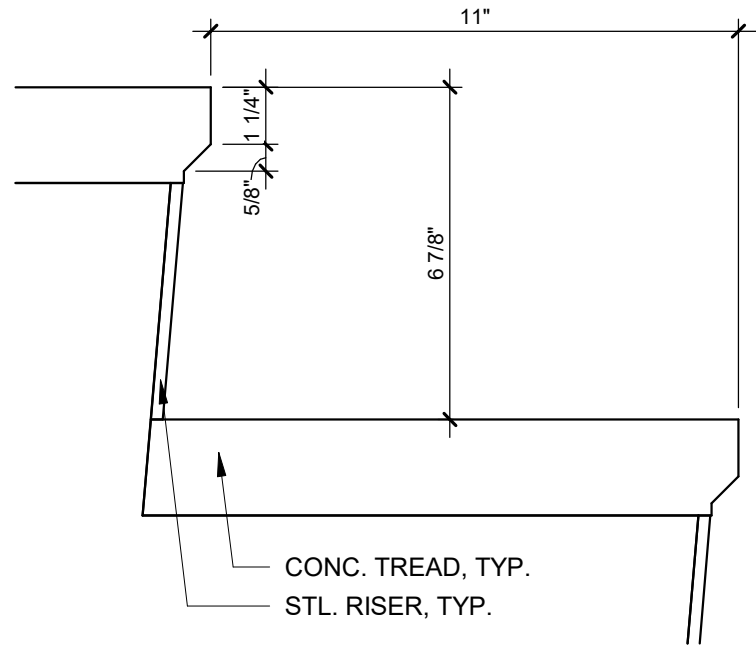


TYPICAL TREAD & RISER DETAIL
3" = 1'-0"

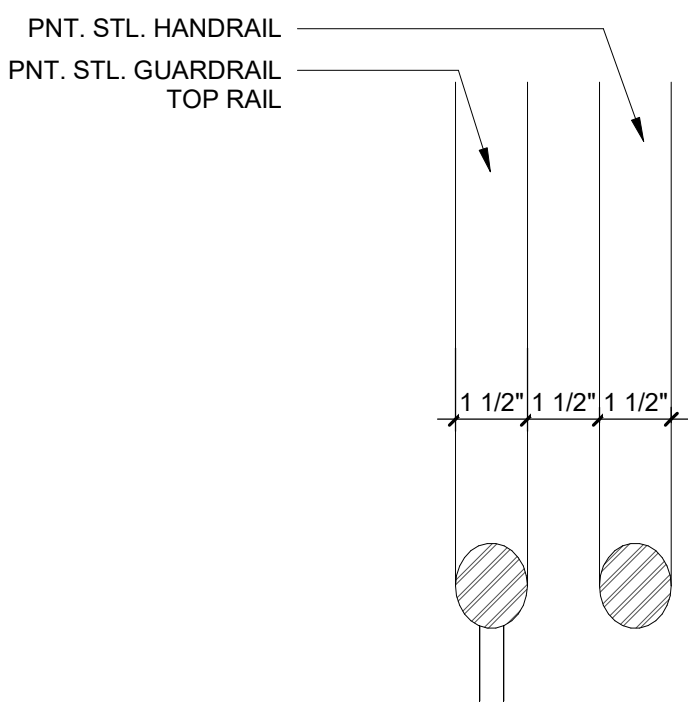


TYPICAL HANDRAIL CLEARANCE DETAIL
3" = 1'-0"

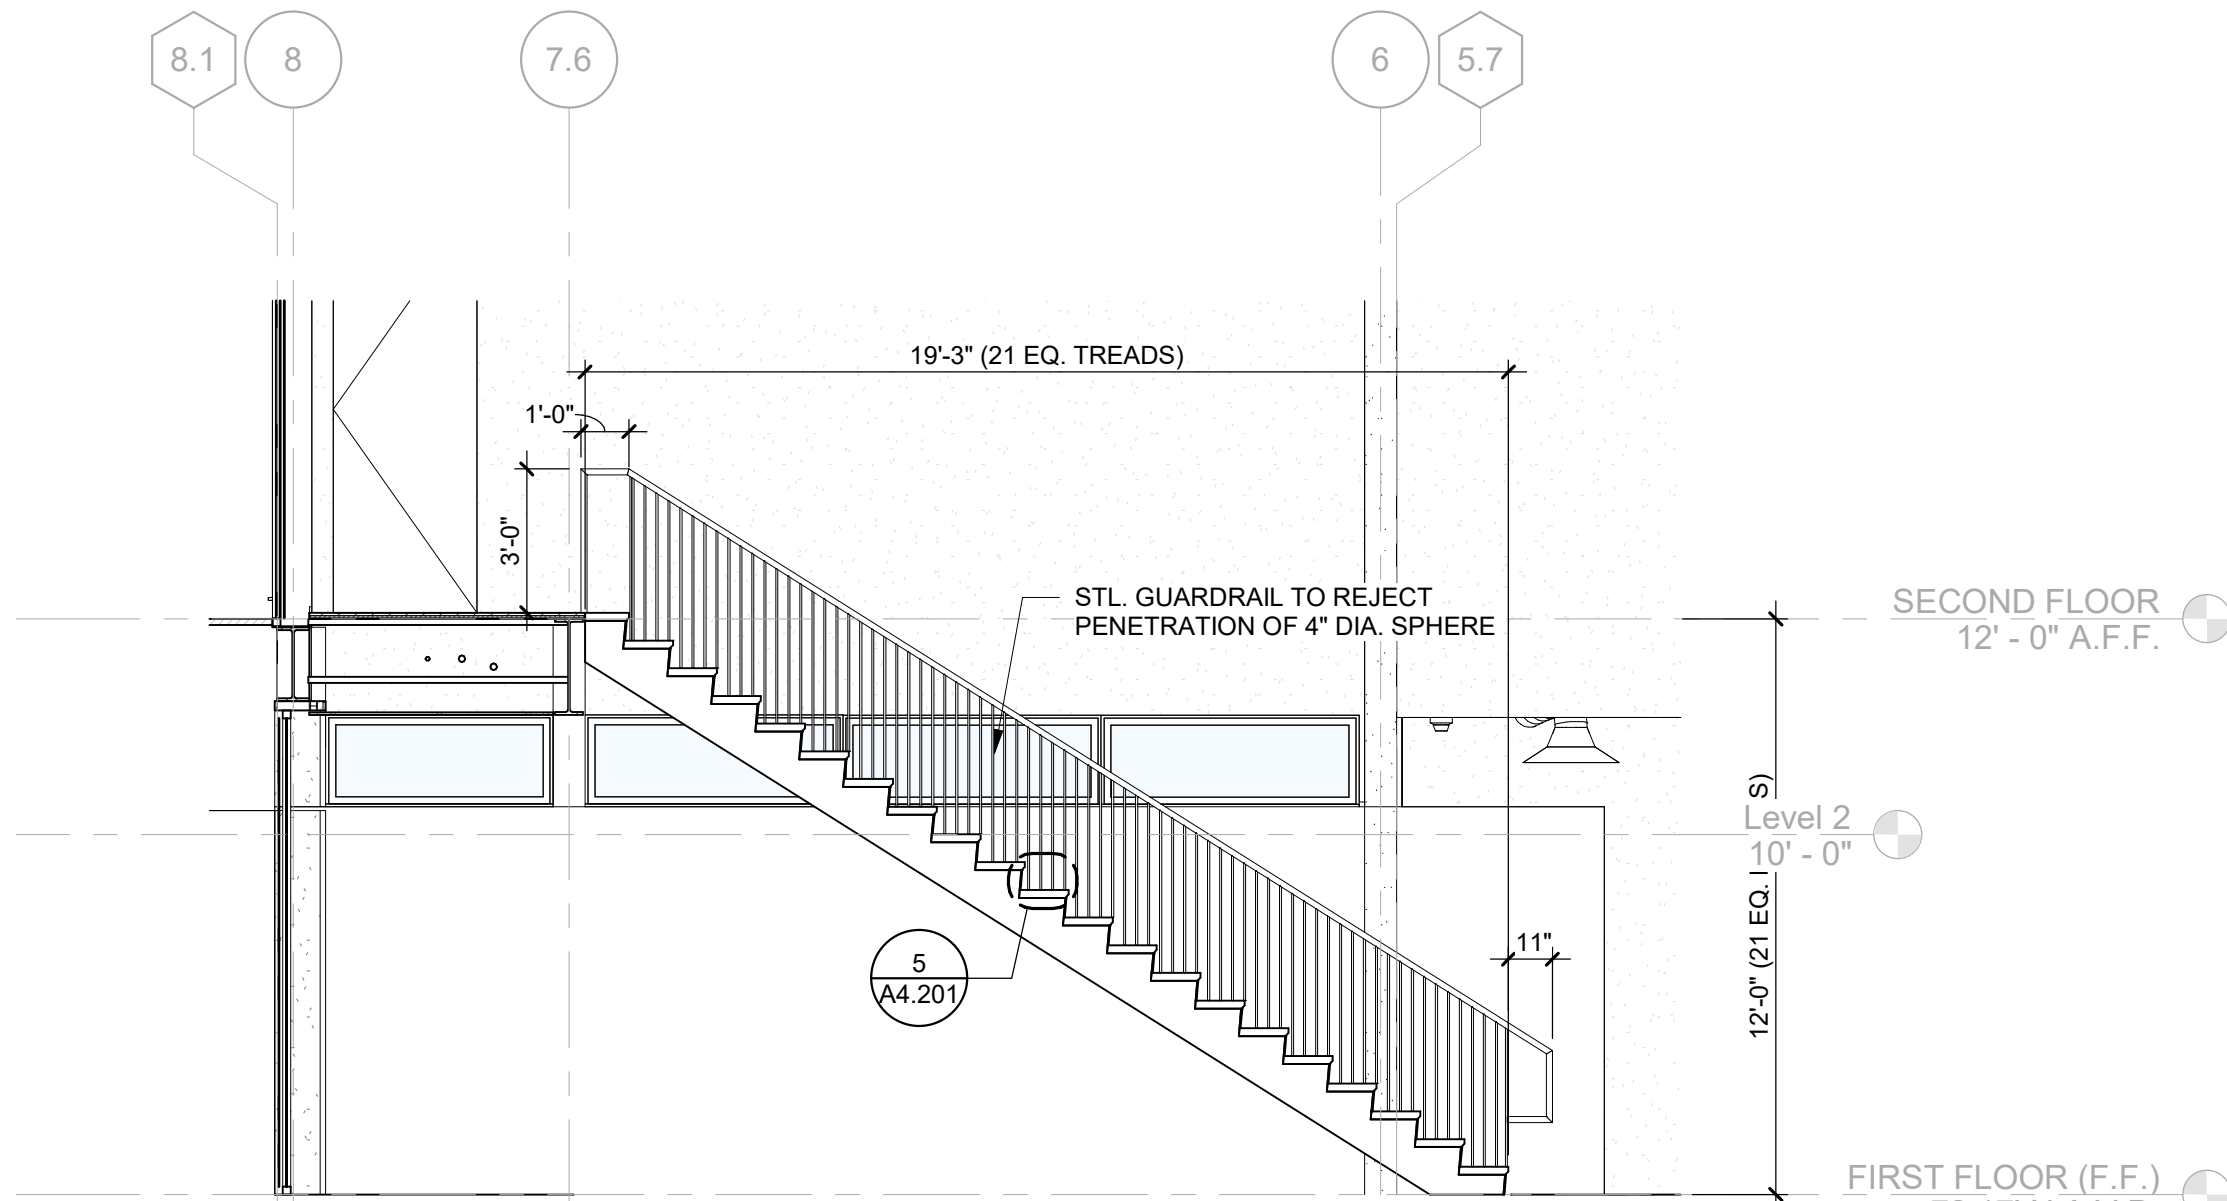

CIRCULATION SECTION - ATRIUM STAIR
1/4" = 1'-0"

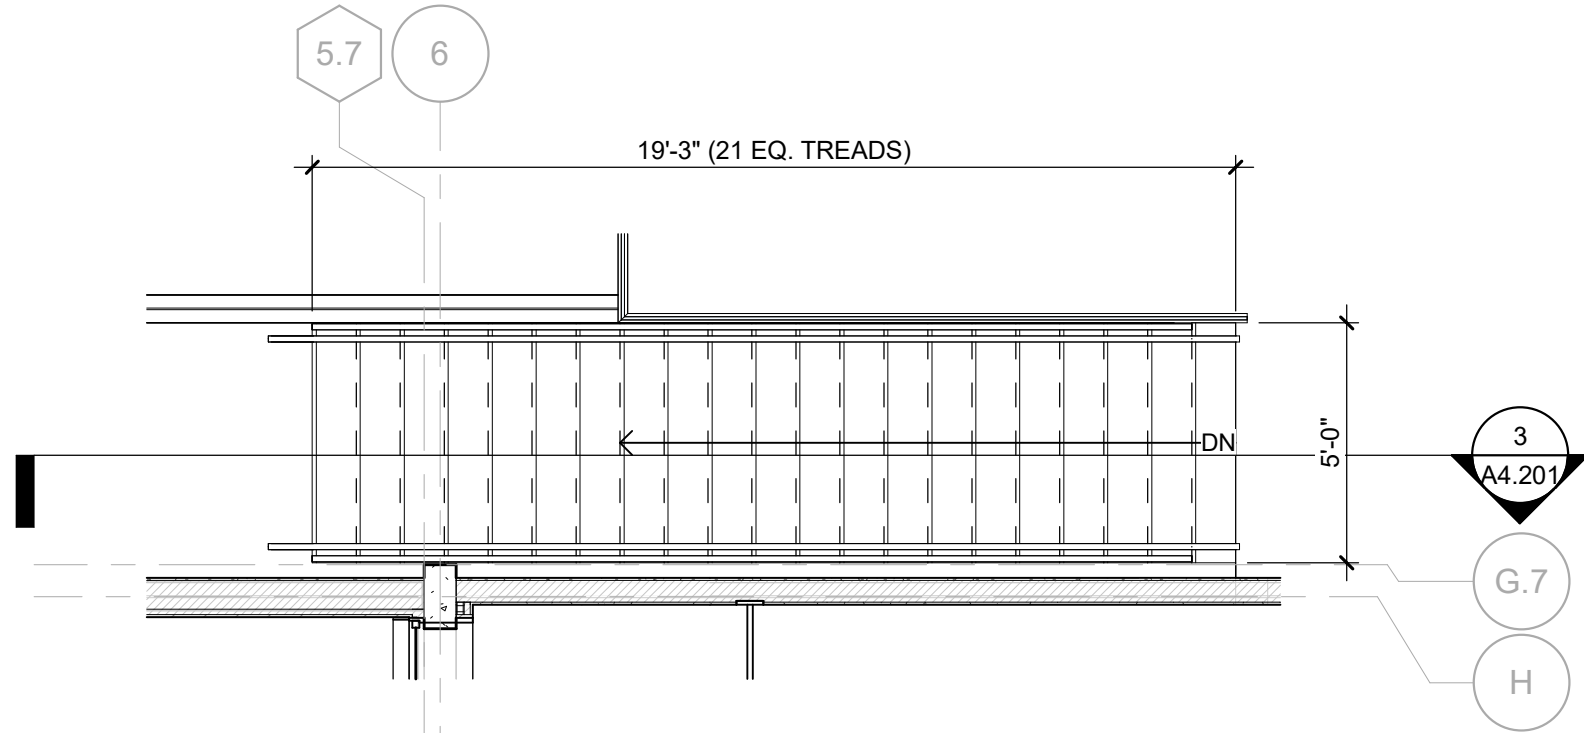

CIRCULATION PLAN - ATRIUM STAIR - SECOND FLOOR
1/4" = 1'-0"




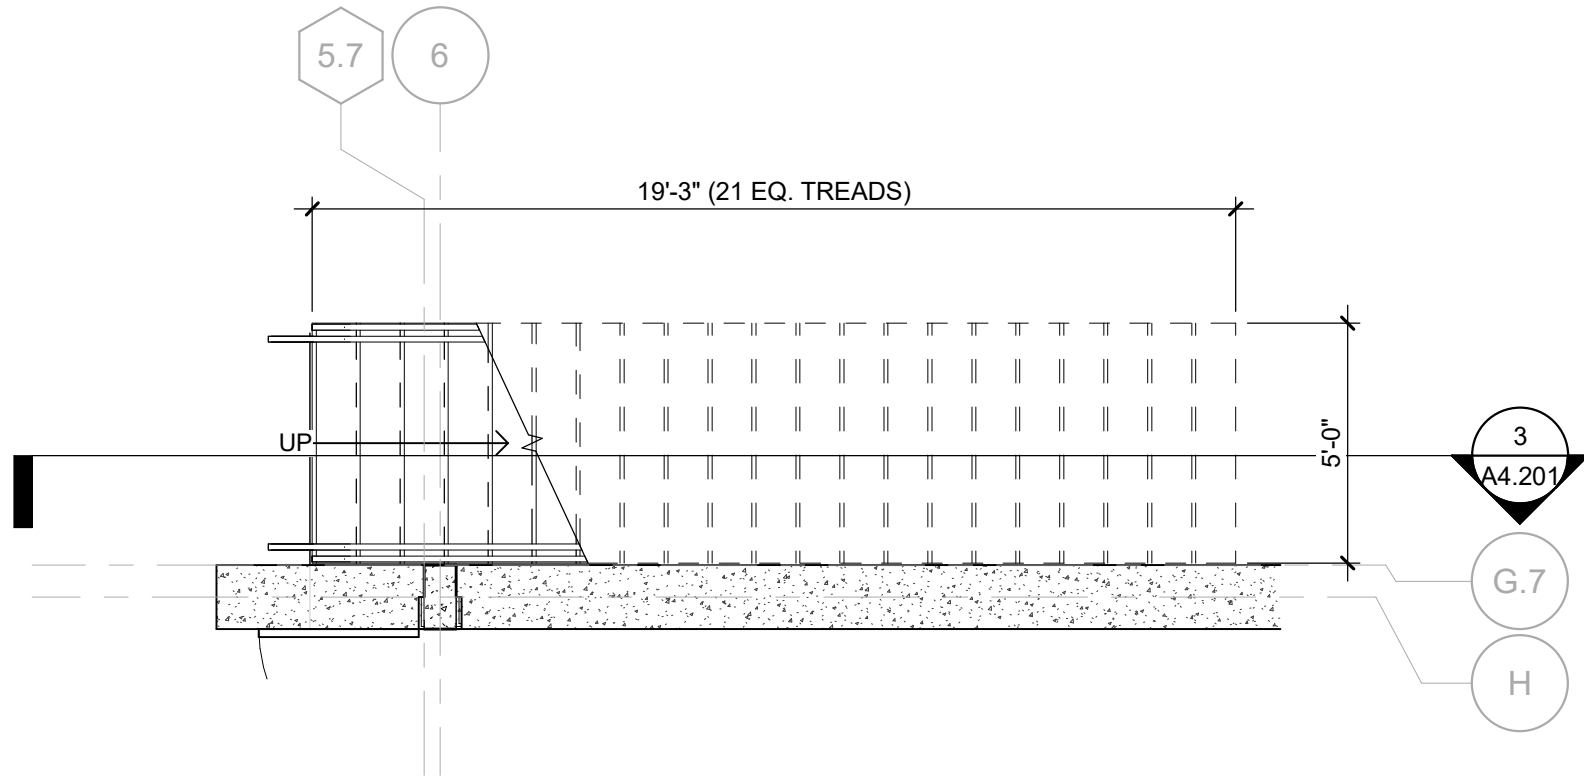


CIRCULATION PLAN - ATRIUM STAIR - FIRST FLOOR
1/4" = 1'-0"
















NO.	REVISION	DATE

ENLARGED PLANS & SECTIONS

PROJECT #	2301
ISSUE DATE	11.21.23

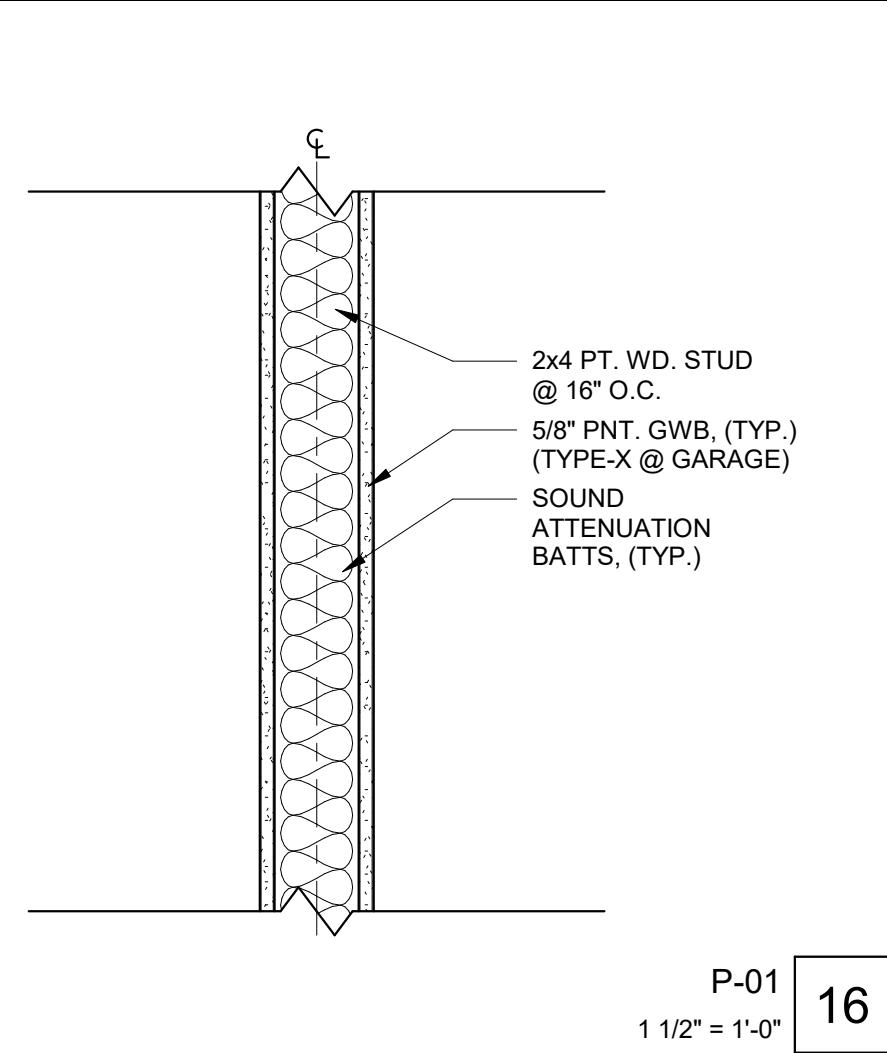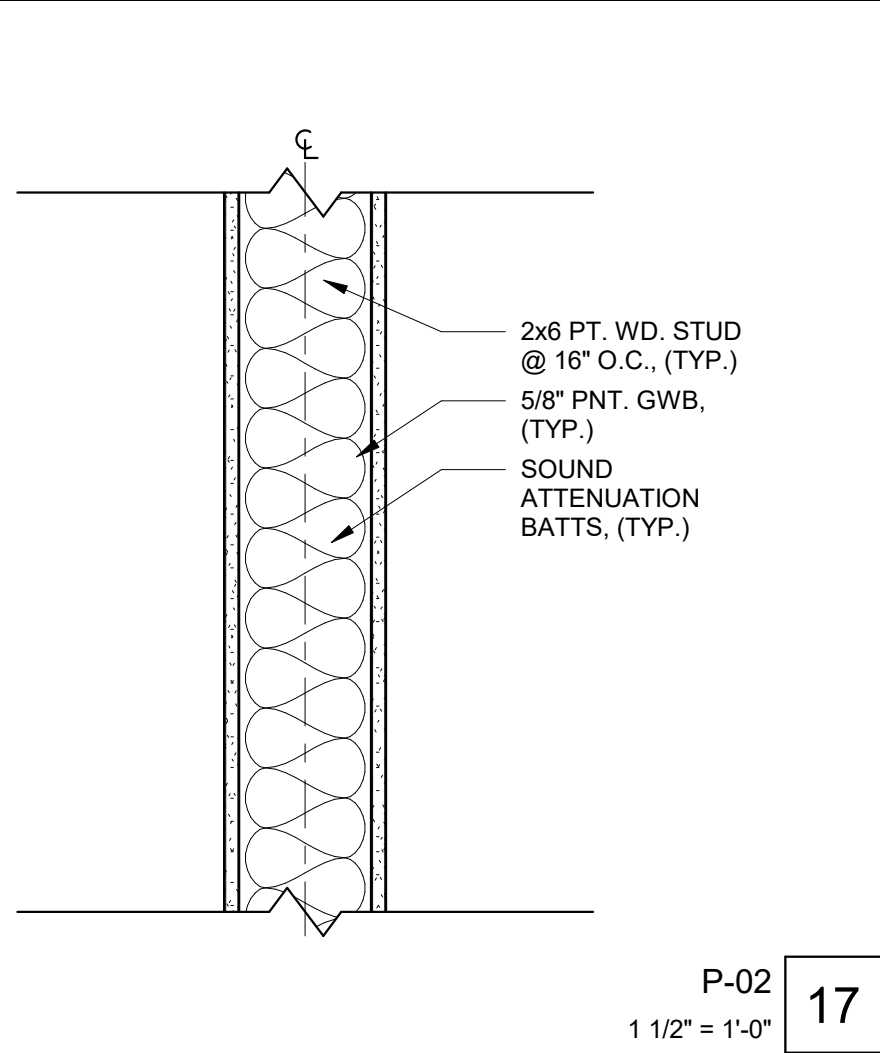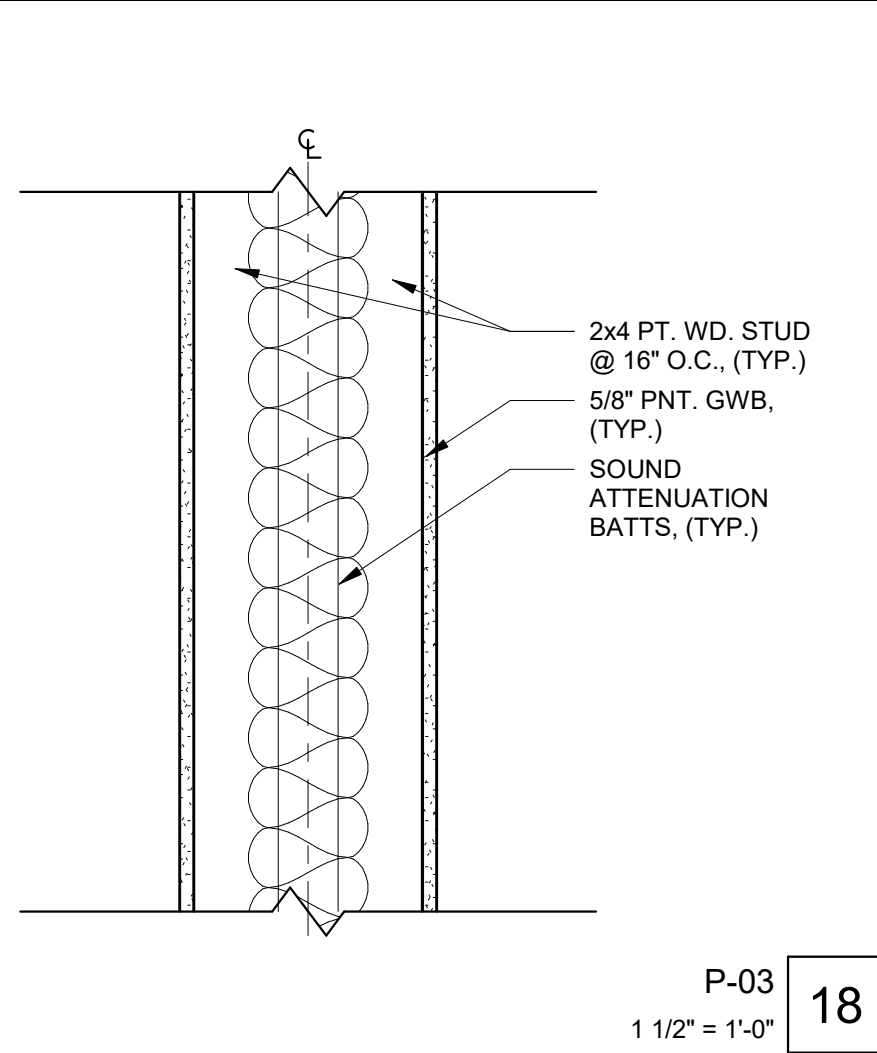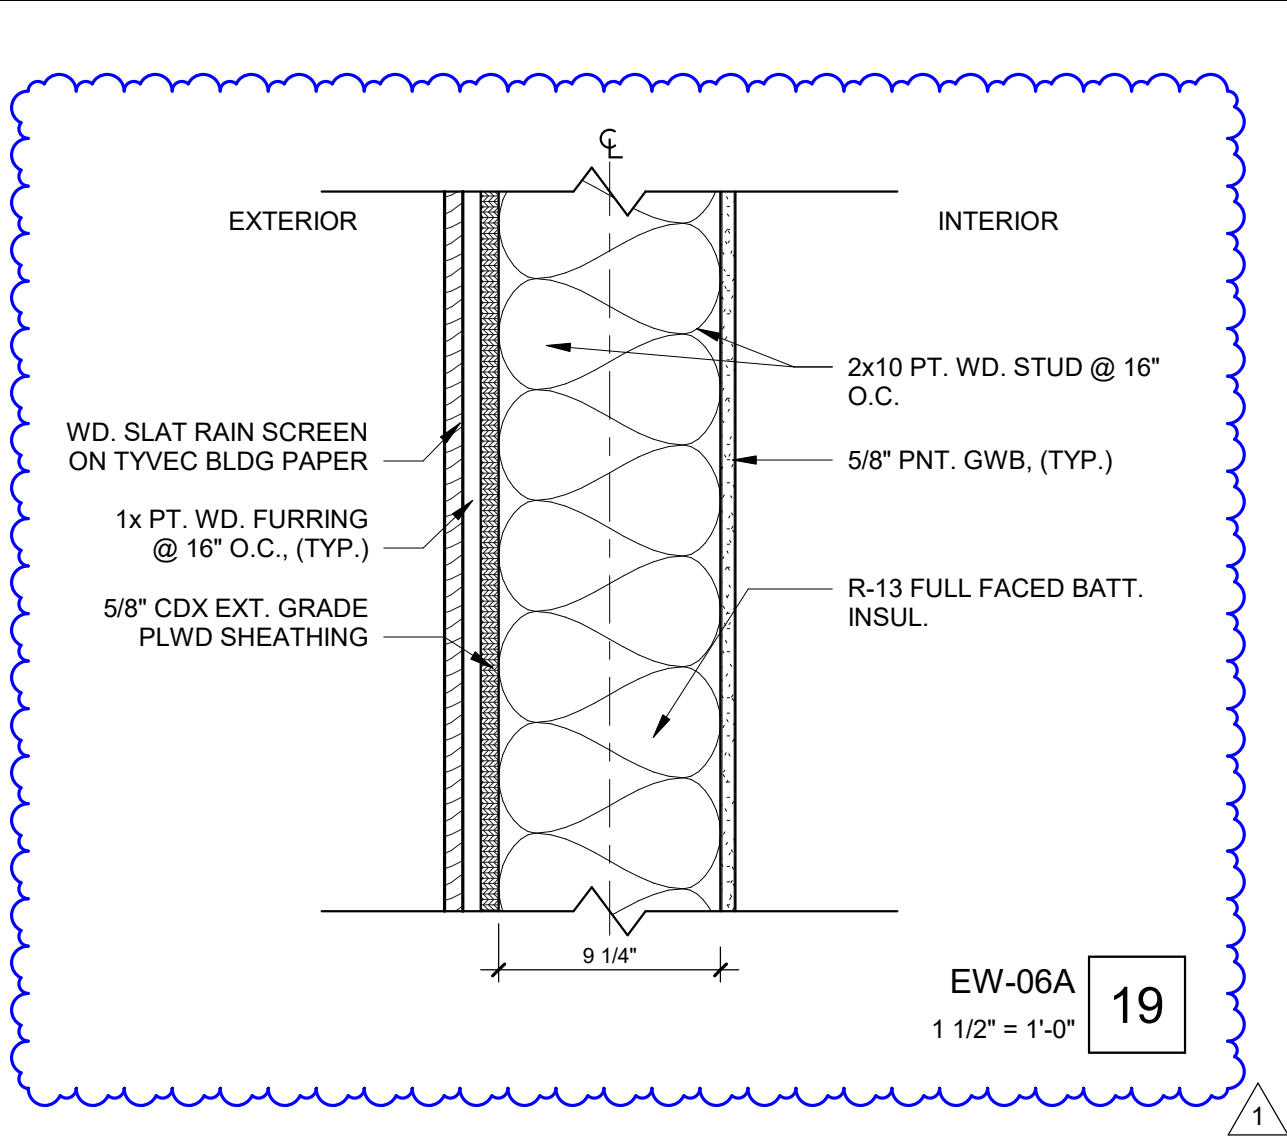

- PARTITION TYPE GENERAL NOTES**
- DIMENSIONS ON THE PLAN ARE TO THE CENTERLINE OF THE PARTITION (CENTERLINE SHOWN).
 - SEE FINISH SCHEDULE FOR WALL FINISH. CONDITION SHOWN ON PARTITION TYPES ARE GENERIC AND VARY FROM INSTANCE TO INSTANCE.
 - SEE FINISH SCHEDULE FOR FLOOR FINISH AND BASE MATERIALS. CONDITION SHOWN ON PARTITION TYPES ARE GENERIC AND VARY FROM INSTANCE TO INSTANCE.
 - PARTITIONS WITH FIRE RATINGS SHALL NOT BE INTERRUPTED BY OTHER NON-RATED PARTITIONS.
 - PARTITIONS WITH A HIGHER STC RATINGS SHALL HAVE PRIORITY (NOT BE INTERRUPTED) OVER OTHER INTERSECTING PARTITIONS.
 - SPECIFIC NOTES ON PLANS INDICATE WHERE WALL PLANES SHOULD ALIGN.
 - GWB THICKNESS TO BE 5/8" TYP. (U.N.O.).
 - PROVIDE MOISTURE RESISTANT GWB AT BATHROOMS & WET AREAS. TYP.
 - PROVIDE 1/2" CEM. BD. AT LOCATIONS SCHEDULED TO RECIEVE TILE FINISH, TYP.
 - OFFSET DEVICES A MIN OF 24" THAT OCCUR ON OPPOSITE SIDE OF PARTITIONS, TYP.
 - PROVIDE CONTINUOUS SEALANT AT ALL OPENINGS AND HOLES WITHIN OUTLET BOXES. INSTALL SEALANT AFTER WIRE IS PULLED, TYP.
- FIREBLOCKING SHALL BE PROVIDED IN WOOD-FRAMED CONSTRUCTION IN THE FOLLOWING LOCATIONS:
- IN CONCEALED SPACES OF STUD WALLS AND PARTITIONS, INCLUDING FURRED SPACES AND PARALLEL ROWS OF STUDS OR STAGGERED STUDS, AS FOLLOWS:
 - VERTICALLY AT THE CEILING AND FLOOR LEVELS.
 - HORIZONTALLY AT INTERVALS NOT EXCEEDING 10 FEET (3048 MM).
 - AT INTERCONNECTIONS BETWEEN CONCEALED VERTICAL AND HORIZONTAL SPACES AT SOFFITS, DROP CEILINGS AND COVE CEILINGS.

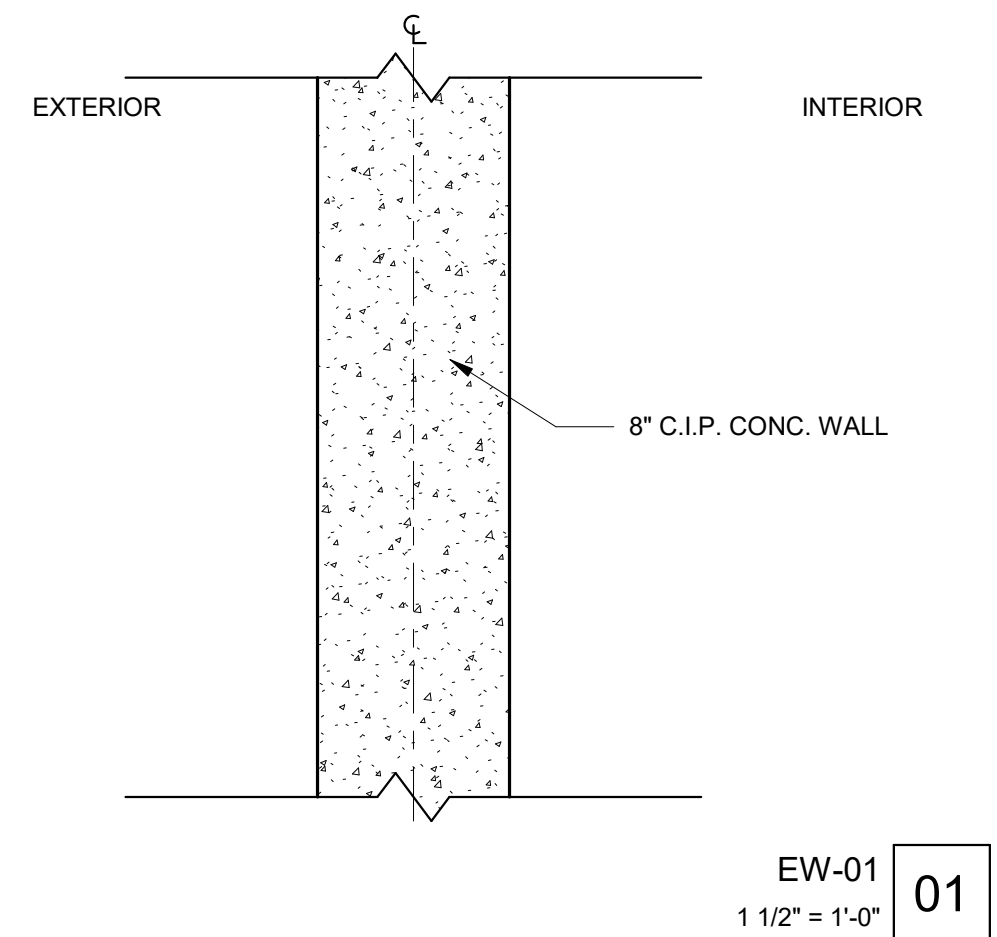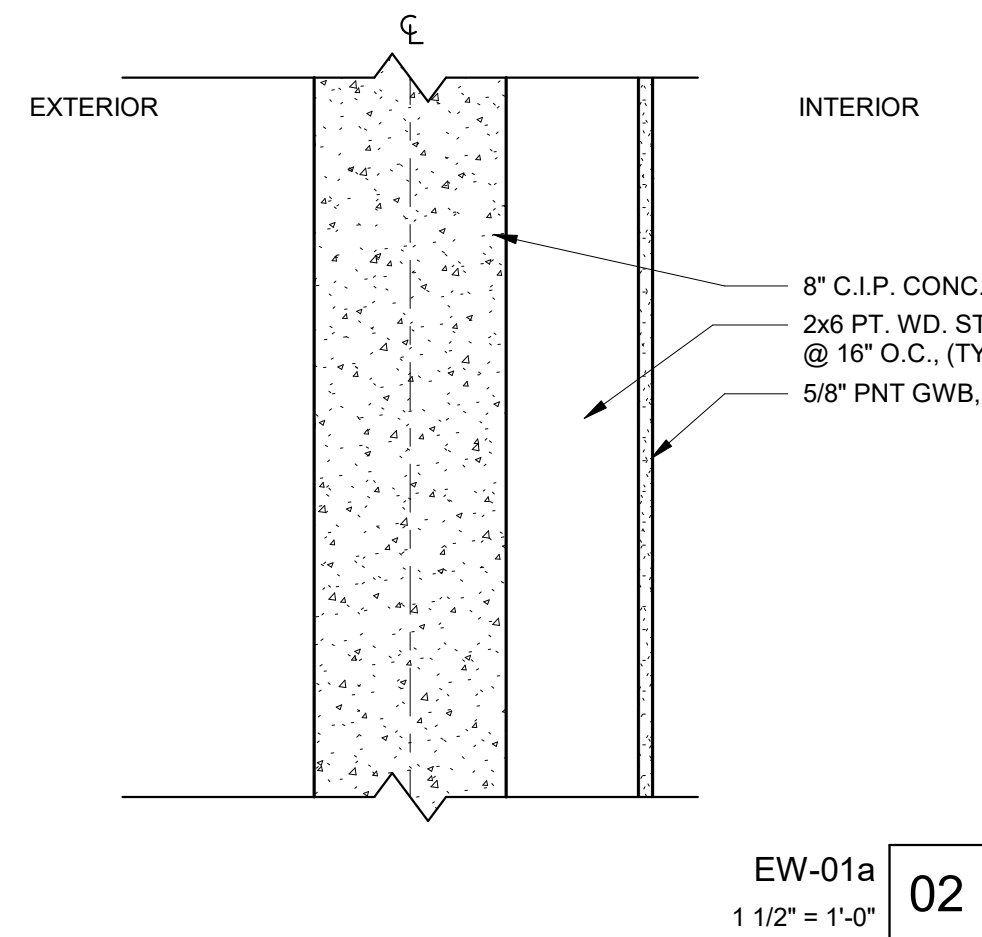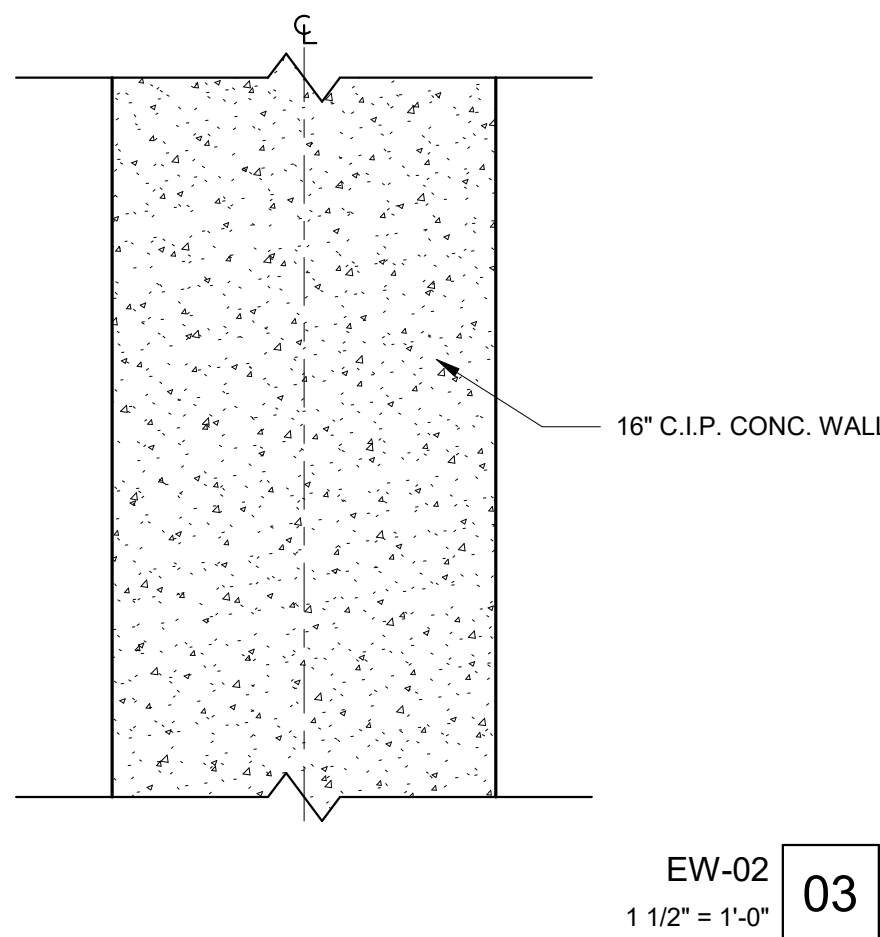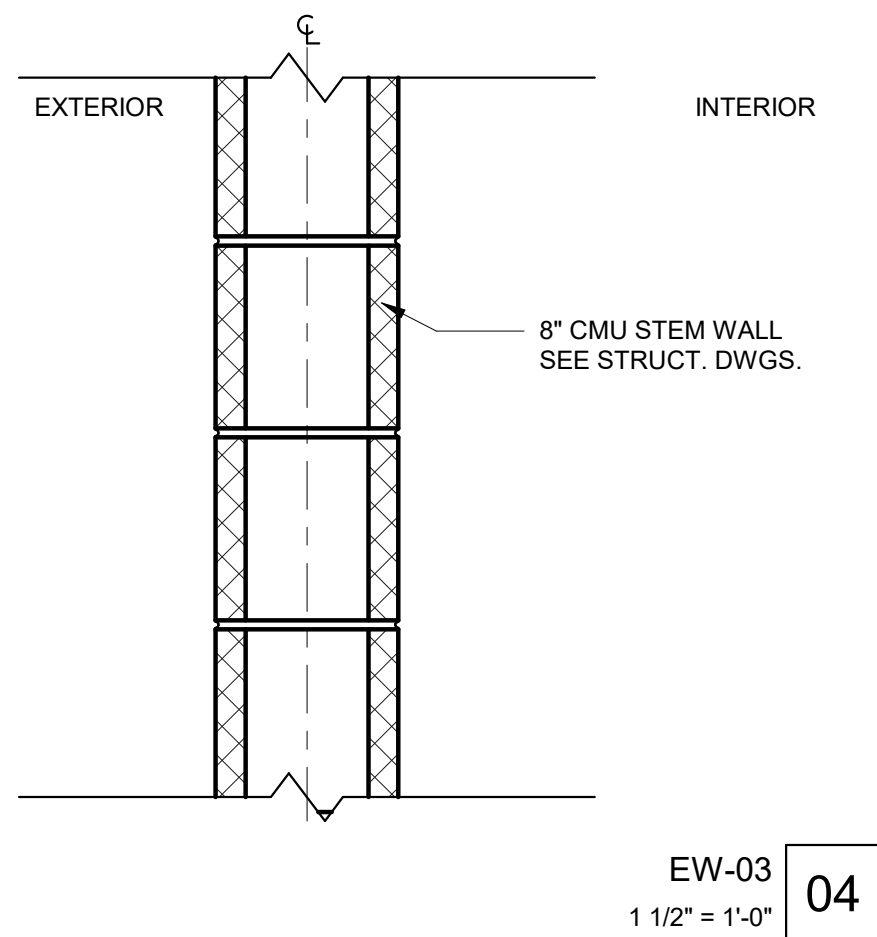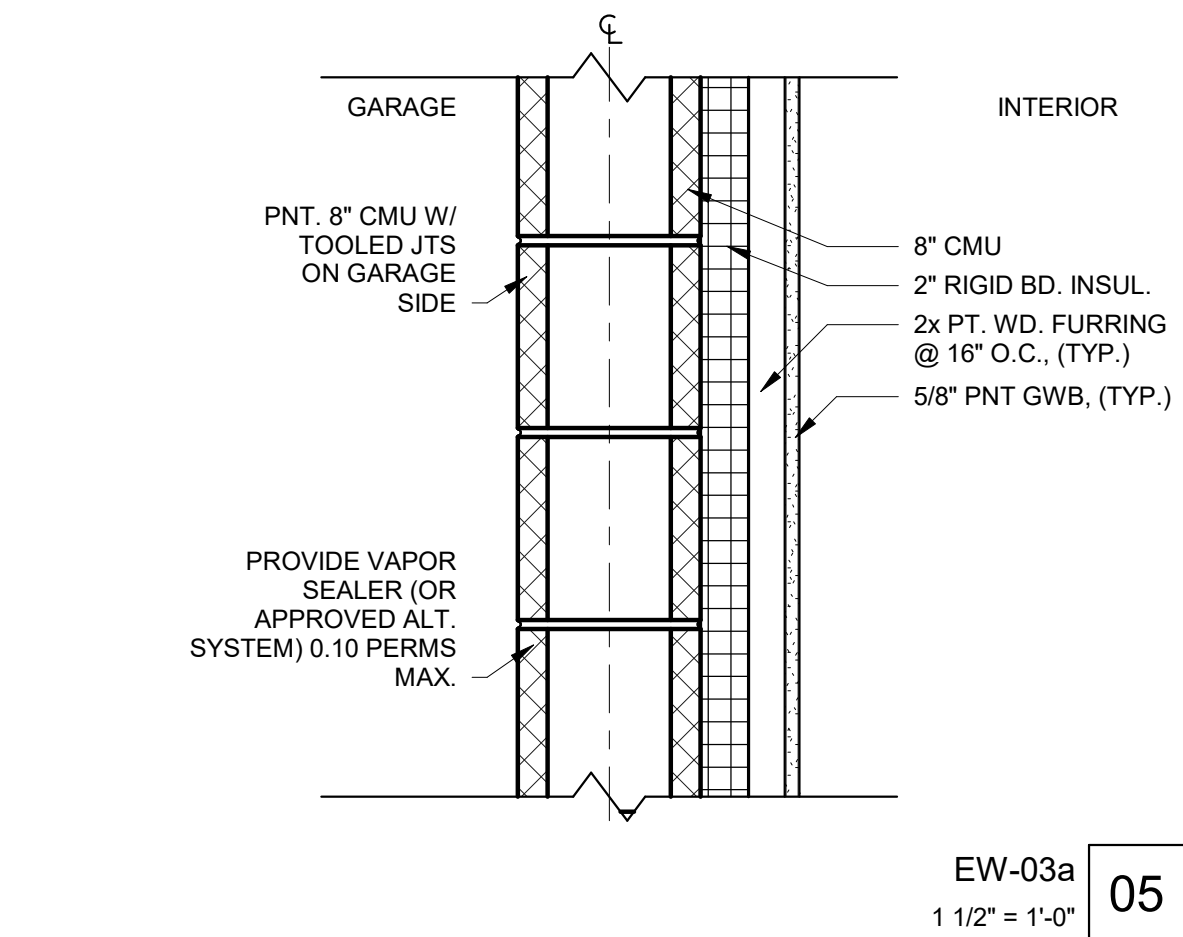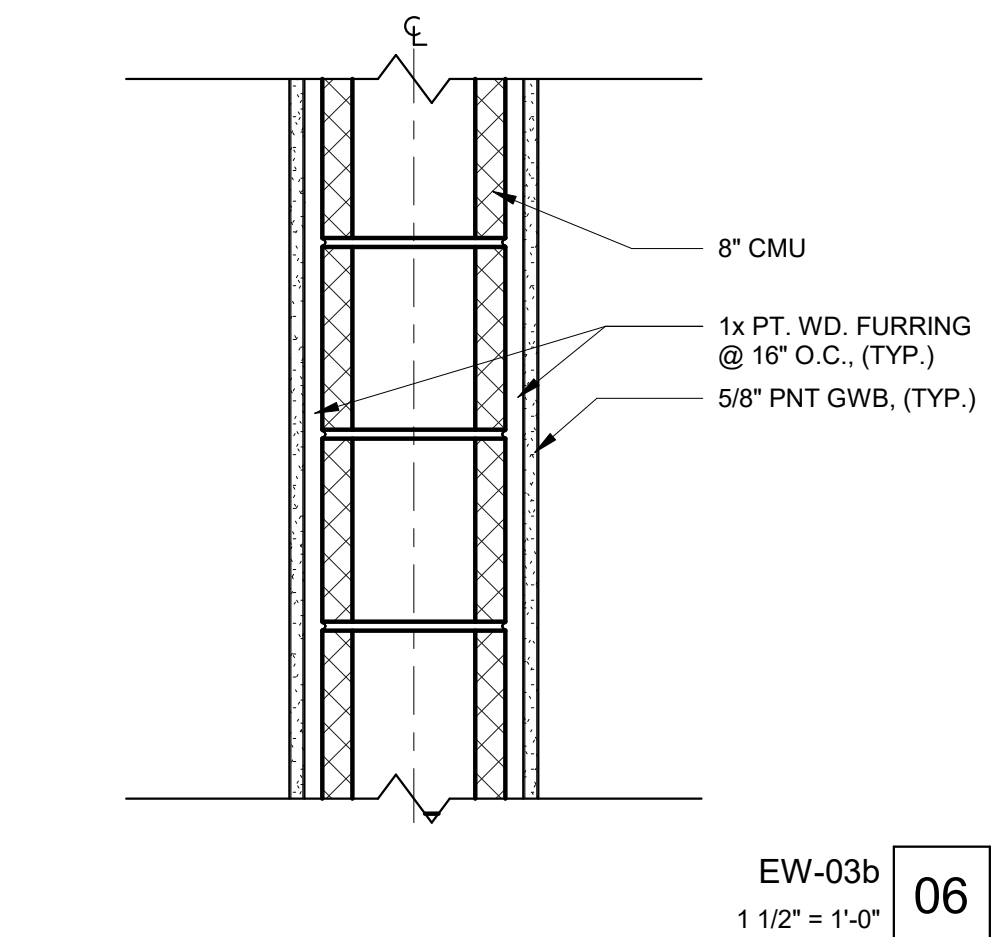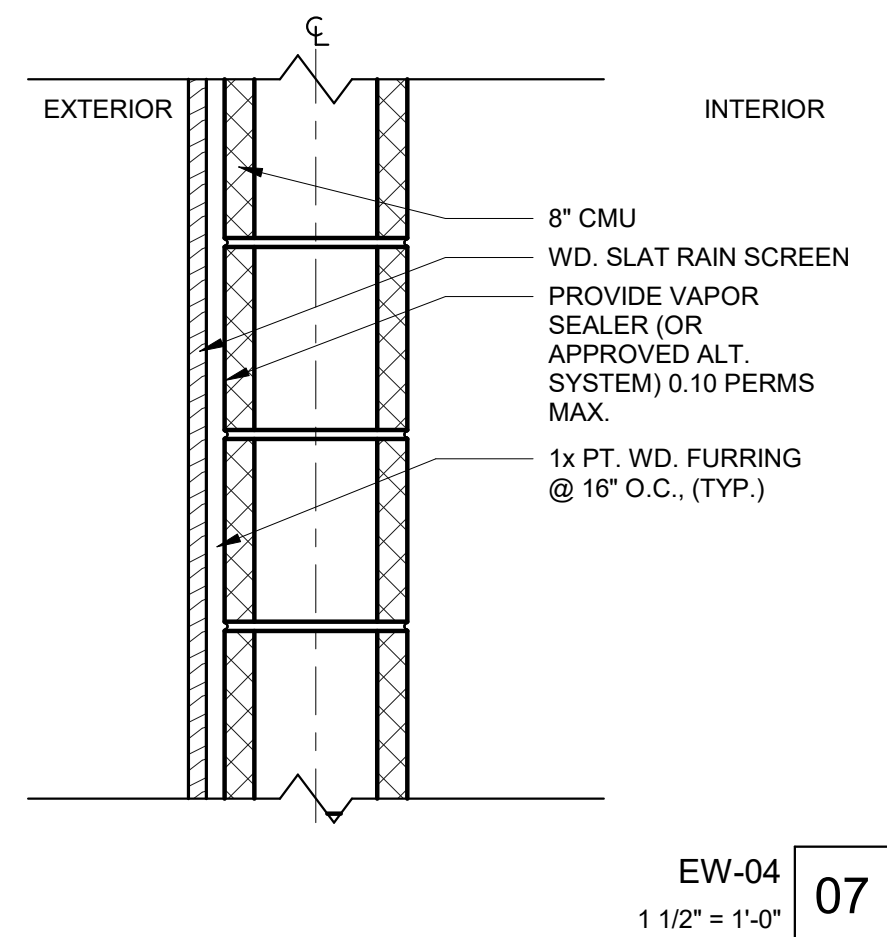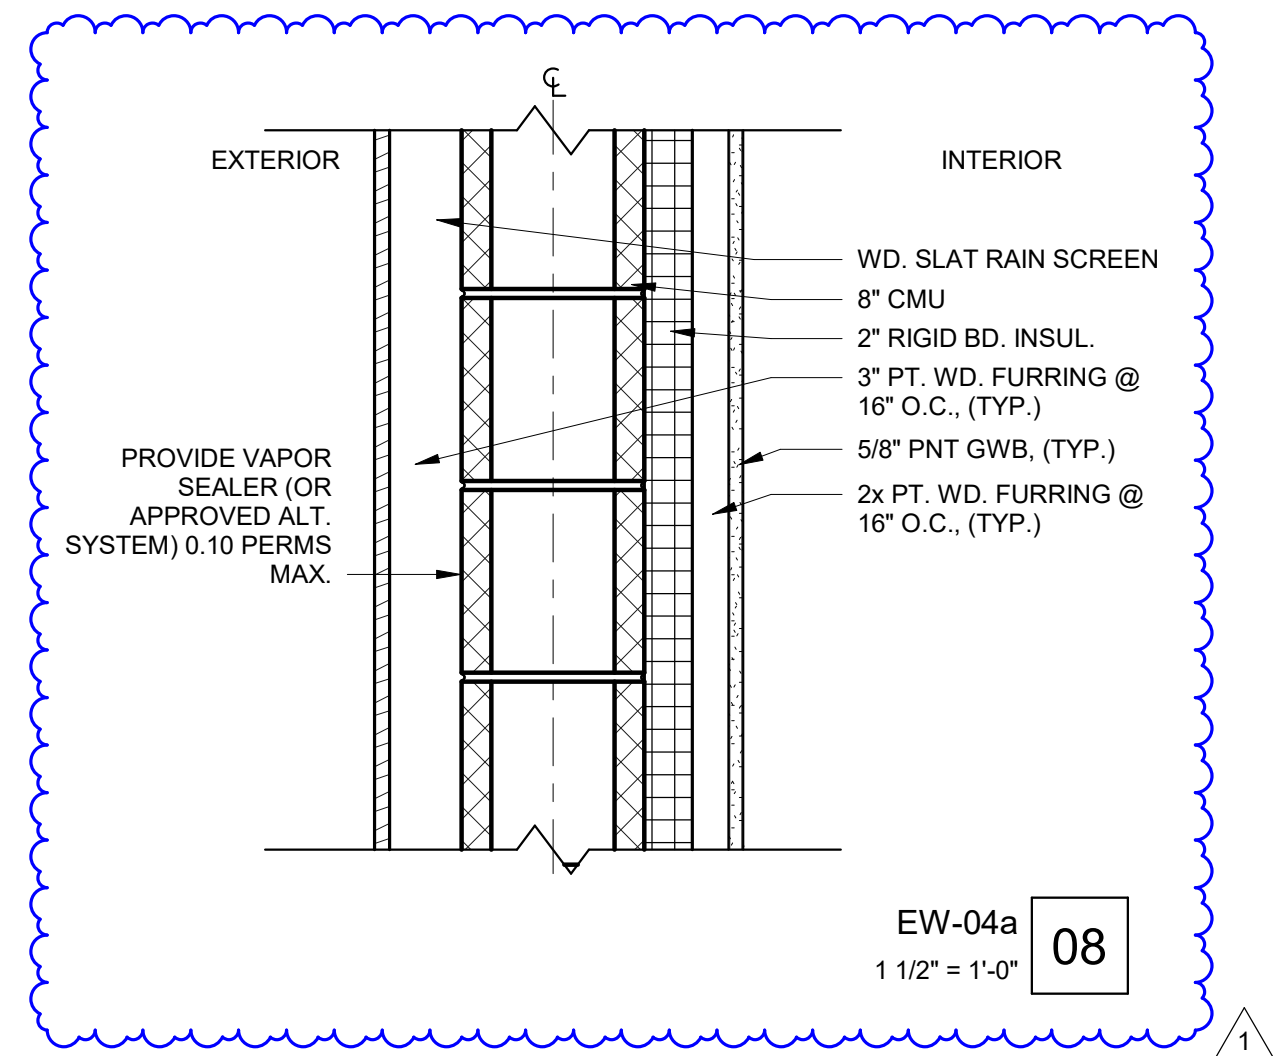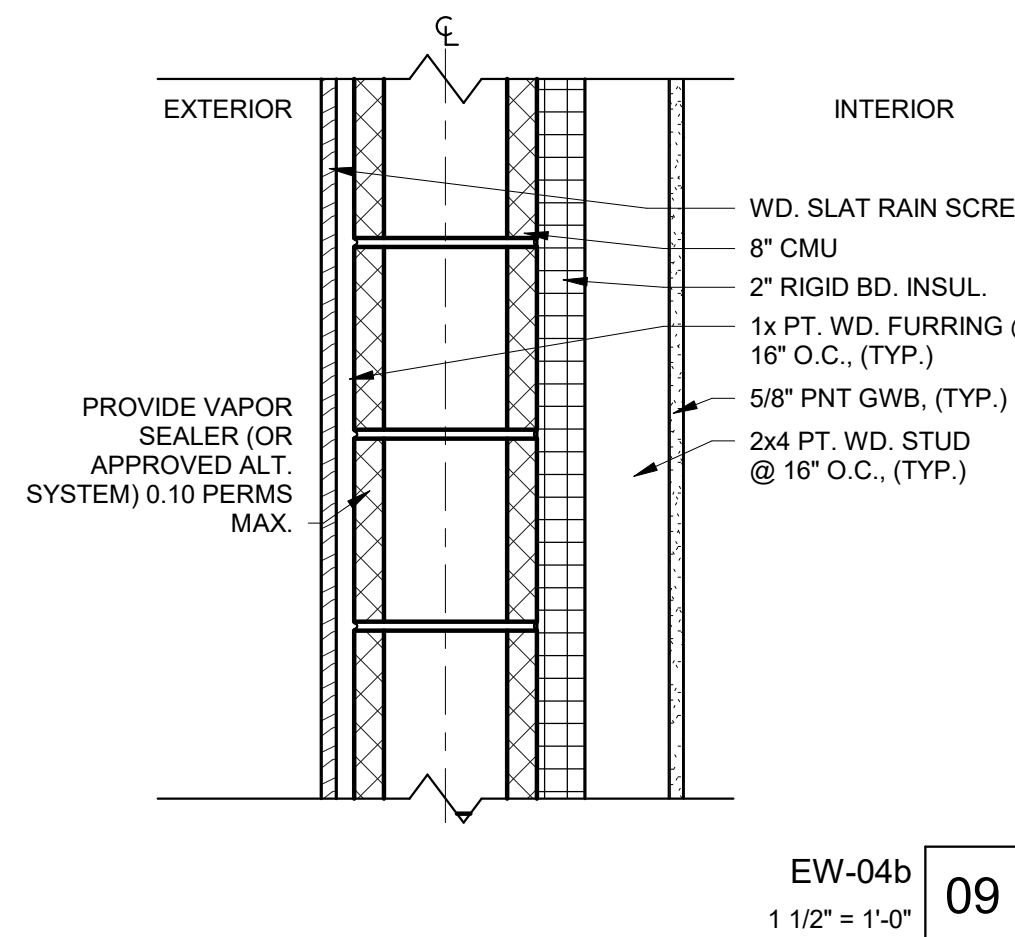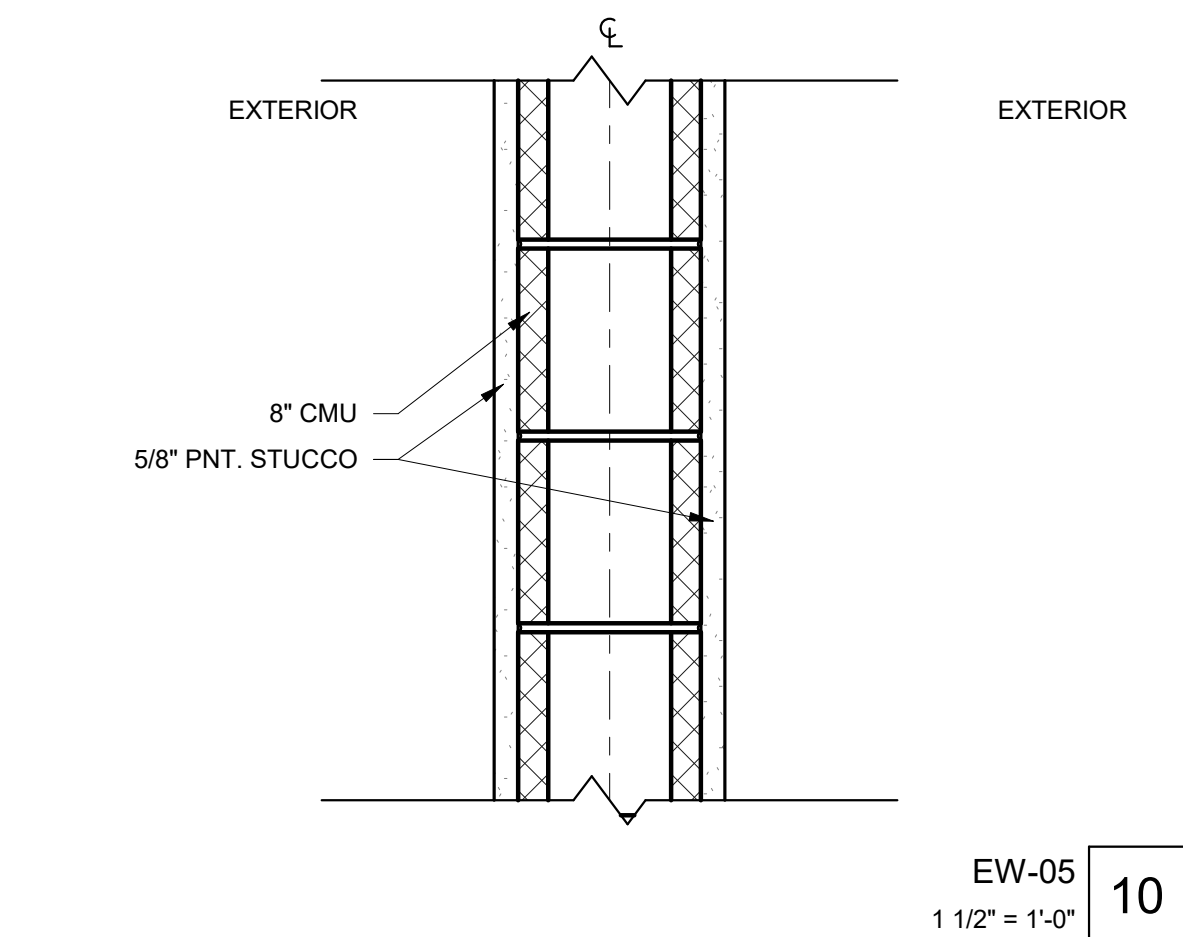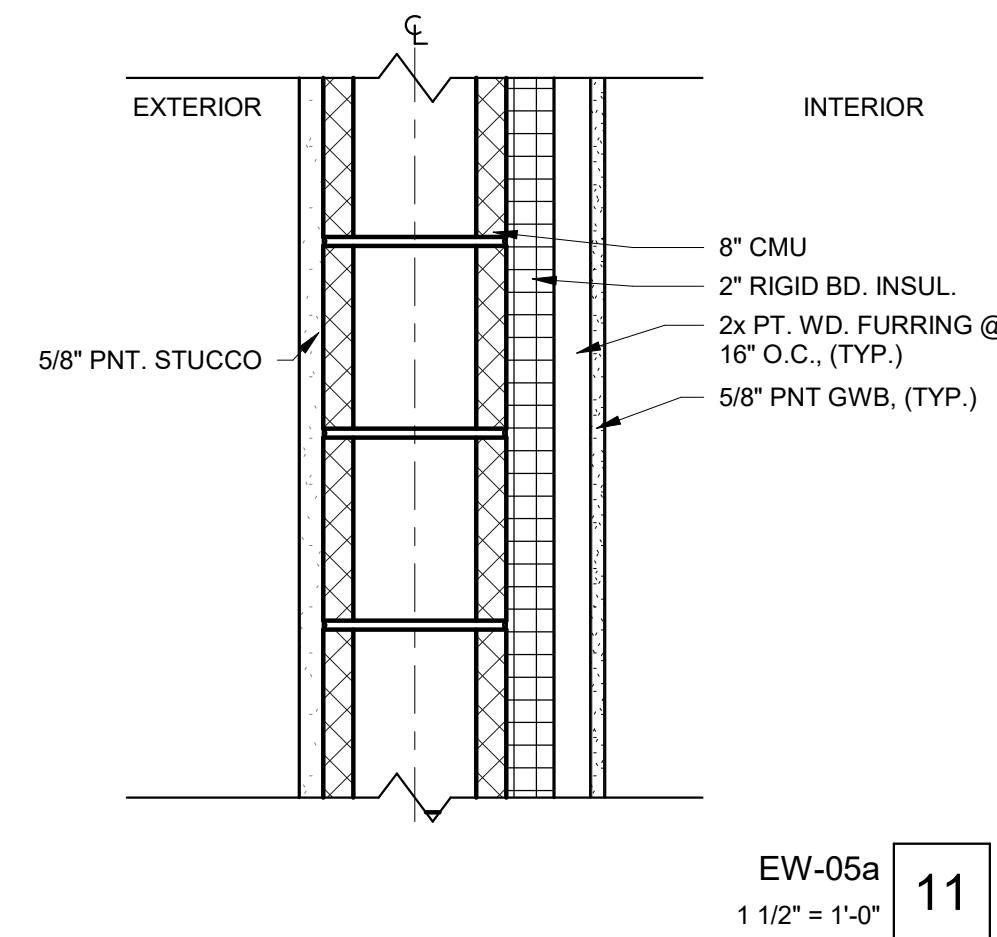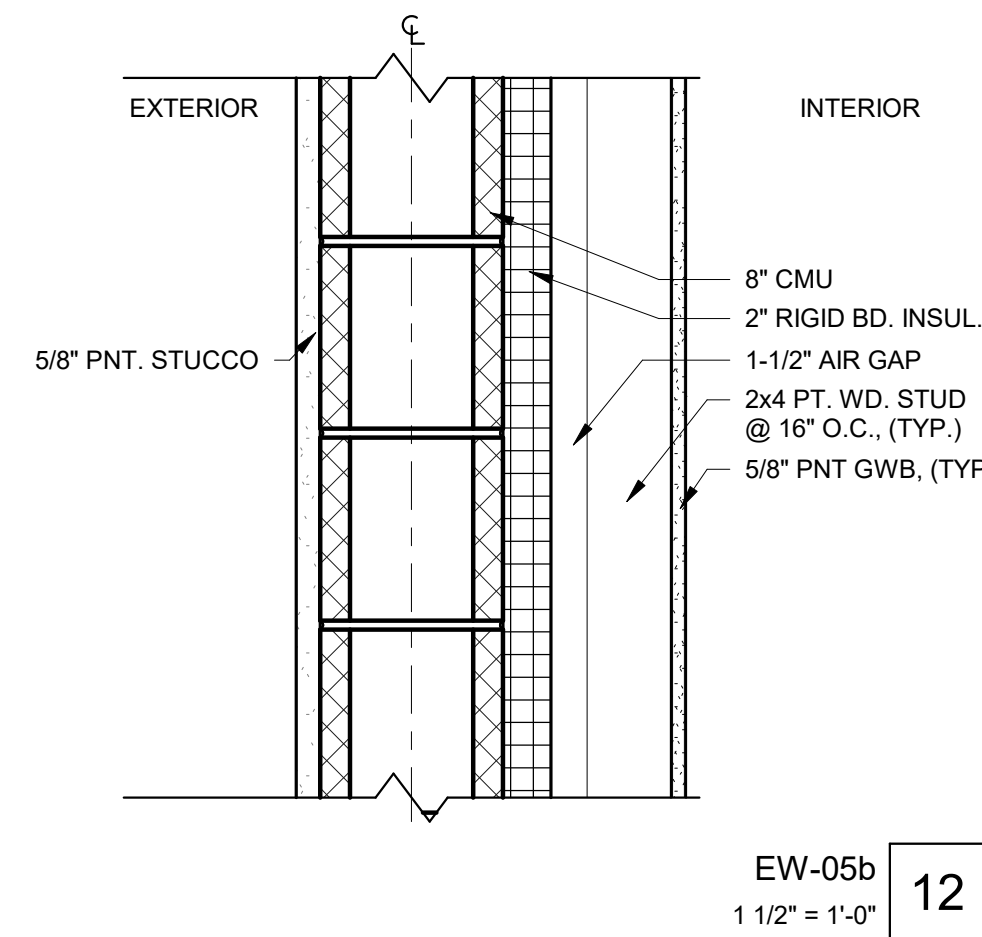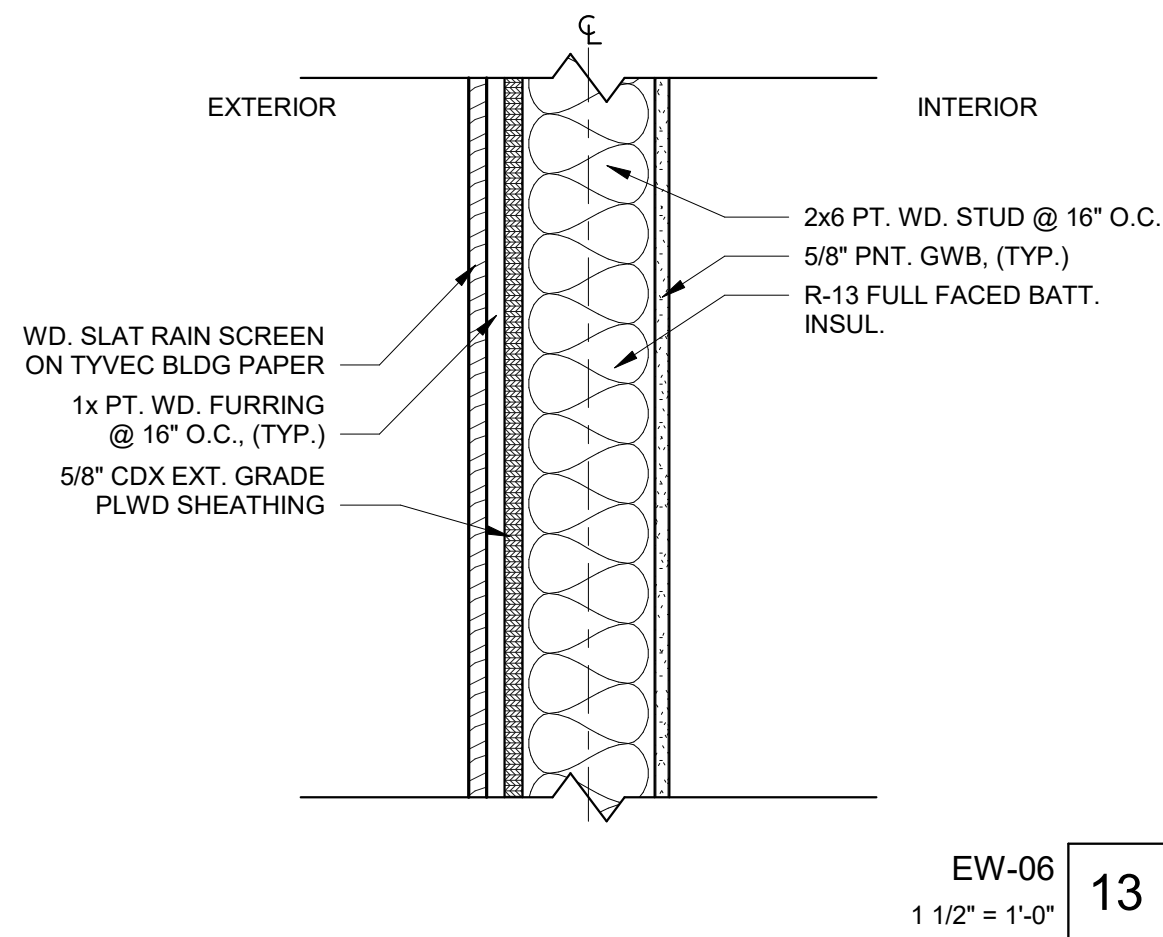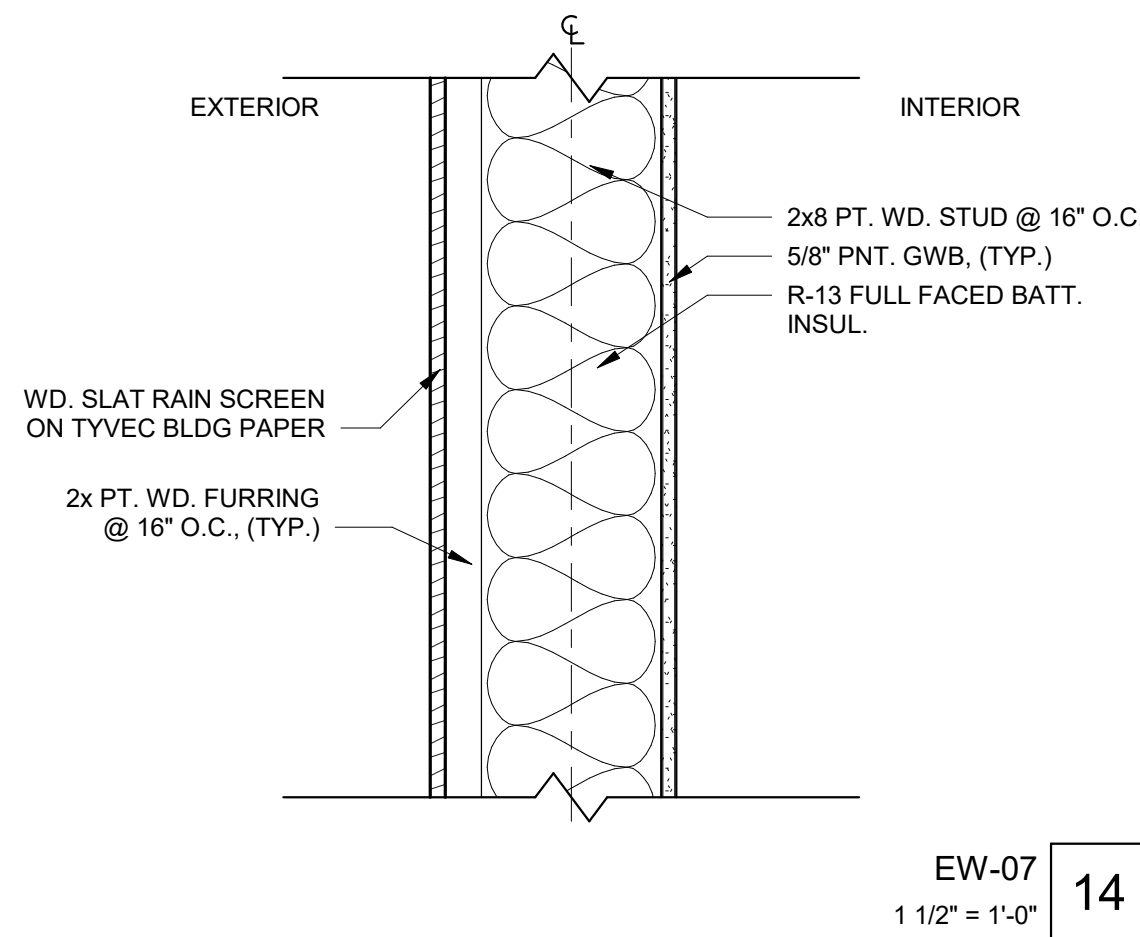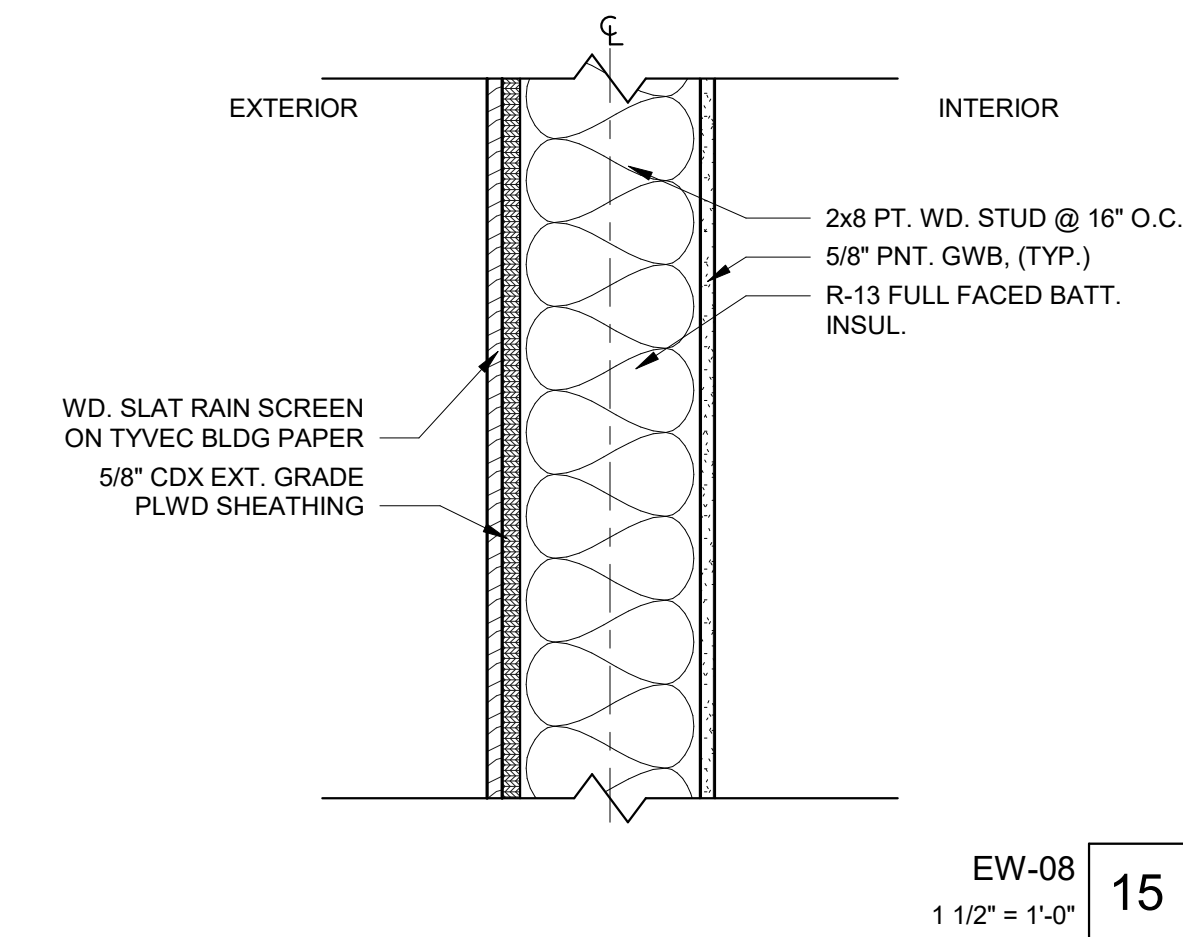

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

PARTITION TYPES

PROJECT #	2301
ISSUE DATE	11.21.23

PROJECT DESIGN TEAM:
ARCHITECT
MODULO A+I, L.L.C.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com
STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475
MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625
ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473
OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548


PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549


PERMIT SET
YOUSEF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

PARTITION TYPES	


PROJECT #	2301
ISSUE DATE	11.21.23

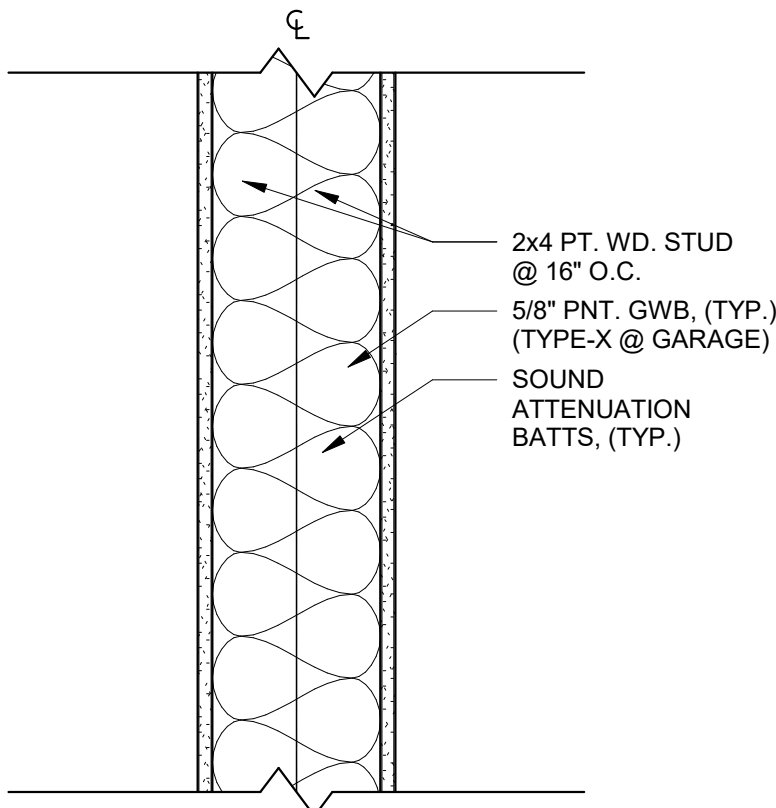

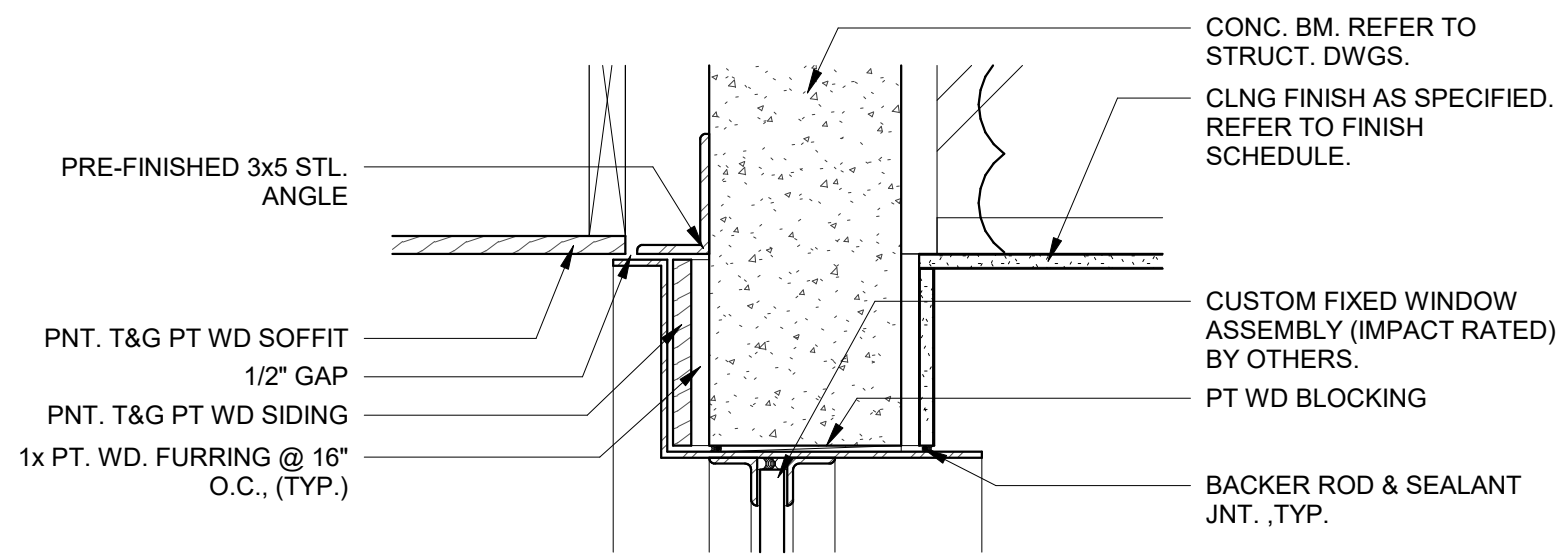


WINDOW - FIXED @ CONC BM - HEAD DTL
1 1/2" = 1'-0"

11

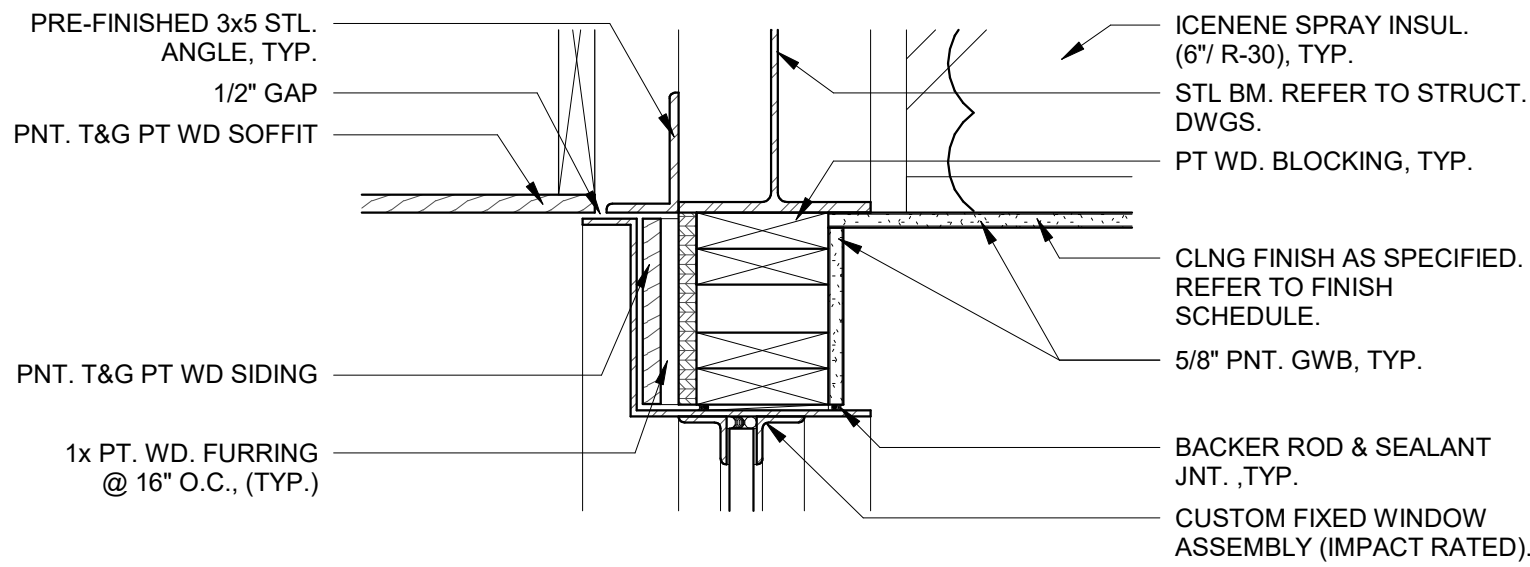


WINDOW - FIXED @ STL BM - HEAD DTL
1 1/2" = 1'-0"

10

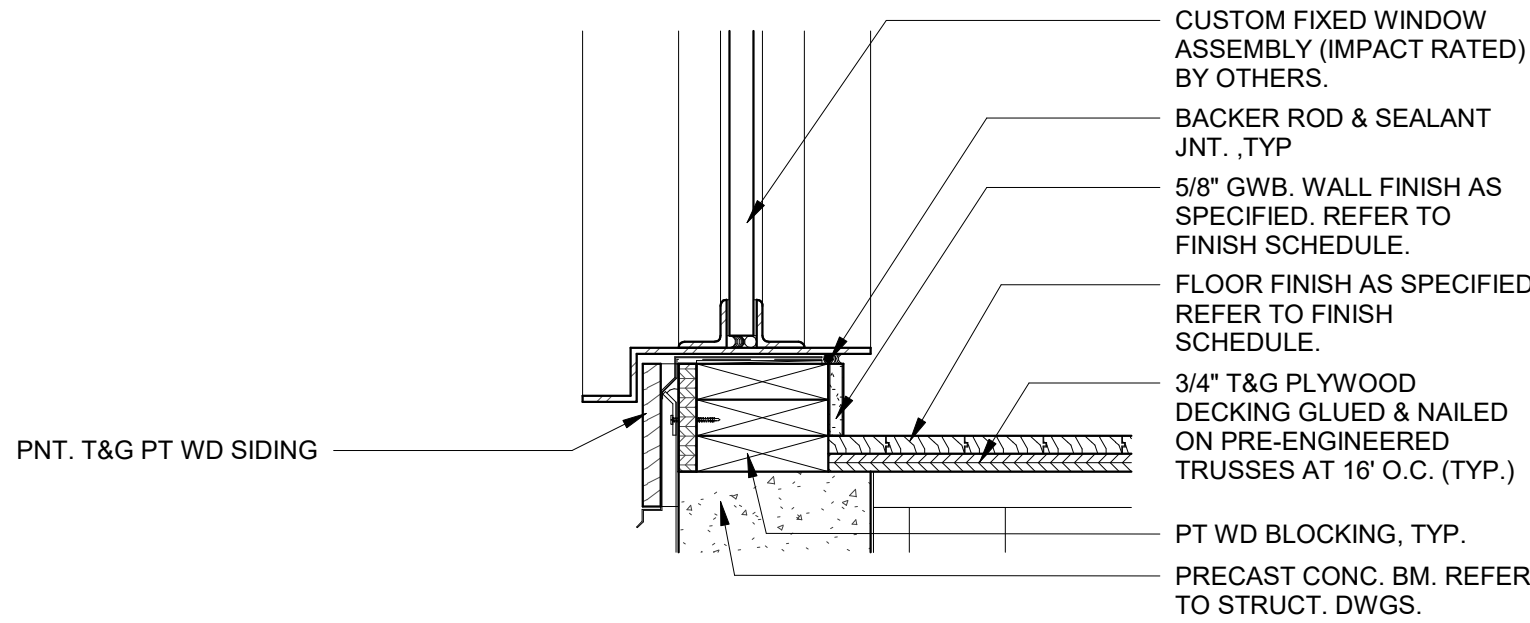


WINDOW - FIXED @ CONC BM - SILL DTL
1 1/2" = 1'-0"

9

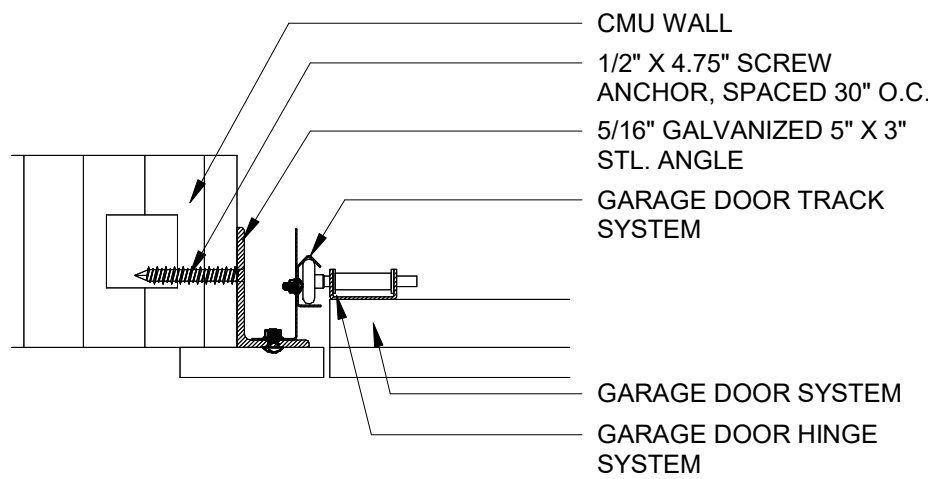


OVERHEAD DOOR - JAMB DTL
1 1/2" = 1'-0"

8

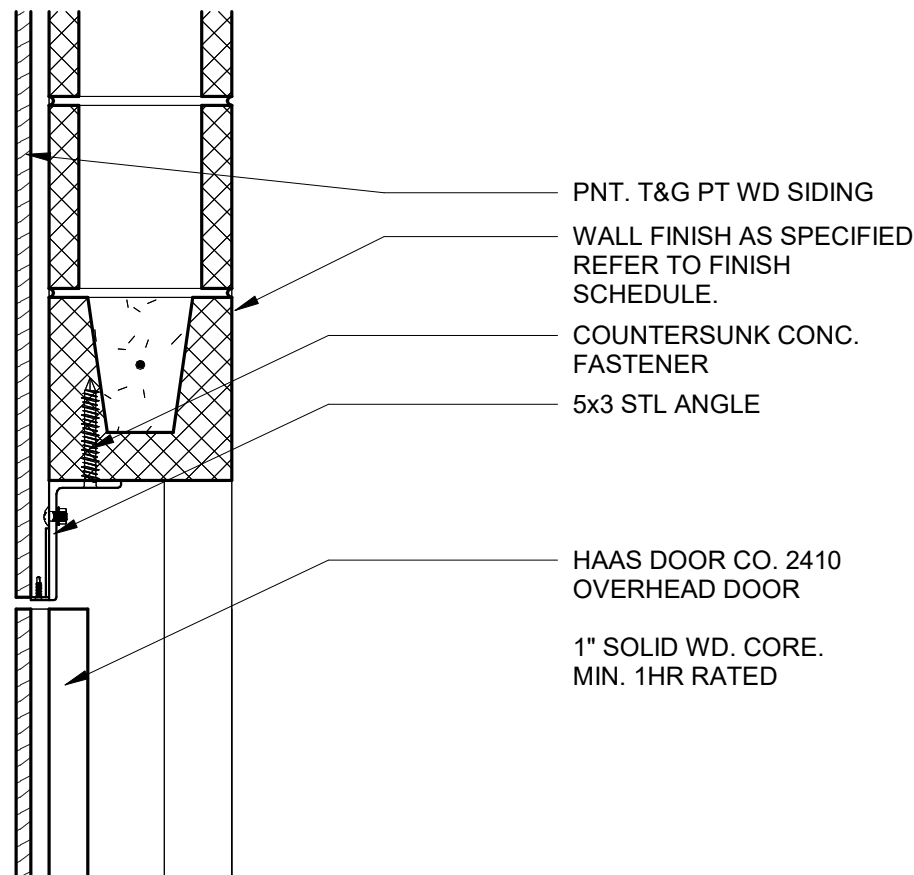


OVERHEAD DOOR - HEAD DTL
1 1/2" = 1'-0"

7

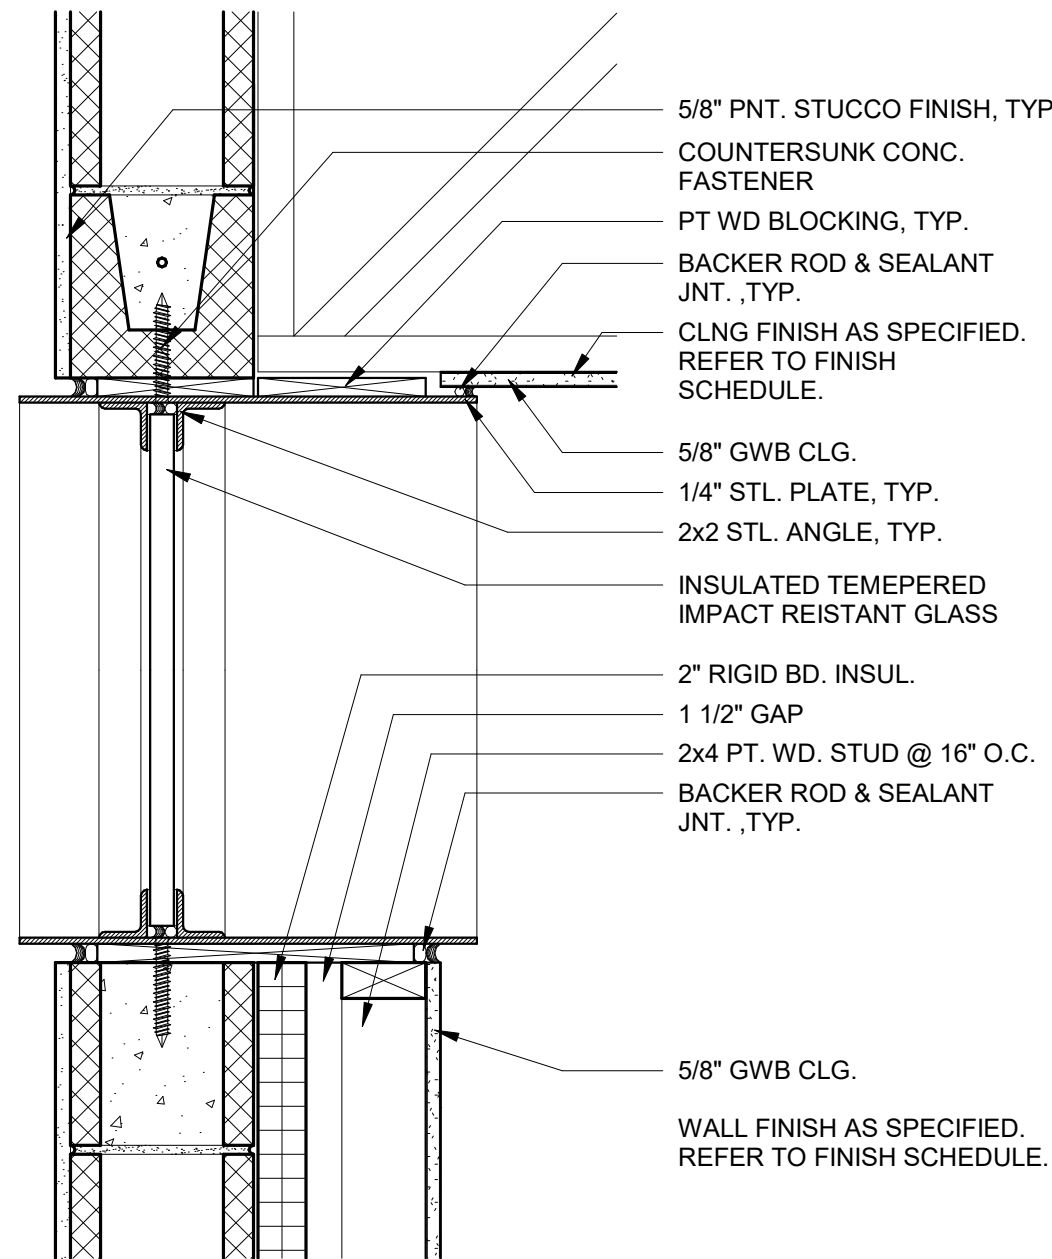


WINDOW - CUSTOM - HEAD / SILL DTL
1 1/2" = 1'-0"

6

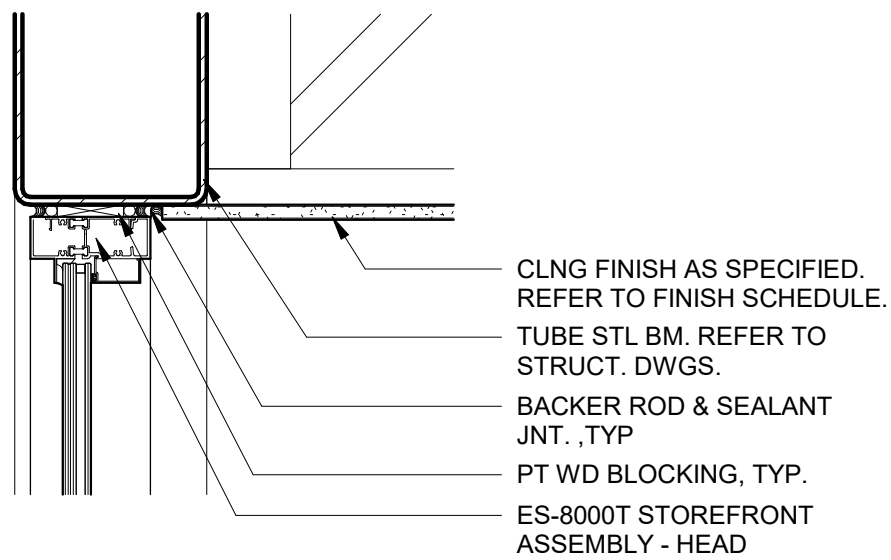


WINDOW - FIXED @ STL TUBE - HEAD DTL
1 1/2" = 1'-0"

5

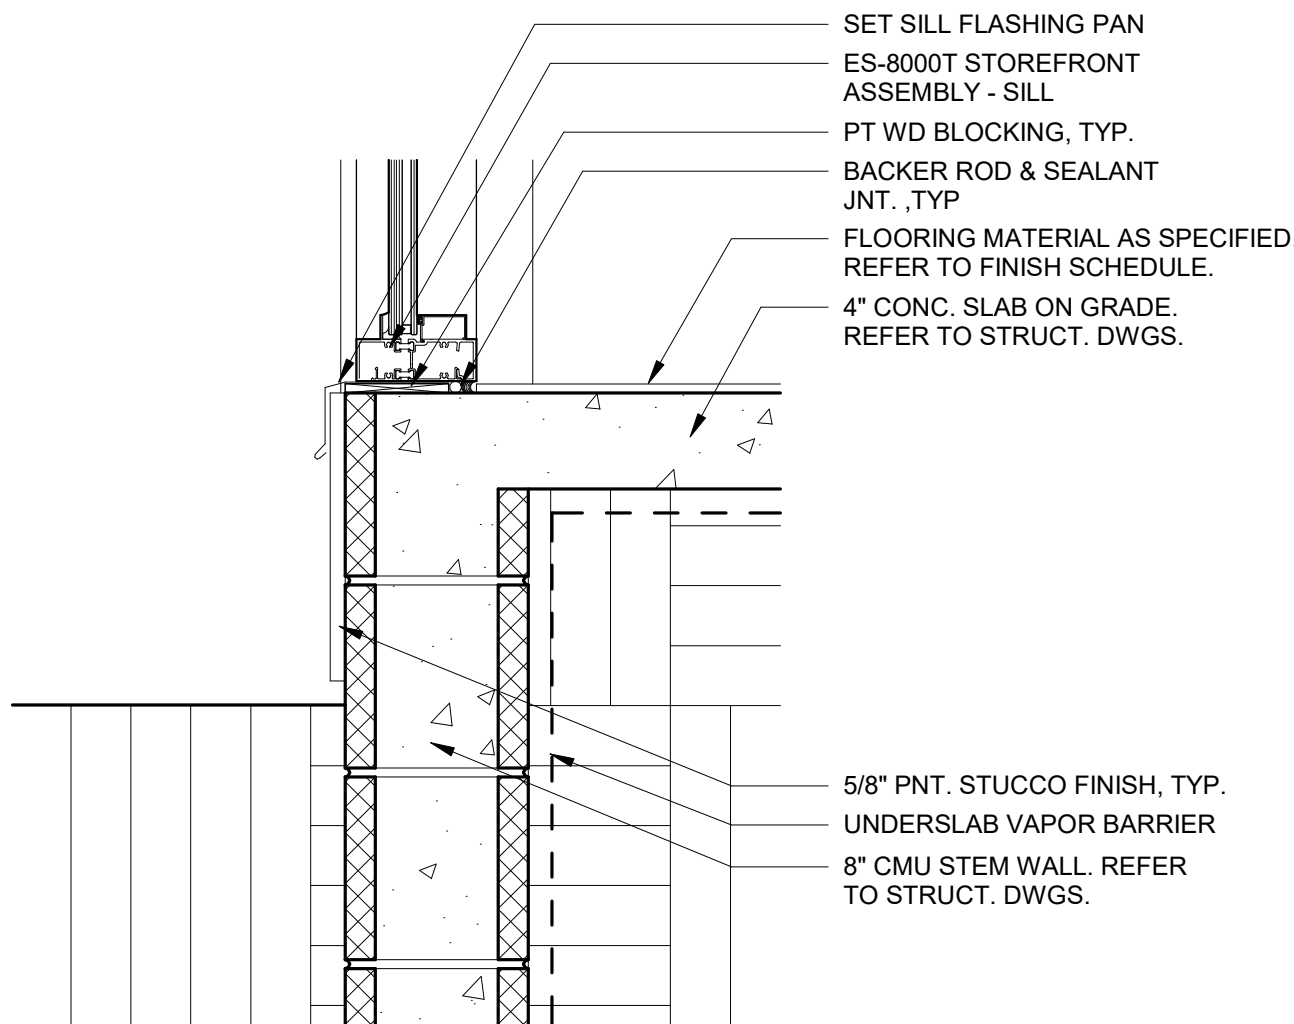


WINDOW - FIXED @ STL TUBE - SILL DTL
1 1/2" = 1'-0"

4

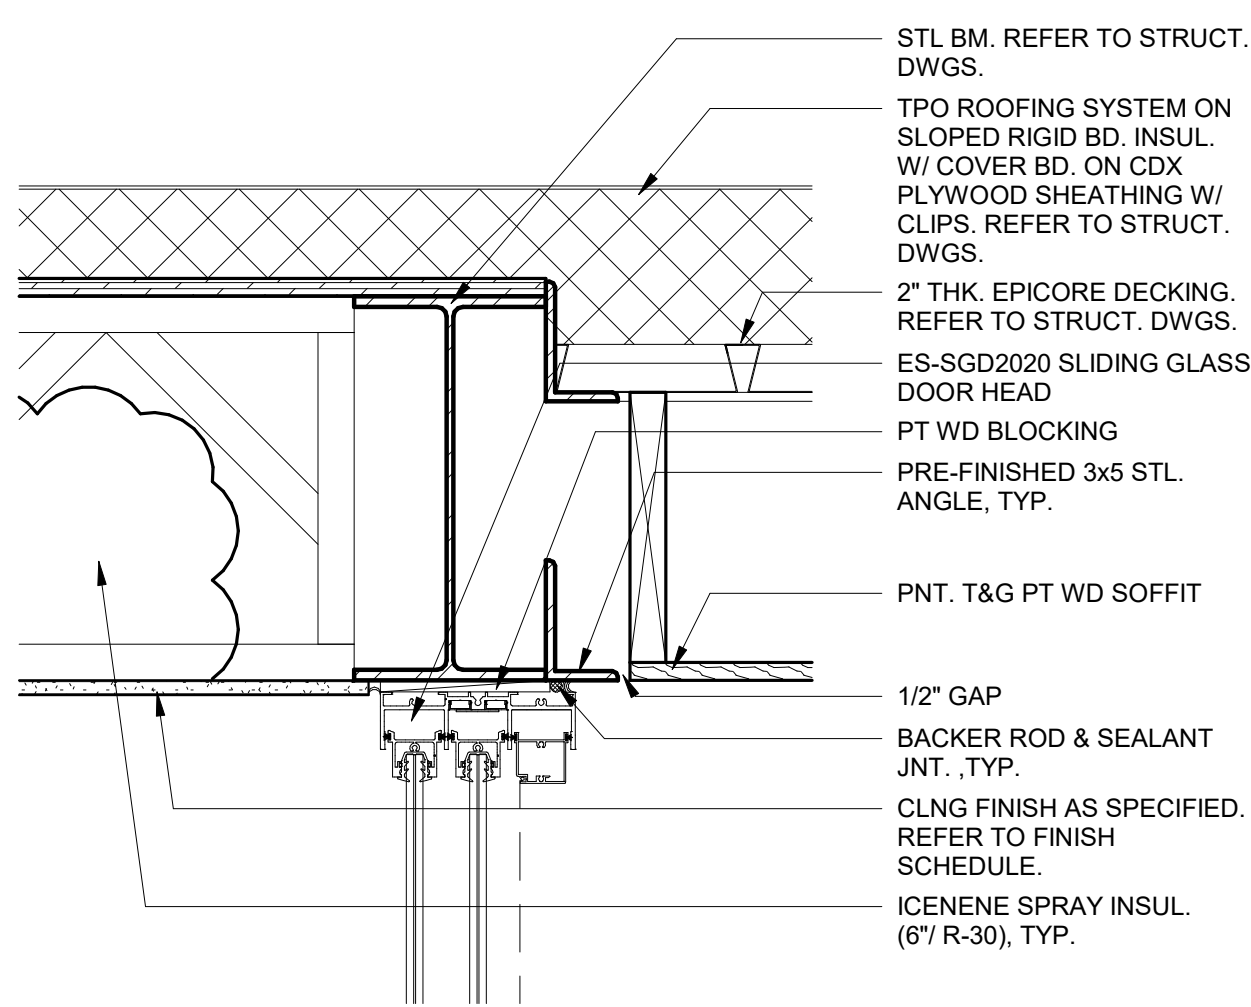


SLIDING DOOR @ L2 / EAST FACADE - HEAD DTL
1 1/2" = 1'-0"

3

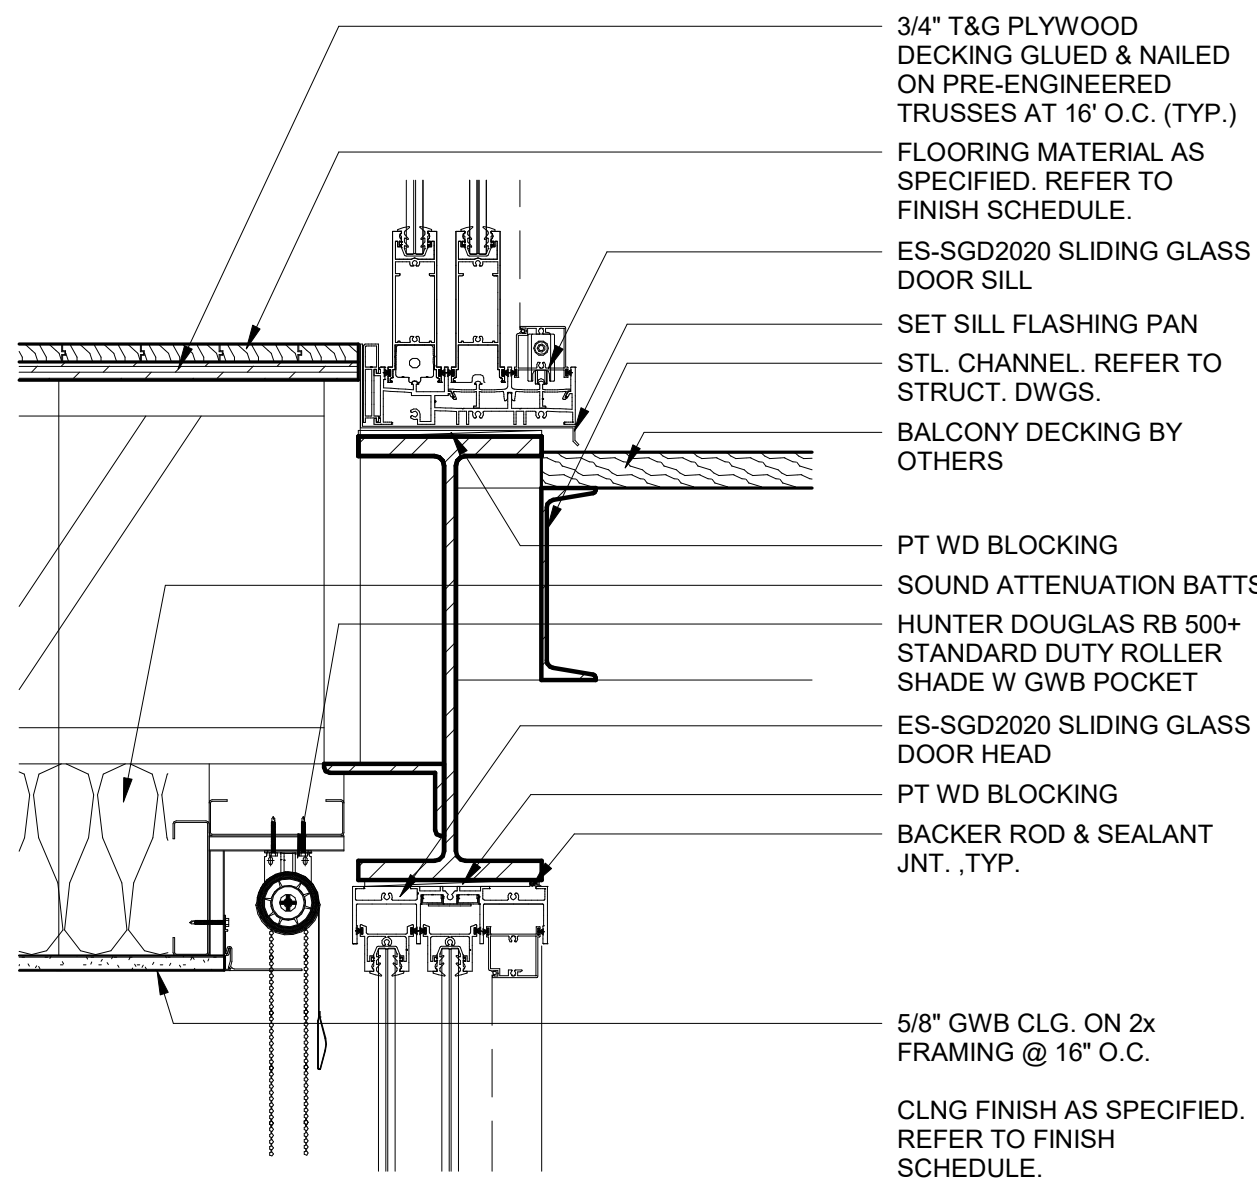

SLIDING DOOR @ L2 / EAST FACADE - HEAD / SILL DTL
1 1/2" = 1'-0"

2

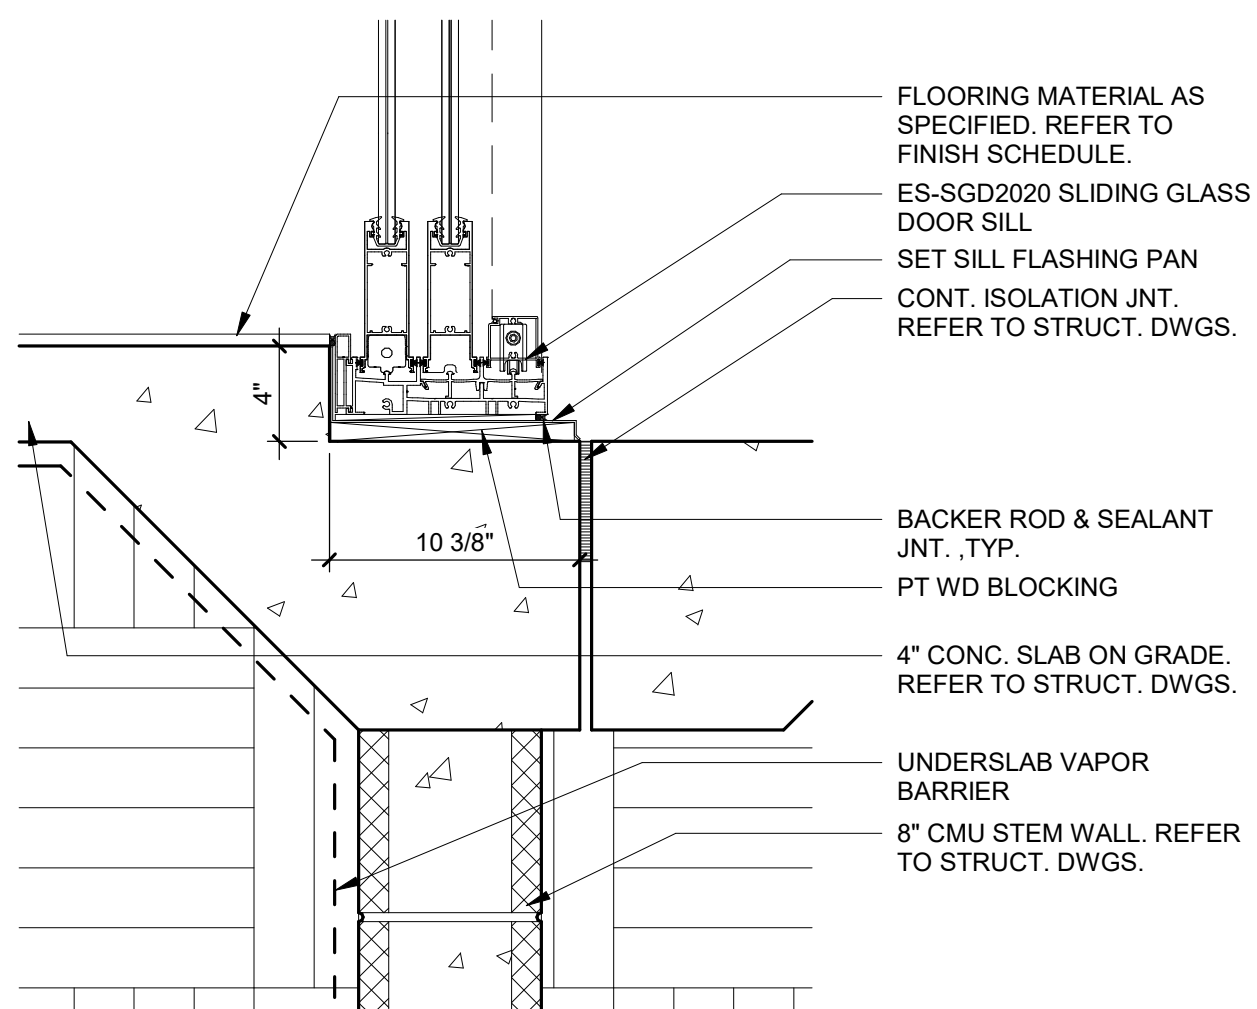

SLIDING DOOR @ L1 / EAST FACADE - SILL DTL
1 1/2" = 1'-0"

1

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, L.L.C.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

DETAILS

PROJECT # 2301
ISSUE DATE 11.21.23

A5.103

3/4/2025 4:31:30 PM

modulo

YOUSEF RESIDENCE

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, LLC.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET


YOUSEF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13


ROOF DETAILS

PROJECT # 2301
ISSUE DATE 11.21.23


A5.104

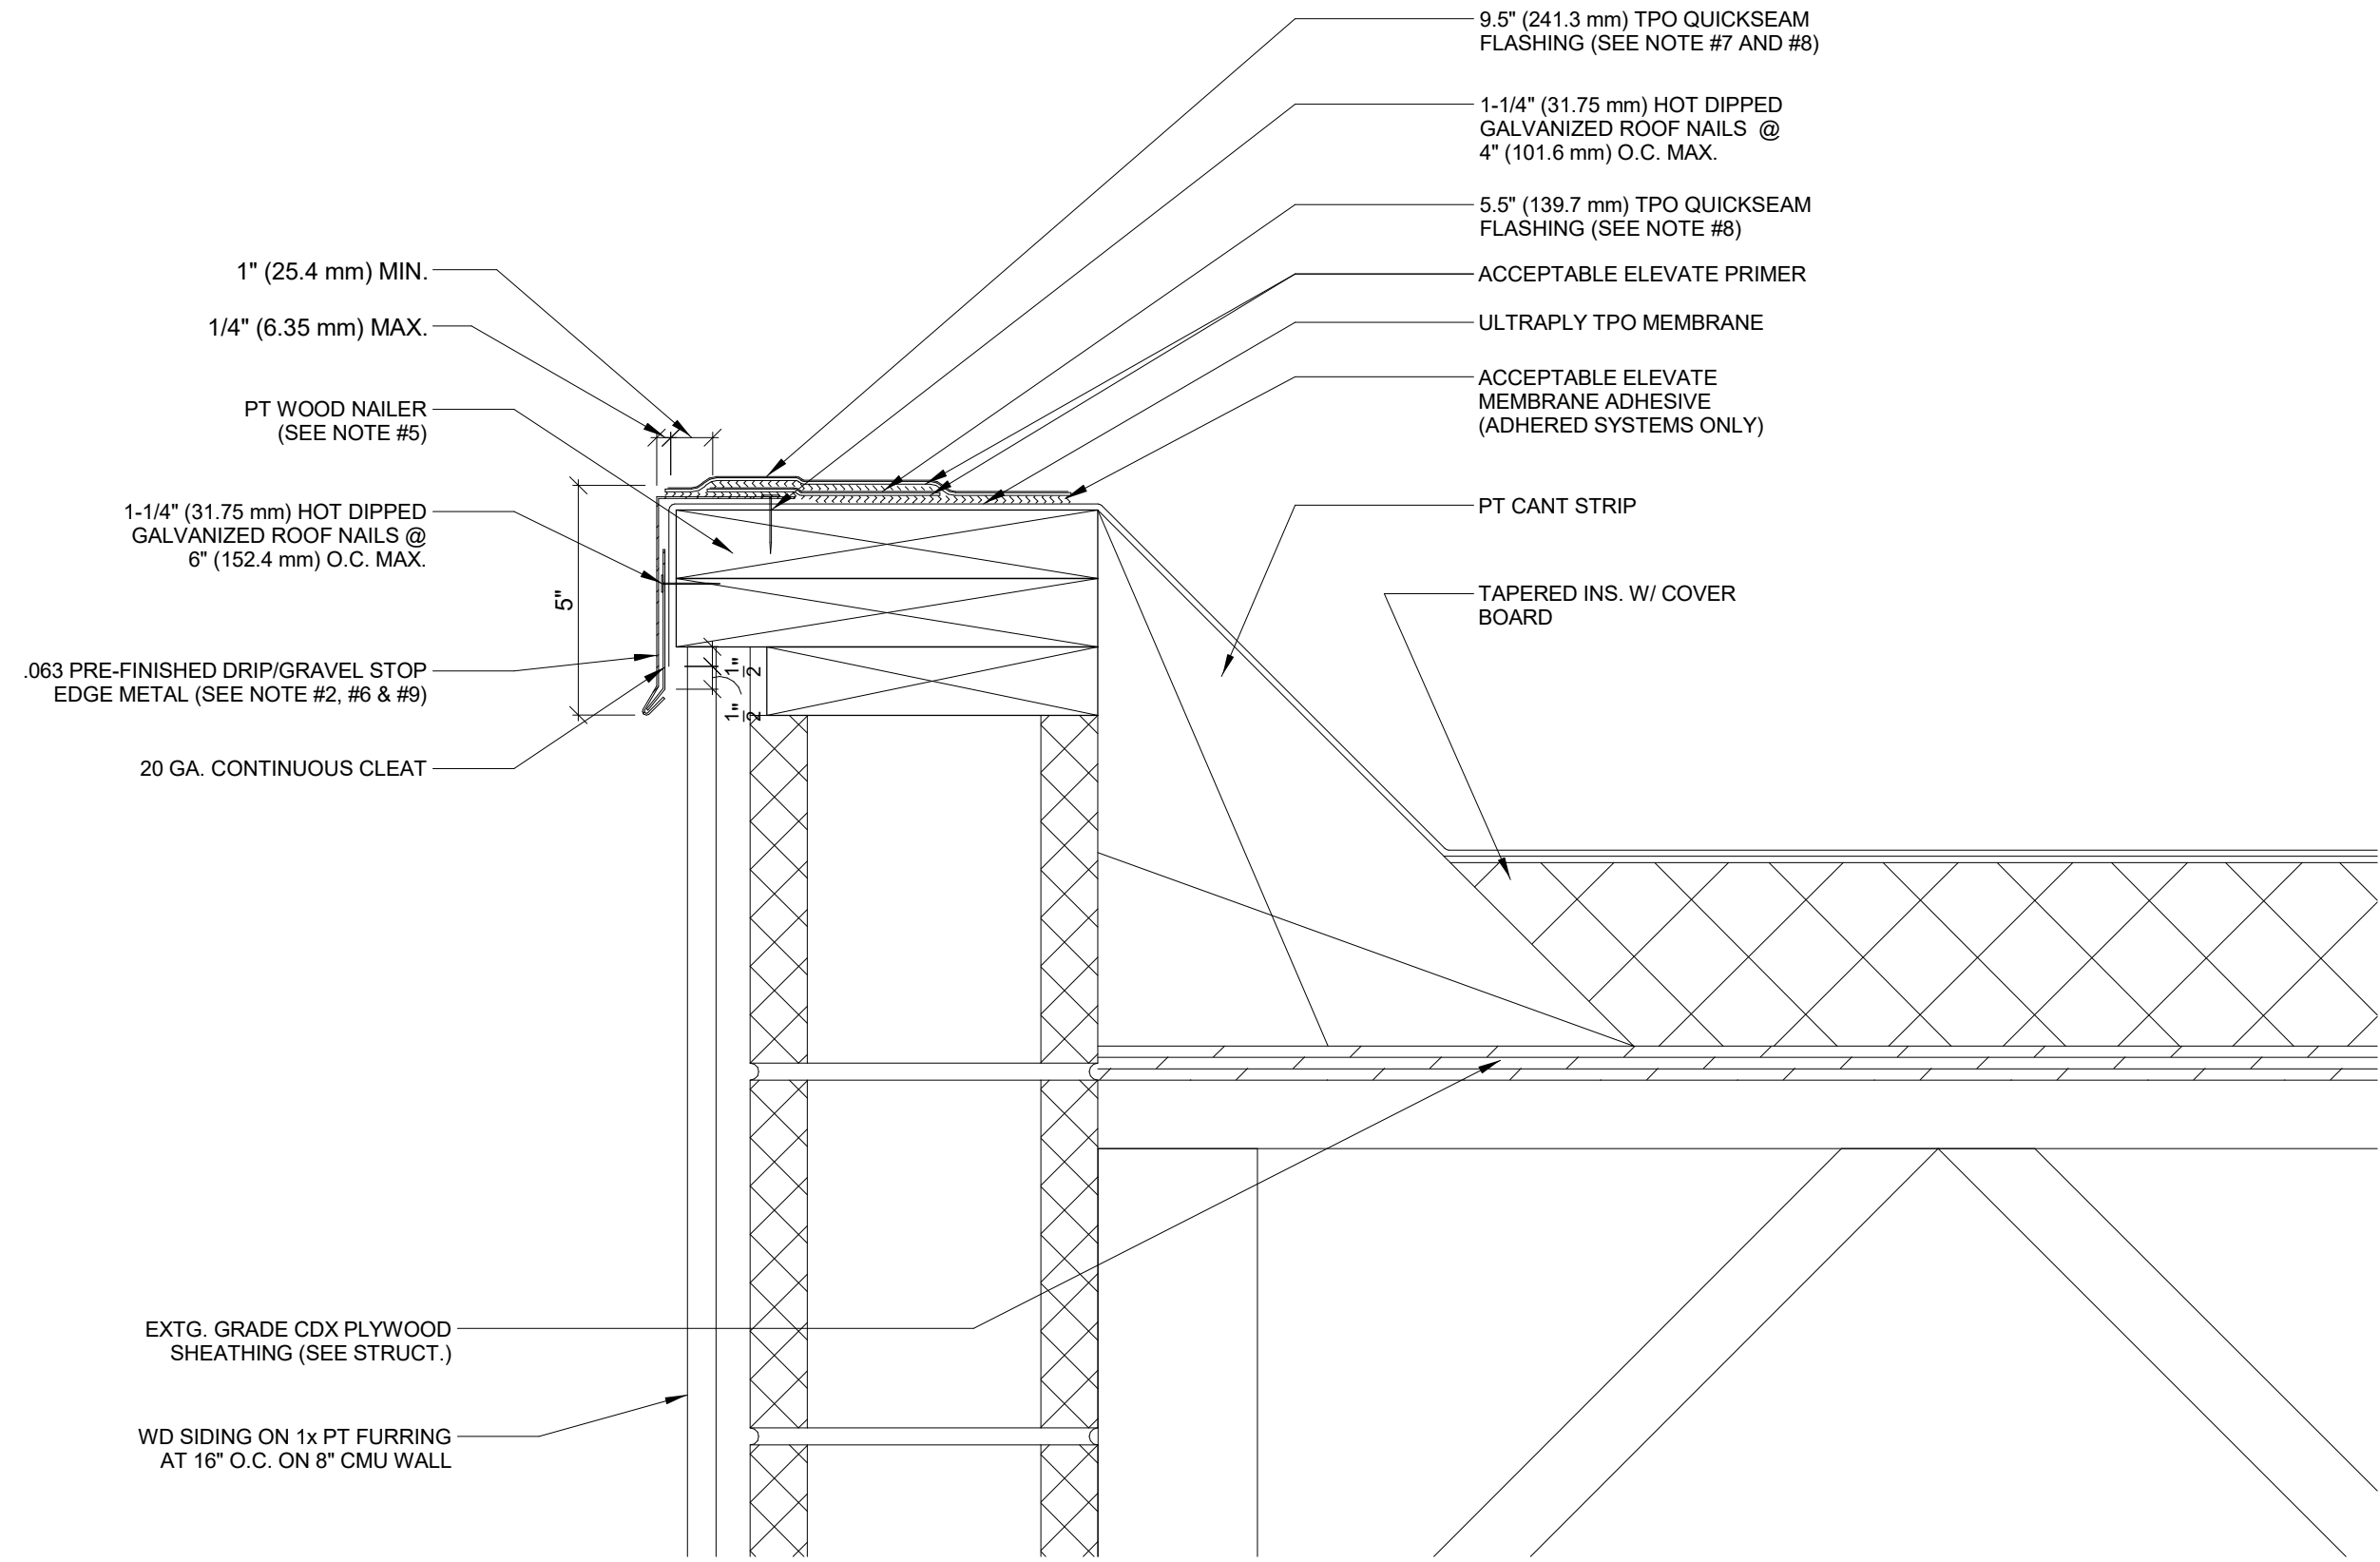

ROOF DETAIL - GARAGE - PARAPET
3" = 1'-0" 4

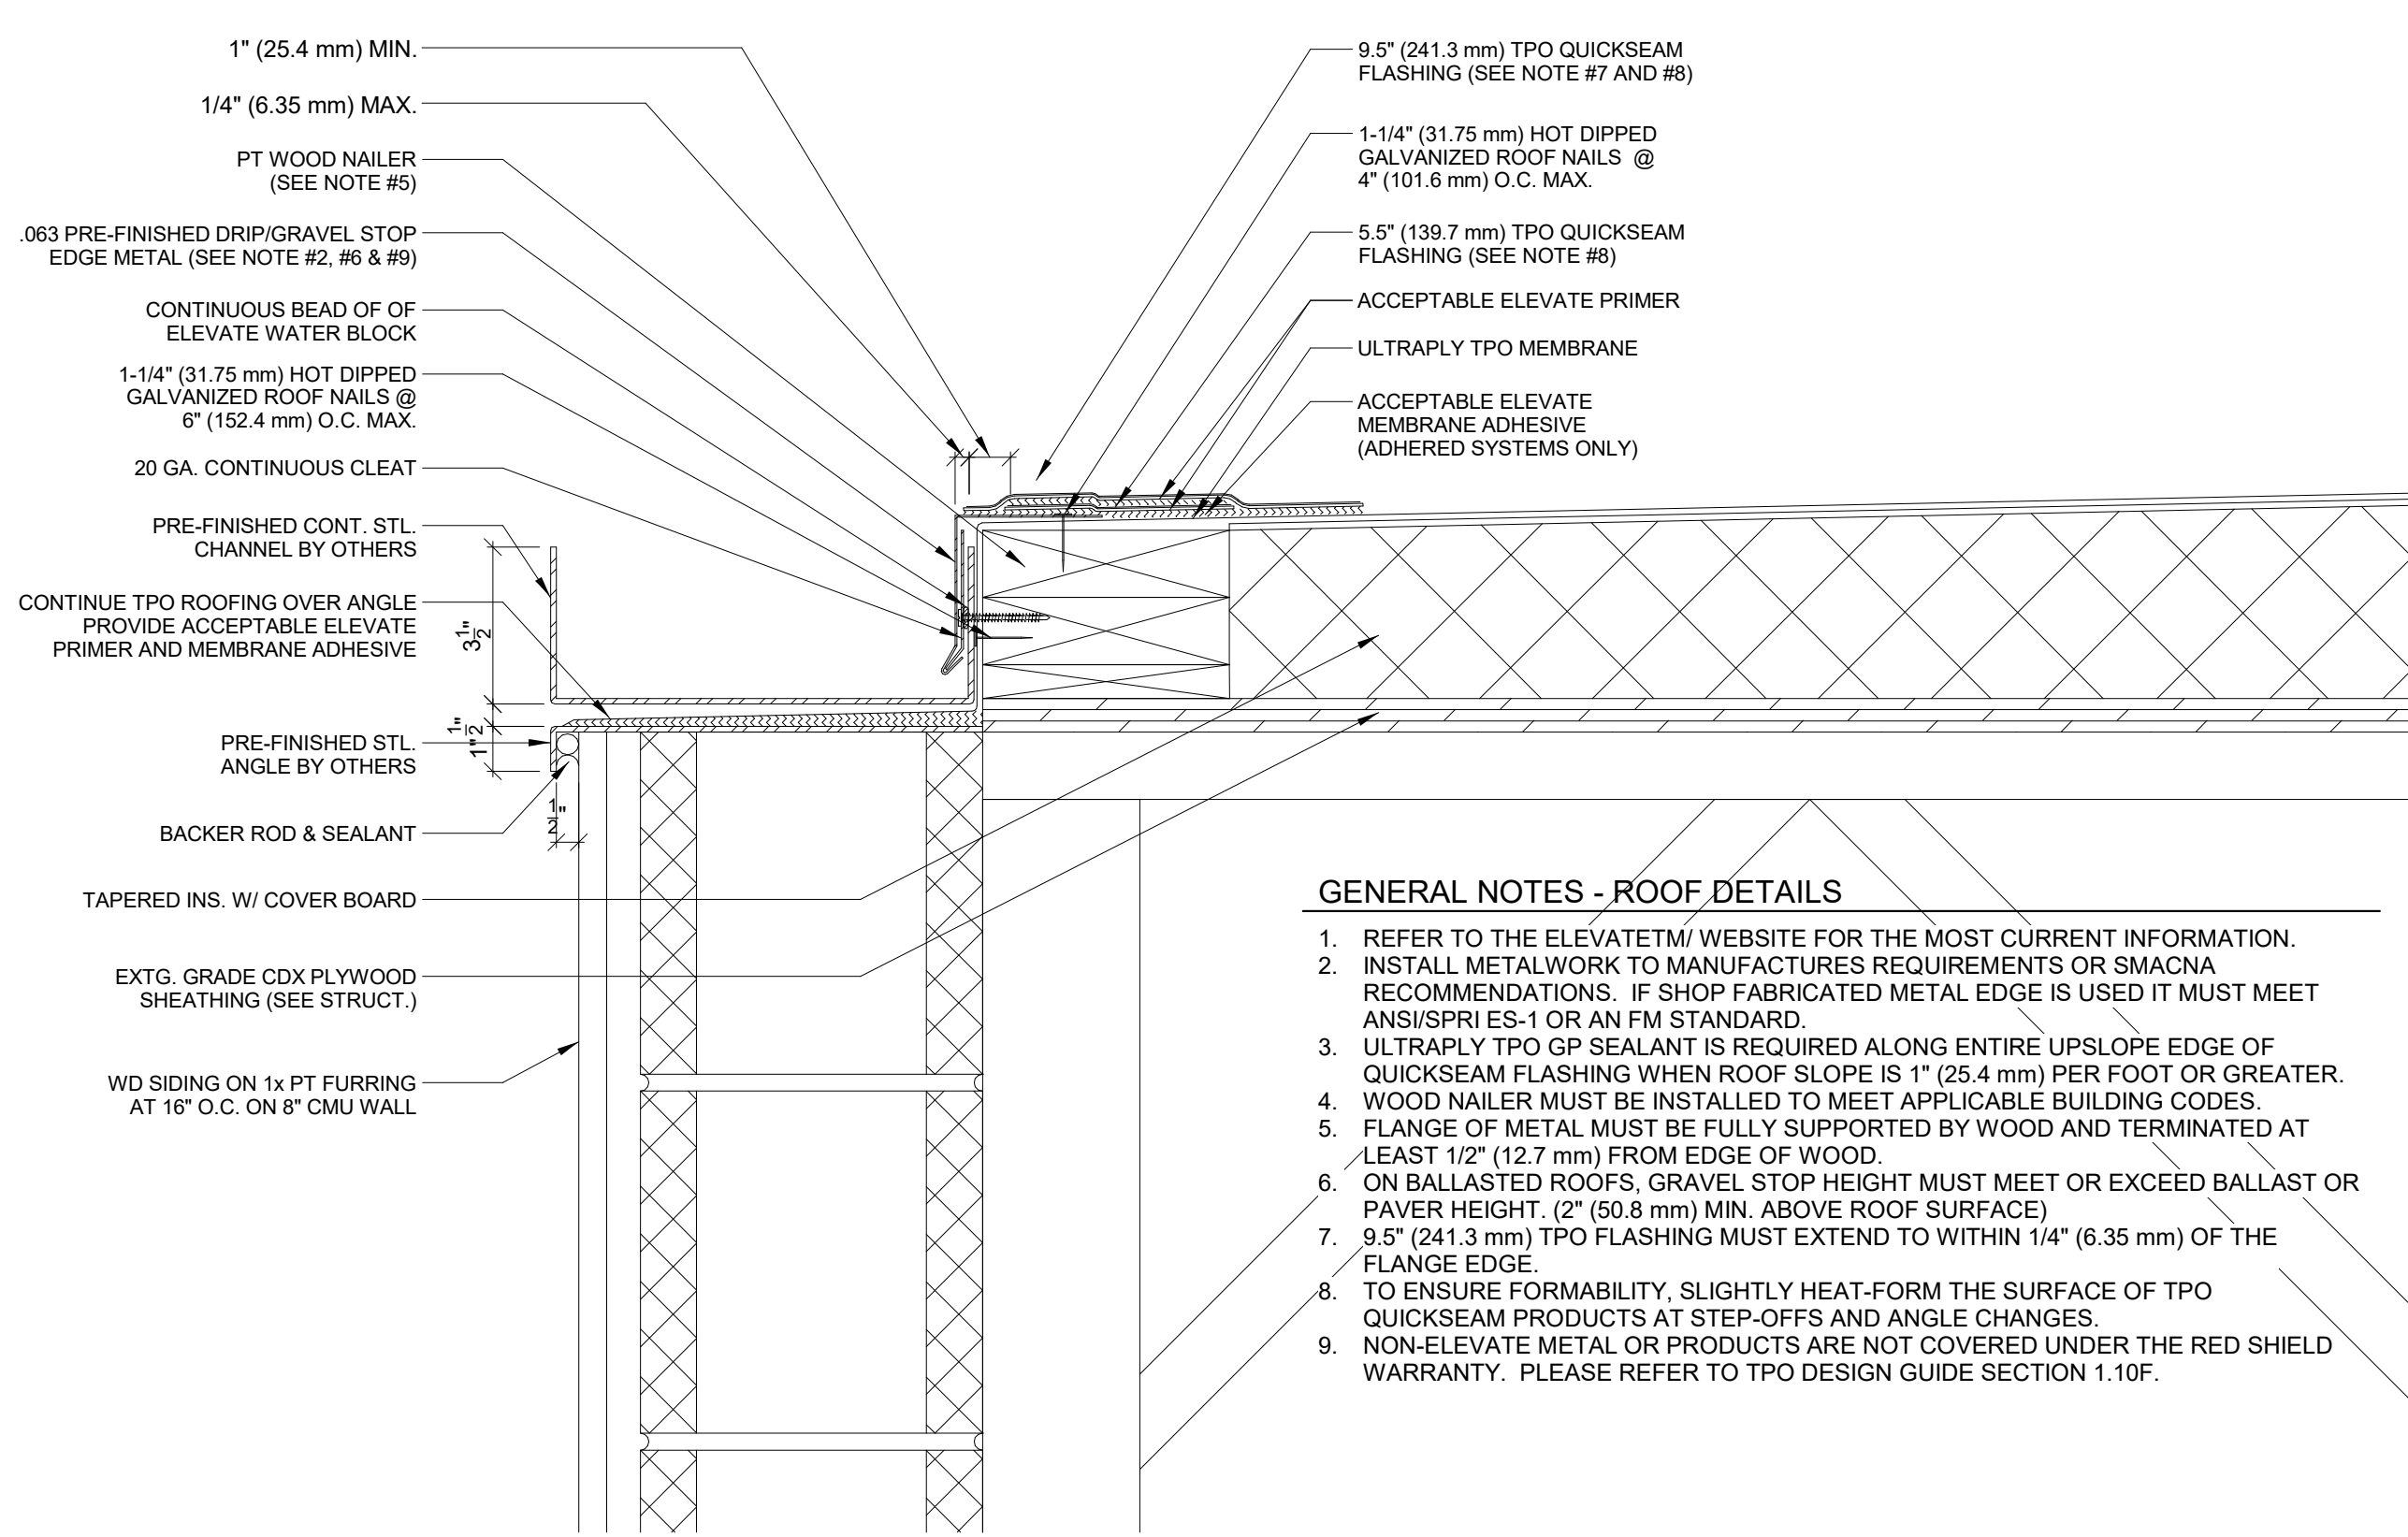


ROOF DETAIL - GARAGE - GUTTER
3" = 1'-0" 3

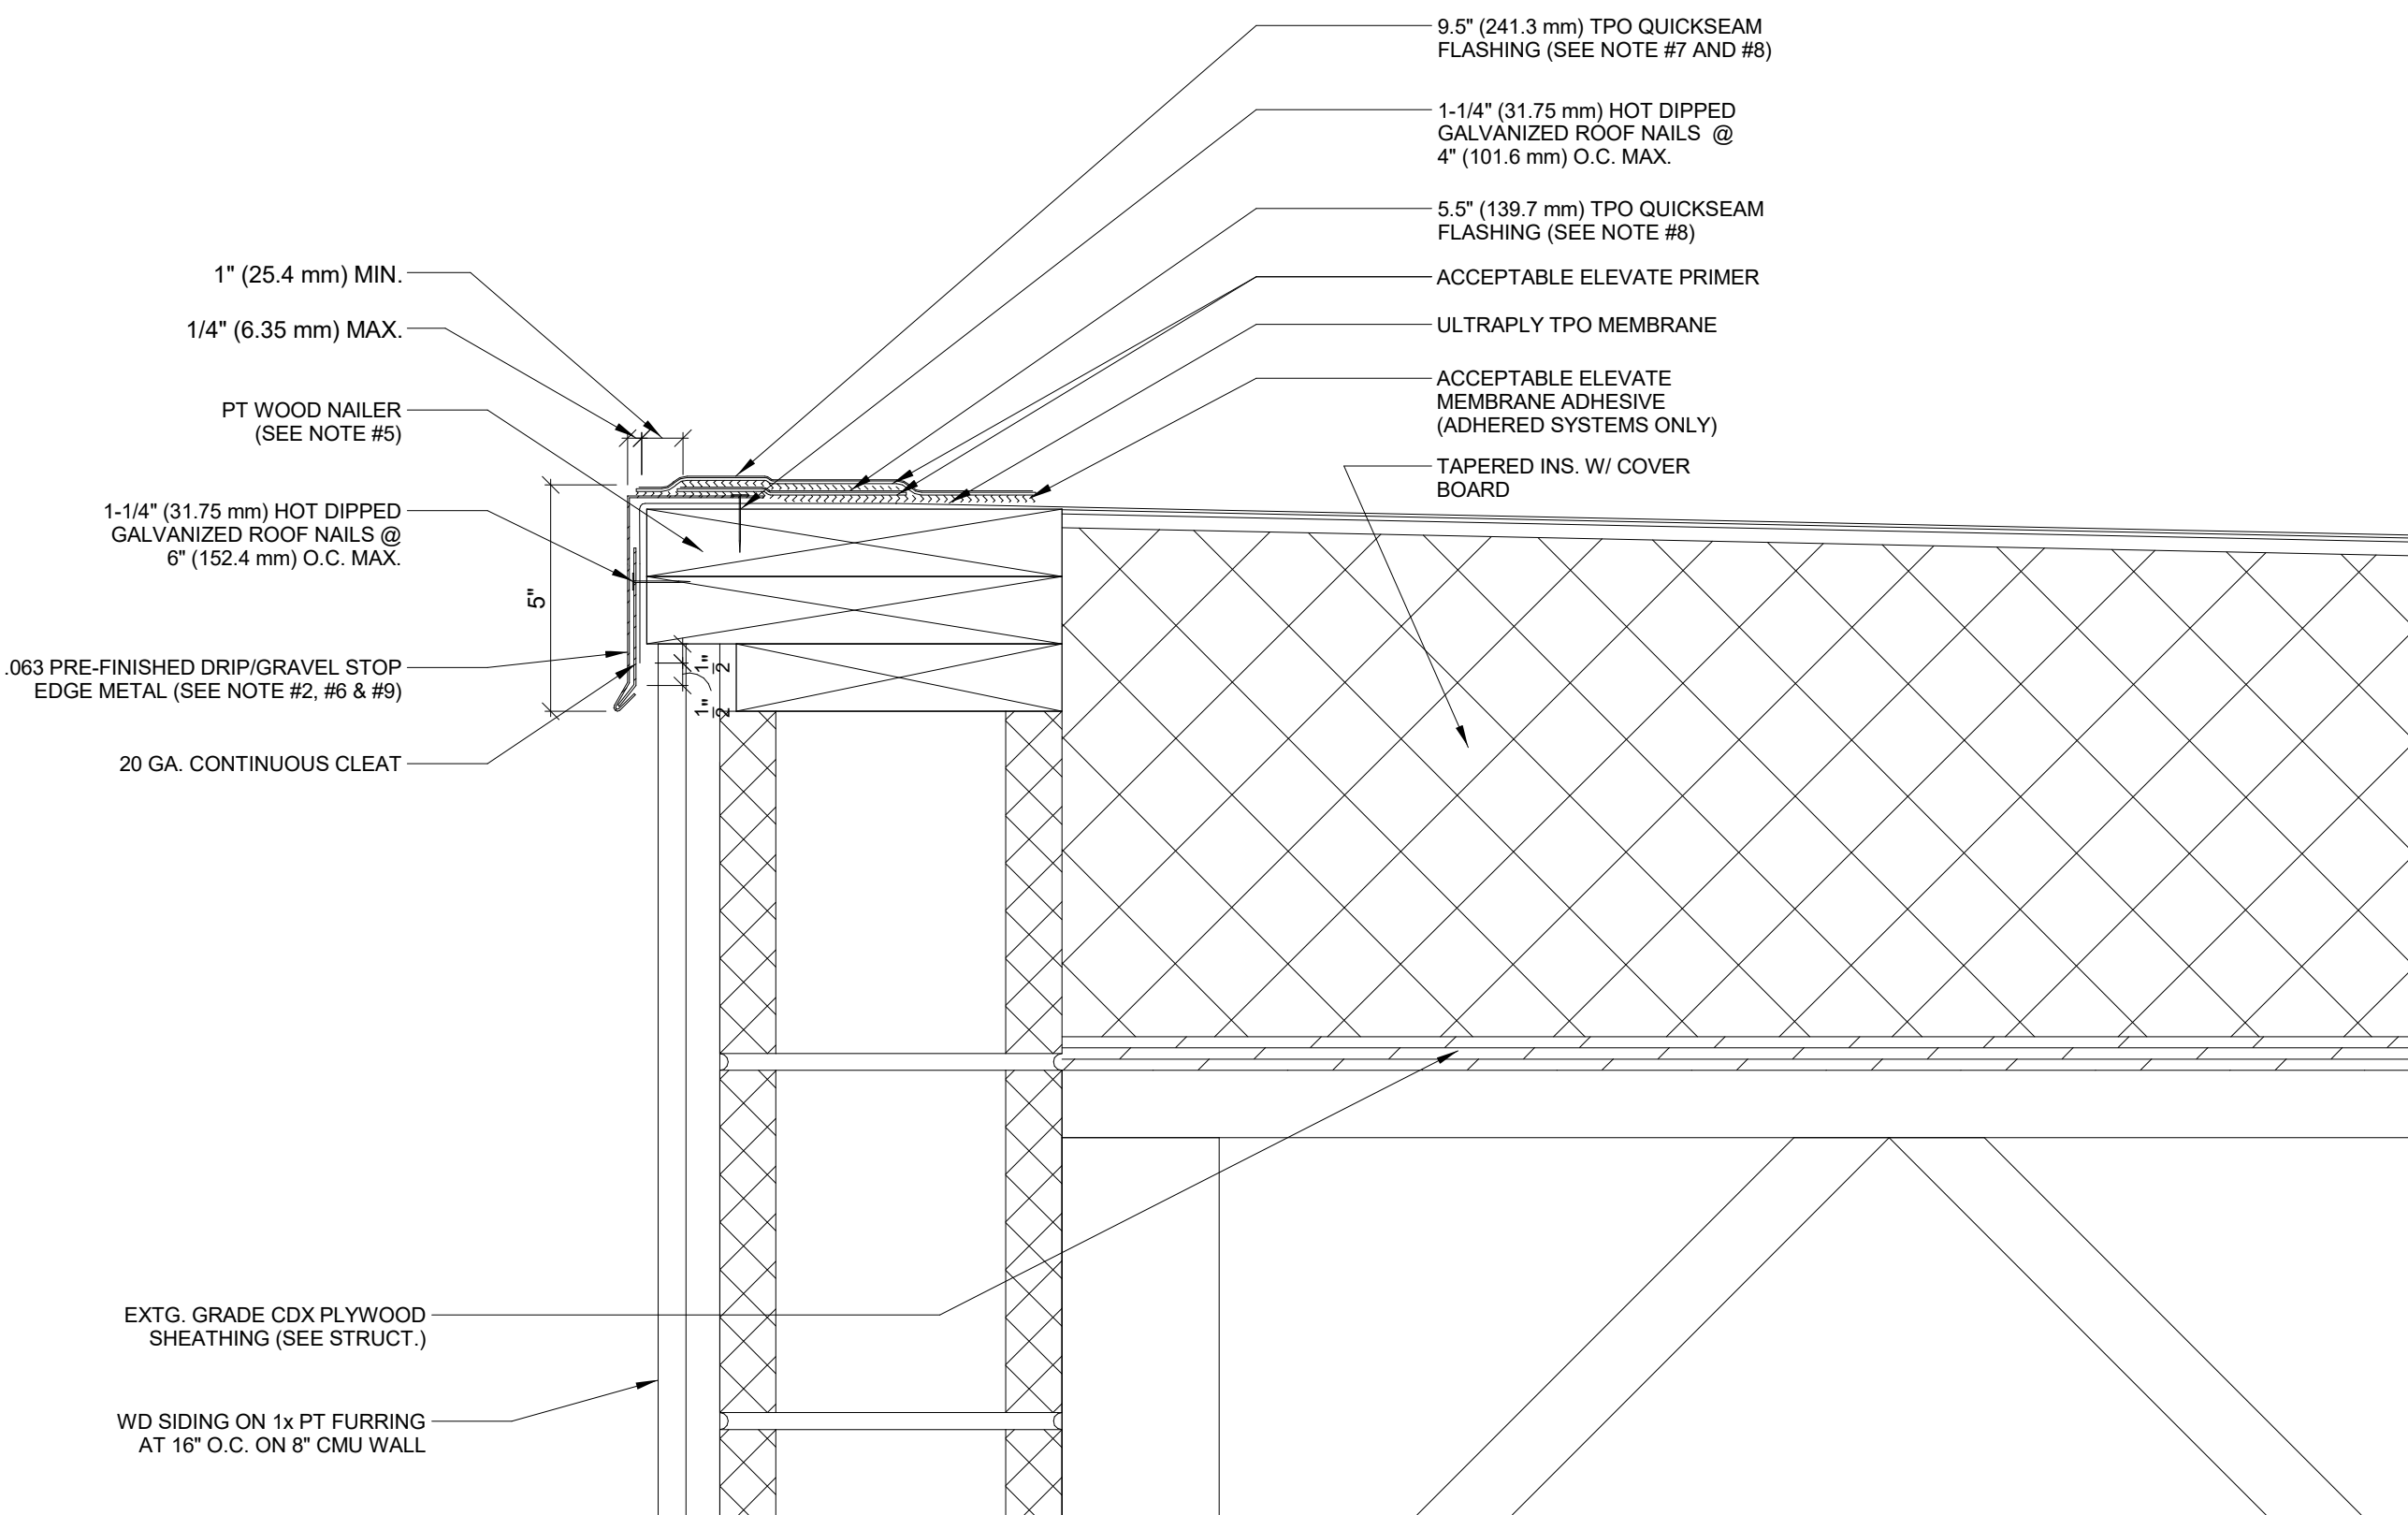


ROOF DETAIL - GARAGE - EDGE FLASHING
3" = 1'-0" 1

DETAIL MOVED TO SHEET A5.105

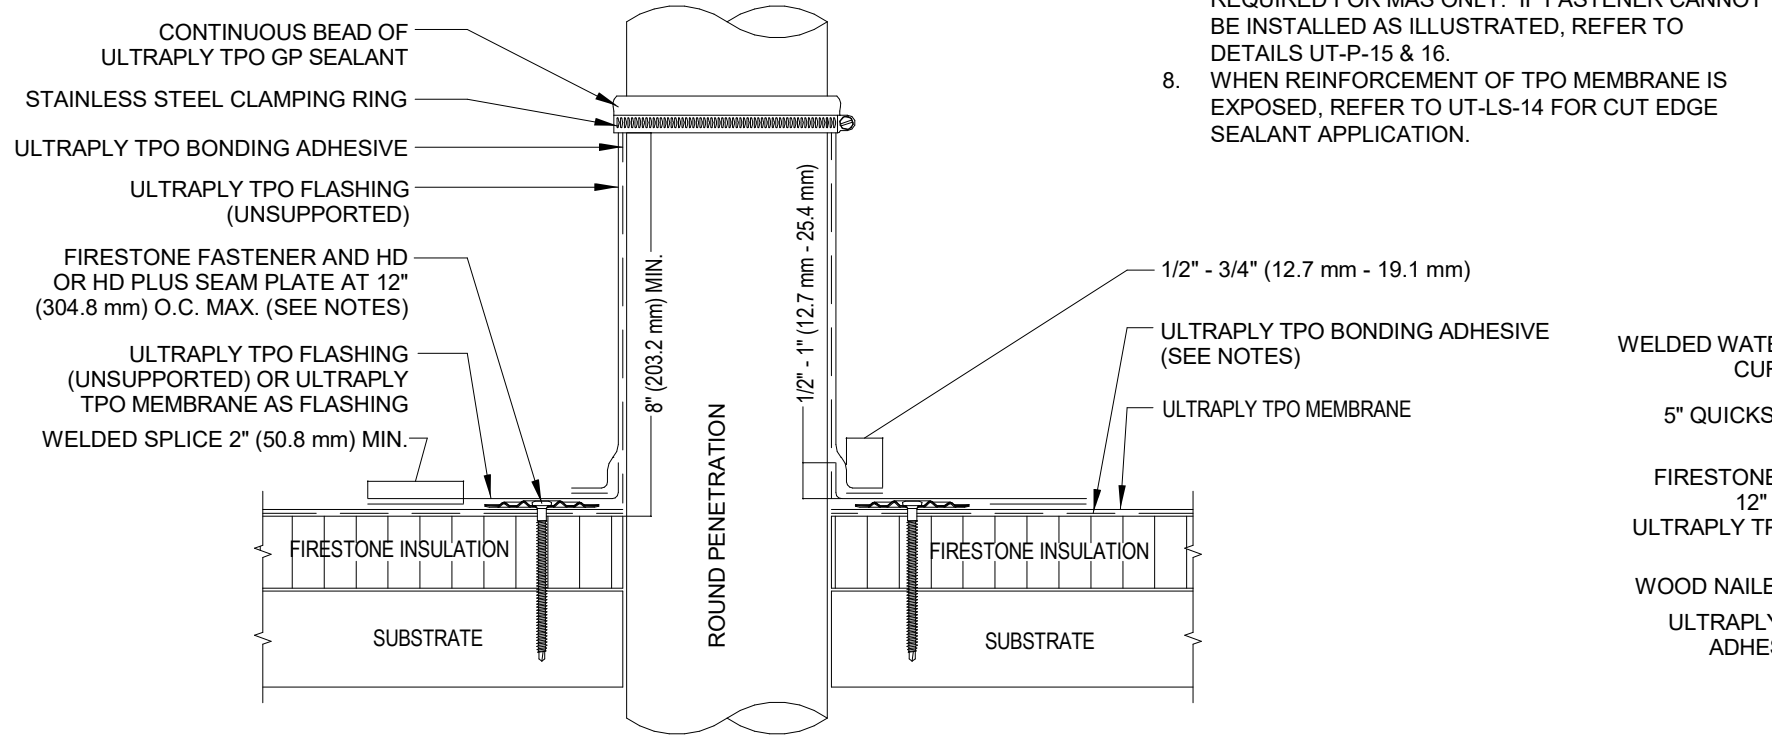


ROOF DETAIL - ROOF PENETRATION DTL
3" = 1'-0"

- NOTES:
1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
 2. REMOVE ALL EXISTING FLASHINGS, LEADS, ETC. PIPE SURFACE MUST BE FREE OF ALL RUST, GREASE, INSULATION, ETC.
 3. PIPE MUST BE ANCHORED TO ENSURE STABILITY. NO WRINKLES OR FOLDS UNDER CLAMPING RING.
 4. DO NOT USE WHEN SERVICE LINE TEMP. EXCEEDS 180°F. REFER TO UT-P-8 & 7.
 5. BONDING ADHESIVE REQUIRED BETWEEN MEMBRANE AND INSULATION FOR FULLY ADHERED SYSTEMS.
 6. FIRESTONE FASTENER AND HD SEAM PLATE REQUIRED FOR MAS ONLY. IF FASTENER CANNOT BE INSTALLED AS ILLUSTRATED, REFER TO DETAILS UT-P-15 & 16.
 7. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO UT-LS-14 FOR CUT EDGE SEALANT APPLICATION.

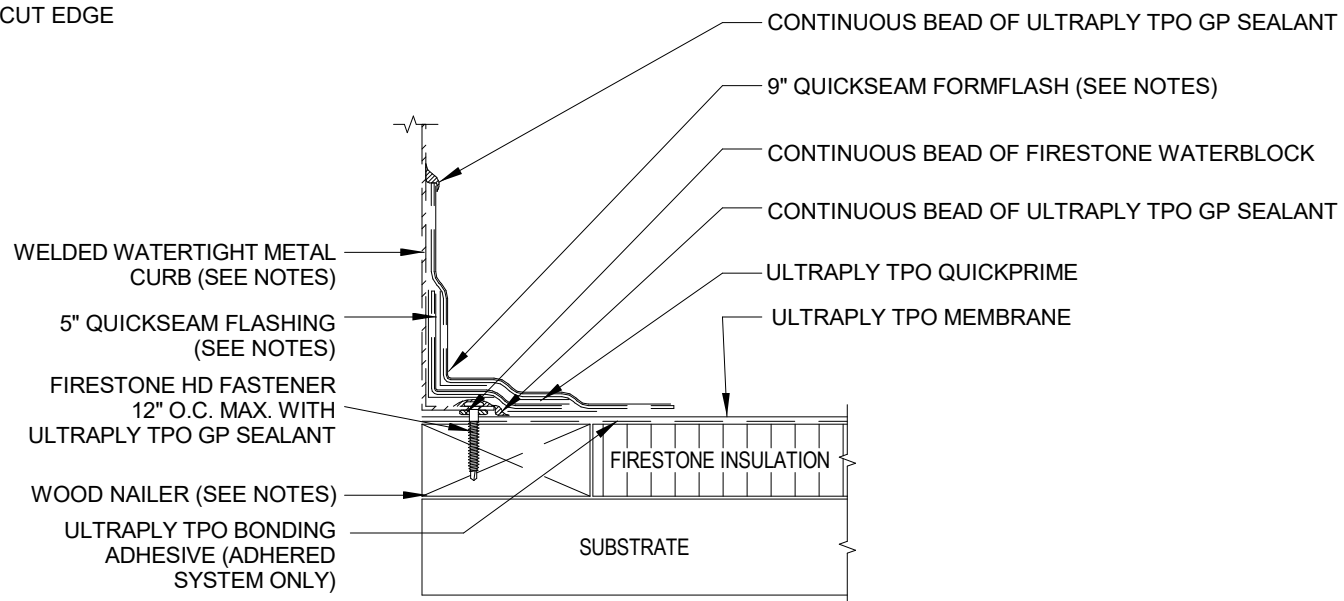

ROOF DETAIL - CURB / SKYLIGHT DTL
3" = 1'-0"


- NOTES:
1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
 2. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES OR 200 LBS PER LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
 3. OVER 5" QUICKSEAM FLASHING SHALL EXTEND 2" (50.8 mm) BEYOND EDGE OF CURB FLANGE. OVER 5" QUICKSEAM FLASHING SO THAT IT EXTENDS 2" (50.8 mm) BEYOND EDGE OF 5" QUICKSEAM FLASHING.
 4. REFER TO UT-C-2 FOR OUTSIDE CORNER APPLICATION.

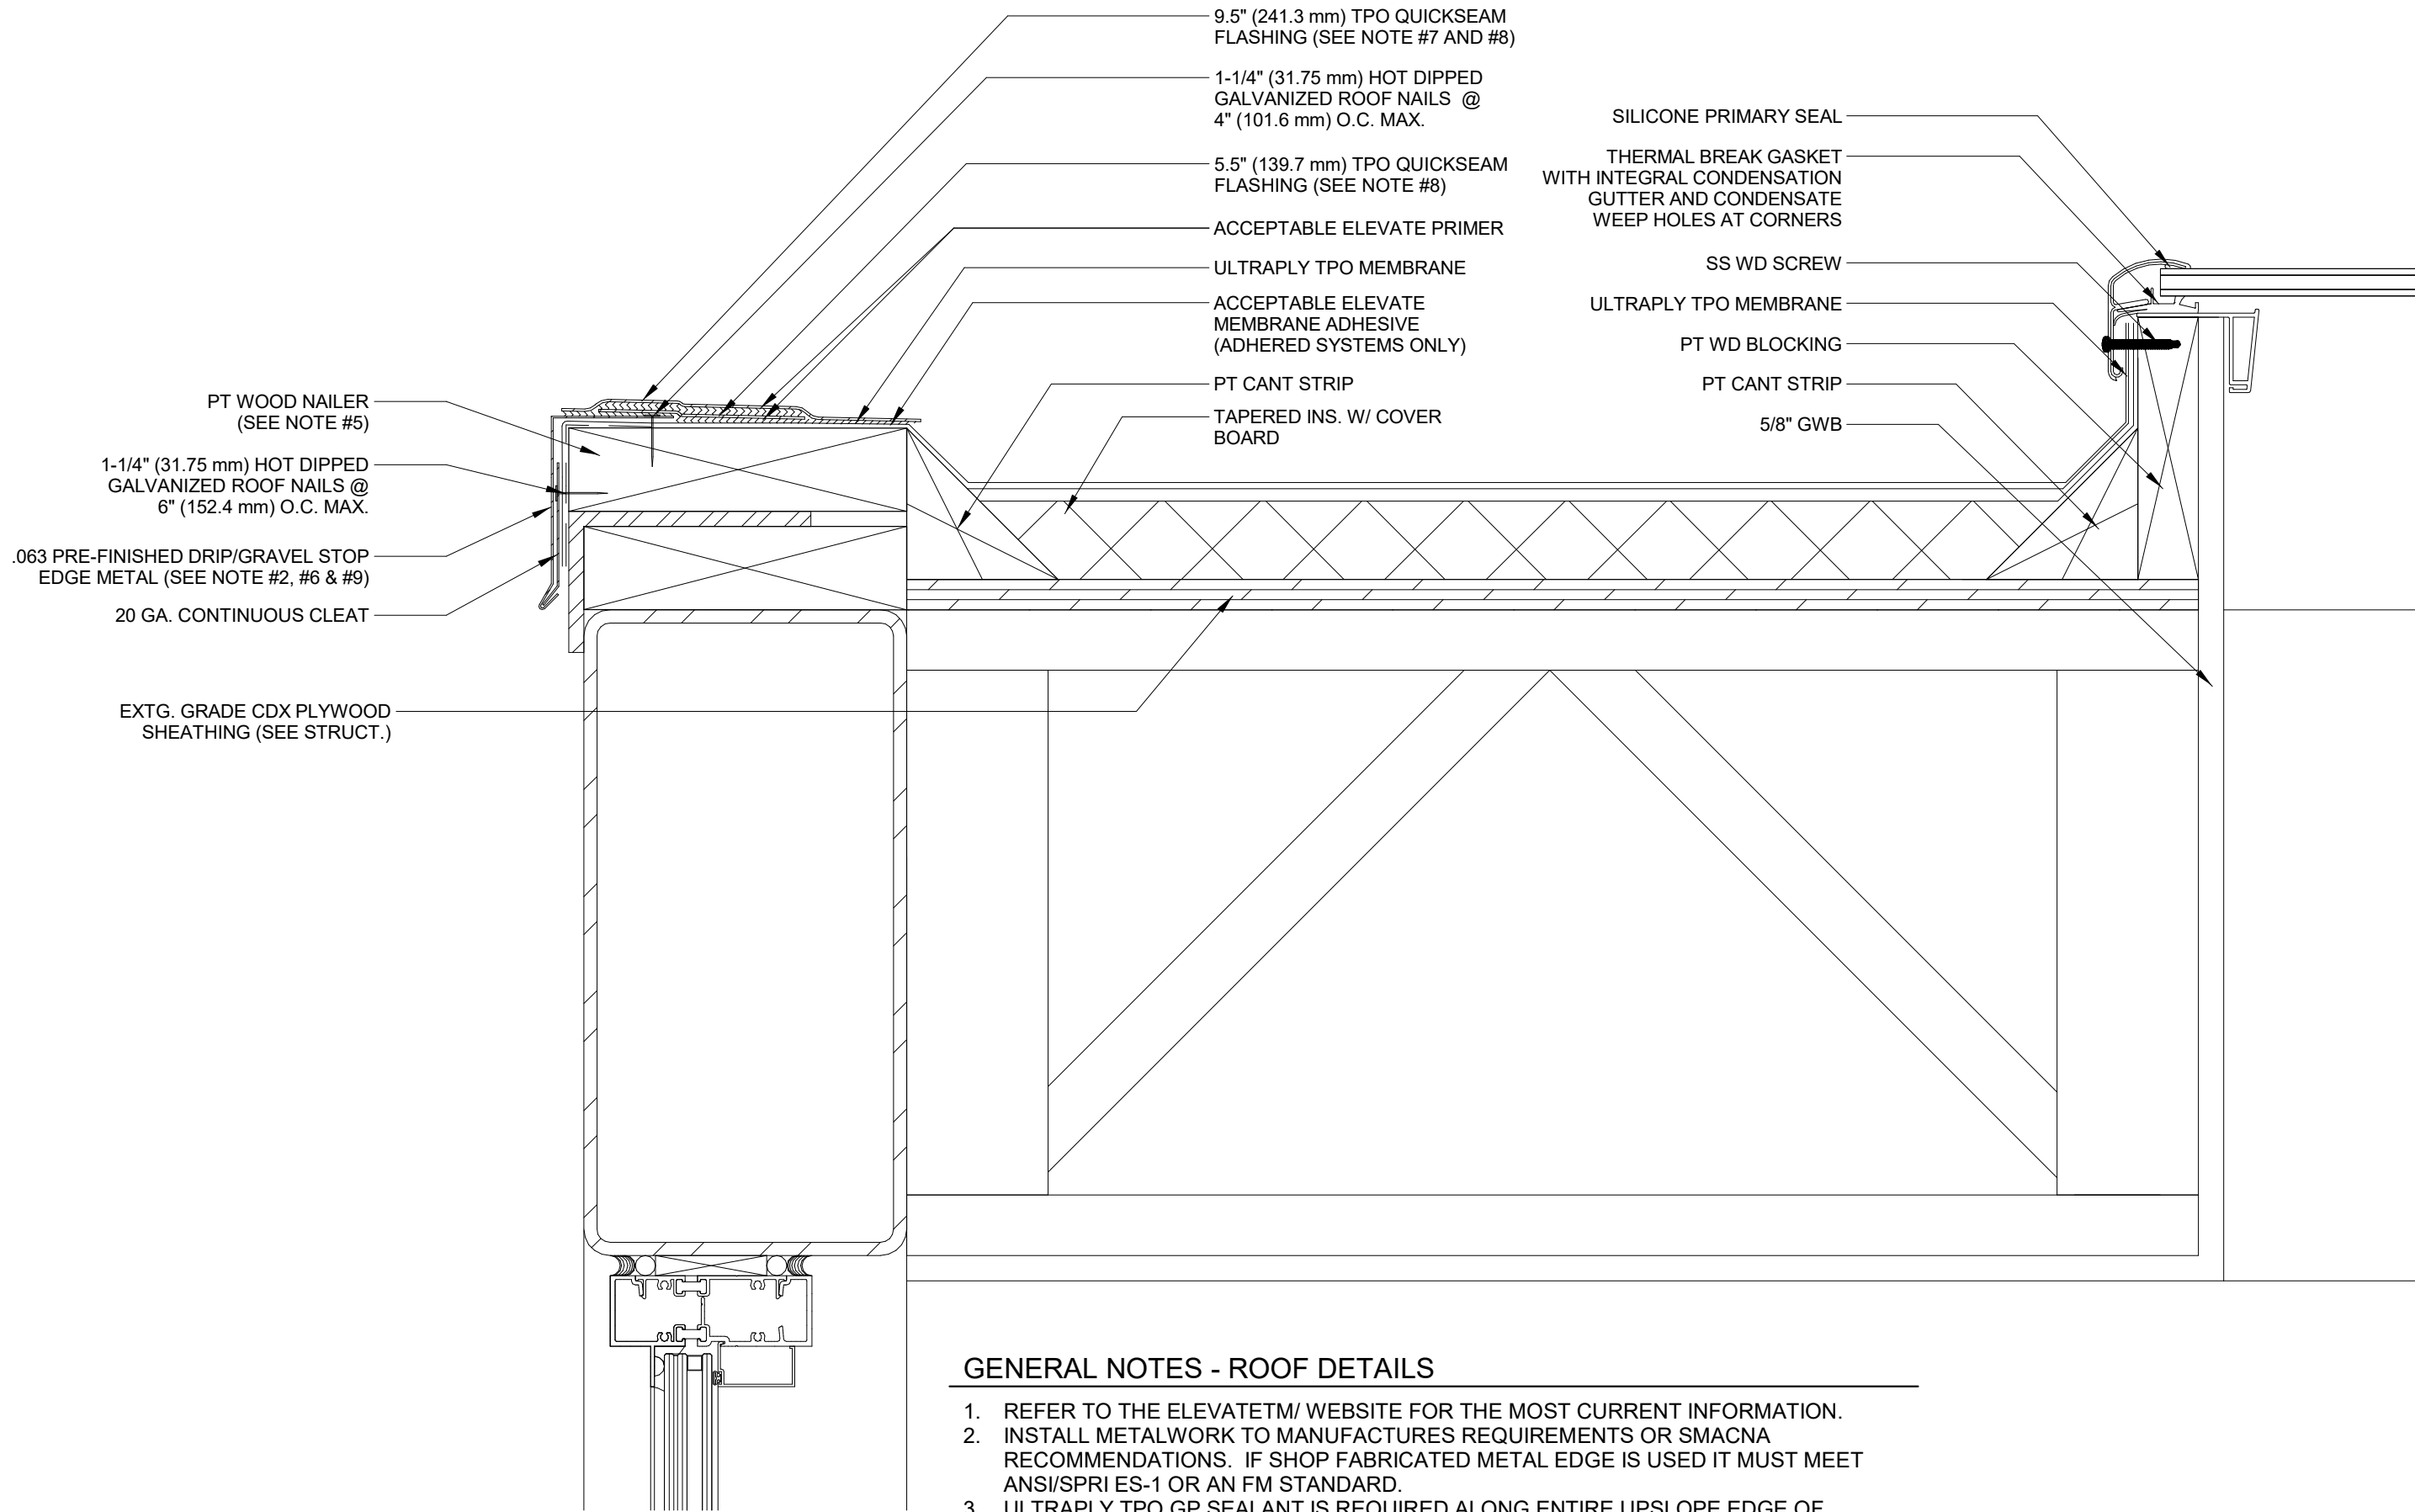

GENERAL NOTES - ROOF DETAILS


1. REFER TO THE ELEVATE™ WEBSITE FOR THE MOST CURRENT INFORMATION.
2. INSTALL METALWORK TO MANUFACTURES REQUIREMENTS OR SMACNA RECOMMENDATIONS. IF SHOP FABRICATED METAL EDGE IS USED IT MUST MEET ANSISPRI ES-1 OR AN FM STANDARD.
3. ULTRAPLY TPO GP SEALANT IS REQUIRED ALONG ENTIRE UPSLOPE EDGE OF QUICKSEAM FLASHING WHEN ROOF SLOPE IS 1" (25.4 mm) PER FOOT OR GREATER.
4. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES.
5. FLANGE OF METAL MUST BE FULLY SUPPORTED BY WOOD AND TERMINATED AT LEAST 1/2" (12.7 mm) FROM EDGE OF WOOD.
6. ON BALLASTED ROOFS, GRAVEL STOP HEIGHT MUST MEET OR EXCEED BALLAST OR PAVER HEIGHT. (2" (50.8 mm) MIN. ABOVE ROOF SURFACE)
7. 9.5" (241.3 mm) TPO FLASHING MUST EXTEND TO WITHIN 1/4" (6.35 mm) OF THE FLANGE EDGE.
8. TO ENSURE FORMABILITY, SLIGHTLY HEAT-FORM THE SURFACE OF TPO QUICKSEAM PRODUCTS AT STEP-OFFS AND ANGLE CHANGES.
9. NON-ELEVATE METAL OR PRODUCTS ARE NOT COVERED UNDER THE RED SHIELD WARRANTY. PLEASE REFER TO TPO DESIGN GUIDE SECTION 1.10F.

ROOF DETAIL - GARAGE - SKYLIGHT
3" = 1'-0"

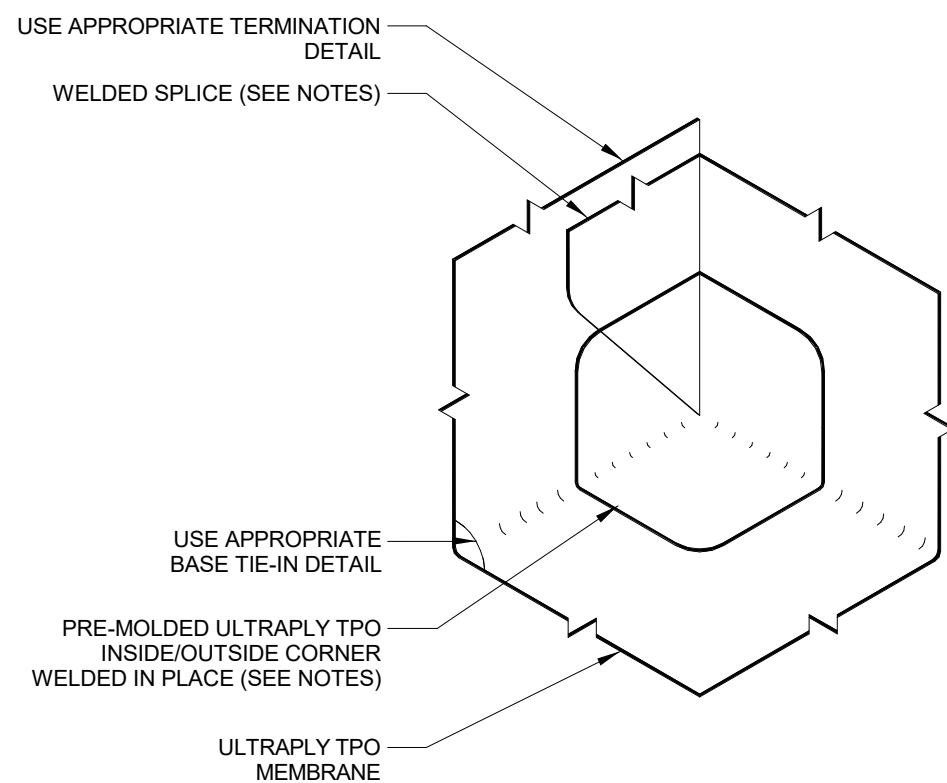


ROOF DETAIL - INSIDE CORNER DTL
3" = 1'-0"

- NOTES:
1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
 2. REFER TO DETAIL UT-LS-1 OR 2 FOR WELD WIDTH.
 3. ULTRAPLY TPO FLASHING (UNSUPPORTED) MAY BE USED IN LIEU OF PRE-MOLDED ULTRAPLY TPO INSIDE/OUTSIDE CORNER. A MAXIMUM WARRANTY OF 20 YEARS.
 4. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO UT-LS-14 FOR CUT EDGE SEALANT APPLICATION.

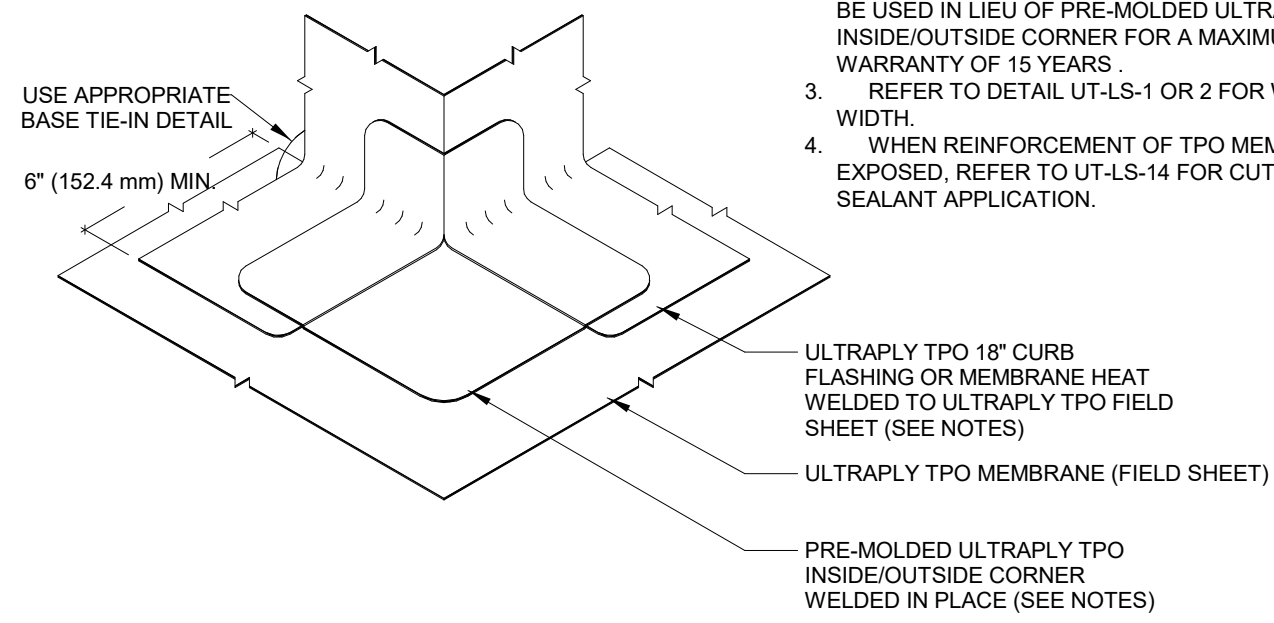

ROOF DETAIL - OUTSIDE CORNER DTL
3" = 1'-0"

- NOTES:
1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
 2. ULTRAPLY TPO FLASHING (UNSUPPORTED) MAY BE USED IN LIEU OF PRE-MOLDED ULTRAPLY TPO INSIDE/OUTSIDE CORNER FOR A MAXIMUM WARRANTY OF 15 YEARS.
 3. REFER TO DETAIL UT-LS-1 OR 2 FOR WELD WIDTH.
 4. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO UT-LS-14 FOR CUT EDGE SEALANT APPLICATION.

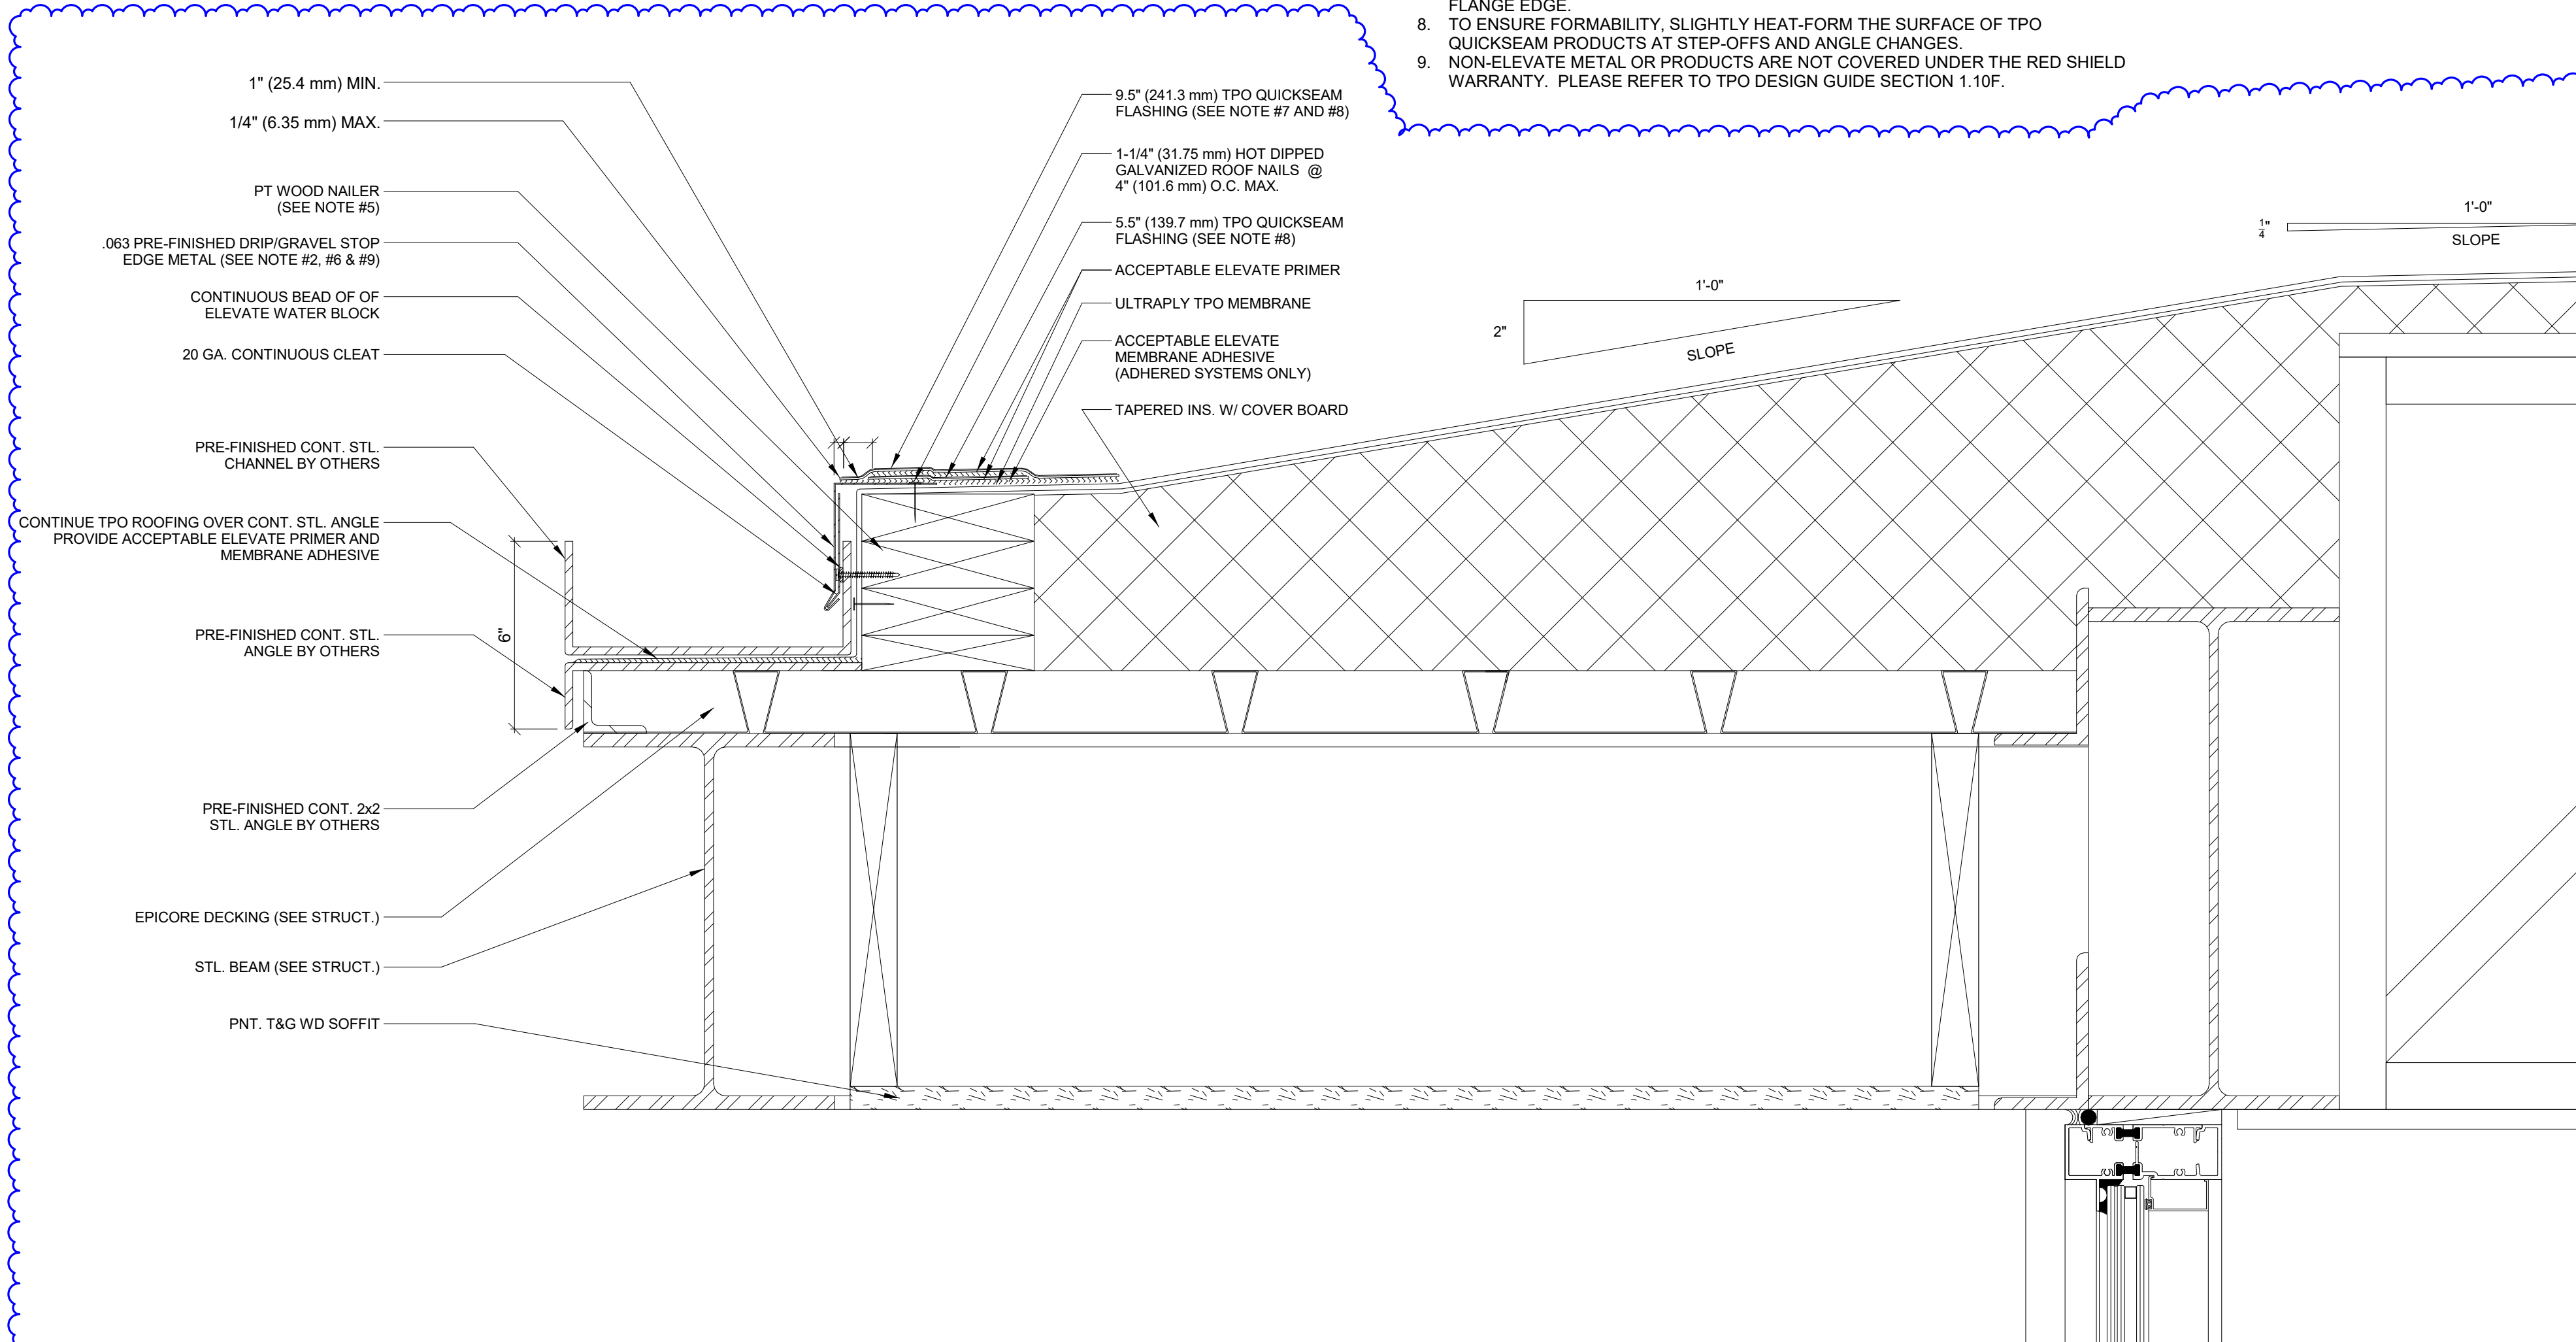

ROOF DETAIL - MAIN - GUTTER
3" = 1'-0"

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+I, L.L.C.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.com

STRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475

MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625

ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473

OWNER:
RAED YOUSEF
18313 LEAFMORE ST.
LUTZ, FL 33548

PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET
YOUSEF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

ROOF DETAILS

PROJECT # 2301
ISSUE DATE 11.21.23

A5.105

3/4/2025 4:31:35 PM

ROOM FINISH SCHEDULE LEGEND

FLOOR MATERIAL

EXP	EXPOSED
PCONC	POLISHED CONCRETE
T	TILE
W	WOOD

BASE MATERIAL

-	INDICATES NO BASE IS REQUIRED
T	TILE BASE
WB	WOOD BASE

WALL MATERIAL

-	INDICATES NO WALL
EXP	EXPOSED
PNT	PAINTED
T	TILE WALL

CEILING MATERIAL

EXP	EXPOSED
EXP-PNT	EXPOSED TO BE PAINTED
GWBPNT	GWBP TO BE PAINTED
PNT	PAINTED

REMARKS

- CLEAN & SEAL TILE FLOOR
- CLEAN & SEAL CONCRETE FLOOR

FINISH SCHEDULE

ROOM NAME	#	FLOOR FINISH	BASE FINISH	NORTH	SOUTH	EAST	WEST	CEILING FINISH	REMARKS
LIVING	100	-	-	-	-	-	-	-	
DINING	101	-	-	-	-	-	-	-	
KITCHEN	102	-	-	-	-	-	-	-	
PANTRY	102a	-	-	-	-	-	-	-	
HALF BATH	102b	-	-	-	-	-	-	-	
HVAC	102c	-	-	-	-	-	-	-	
FAMILY ROOM	103	-	-	-	-	-	-	-	
GUEST ROOM	104	-	-	-	-	-	-	-	
BATH	104a	-	-	-	-	-	-	-	
CLOSET	104b	-	-	-	-	-	-	-	
MASTER BEDROOM	105	-	-	-	-	-	-	-	
HALL	106	-	-	-	-	-	-	-	
CLOSET	106a	-	-	-	-	-	-	-	
CLOSET	106b	-	-	-	-	-	-	-	
MASTER BATH	106c	-	-	-	-	-	-	-	
HALL	107	-	-	-	-	-	-	-	
LAUNDRY	107a	-	-	-	-	-	-	-	
GARAGE	108	-	-	-	-	-	-	-	
A/H #1	108a	-	-	-	-	-	-	-	
SHOE ROOM	108b	-	-	-	-	-	-	-	
STORAGE	108c	-	-	-	-	-	-	-	
POOL BATH	109	-	-	-	-	-	-	-	
POOL EQPM	110	-	-	-	-	-	-	-	
LIVING	200	-	-	-	-	-	-	-	
HALF BATH	200a	-	-	-	-	-	-	-	
STORAGE	200b	-	-	-	-	-	-	-	
STORAGE	200c	-	-	-	-	-	-	-	
BEDROOM	201	-	-	-	-	-	-	-	
CLOSET	201a	-	-	-	-	-	-	-	
BATH	201b	-	-	-	-	-	-	-	
BEDROOM	202	-	-	-	-	-	-	-	
CLOSET	202a	-	-	-	-	-	-	-	
BATH	202b	-	-	-	-	-	-	-	

FLOOR FINISH REQUIREMENTS

- GENERAL CONTRACTOR TO PREPARE FLOOR AS REQUIRED (SCRAPING, LATEXING, ETC.) TO RECEIVE SPECIFIED LEVEL FLOOR FINISHES.

- WHEREVER APPLICATION OF TILE FLOORING, PRETREAT CRACKS, COLD JOINTS, CONTROL JOINTS WITH ANTI-FRACTURE MEMBRANE (LATICRETE OR EQUAL).

WATERPROOFING FOR KITCHEN / COOKING & TOILETS

PROVIDE WATERPROOFING MEMBRANE THROUGHOUT EXTENTS: KITCHEN RE-FRONT EXPO BAR: EPOXY FLOOR WITH INTEGRAL WATERPROOF SYSTEM.

TOILET ROOMS - ENTIRE EXTENTS OF FLOOR AND A MIN. OF 12" UP PERIMETER WALLS. MUST USE LATICRETE 9235 OR EQUAL AND REFER TO MANUFACTURER SPECIFICATIONS FOR INSTALLATION.

GENERAL ROOM FINISH NOTES

- INTERIOR WALL AND CEILING FINISH CERTIFICATION: FURNISH CERTIFICATION THAT ALL INTERIOR FINISH OF WALLS AND CEILINGS THROUGHOUT ARE CLASS A WITH A FLAME SPREAD OF 0-25, SMOKE DEVELOPED 0-450. INTERIOR WALL AND CEILING FINISHES SHALL BE CLASSIFIED BASED ON TEST RESULTS FROM NFPA 255, STANDARD METHOD OF TEST OF SURFACE BURNING CHARACTERISTICS OF BUILDING MATERIALS.
- PROVIDE RESILIENT ACCESSORY TRANSITION STRIP WHERE RESILIENT FLOORING ABUTS DISSIMILAR FLOORING MATERIAL.
- DOOR FRAME'S COLOR TO MATCH ADJACENT WALL COLOR. WHERE WALL COLOR IS NOT THE SAME ON BOTH SIDES, MATCH WALL EACH SIDE AND BREAK COLOR AT INTERIOR CORNER OF DOOR STRIKE.
- PROVIDE LATICRETE 9235 12 INCHES VERTICALLY AND HORIZONTALLY.

DOOR & FRAME SCHEDULE LEGEND

DOOR & FRAME MATERIAL TYPES

ALUM	ALUMINUM
GL	GLASS
STL	STEEL
WD	WOOD

HARDWARE SCHEDULE

REFER TO DOOR HARDWARE SPECIFICATIONS:

- SET # -

REMARKS

- TEMPERED GLASS.
- IMPACT RATED.

MANUFACTURER INFORMATION

WINDOW & SLIDING GLASS DOOR MANUFACTURER

APS WINDOWS & DOORS

KEVIN CASIANO

(813) 248.4995 (O)
(727) 743.4432 (C)

kcasiano@apswins.com

1402 N 25TH ST
TAMPA, FL 33605

www.apswins.com

DOOR SCHEDULE

ROOM NAME	FUNCTION	#	TYPE	DOOR MATERIAL	RATING	HEIGHT	WIDTH	FRAME TYPE	MATERIAL	HEAD	SILL	JAMB	HARDWARE	REMARKS
LIVING	EXT.	100.1	D-41	ALUM	-	10' - 1 1/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
LIVING	EXT.	100.2	D-41	ALUM	-	10' - 1 1/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
LIVING	EXT.	100.3	D-41	ALUM	-	10' - 1 1/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
DINING	EXT.	101.1	D-41	ALUM	-	10' - 1 1/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
DINING	EXT.	101.2	D-41	ALUM	-	10' - 1 1/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
DINING	EXT.	101.3	D-41	ALUM	-	10' - 1 1/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
KITCHEN	INT.	102.1	D-18	-	-	0' - 0"	0' - 0"	-	-	-	-	-	-	-
HALF BATH	INT.	102b.1	D-10	WD	-	8' - 7 1/2"	3' - 0"	-	-	-	-	-	-	-
FAMILY ROOM	EXT.	103.1	D-41	ALUM	-	10' - 1 1/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
FAMILY ROOM	EXT.	103.2	D-41	ALUM	-	10' - 1 1/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
GUEST ROOM	INT.	104.1	D-15	WD	-	8' - 7 1/2"	3' - 4"	-	-	-	-	-	-	-
GUEST ROOM	EXT.	104.2	D-40	ALUM	-	8' - 7 1/2"	6' - 11 1/4"	-	ALUM	-	-	-	-	1,2
GUEST ROOM	EXT.	104.3	D-40	ALUM	-	8' - 7 1/2"	6' - 11 1/4"	-	ALUM	-	-	-	-	1,2
BATH	INT.	104a.1	D-10	WD	-	8' - 7 1/2"	3' - 0"	-	-	-	-	-	-	-
CLOSET	INT.	104b.1	D-10	WD	-	8' - 7 1/2"	3' - 0"	-	-	-	-	-	-	-
MASTER BEDROOM	INT.	105.1	D-12	WD	-	9' - 11 1/2"	3' - 4"	-	-	-	-	-	-	-
MASTER BEDROOM	EXT.	105.2	D-41	ALUM	-	10' - 1 1/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
MASTER BEDROOM	EXT.	105.3	D-41	ALUM	-	10' - 1 1/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
CLOSET	INT.	106a.1	D-10	WD	-	8' - 7 1/2"	3' - 0"	-	-	-	-	-	-	-
CLOSET	INT.	106b.1	D-10	WD	-	8' - 7 1/2"	3' - 0"	-	-	-	-	-	-	-
MASTER BATH	INT.	106c.1	D-30	GL	-	8' - 7 1/2"	3' - 0"	-	-	-	-	-	-	1
LAUNDRY	INT.	107a.1	D-10	WD	-	8' - 7 1/2"	3' - 0"	-	-	-	-	-	-	-
GARAGE	INT.	108.1	D-13	WD	20 MIN	11' - 1 1/2"	3' - 0"	-	-	-	-	-	-	-
GARAGE	EXT.	108.2	D-50	STL	20 MIN	10' - 0"	18' - 0"	-	-	-	-	-	-	2
GARAGE	EXT.	108.3	D-50	STL	20 MIN	10' - 0"	18' - 0"	-	-	-	-	-	-	2
GARAGE	INT.	108.4	D-16	WD	20 MIN	7' - 4"	3' - 4"	-	-	-	-	-	-	2
A/H #1	INT.	108a.1	D-20	WD	20 MIN	7' - 0"	3' - 0"	F-01	WD	-	-	-	-	-
SHOE ROOM	INT.	108b.1	D-20	WD	20 MIN	7' - 0"	3' - 0"	F-01	WD	-	-	-	-	-
STORAGE	INT.	108c.1	D-20	WD	20 MIN	7' - 0"	3' - 0"	F-01	WD	-	-	-	-	-
LIVING	EXT.	200.1	D-42	ALUM	-	8' - 9 3/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
LIVING	EXT.	200.2	D-42	ALUM	-	8' - 9 3/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
LIVING	EXT.	200.3	D-42	ALUM	-	8' - 9 3/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
LIVING	EXT.	200.4	D-42	ALUM	-	8' - 9 3/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
LIVING	EXT.	200.5	D-42	ALUM	-	8' - 9 3/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
LIVING	EXT.	200.6	D-42	ALUM	-	8' - 9 3/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
HALF BATH	INT.	200a.1	D-14	WD	-	8' - 6"	3' - 0"	-	-	-	-	-	-	-
STORAGE	INT.	200b.1	D-14	WD	-	8' - 6"	3' - 0"	-	-	-	-	-	-	-
STORAGE	INT.	200c.1	D-14	WD	-	8' - 6"	3' - 0"	-	-	-	-	-	-	-
BEDROOM	INT.	201.1	D-14	WD	-	8' - 6"	3' - 0"	-	-	-	-	-	-	-
BEDROOM	EXT.	201.2	D-42	ALUM	-	8' - 9 3/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
CLOSET	INT.	201a.1	D-31	GL	-	8' - 6"	3' - 0"	-	-	-	-	-	-	1
BATH	INT.	201b.1	D-31	GL	-	8' - 6"	3' - 0"	-	-	-	-	-	-	1
BEDROOM	INT.	202.1	D-14	WD	-	8' - 6"	3' - 0"	-	-	-	-	-	-	-
BEDROOM	EXT.	202.2	D-42	ALUM	-	8' - 9 3/4"	8' - 2"	-	ALUM	-	-	-	-	1,2
CLOSET	INT.	202a.1	D-31	GL	-	8' - 6"	3' - 0"	-	-	-	-	-	-	1
BATH	INT.	202b.1	D-31	GL	-	8' - 6"	3' - 0"	-	-	-	-	-	-	1

GENERAL DOOR & FRAME NOTES

- PROVIDE DOOR STOPS WEATHER STRIPPING AT ALL EXTERIOR DOORS.
- CONTRACTOR SHALL COORDINATE AND VERIFY ALL TRIM AND HARDWARE WITH THE ARCHITECT PRIOR TO CONSTRUCTION. HARDWARE LOCKING WITH OWNER.
- PROVIDE PAINT FINISH AT ALL DOORS TO MATCH ADJACENT WALL COLOR (UNLESS DEFINED IN ELEVATIONS).
- ALL THRESHOLDS NOT TO EXCEED 1/2", RAISED THRESHOLDS (AND FLOOR CHANGES) GREATER THAN 1/4" AT DOORWAYS SHALL BE BEVELED WITH SLOPE NOT GREATER THAN 1 VERT. 2 HOR. MEETING A.D.A. REQU. ON PURCHASE SPECIFICATIONS.
- PROVIDE, UPON REQUEST, TO THE ARCHITECT AND THE CONTRACTOR A FLORIDA PRODUCT APPROVAL OR MIAMI-DADE NOA CERTIFYING THAT EACH EXTERIOR DOOR & GLAZING ASSEMBLY WILL WITHSTAND THE WIND PRESSURE AND DESIGN LOADS INDICATED ON THE STRUCTURAL DRAWINGS AND ARE INSTALLED ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS INCLUDING THOSE IN THE FLORIDA PRODUCT NOTICE OF ACCEPTANCE. FIELD VERIFY THAT THE CONFIGURATION, SIZE, AND CONDITIONS OF THE OPENING PROVIDED FOR EACH DOOR & GLAZING ASSEMBLY ARE SUITABLE FOR EACH ASSEMBLY.
- FLOOR LEVEL CHANGES GREATER THAN 1/4" SHALL BE BEVELED OR TAPERED 1:2 PER ADA. FLOOR LEVEL CHANGES BETWEEN 1/4" AND 1/2" SHALL BE TAPERED AT A MAX 1:2 RATIO. MAX VERTICAL SHALL BE 1/4". FLOOR LEVEL CHANGES GREATER THAN 1/2" SHALL BE SLOPED AT A MIN 1:12 RATIO OR PROVIDE ADA THRESHOLD.
- COORDINATE AND FIELD VERIFY OPENING DIMENSIONS.

WINDOW / DOOR NOTES

ALL NEW GLAZING TO BE IMPACT RATED DOUBLE PANE CLEAR W/ LOW E
DBL U = 0.40
SHGC = 0.25

VERIFY ALL WINDOW, DOOR DIMENSIONS PRIOR TO FABRICATION & INSTALLATION. COORDINATE W/ WINDOW MANUF. ON STANDARD SIZES ALL NEW DOOR HARDWARE SELECTIONS BY OWNER

NEW WINDOWS, DOORS TO BE IMPACT RESISTANT INSTALLED PER MANUFACTURER DETAILS.

EGRESS WINDOW DIMS. PER CODE: SECTION (R310)

SILL HT. ABOVE FLOOR = 44" MAX.
MIN. WIDTH OF WINDOW = 20"
MIN. SQ. FT. = 5 SQ. FT. (GROUND FLOOR)
MIN. SQ. FT. = 5.7 SQ. FT. (2ND FLOOR)

NOTE: REFER TO FLOOR PLANS FOR EGRESS WINDOW LOCATIONS

SAFETY GLAZING NOTES

REQUIRED SAFETY GLAZING IN HAZARDOUS LOCATIONS (RE. FBC 2406.4.1 THOROUGH 2406.4.6)


2406.4 HAZARDOUS LOCATIONS

THE FOLLOWING SHALL BE CONSIDERED SPECIFIC HAZARDOUS LOCATIONS FOR THE PURPOSE OF GLAZING:

- GLAZING IN ALL FIXED AND OPERABLE PANELS OF SWINGING, SLIDING AND BIFOLD DOORS SHALL BE CONSIDERED A HAZARDOUS LOCATION.
- GLAZING IN AN INDIVIDUAL FIXED OR OPERABLE PANEL ADJACENT TO A DOOR WHERE THE NEAREST VERTICAL EDGE OF THE GLAZING IS WITHIN A 24-INCH ARC OF EITHER VERTICAL EDGE OF THE DOOR IN A CLOSED POSITION AND WHERE THE BOTTOM EXPOSED EDGE OF THE GLAZING IS LESS THAN 60 INCHES ABOVE THE WALKING SURFACE SHALL BE CONSIDERED A HAZARDOUS LOCATION.
- GLAZING IN AN INDIVIDUAL FIXED OR OPERABLE PANEL THAT MEETS ALL OF THE FOLLOWING CONDITIONS SHALL BE CONSIDERED A HAZARDOUS LOCATION:
A. EXPOSED AREA OF AN INDIVIDUAL PANE GREATER THAN 9 SQ.FT.
B. BOTTOM EDGE LESS THAN 18 INCHES ABOVE FLOOR.
C. TOP EDGE GREATER THAN 36 INCHES ABOVE THE FLOOR.
D. ONE OR MORE WALKING SURFACES WITHIN 36 INCHES HORIZONTALLY OF THE PLANE OF THE GLAZING.
- GLAZING IN GUARDS AND RAILINGS, INCLUDING STRUCTURAL BALUSTER PANELS AND NONSTRUCTURAL IN-FILL PANELS, REGARDLESS OF AREA OR HEIGHT ABOVE A WALKING SURFACE SHALL BE CONSIDERED A HAZARDOUS LOCATION.
- GLAZING IN WALLS, ENCLOSURES OR FENCES CONTAINING OR FACING HOT TUBS, SPAS, WHIRLPOOLS, SAUNAS, STEAM ROOMS, BATHTUBS, SHOWERS AND INDOOR OR OUTDOOR SWIMMING POOLS WHERE THE BOTTOM EXPOSED EDGE OF THE GLAZING IS LESS THAN 60 INCHES MEASURED VERTICALLY ABOVE ANY STANDING OR WALKING SURFACE SHALL BE CONSIDERED A HAZARDOUS LOCATION. THIS SHALL APPLY TO SINGLE GLAZING AND ALL PANES IN MULTIPLE GLAZING.
- GLAZING WHERE THE BOTTOM EXPOSED EDGE OF THE GLAZING IS LESS THAN 60 INCHES ABOVE THE PLANE OF THE ADJACENT WALKING SURFACE OF STAIRWAYS, LANDINGS BETWEEN FLIGHTS OF STAIRS AND RAMPS SHALL BE CONSIDERED A HAZARDOUS LOCATION.

DOOR TYPES LEGEND

1/4" = 1'-0"

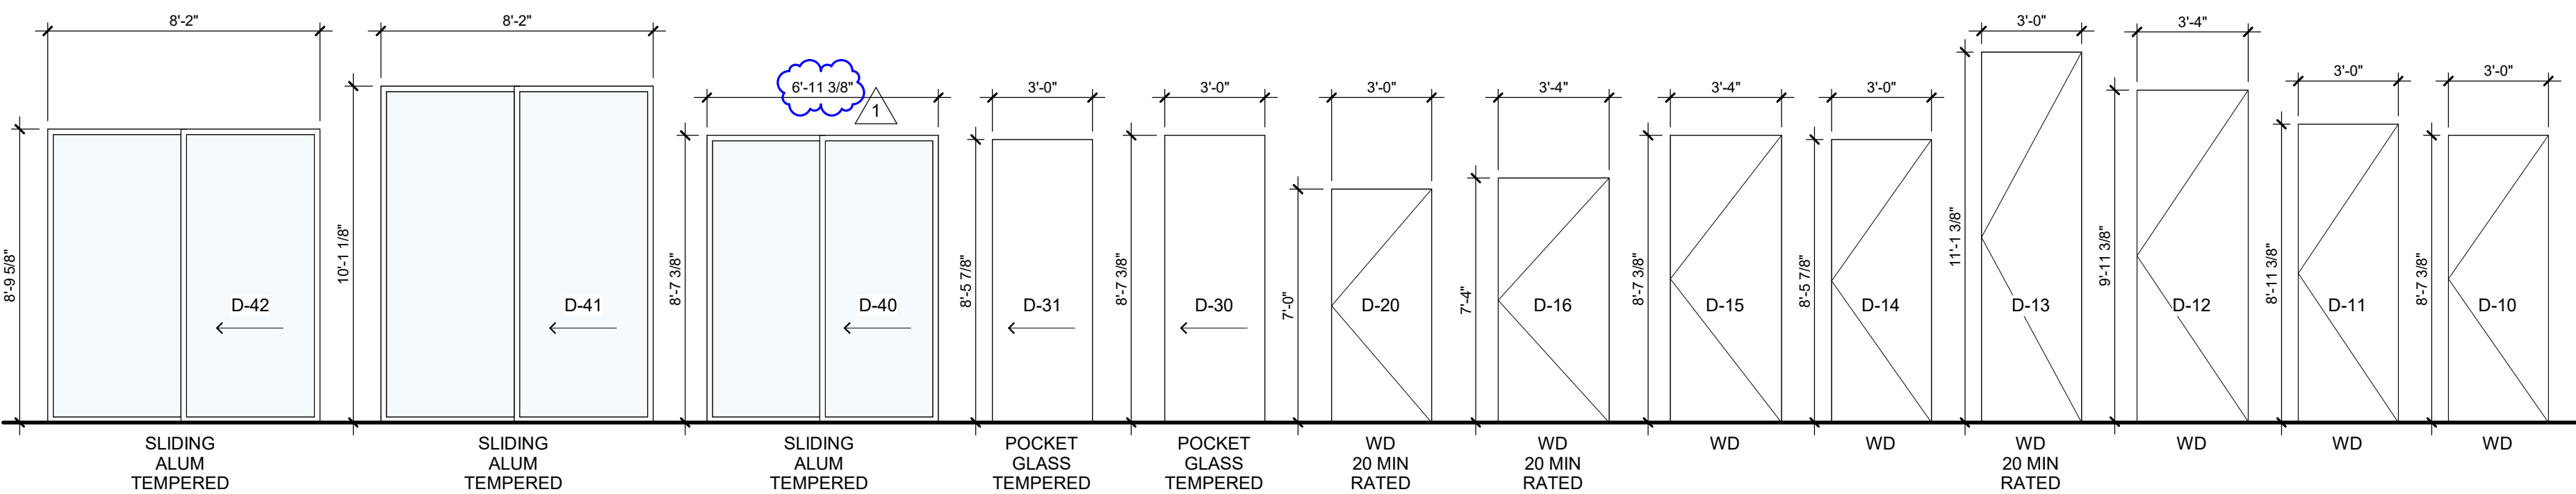

FRAME TYPES LEGEND

1/4" = 1'-0"

WINDOW TYPES LEGEND

1/4" = 1'-0"

PROJECT DESIGN TEAM:

ARCHITECT
MODULO A+H, L.L.C.
1704 W NORTH A ST
TAMPA, FL 33606
PH: (813) 512.8872
E-MAIL: info@modulodesignstudio.comSTRUCTURAL
GLOBAL CONSULTING
ENGINEERS, INC.
PH: (727) 656.3475MECHANICAL + PLUMBING
EXECUTIVE
ENGINEERING, INC.
PH: (904) 589.4625ELECTRICAL
ELECTRICAL POWER
DESIGNS, INC.
PH: (813) 244.3473OWNER:
RAED YOUSUF
18313 LEAFMORE ST.
LUTZ, FL 33548PROJECT ADDRESS:
19927 FRENCH LANE
LUTZ, FL 33549

PERMIT SET

YOUSUF RESIDENCE

NO.	REVISION	DATE
1	OWNER REVISION	25/02/13

SCHEDULES

PROJECT #	2301
ISSUE DATE	11.21.23

A6.101